Ref. No. 4174
082009

ONKYO SERVICE MANUAL

AV RECEIVER
MODEL HT-RC180(B)

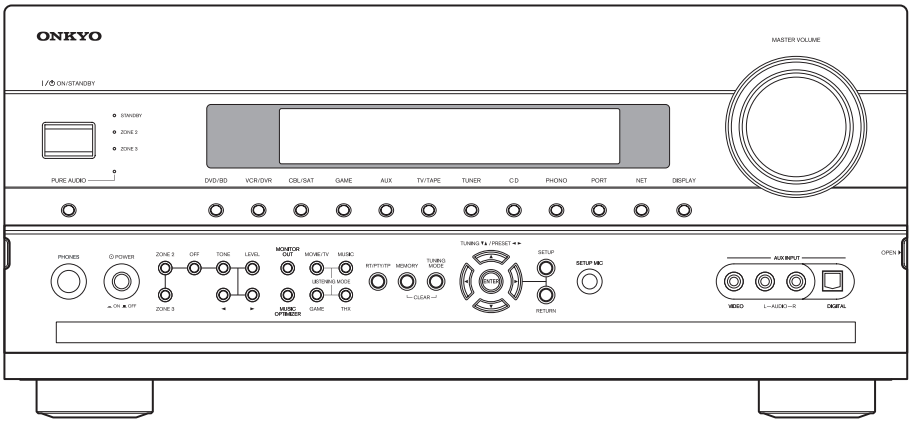

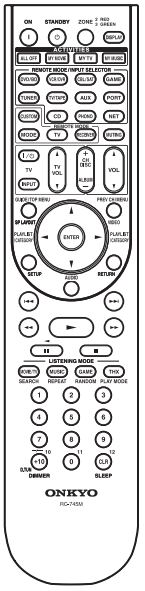

RC-745M

Black model

B MDC	120V AC, 60Hz

SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY MARK ⚠ ON THE SCHEMATIC DIAGRAM AND IN THE PARTS LIST ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE THESE COMPONENTS WITH ONKYO PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL.

MAKE LEAKAGE-CURRENT OR RESISTANCE MEASUREMENTS TO DETERMINE THAT EXPOSED PARTS ARE ACCEPTABLY INSULATED FROM THE SUPPLY CIRCUIT BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.

ONKYO®
IMAGINATIVE SIGHT & SOUND

SERVICE PROCEDURE-1

1. Replacing the fuses

 This symbol located near the fuse indicates that the fuse used is show operating type, For continued protection against fire hazard, replace with same type fuse, For fuse rating, refer to the marking adjacent to the symbol.

 Ce symbole indique que le fusible utilise est e lent. Pour une protection permanente, n'utiliser que des fusibles de meme type. Ce demier est indique la qu le present symbol est apposre.

<Notes>

<DC> : HT-RC180 Canadian model

REF NO.	PART NAME	DESCRIPTION	PART NO.	REMARKS
F4000	FUSE	4A-UL/T-233	252325GR	!
F4000 or	FUSE	4A-T/UL-ST2	252257GR	!
F4001	FUSE	4A-UL/T-233	252325GR	!
F4001 or	FUSE	4A-T/UL-ST2	252257GR	!
F6901	FUSE	15A-TUL-250V	252303GR	!
F6902	FUSE	15A-TUL-250V	252303GR	!
F901	FUSE	10A-UL/T-233	252330GR	!
F901 or	FUSE	10A-T/UL-ST2	252333GR	!

2. To initialize the unit

1. Press and hold down VCR/DVR button, then press ON/STANDBY button when the unit is powered on.
2. After " *Clear* " is displayed, the preset memory and each mode stored in the memory are initialized and will return to the factory settings, and turn to Standby mode.

3. Safety check out

(U.S.A. model only)

After correcting the original service problem, perform the following safety check before releasing the unit to the customer.

Leakage current Check

Measure the leakage current to a known earth ground (water pipe or conduct etc.) by connecting a leakage current tester between the earth ground and exposed metal parts of the unit (input/output ground terminals, screw heads or metal overlays etc.).

Plug the power supply cord directly into a 120Vac 60Hz wall socket and turn ON/STANDBY button on.

Any current measured must not exceed 0.5mA.

4. Memory Backup

This model uses a EE-PROM IC in order to retain radio presets and other settings. So, memory contents will be kept eternally with no care.

SERVICE PROCEDURE-2

5. Replacing Power Amplifier Parts

When a power amplifier of certain channel is broken and goes into Protect mode, the following parts in the channel must be replaced at the sametime, because these parts also get damage in most cases.

Front L ch	Front R ch	Center ch	Surround L ch	Surround R ch	Surround Back L ch	Surround Back R ch
Q6000,Q6010	Q6001,Q6011	Q6002,Q6012	Q6003,Q6013	Q6004,Q6014	Q6005,Q6015	Q6006,Q6016
Q6030,Q6040	Q6031,Q6041	Q6032,Q6042	Q6033,Q6043	Q6034,Q6044	Q6035,Q6045	Q6036,Q6046
Q6100,Q6110	Q6101,Q6111	Q6052,Q6062	Q6053,Q6063	Q6054,Q6064	Q6055,Q6065	Q6056,Q6066
Q6050,Q6060	Q6051,Q6061	Q6082,Q6092	Q6083,Q6093	Q6084,Q6094	Q6085,Q6095	Q6086,Q6096
Q6070	Q6071	Q6072	Q6073	Q6074	Q6075	Q5096
Q5000,Q5010	Q5001,Q5010	Q5002,Q5012	Q5003,Q5013	Q5004,Q5014	Q5005,Q5015	Q5006,Q5016
Q5030,Q5040	Q5031,Q5041	Q5032,Q5042	Q5033,Q5043	Q5034,Q5044	Q5035,Q5045	Q5036,Q5046
Q5050,Q5060	Q5051,Q5061	Q5052,Q5062	Q5053,Q5063	Q5054,Q5064	Q5055,Q5065	Q5056,Q5066
Q5070	Q5071	Q5072	Q8073	Q8074	Q8075	Q8076

BAAMP-0072 and BACLA-0087 are electrically and mechanically full-compatible with each other, but idling readjustment is necessary.

BAAMP-0072 and BACLA-0087 are also electrically and mechanically full-compatible with each other, but idling readjustment is necessary.
The parts listed above include the following driver-stage components in each pcb.

ADJUSTMENT PROCESURE

ADJUSTMENT OF IDLING CURRENT

1) Setting R6040 to R6046 to minimum position before power ON.
2) Setting the voltage at P6080 to P6086 to 3mV by adjusting R6040 to R6046, under the condition of no input signal and no load, immediately after powr ON.

L/C/R		SL/SR/SBL/ABR
Below 4mV	4mV	4mV
Between 4 ～6mV	Leave just as it is.	Leave just as it is.
Over 6mV	6mV	6mV

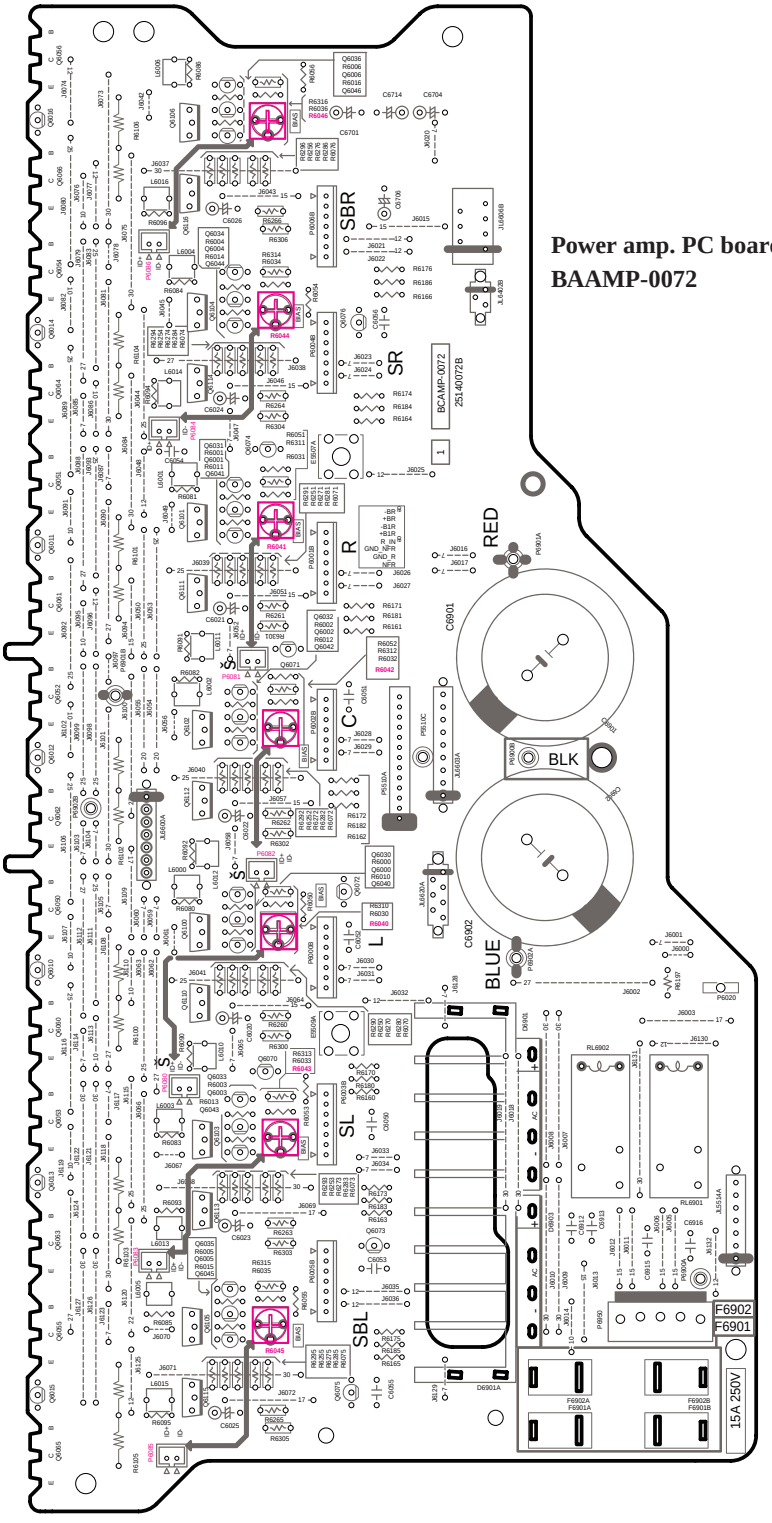

Power amp. PC board
BAAMP-0072

EXPLODED VIEWS-1

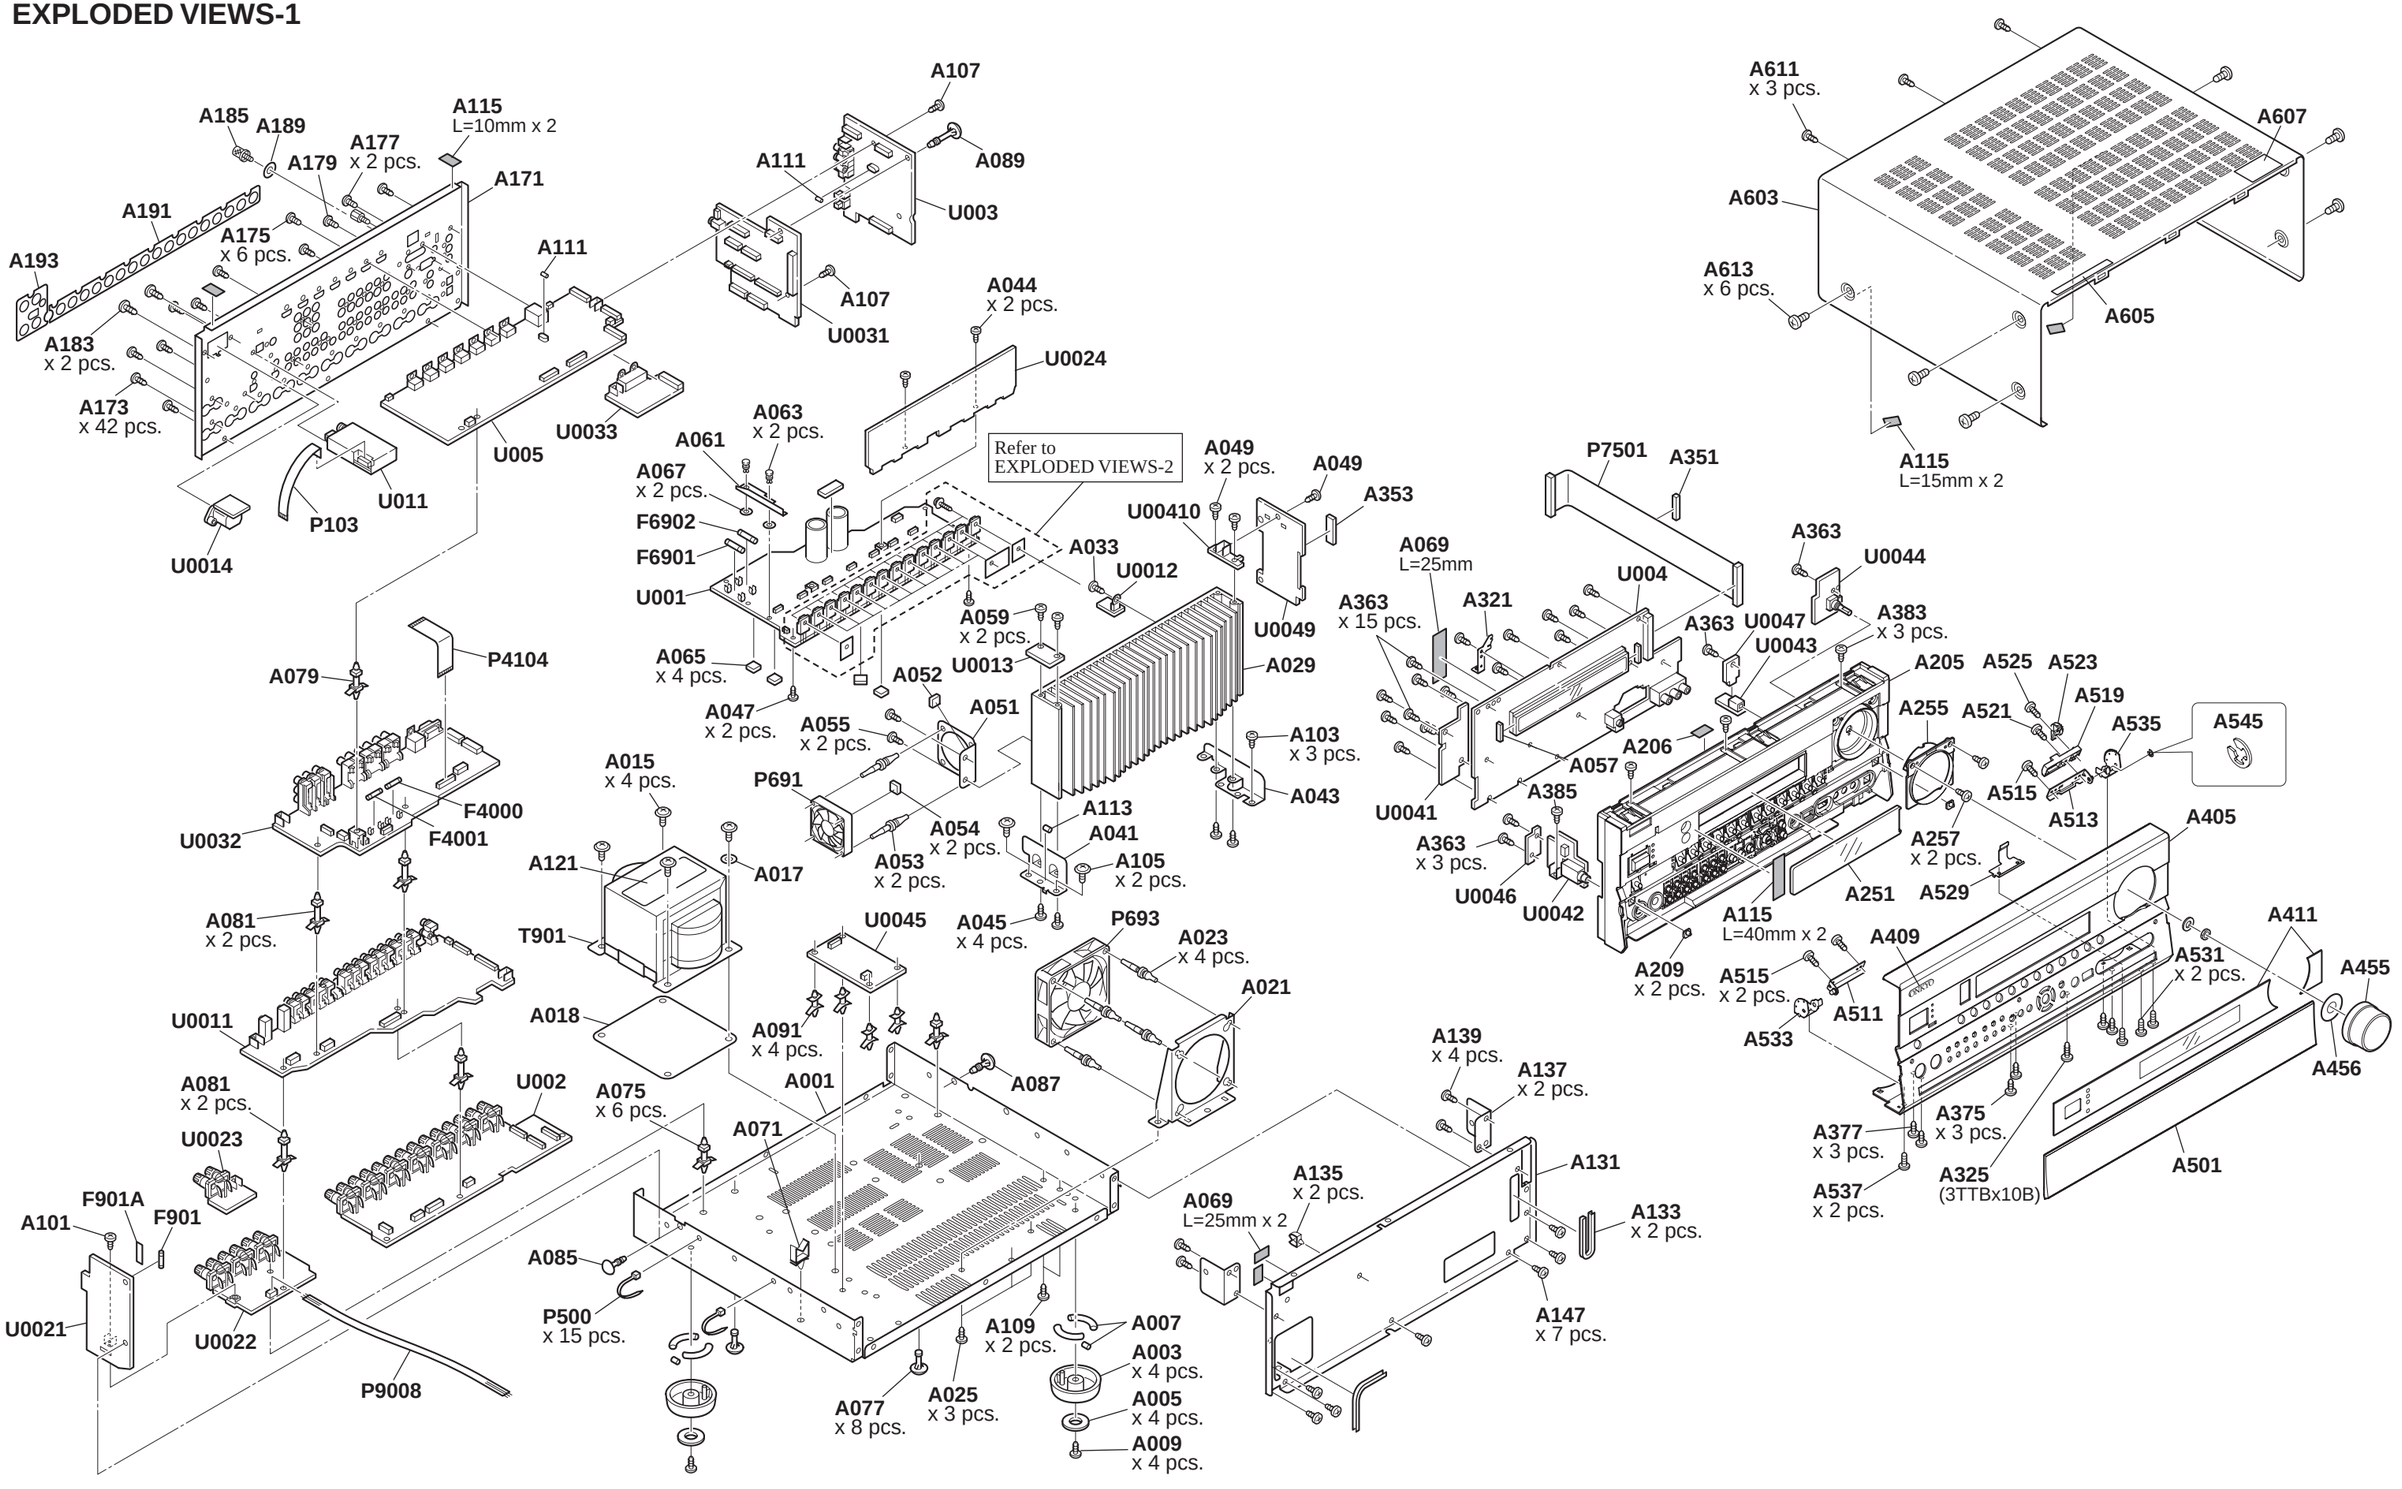

EXPLODED VIEWS-2

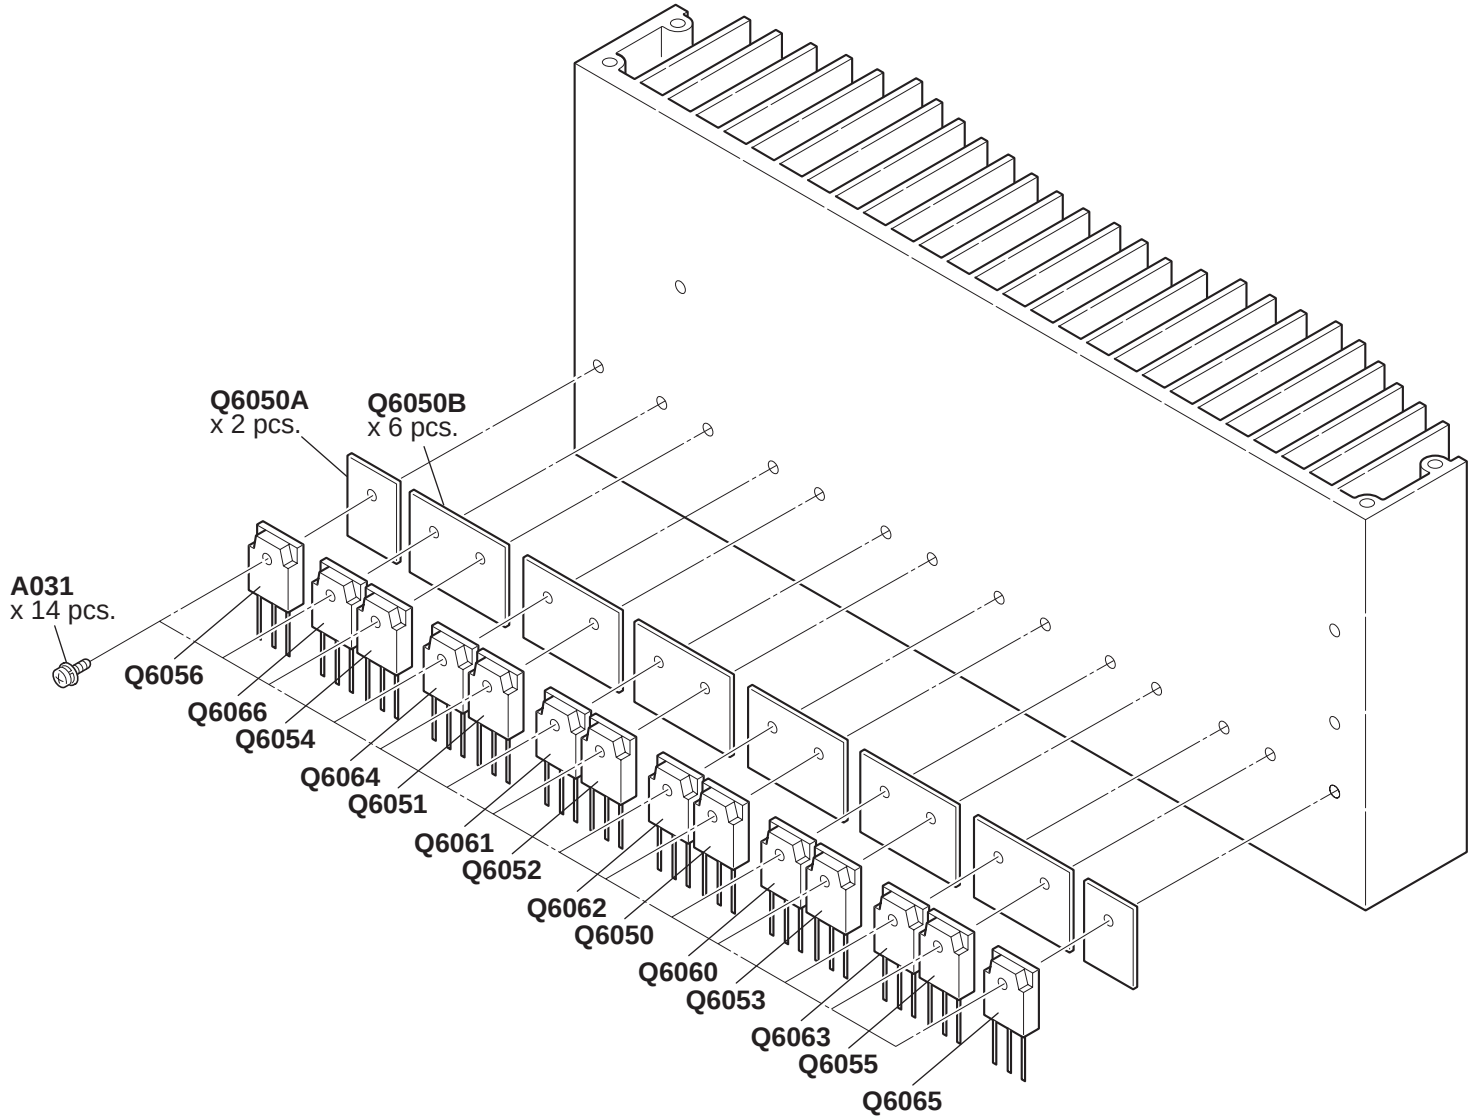

HT-RC180

BLOCK DIAGRAM-1

AUDIO SECTION

(PART-1)

R2A15220FP

except JJ , MR
TUNER PACK

M.M. Port

for MDC only
SIRIUS

FRONT IN
PHONO MM
TUNER (for MJJ , MMR)
CD IN
(AUX IN)
TAPE OUT
TAPE IN
GAME IN
CBL/SAT IN
VCR OUT
VCR IN
DVD IN

PHONO EQ

IN12
IN10
IN11
INB
IN9
IN8
IN14
IN7
IN6
IN5
IN3
IN2
IN13

Z3
Z2
MAIN

SUB1 should be always ON.

COAX 1
COAX 2
COAX 3
OPT FRONT (FRONT IN)
OPT1
OPT2
OPT3
OPT OUT
COAX OUT
NET

SPDIF SW
SPDIF
Z2/Z3 Analog

MIC
MIC AMP

CS42516
2ch ADC
DIR
ATT

8ch DAC
PCM1690

VLSC
LPF

1st DSP
TMS320DA830

2nd DSP
TMS320DA788

TC74VHCT157FT

I2S(DVD-AUDIO/DSD)x4

IN1-6 *ALL
IN7-8? *8040
FRONT *ALL
HDMI
OUT1 *8040
OUT2 *ALL
HDMI RX
HDMI TX

M61540
except TX-SR707 & MJJ

Down mix : No use
Tone : Use for Z3

priority terminal

0.5dB step/each VR
for only TX-SR707

1dB step/each VR

Tones are used for all Integra.

POWER AMPLIFIER
+29dB
+20dB

Except DHC-40.1

HEADPHONES

SPEAKER TERMINALS
FRONT LEFT
FRONT RIGHT
CENTER
SURR / Z3 LEFT
SURR / Z3 RIGHT
SUR. BACK Z2 / Bi Amp LEFT
SUR. BACK Z2 / Bi Amp RIGHT
Front Wide LEFT
Front Wide RIGHT
Front High LEFT
Front High RIGHT

7.2CH PREOUT

mount for only TX-SR707
2.2K / (1.2K+1K+2.2K)= -6dB
Z2 LINE OUT (for only TX-SR707)
Z2 Pre OUT (for TX-NR807,DTR-40.1/50.1) except MJJ
Z3 Pre OUT
except TX-SR707,DTR-40.1 & MJJ

for 03a , 03b
12V TRIGGER CONTROL
12V TRIG A
12V TRIG B
12V TRIG C
12V TRIG Z2
12V TRIG Z3
except 03b, 03a, JJ

IR IN
IR IN
IR OUT
IR REMOTE SENSOR
Ether
E-cont only DTR/DTX-6.9
RI
RI INTERFACE
RS232
RS232 INTERFACE

from Micon

BLOCK DIAGRAM-2

VIDEO SECTION

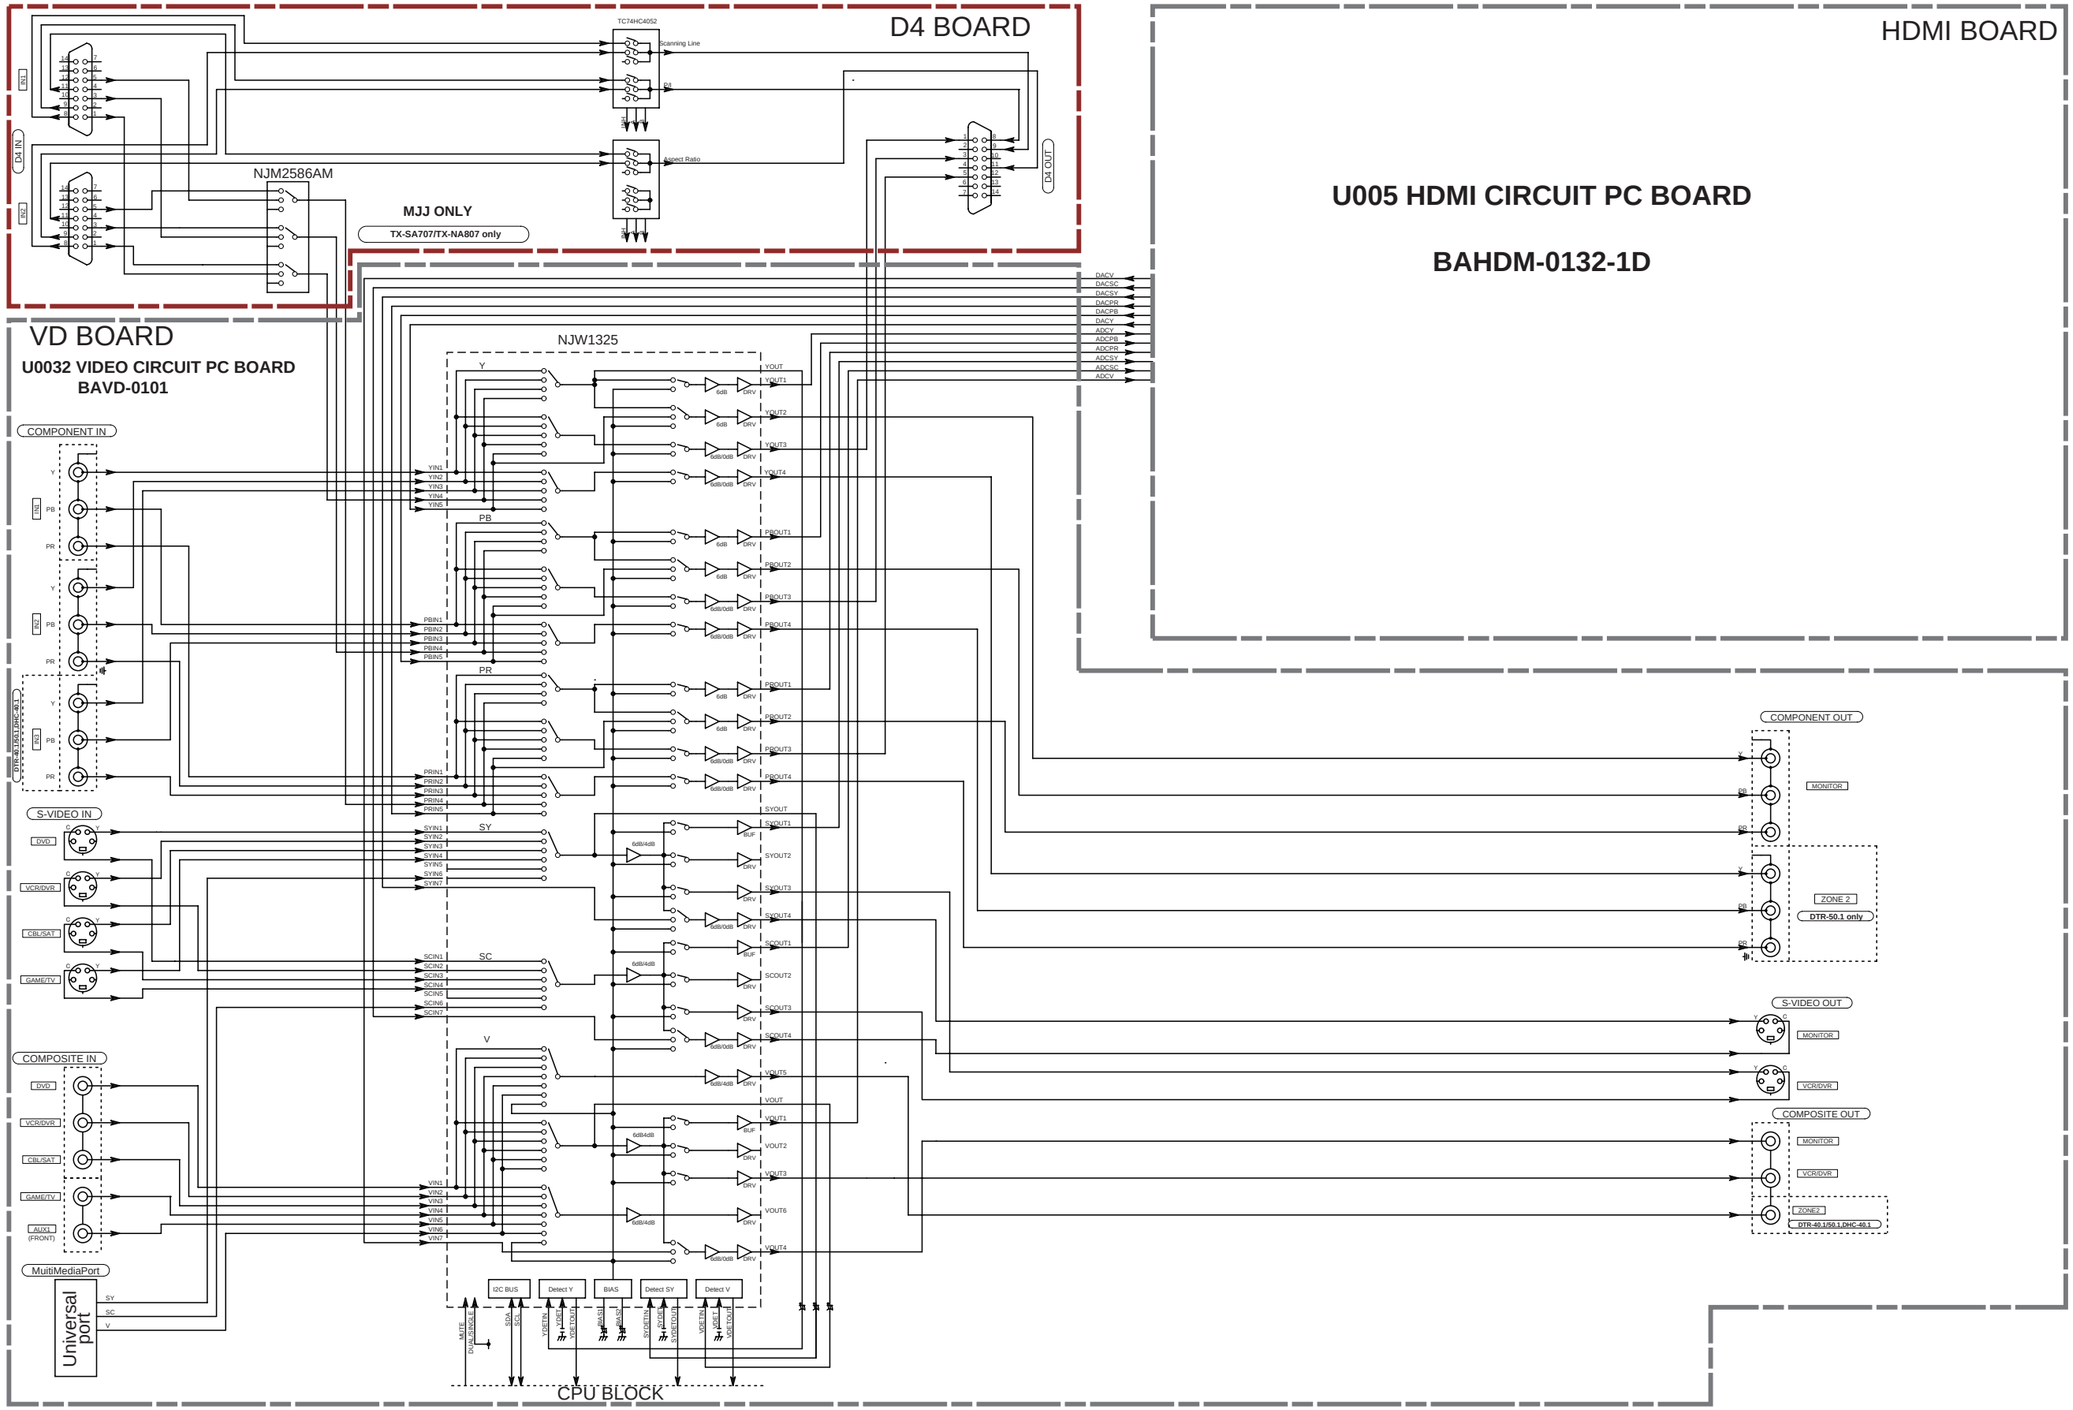

BLOCK DIAGRAM-3

HDMI SECTION

U005

HDMI CIRCUIT PC BOARD

BAHDM-0132-1D

(PART-3)

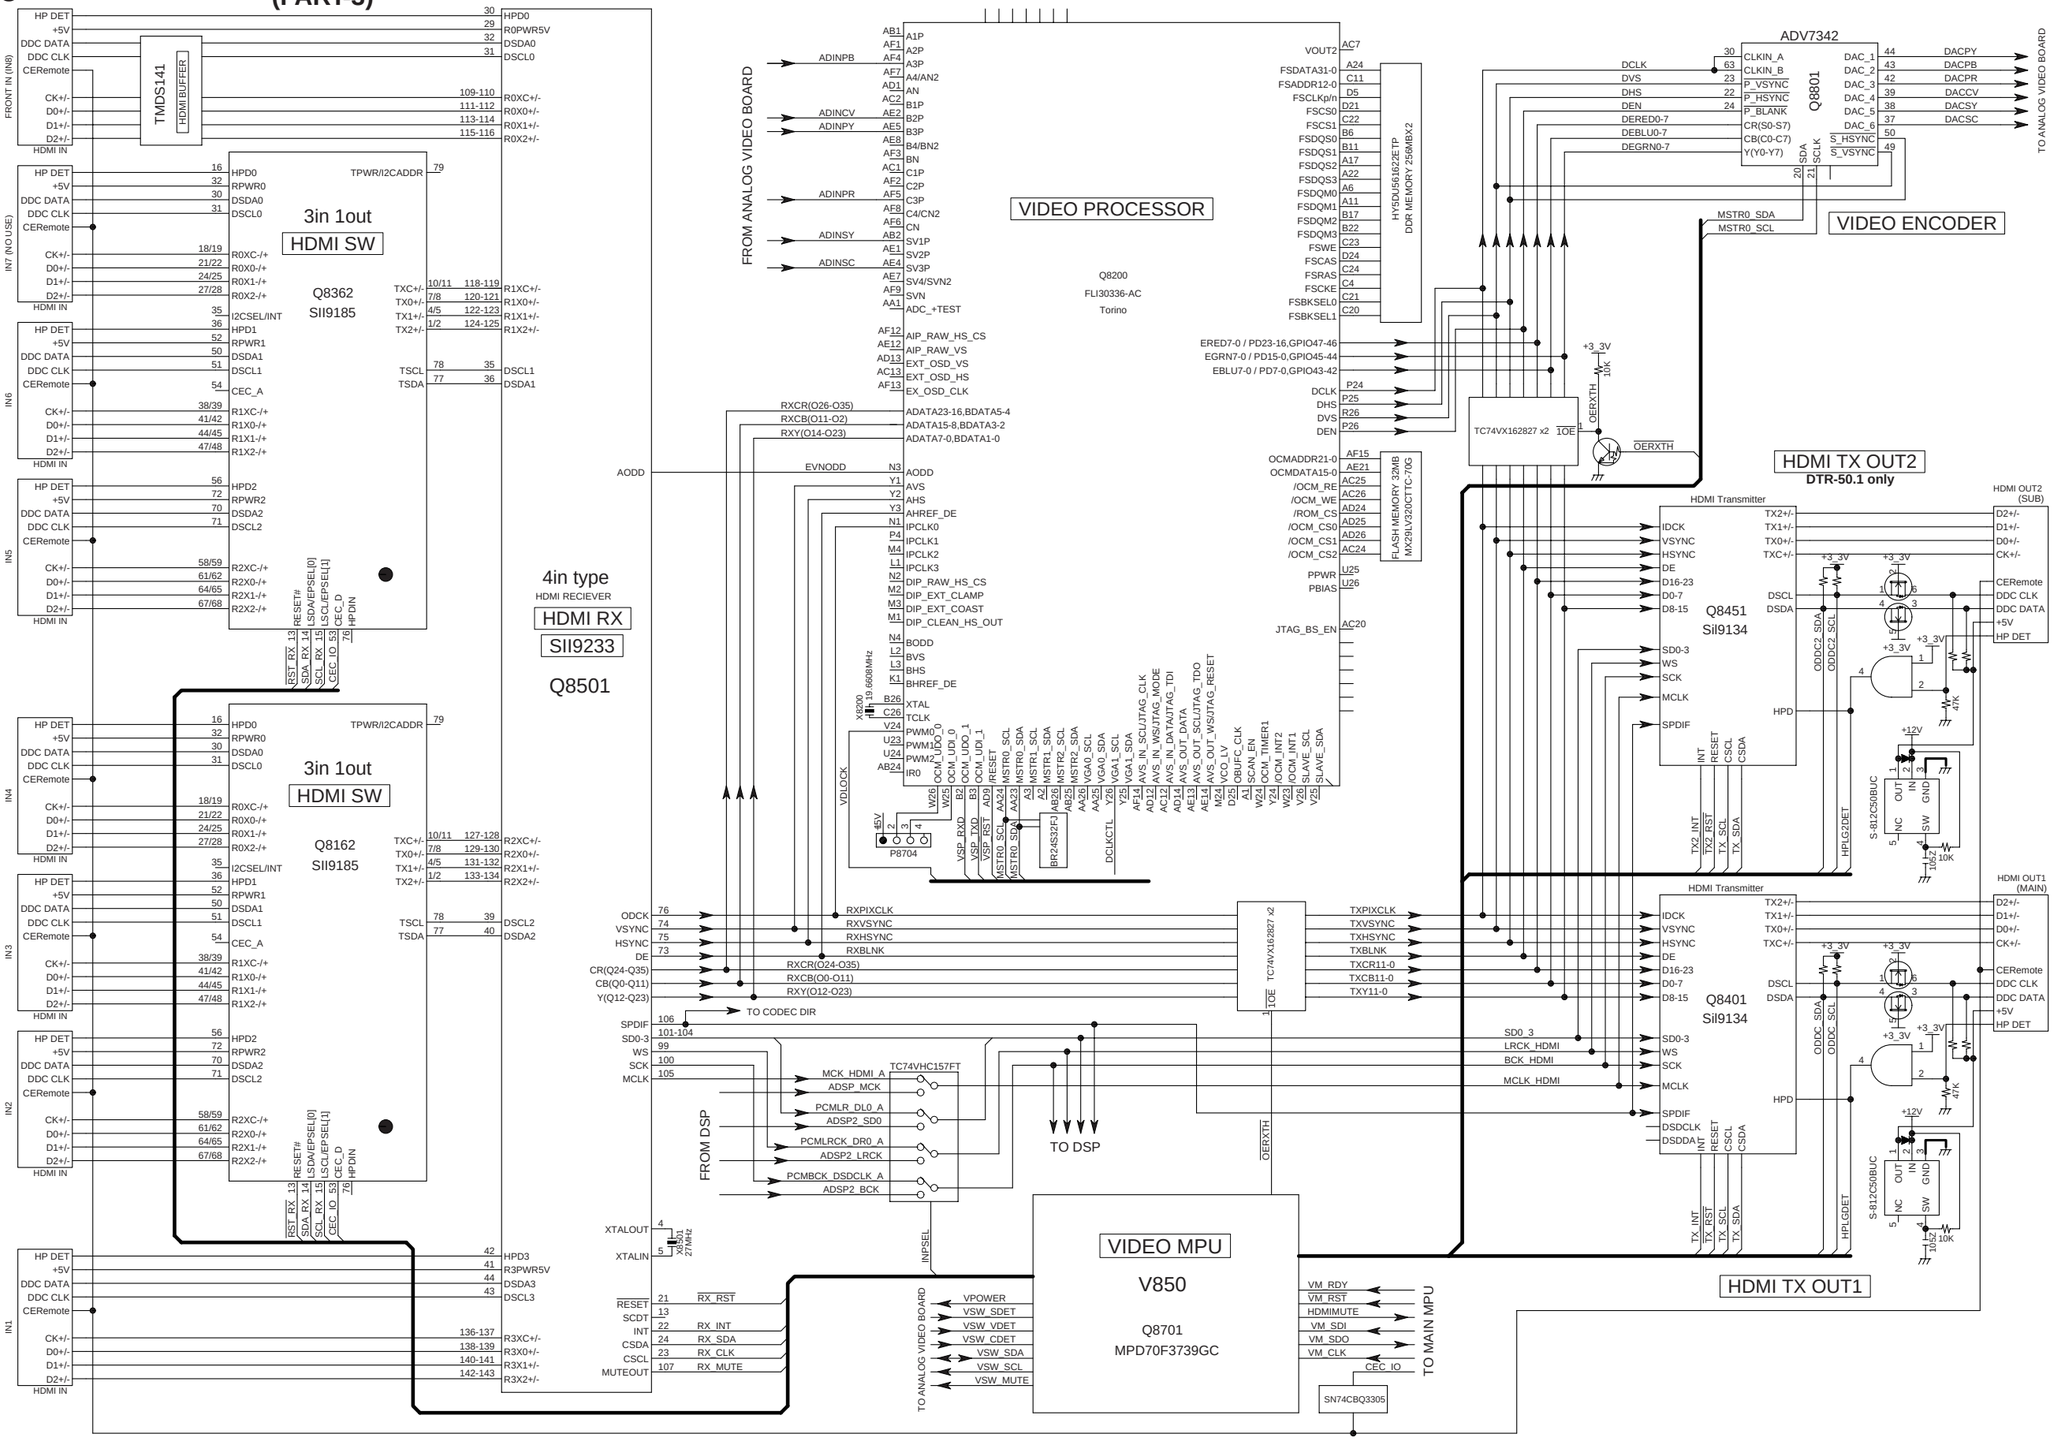

BLOCK DIAGRAM-4

DSP/ ETHER/ USB SECTION

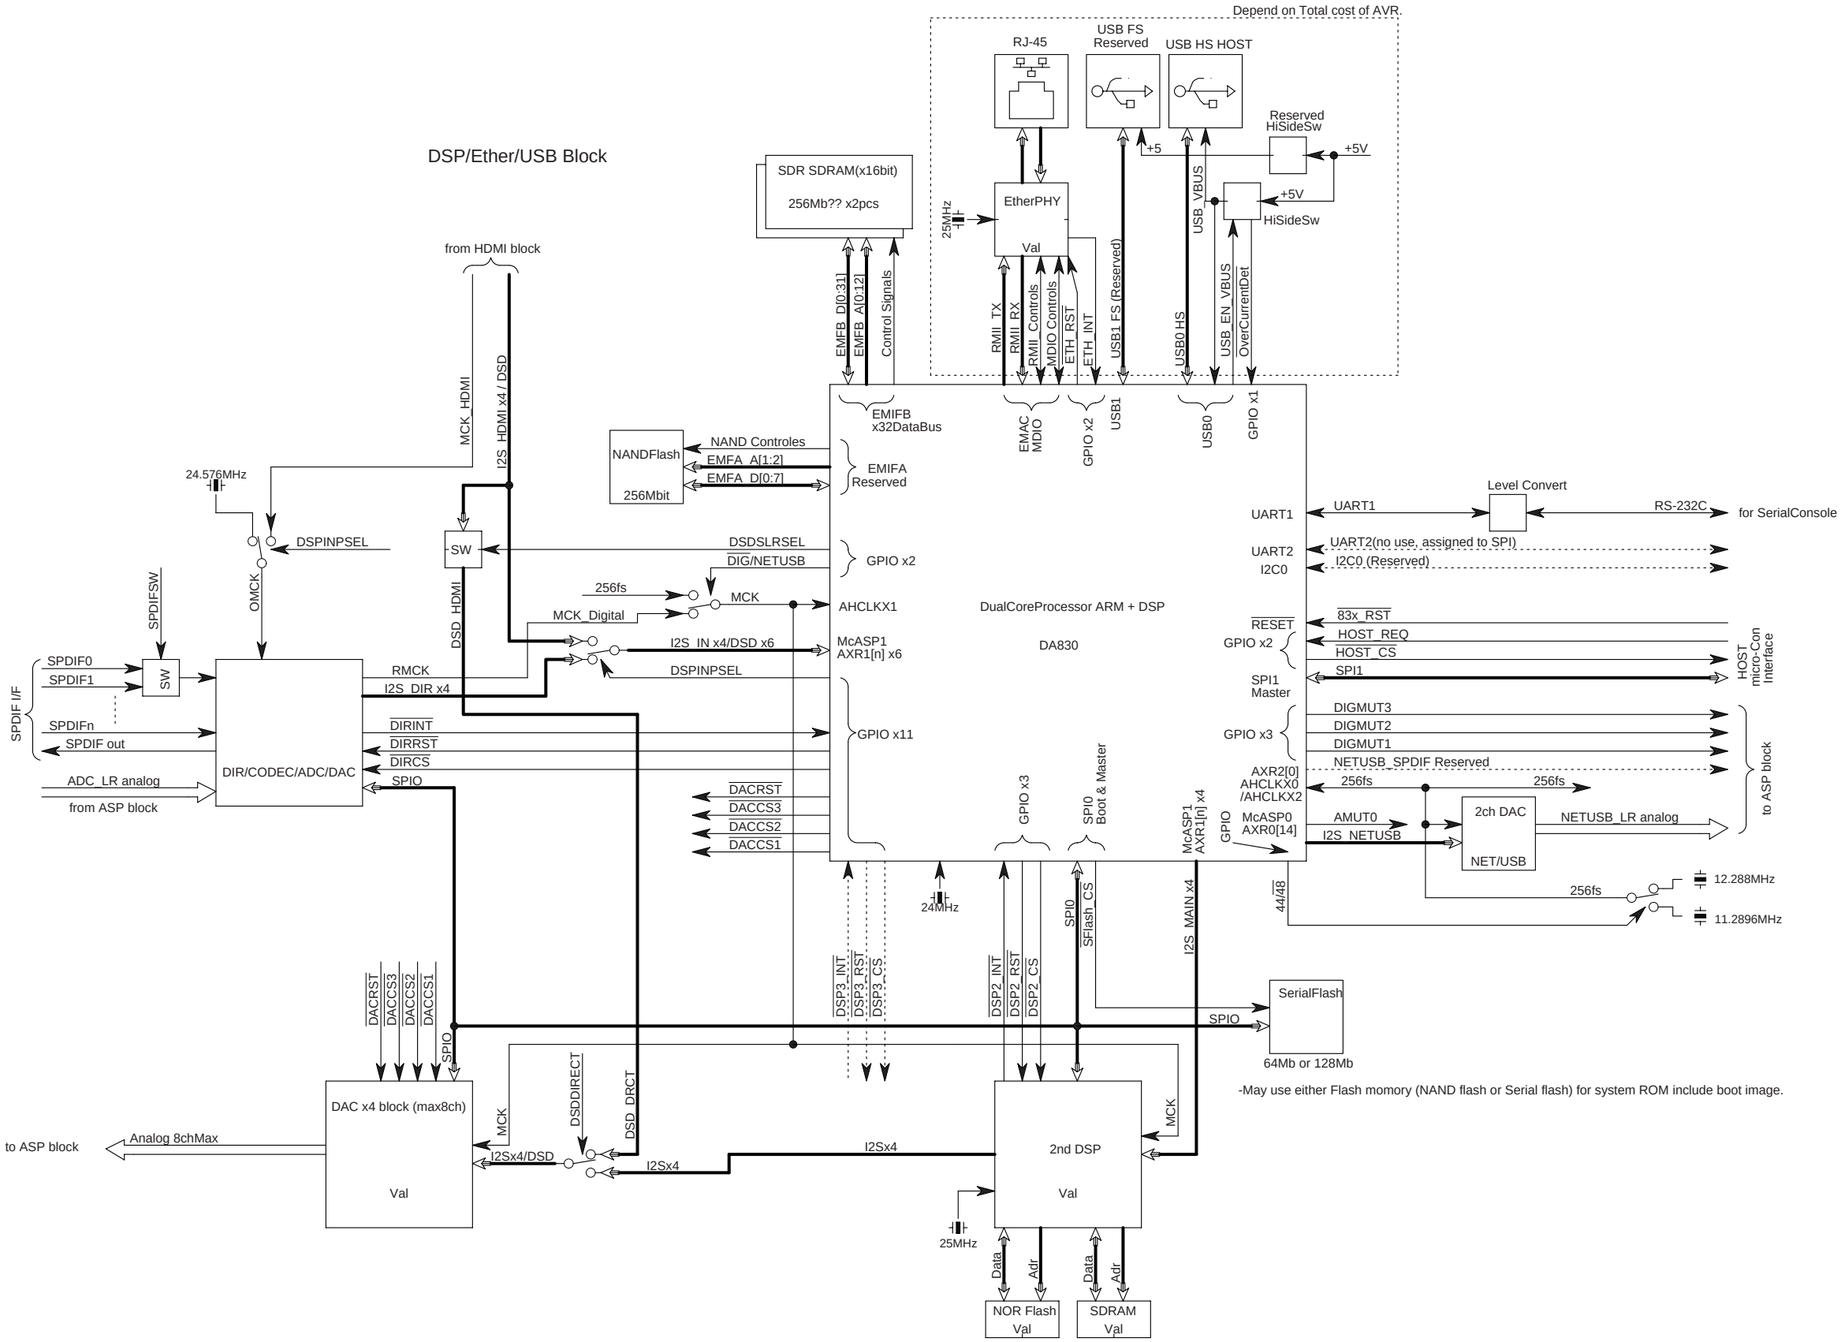

-May use either Flash momory (NAND flash or Serial flash) for system ROM include boot image.

HT-RC180

SCHEMATIC DIAGRAM-1

U0011 AUDIO INPUT CIRCUIT PC BOARD (BAASP-0073-1L) (PART-5)

BAASP-0073

Not Used

except TX-SA707JJ
except TX-NA807JJ

to BAVD-0101

except TX-SR707

to HDMI PWB

((SD-7)) connect with MICON PWB(BADG-0099)

(SD-7) connect with MICON PWB(BADG-0099)

for TX-SA707 JJ
for TX-NA807 JJ

P5500
PHONO
TUNER
CD
TAPE_OUT
TAPE_IN
CBL/SAT
VCR OUT
VCR IN
DVD
GAME

Not Used <AREA-5>

PHONO_R
PHONO_L
TUNER-R
TUNER-L
CD-R
CD-L
TAPE-R
TAPE-L
GAME-R
GAME-L
CBL/SAT-R
CBL/SAT-L
VCR-R
VCR-L
DVD-R
DVD-L

Q5501
R2A15220FP

(Bottom View)

Downmix
FL/FR : -12dB
SW: +3.5dB

Subwoofer
Av=20dB

except 707 & 807JJ < AREA-1 >

M61540FP
Q5502
(Botom view)

< AREA-4 >

SBL/Z2L/BiAmpL

SBR/Z2R/BiAmpR

SW

C

FL

FR

SR/Z3R

SL/Z3L

PRESRMUT
PRERFMUT
PRESBMUT

P5503-A
P5504
P5505
P5506
P5510B
P5509B
P5514B

7.2CH
PRE OUT

to Po-AMP PWB(BAAMP-0072)
to H/P Amp PWB (SD-3)
(DTC-50.1)

for only 707

except TX-SA707JJ < AREA-2 >
Z2 LINE/Pre OUT

Z3 Pre OUT

except TX-SA707/DTR-40.1 & TX-NA807JJ < AREA-3 >

for only SR707
(without JJ)

for only DHC-40.1

for only 707
except JJ

Test point for protect checking

Voltage Drop
= + 6 . . 6 V

Unbalance
+7.6V/-10.5V
or +10.5V/-8.0V

< AREA-6 >

P4600,4601,4602 are not used for HT-RC180.

Look at the List about parts marked. ★

< AREA-7 >

< AREA-8 >

< AREA-9 >

12VTRG / IR	R4609,4611	R4612,4614,4622	R4615	R4616	D4606	JL5515B
707 without JJ	ALL	○	----	○	○	○
40.1ALL, 40.1JJ	ALL	○	----	----	○	○
707JJ	MJJ	○	----	----	----	----
807 without JJ	ALL	----	----	○	○	○
50.1ALL, 50.1JJ	ALL	○	----	----	----	○
807JJ	MJJ	----	----	----	----	----
DHC-40.1	MDD	○	----	----	○	○

○ = mount --- = no mount

| | | + | | | | | - | | | | |

SCHEMATIC DIAGRAM-2

U0024

POWER AMP. INPUT CIRCUIT (INPUT STAGE) PC BOARD BACLA-0087-1G (PART-6)

	TX-SR707 -SA707 DTR-40.1	TX-NR807 -NA807 DTR-50.1
Q5060 - 5066	2SA949-Y	2SA1360-Y
Q5070 - 5076	2SC2229-Y	2SC3423-Y

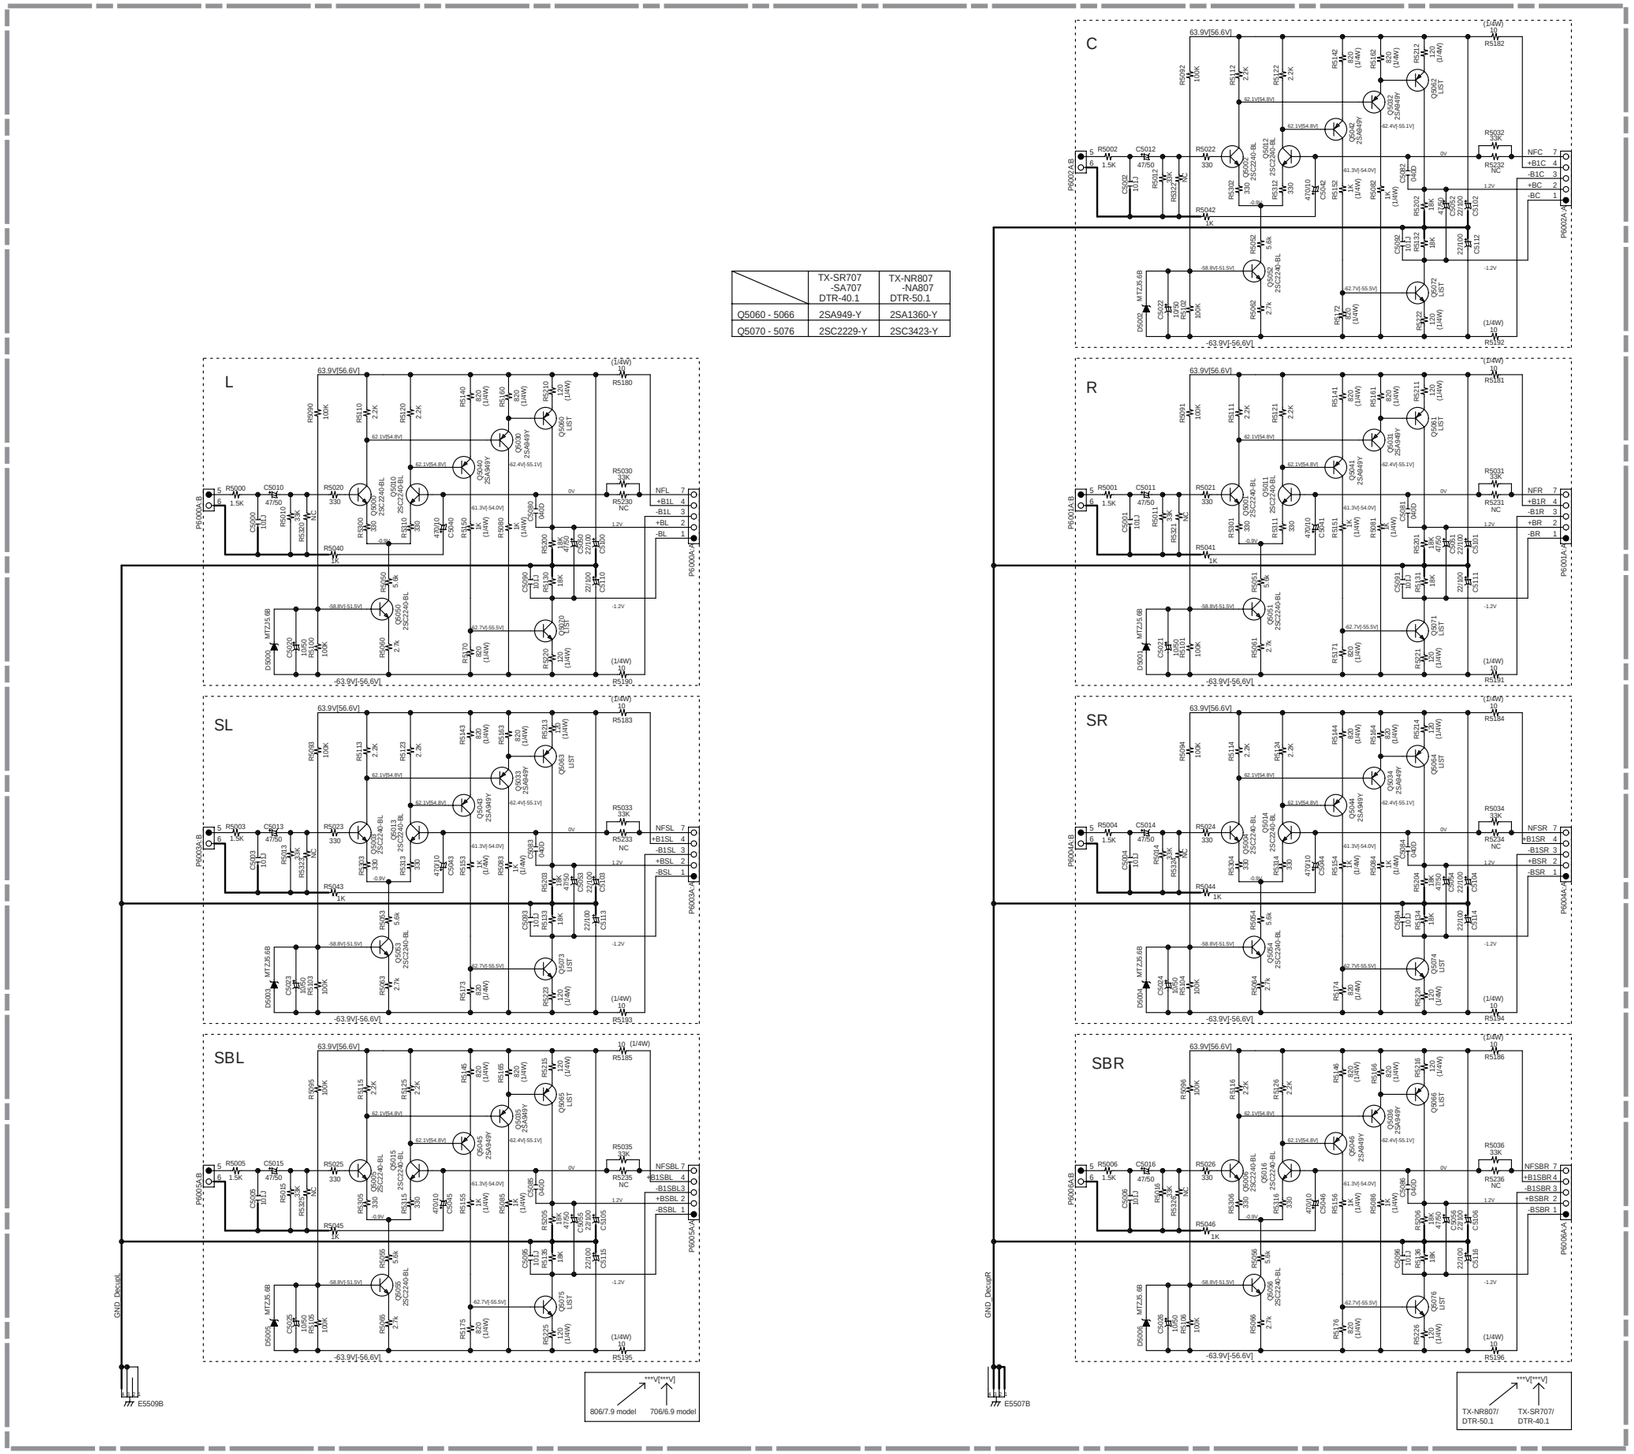

HT-RC180

SCHEMATIC DIAGRAM-3

U001 POWER AMPLIFIER CIRCUIT PC BOARD (BAAMP-0072-1L) (PART-7)

POWER AMP(Final Stage) SECTION

BAAMP-0072

	TX-SR707 / DTR-40.1	TX-NR807 / DTR-50.1
Q6050 - Q6056	2SC5242	TTC0001
Q6060 - Q6066	2SA1962	TTA0001

U0014 AC INLET TERMINAL PC BOARD BAETC-0089-1L

except TX-SR707 DC,DF

AC INLET

U0012 THERMISTER PC BOARD BAETC-0074-1L

U0013 CONNECTION BOARD BAETC-0075-1L

Large Fan connect board for TX-NR807,DTR-50.1

To Video board Part-11

to SPEAKER TERMINAL PC BOARD BA-TRM-0083 (PART 10) (SD-4)

PROTECT

FROM TRANS WDG

From ASP board (PART 7)

From AMPLIFIER PC BOARD (PART 7) (SD-1)

To SPEAKER TERMINAL PC BOARD (PART 10) (SD-4)

C6901 C6902	MODEL
12000u/63v	TX-SR707,DTR-40.1 DC
12000u/71v	TX-SR707,DTR-40.1 except DC
15000u/71v	TX-NR807,DTR-50.1

E5507A R — E5509A L PCB HOLD

TX-NR807/DTR-50.1 — TX-SR707/DTR-40.1

031/03b model 030/03a model

HT-RC180

SCHEMATIC DIAGRAM-4

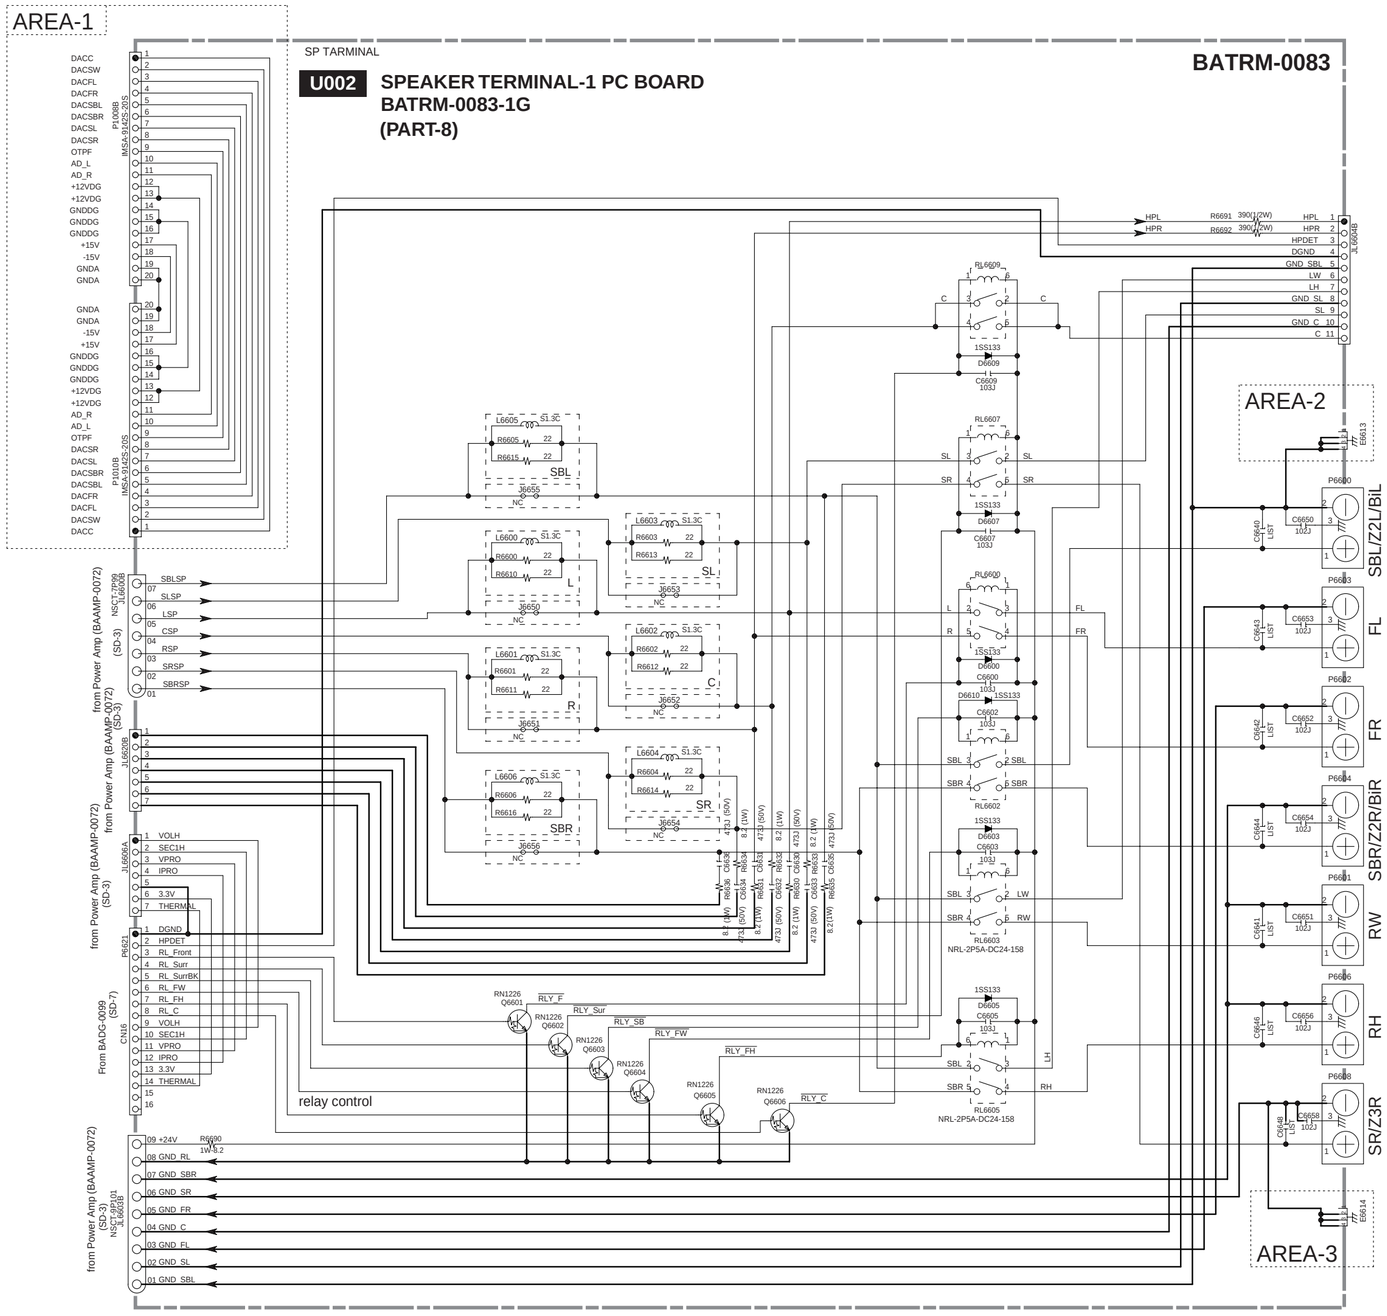

C6639 -- 6649

TYPE	T7	A7	T8	A8
D	NC	---	NC	---
J	---	NC	---	NC
M	472J	---	472J	---

CODE	MODEL
T7	TX-SR-707, DTR-40.1
A7	TX-SA707
T8	TX-NR807, DTR-50.1
A8	TX-NA807

AC CORD



for TX-SR707DC,DF

J902

TX-SR707,TX-SA707,DTR-40.1	Mount
NR807,NA807,DTR-50.1	No mount
DHC-40.1	Mount

P902B

TX-SR707,TX-SA707,DTR-40.1	No mount
TX-NR807,TX-NA807,DTR-50.1	Mount
DHC-40.1	No mount

F901

TYPE	T7	A7	T8	A8	DHC-40.1
D	10A 125V	---	12A 125V	---	5A 125V
J	10A 125V	10A 125V	15A 125V	15A 125V	---
M	T5.0AL250V	---	T6.3AL250V	---	---

T902

TYPE	T7	A7	T8	A8	DHC-40.1
D	1520JQ	---	1520JQ	---	1520JQ
J	---	1520JQ	---	1520JQ	---
M	1520GQ	---	1520GQ	---	---

< CAUTION >

DHC-40.1 use only AREA-1, 2, 3, 4, 5 & 6.

NOTE

- THE COMPONENTS IDENTIFIED BY MARK ⚠ ARE CRITICAL FOR SAFETY. REPLACE ONLY WITH PART NUMBER SPECIFIED.
- VOLTAGE (MEASURED WITH VOLTMETER) IS DC VOLTAGE. (NO INPUT SIGNAL)
- ELECTROLYTIC CAPACITORS (⊣⊢) ARE IN uF/WV.
- ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED. EX) 030→3pF 330→33pF 331→330pF 333→0.033uF
- ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED. THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS. EX) ○ ○ ○ ↙ PRINTING SIDE
- CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

THIS SYMBOL LOCATED NEAR THE FUSE INDICATES THAT THE FUSE USED IS SLOW OPERATING TYPE FOR CONTINUED PROTECTION AGAINST FIRE FUSE HAZARD,REPLACE WITH SAME TYPE FUSE. FOR FUSE RATING REFER TO THE MAKING ADJACENT TO THE SYMBOL.

CE SYMBOLE INDIQUE QUE LE FUSIBLE UTLISE EST A LENT, E POUR UNE PROTECTION PERMANENTE,N'UTILISER QUE DES FUSIBLES DE MEME TYPE. CE DARNIER EST INDIQUE LA QU LE PRESENT SYMBOL EST APPOSE.

CAUTION

FOR CONTINUED PROTECTION AGAINST FIRE HAZARD, REPLACE ONLY WITH FUSE OF SAME TYPE AND RATING INDICATED.

ATTENTION

CAUTIONF AFIN D'ASSURER UNE PROTECTION PERMANENTE CONTRE LES RISQUES D'INCENDIE, REMPLACER UNIQUEMENT PAR UN FUSIBLE DE MEME TYPE ET CALIBRATION COMME INDIQUE.

HT-RC180

SCHEMATIC DIAGRAM-5

U0032 VIDEO CIRCUIT PC BOARD BAVD-0101-1P (PART-9)

BAVD-0101

Not used

TO D Terminal PWB
TO BAVD-0102 (Part-10 D Terminal Section)
P4900=NCFC7-151012 (JJ ONLY) FFC

TO HDMI PWB (SD-8)
TO BAHDM-0132 (Part-14 HDMI Section)
* P4104A TX-NR807/NA807,DHC-40.1,DTR-50.1=NSCT-31P2124
TX-SR707/SA707,DTR-40.1=NSCT-19P2112
* P4104 NCFC7-191012 or NCFC7-311012

(SD-9) To HDMI board
JL8002A NSCT-5P896
JL8002:5J200606H P2.5X5 L=20

HDMI

MODEL	TX-SR707/SA707, DTR-40.1	TX-NR807/NA807, DTR-50.1,DHC-40.1	HT-RC180
DESTINATION	DC,DD,DT,MP,MA,MT,MJ,MQ,MR,JJ		
C4250-4252,4117	O	X	X
C,4191,4223			
R4156,4213,4214	X	O	O
C4236-4241	X	O	O
P4104A	NSCT-19P2112	NSCT-31P2124	NSCT-19P2112
P4104	NCFC7-111012	NCFC7-311012	NCFC7-111012

TO BACPU-0100 (Part-11 MICON Section)
TO DG PWB
P4100A IMSA-9142B-16A
P4101A IMSA-9142B-18A

TO BAASP-0073 (Part-5 ASP Section)
TO ASP PWB
JL1048 NPLG-9P592

(Except TX-SA707/NA807)

TO TUNER
PLLSCL 1
PLLSDA 2
STEREO 3
SD 4
+B_9V 5
VDD_SEL 6
TU_L_OUT 7
TUNER_GND_8
TU_R_OUT 9
TUNER_GND 10
FM_RDS 11
P1038 NCSCT-111012

(Except JJ,DD,DC)

TO TRANSFORMER
P4000B NPLG-SP119
FOR VIDEO SEC2=+12VDC,2A
FOR AUDIO SEC3=+12VDC,2A

TO PS PWB
JL901B NPLG-SP588
POFF 5
12VRL 4
GND_MPU 3
+12VDG1+SUB 2
POWERD 1

FAN

MODEL	TX-SR707/SA707, DTR-40.1,DHC-40.1	TX-NR807/NA807, DTR-50.1
DESTINATION	DC,DD,DT,MP,MA,MT,MO,MQ,MR,JJ	
C4501	X	O
Q4500,4501	X	O
R4500-4504,4512	X	O
JL4500B	X	O

HT-RC180

MODEL	HT-RC180
Q4700	X
P4700	X
PB	X

(TX-SR707 DC, TX-NR807 DC ONLY)

TO TRANSFORMER
P4000B NPLG-SP119
FOR VIDEO SEC2=+12VDC,2A
FOR AUDIO SEC3=+12VDC,2A

TO PS PWB
JL901B NPLG-SP588
POFF 5
12VRL 4
GND_MPU 3
+12VDG1+SUB 2
POWERD 1

VIDEO PS:4000-4099
EXCEPT E-CON&JL901B
VIDEO:4100-4499
FAN:4500-4599
12VTRG&IR:4600-4699
232C:4700-4799
E-CON:4800-4899
D4:4900-4999
TUNER&XM&SIRIUS:1-199

D4 Terminal(BAVD-0102)

MODEL	TX-SR707/SA707/NR807/NA807, DTR-40.1/50.1,DHC-40.1	TX-SA707 TX-NA807
DESTINATION	DC,DD,MP,MA,MT,DT,MQ,MO,MR,JJ	JJ
P4900A	X	O
P4900	X	O
C4253-4255	X	X
C4170-4172	X	O
C4124-4126	X	O

COMPONENT

	MODEL	TX-SR707/SA707 TX-NR807/NA807 DESTINATION	DTR-40.1 DHC-40.1 DD,MA,MP,JJ	DTR-50.1 DD,MA,MP,JJ
		DC,DD,MP,MA,JJ MT,DT,MQ,MO,MR		
IN3	C4108-4110	X	O	O
	R4103-4105			
	C4129,4228,4256	O	X	X
	R4203,4199,4114	X	O	O
Z2	C4120,4127,4130	X	X	O
	R4129-4134			
JK	P4108(9p)	X	X	O
	P4109(6p)	X	X	O
	P4110(9p)	O	X	X
	P4116(9p)	X	O	X
	P4117(6p)	X	O	X
		2/1	3/1	3/2

COMPOSITE

MODEL	TX-SR707/SA707 TX-NR807/NA807	DTR-40.1/50.1 DHC-40.1
DESTINATION	DC,DD,MP,MA,JJ MT,DT,MQ,MO,MR	DD,MA,MP,JJ
P4112-4114	NPJ-10PDBY621 or NPJ-10PDBY478	NPJ-10PDSY628 or NPJ-10PDBY481
P4115	X	O
R4247,4248 C4294,4295,4142	X	O

Component Terminals
Onkyo= Silver
Integra= Gold
P4118 MEJITANS_ST-5

Composite Terminals
Onkyo= Silver
Integra= Gold

A2 size

HT-RC180

SCHEMATIC DIAGRAM-6

U0031 CPU CIRCUIT PC BOARD BACPU-0100-1P (PART-11)

BACPU-0100

To display circuit PC board (SD-18) — TO DISPLAY (Part-23,24,26,28)

To video circuit PC board (SD-5) — TO BAVD-0101 (Part-9)

TO DEBUGER — NC(Debuger) P1001A

TO FLASH WRITER — NSCT-6P2243 P1004A

TO HP AMP (Part-25) ※5 — IL01038 NSCT-6P2266 — DHC-40.1only

TO BAASP-0073 (Part-5) (SD-1) — To power amp. input PC board — P5018B NPC-2P5018

TO BAHDM-0132 (Part-20) (SD-15) — P3608B IMSA-9142S-18A

To BATRM-0083 (Part-8) (SD-4) — P1010B IMSA-9142B-20A

P6621B IMSA-9142B-16A except DTH-40.1 ※5

P4102B IMSA-9142S-16A — P4101B IMSA-9142S-16A

P1208 RJJACK MSJ-035-22

P1901A IMSA-9140-22A — P1901B IMSA-9140-22B

※1 RDS

DESTINATION	Dx,JJ	OTHER
R1058 R1220	O	X
R1065 R1199	X	O

※2 SIRIUS

DESTINATION	TX-SR707Dx DTR40.1Dx TX-NR807Dx DHC40.1Dx DTR50.1Dx	OTHER
R1114 R1116 R1118	O	X

※3 IR IN

DESTINATION	TX-SA707JJ RC180Dx TX-NA807JJ	OTHER
R1247	O	X
U1100 D1100-1101 R1270-1271 C1053-1054 JL5515	X	O

※4 Bi-direction Remote

DESTINATION	TX-NR807Dx,Xx DTR50.1Dx,XX,JJ RC180Dx	OTHER
Q1101Q1101 R1272-R1288 C1101-C1104 X1101	O	X

※5 model

DESTINATION	DHC-40.1	OTHER
R1206 R1208 R1236 R1237 IL01038 P6621B	O X	X O

MODEL	A B	C	D E F			N	G H	J	P	K L M		
TYPE	TX-SR707	TX-SA707	DTR40.1			DHC40.1	TX-NR807	TX-NA807	HT-RC180	DTR50.1		
	Dx	xx	JJ	Dx	xx	JJ	Dx	Dx	xx	JJ	Dx	Dx	xx	JJ
BAND u	R1159	NC	10K	NC	10K	4.7K	NC	NC	10K	10K	33K	NC	10K	4.7K
BAND d	R1160	0 Ω	10K	33K	0 Ω	10K	33K	0 Ω	10K	33K	4.7K	0 Ω	10K	33K
INT1 u	R1157	33K	33K	10K	10K	10K	10K	NC	NC	10K	NC	NC	NC	NC
INT1 d	R1158	10K	10K	33K	10K	10K	10K	NC	0 Ω	0 Ω	33K	0 Ω	0 Ω	0 Ω
INT2 u	R1154	NC	NC	33K	33K	33K	10K	10K	10K	56K	10K	33K	33K	33K
INT2 d	R1155	0 Ω	0 Ω	4.7K	10K	10K	10K	NC	10K	10K	33K	56K	56K	56K
INT3 u	R1150	NC	NC	33K	10K	10K	33K	10K	NC	NC	33K	33K	10K	33K
INT3 d	R1152	0 Ω	0 Ω	4.7K	10K	10K	56K	NC	0 Ω	0 Ω	4.7K	10K	10K	56K

uCOM	1000-1299
U-port	1900-1999

BAETC-0103

U0033 UNIVERSAL PORT PC BOARD BAETC-0103-1P

Q1016 MPD70F3746GJ-GAE-AX

Q1022 R1EX2506ASA00A

Q1101 S3F80K9

Q1100 KSM-603TE2Q

Q1023 NJU7706F27A3

Q1950 NJM2505AF

Q1960 NJM2505AF

Q1970 NJM2505AF

Q1291 TC4066BFT

Q1290 2SC2712-GR

Q1102 2SC2712-GR

Q1292 2SC2712-GR

Q1019 S-812C33AUA-C2N

Q1020 S-812C56AUA-C3K

Q1017 XC6203P502FR

Q1018 XC6213B332MR

Q1100 KRC102S

Q1005 KRC102S

Q1007 KRC102S

Q1006 KRA107S

Q1008 KRA107S

Q1027 KRA102S

Q1029 KRA102S

Q1031 KRA102S

Q1033 KRA102S

Q1035 KRA102S

Q1037 KRA102S

Q1002 KRA102S

Q1004 KRA102S

Q1011 KRA102S

Q1028 RK7002AS

Q1030 RK7002AS

Q1032 RK7002AS

Q1034 RK7002AS

Q1036 RK7002AS

Q1038 RK7002AS

Q1003 RK7002AS

Q1005 RK7002AS

Q1007 RK7002AS

Q1009 KRC102S

D1100 SIR-34ST3F

D1101 SIR-34ST3F

D1005 1SS362

D1040 1SS362

D1041 1SS362

D1042 1SS362

D1043 1SS362

D1044 1SS362

D1045 1SS362

D1046 1SS362

D1047 1SS362

D1048 1SS362

D1049 1SS362

D1050 1SS362

D1051 1SS362

D1052 1SS362

D1053 1SS362

D1054 1SS362

D1055 1SS362

D1056 1SS362

D1057 1SS362

D1058 1SS362

D1059 1SS362

HT-RC180

SCHEMATIC DIAGRAM-7

U003 DAC/ DIR CIRCUIT PC BOARD-7
BADG-0099-1P (PART-12)

BADG-0099

(SD-15)
TO_NAHDM-0132
(Part-20)

SP terminal PC board
(SD-4)
TO BATRM-0083
(Part-10)

※1		JJ	exceptJJ
R1620-1627	R1640-1647	22K	10K
R1630-1637	R1650-1657	22K	12K
R1660-1667	R1670-1677	2.2K	1.8K
C1600-1607		331J	471J
C1610-1617	C1620-1627	470J	101J

※2				JJ	exceptJJ
Q1611-1614	Q1621-1624	Q1631-1634	C1630-1637	○	×
C1640-1647	R1680-1687	R1690-1697	R1700-1707		
R1710-1717	R1720-1727	R1730-1737	R1740-1747		
R1750-1757	R1760-1767				
R1770-1777				×	○

except JJ

JJ ONLY

CODEC,DAC	1300-1599	
Filter,VLSC	1600-1799	
ADIN	1800-1899	

HT-RC180

SCHEMATIC-DIAGRAM-8

U005 HDMI CIRCUIT PC BOARD-1
BAHDM-0132-1D
HDMI IN/ HDMI RX/ HDMI TX SECTION
(PART-13)

HDMI IN4 · HDMI IN3 · HDMI IN2 · HDMI IN1 · HDMI IN8 FRONT IN · HDMI INPUT2 PART PART-2 · HDMI INPUT2 PART PART-14 · DSP PART · BUS SW PART PART-16 · HDMI OUT SUB · HDMI OUT MAIN

SII9185A Q8162 · SII9233 Q8501 · SII9134 Q8451 · SII9134 Q8401

	Reon
R8501	33
R8502	12
R8503-8513	33X4

BAHDM-0132

HT-RC180

SCHEMATIC DIAGRAM-9

U005 HDMI CIRCUIT PC BOARD-2
BAHDM-0132-1D
(PART-14)

HDMI IN/ ENCODER/ POWER SUPPLY SECTION

HDMI INPUT1 PART
PART-13

MEMORY PART
PART-16

VIDEO MPU

Q8701
MPD70F3740GC-UEC-AX

JTAG JIG

DSP PART

TRINO PART
PART-15

TRINO PART
PART-15
(SD-10)

Q8801
ADV7342

POWER SUPPLY

FRONT HDMI JIG

HDMI IN7

HDMI IN6

HDMI IN5

ar042 Only

*High RCV only

SII9185A
Q8362

HDMI INPUT1 PART
PART-13
(SD-8)

DSP PART GND

	Reon
R8958	0
R8959	NC

HT-RC180

SCHEMATIC DIAGRAM-10

U005 **HDMI CIRCUIT PC BOARD-3**
BAHDM-0132-1D
(PART-15) TRINO SECTION

Q8200
FLI30336-AC
FLI30336

HDMI INPUT2 PART
PART-14

MEMORY PART
PART-16

HDMI INPUT2 PART
PART-14

BAHDM-0132

SCHEMATIC DIAGRAM-11

U005 **HDMI CIRCUIT PC BOARD-4**
BAHDM-0132-1D
(PART-16) TRINO BOARD MEMORY SECTION

SCHEMATIC DIAGRAM-12

U005

HDMI CIRCUIT PC BOARD-5
BAHDM-0132-1D
(PART-17) NET/ USB SECTION

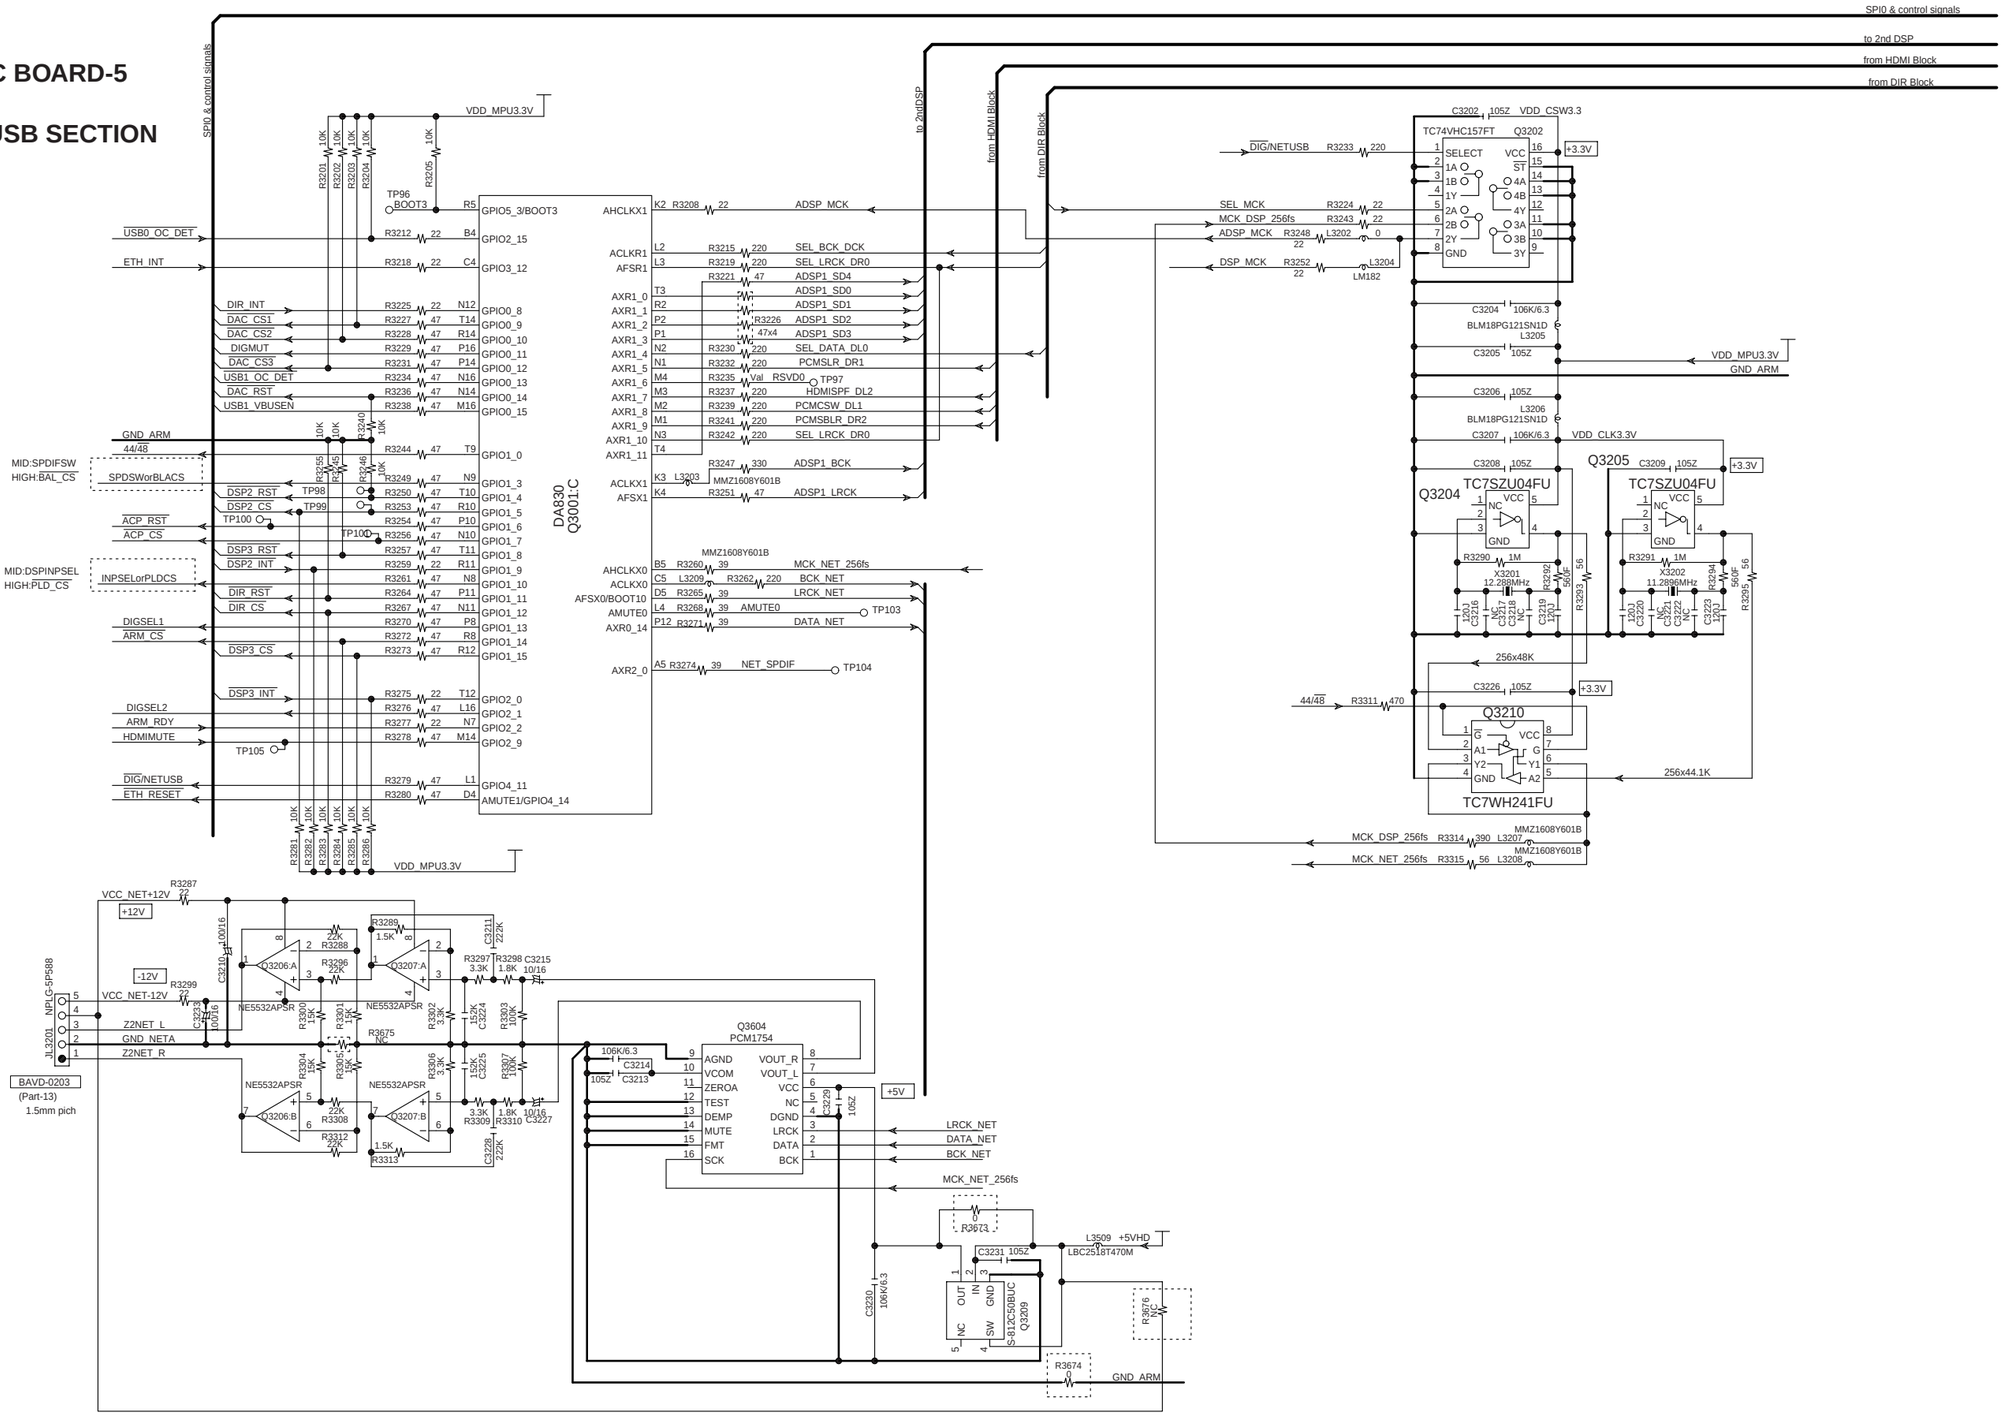

SCHEMATIC DIAGRAM-13

U005

HDMI CIRCUIT PC BOARD-6
BAHDM-0132-1D
(PART-18)
NET/ USB POWER SECTION

R3115 or R3116	BOOT2
R3111 or R3112	BOOT5
R3109 or R3110	BOOT6
R3107 or R3108	BOOT7

for Debugging

Boot Opt.	NAND	UART1	SPI0
BOOT7	L	H	L
BOOT1	H	H	L
BOOT0	H	H	H
BOOT3	H	H	H
BOOT2	H	L	H

BOOT3 is always pulled up.

SPI0 & control signals

SPI0_SOMI must be Hi-Z when booting DA830 — DIGSDI
DIGSDO
SPI0_CLK must be Hi-Z when booting DA830 — DIGCLK
SPI0_SCS
TP81

Host communication

SPI1_SOMI must be Hi-Z when booting DA830 — ARM_SOMI
SPI1_SIMO must be Hi-Z when booting DA830 — ARM_SIMO
SPI1_CLK must be Hi-Z when booting DA830 — ARM_CLK
ARM_CS
ARM_RDY

APOWER, GNDD, 232TXD, NC, VDD, NC, 232RXD, NC, RESET — P3102A
TP86 GND_ARM
TP87 TXD 100 R3139 UART1_TXD
TP89 VDD_MPU3.3V
TP91 RXD 100 R3144 UART1_RXD
TP92 RST 0 R3147 ARM_RST

TP84 I2C0_SDA
TP85 I2C0_SCL
DIGSDI R3100 Val — TP88 UART2_RXD
DIGSDO R3105 Val — TP90 UART2_TXD
DIGCLK R3106 Val

ACP_RST
ACP_CS R3104 Val

Q3105 NC_MFIver2B
NC, MD1/CS, NC, RESET, VCC, MD0/SCLK, SDA/SOMI, SCL/SIMO, VSS

Q3106 BH33FB1WG-TR
VIN, VSS, CE, VOUT, NC — +3.3V

VDD_MPU3.3V
+5VHD
Q3107 TA48033BF — VDD_MPU3.3V — L3107 BLM18PG121SN1D — VDD_DA8x_3.3V +3.3V — TP107
RampUpTime > 330uSec

Q3109 BD7820 — SHUT, INPUT, GND, OUTPUT, DAJ
RampUpTime > 120uSec
+2.4VDSP — BLM18PG121SN1D L3109 +1.2V — VDD_CORE1.2V — TP108

Q3001:D DA830

SPI0_SOMI0/BOOT0	R3124 330 R6		USB0_DM G4
SPI0_SIMO0/BOOT1	R3125 47 P6		USB0_DP F4
SPI0_CLK/BOOT2	R3126 47 T5		
SPI0_SCS/BOOT4	R3127 47 N4		
			USB0_VBUS D3
			USB0_DRVVBUS E4 R3129 47
SPI1_SOMI0/BOOT5	R3130 47 P5		
SPI1_SIMO0/BOOT6	R3131 47 N5		
SPI1_CLK/BOOT7	R3133 47 T6		USB0_ID D2
			USB0_VDDA33 H5
I2C0_SDA/BOOT8	R3		USB0_VSSA33 H4
I2C0_SCL/BOOT9	P3		
			USB0_VDDA18 E3
UART2_RXD/GPIO5_12	R4		USB0_VDDA12 C3
UART2_TXD/GPIO5_13	P4		
			USB0_VSSA F3
UART1_RXD	C6		USB1_VDDA33 C1
UART1_TXD	D6		USB1_VDDA18 C2
RMII_50MHz R3150 33	A4		
RMII_MHZ_50_CLK/BOOT11			
RMII_TXD0 R3154 39	B8		USB1_DM B3
RMII_TXD1 R3155 39	C8		USB1_DP A3
RMII_TXEN R3156 39	D8		
RMII_CRSDV R3157 0	A7		
RMII_RXD0	B7		
RMII_RXD1	C7		
RMII_RXER	D7		
MDIO_CLK R3162 39	A6		
MDIO_D R3163 22	B6		

RMII_TXD1

differential impeadance = 90ohm
USB0_D-
USB0_D+
TP82
Mid only R3672 0 for non_frontUSB
USB0_VBUSEN
R3101 10K
R3102 15K
R3121 15K
USB_FS_D-
USB_FS_D+
differential impeadance = 90ohm

TPD2E001DRLR — Q3101 — VCC, NC, IO1, IO2, GND
GND_USB
R3123 0
USBDP1 TP79
USBDM1
TP80
L3101
P3101A NPLG-9P1B
L3102 BLM18PG181SN1D — VDD_VBUS0_5V
Q3102 MIC2005-0.5YM6 — VIN, GND, EN, VOUT, CSLW, FAULT
To Front USB
USB0_OC_DET
VDD_USB3.3V
GND_USB
Q3103 BH18LB1WG-TR — CE, VSS, NC, VIN, VOUT
Q3104 NC_TPD2E001DRLR — VCC, NC, IO1, IO2, GND
C3604 CHASSIS_GND
NC_103Z
USB
P3103A
Q3110 MIC2005-0.5YM6
R3671 0 for non_rearUSB
L3111 BLM18PG181SN1D
P3609
IMSA-9618S-04A
R3200 10K
USB1_OC_DET — TP115
USB1_VBUSEN — TP116
R3132 10K

GND_ARM
VDD_MPU3.3V
L3108 BLM18PG121SN1D +3.3V

RMII_50MHz
MDIO_D
MDIO_CLK
RMII_RXD1
RMII_RXD0
RMII_CRSDV
RMII_RXER
ETH_INT
RMII_TXEN
RMII_TXD0
RMII_TXD1

KSZ28041NL Q3108 — PADDLE
VDD_ETH3.3V
VDDIO_3.3, CRSDV/CNFG2, RXC, RXER/ISO, INTRP, TXC, TXEN, TXD0
RXD0/DUP, RXD1/AD2, RXD2/AD1, RXD3/AD0, MDC, MDIO, REXT, REFCLK
TXD1, TXD2, TXD3, COL/CNFG0, CRS/CNFG1, LED0/ANEG, LED1/SPEED, RST
XO, TX+, TX-, RX+, RX-, VDDA_3.3, VDDPLL_1.8, GND

VCC_ETHA3.3V
TX+,TX- / RX+,RX- Pair's differential impeadance= 100ohm
L3145 D1P2ADN90DH4L
TP93
P3104 SI-60073-F J0026D21NL
SI-60073-F or J0026D21NL

ETH_RESET
ARM_RST

TP65/TP66 must be connected to GPIO port when USB1 is used.
These signals are not wired at this EvaBoard

SCHEMATIC DIAGRAM-14

U005 HDMI CIRCUIT PC BOARD-7 BAHDM-0132-1D (PART-19)
DSP MEMORY SECTION

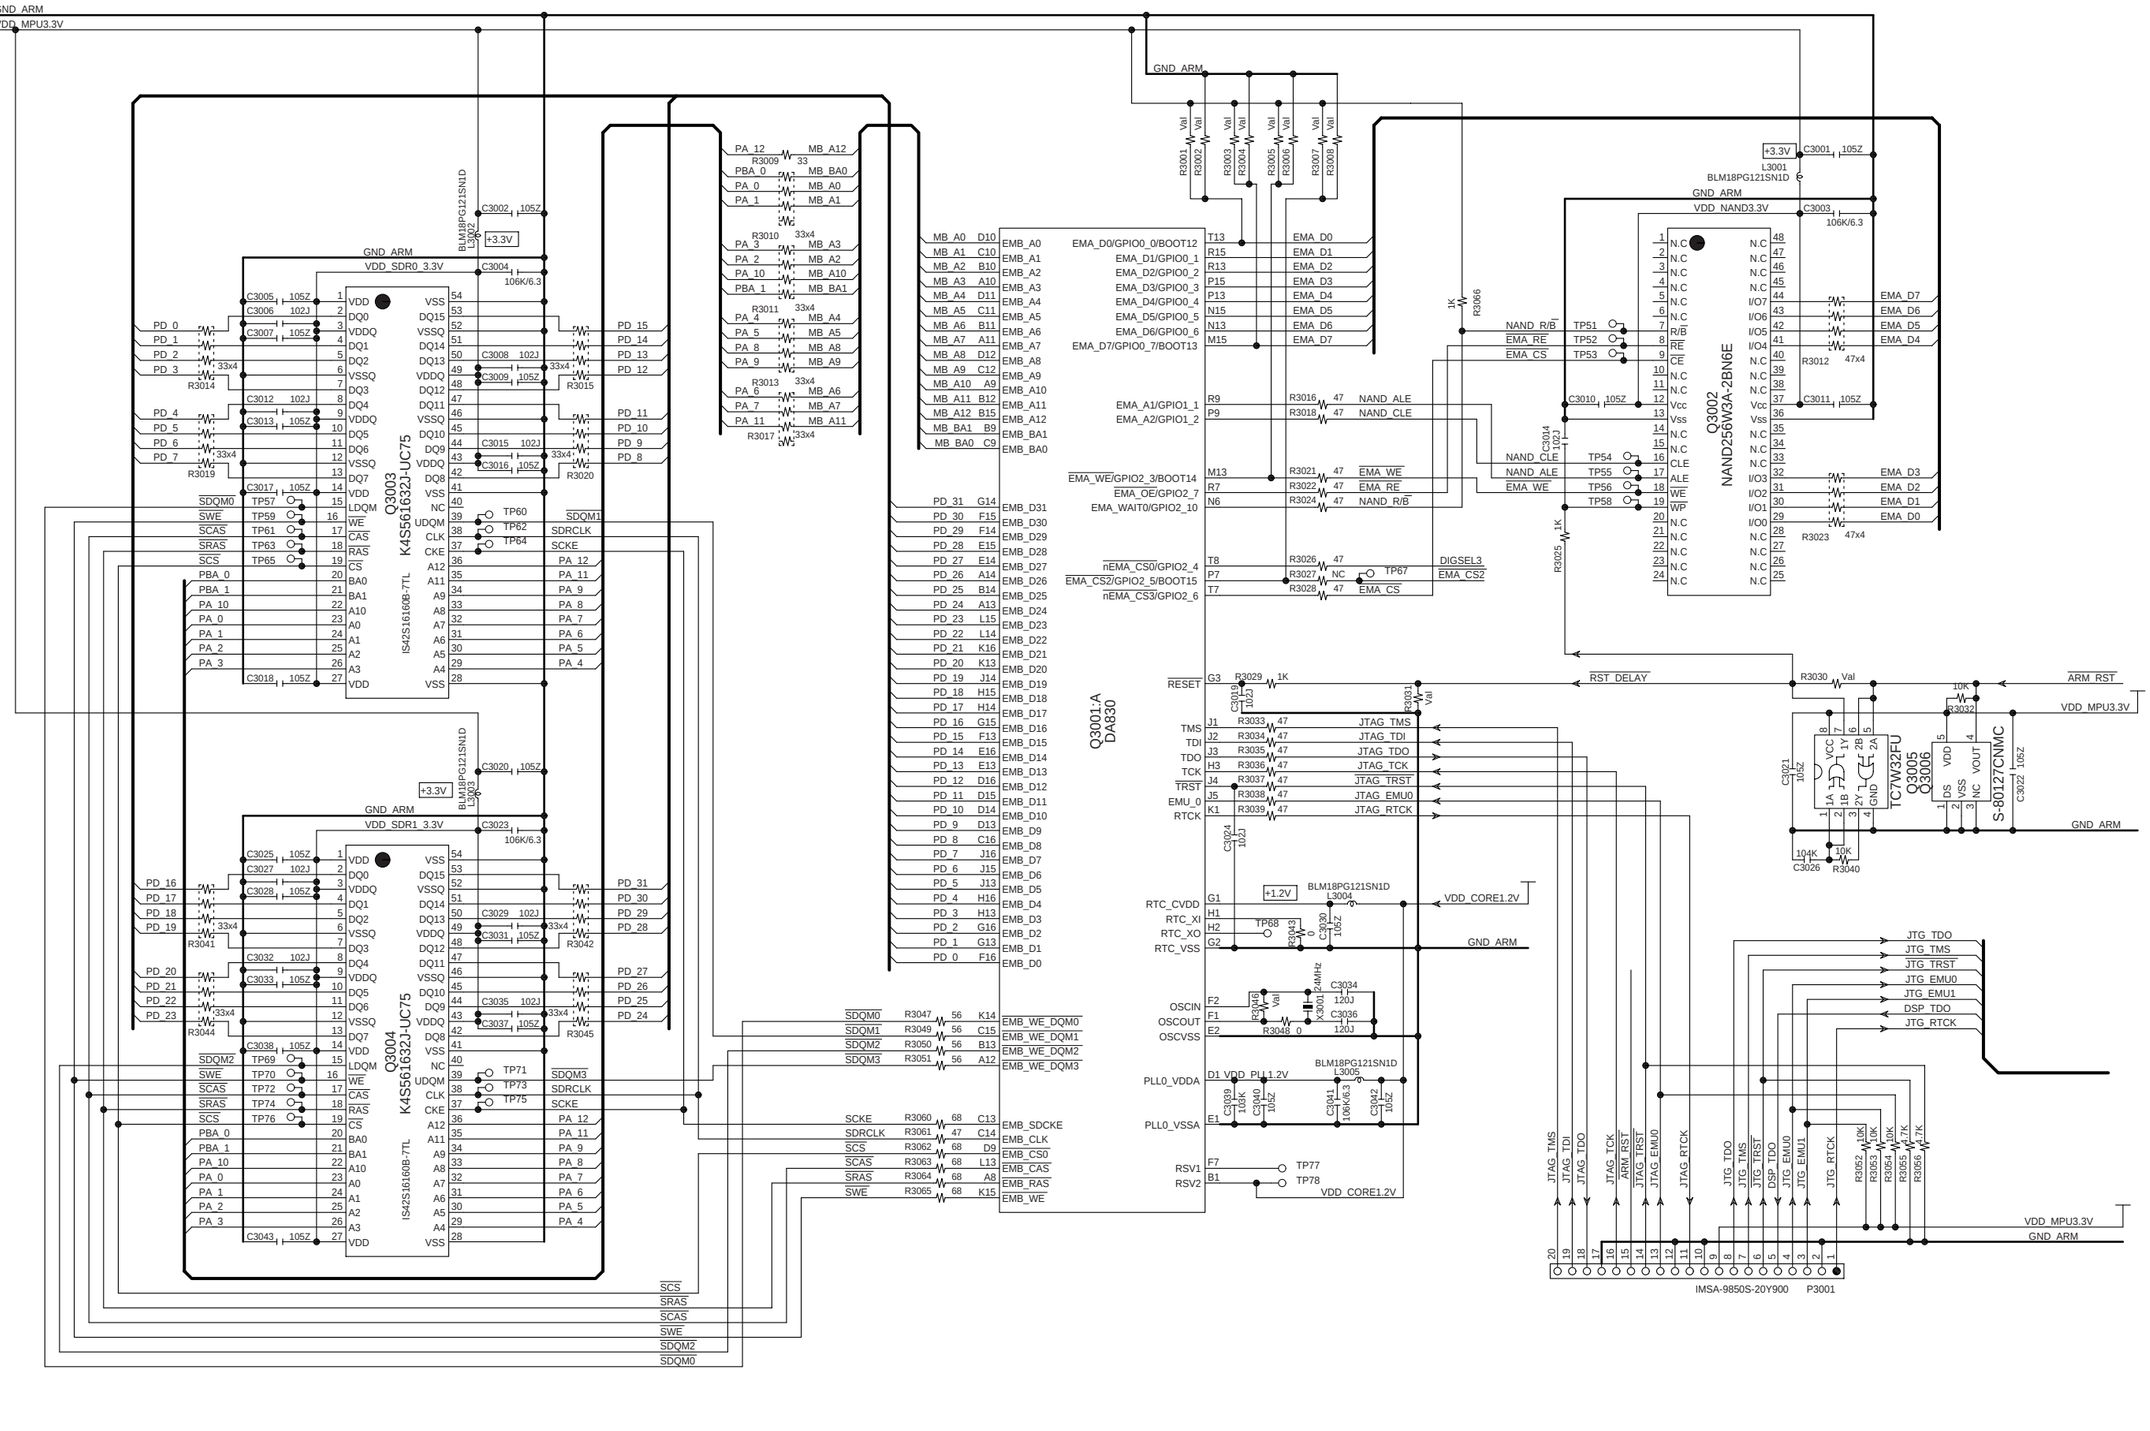

SCHEMATIC DIAGRAM-15

U005 **HDMI CIRCUIT PC BOARD-8**
BAHDM-0132-1D
(PART-20) DSP CONNECT SECTION

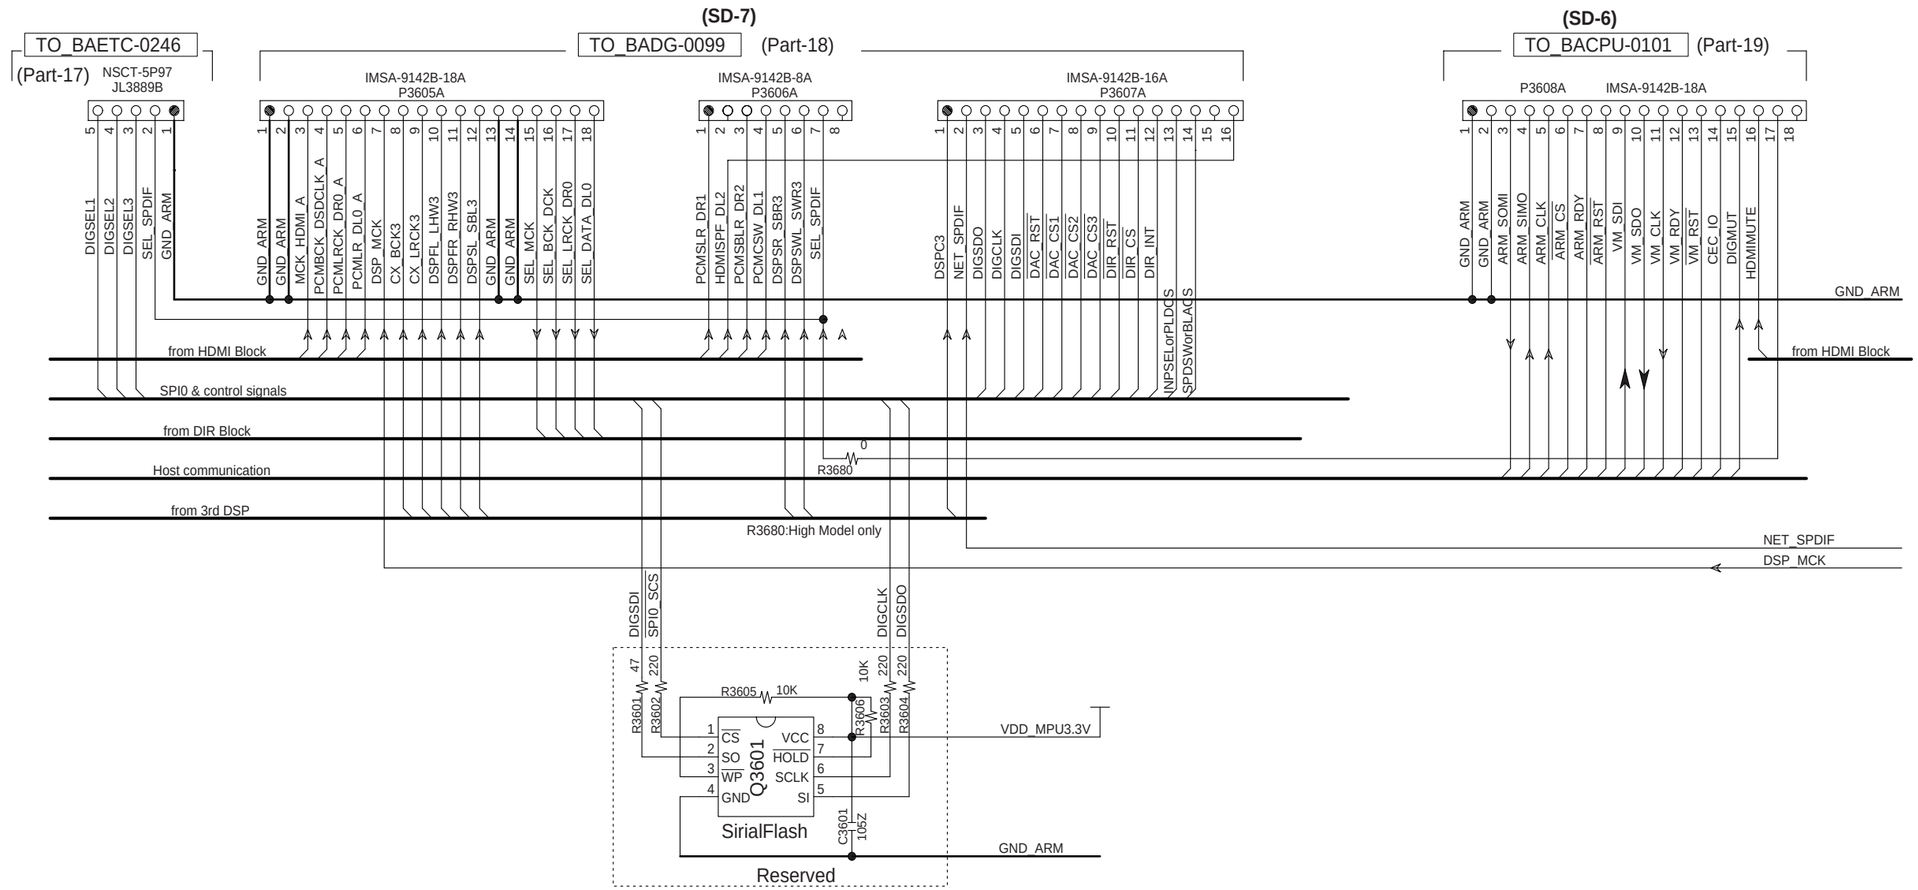

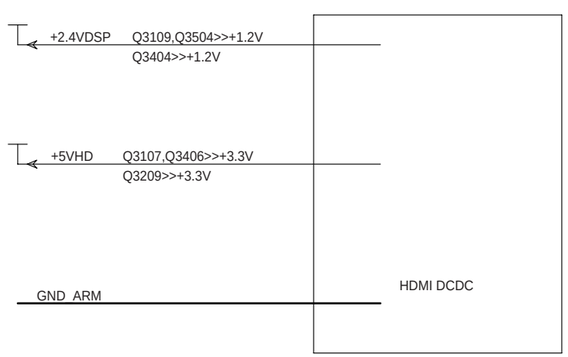

SCHEMATIC DIAGRAM-16

U005 HDMI CIRCUIT PC BOARD-9 BAHDM-0132-1D
(PART-21) DSP 2ND SECTION

	TX-SR707/ DTR-40.1 TX-NR807/ DTR-50.1
R3411	220
R3410 R3416	330

SPI0 & control signals
from1stDSP
to 2nd DSP
DIGSDO
DIGSDI
ADSP2_SD0
ADSP2_SD1
ADSP2_SD2
ADSP2_SD3
ADSP2_SD4
ADSP2_SD5
EM2_A12
EM2_A13
EM2_A14
EM2_A15
ADSP1_SD0
ADSP1_SD1
ADSP1_SD2
ADSP1_SD3
ADSP1_SD4
ADSP1_BCK
ADSP1_LRCK
ADSP2_BCK
ADSP2_LRCK
ADSP_MCK
DSP2_RST
DIGCLK
DSP2_CS
DSP2_INT
EM2_OE
EM2_FCS
EM2_RAS
EM2_SDCS
EM2_BA0
EM2_BA1
EM2_A10
EM2_A0
EM2_A1
EM2_A2
EM2_A3
EM2_A4
EM2_A5
EM2_A6
EM2_A7
EM2_A8
EM2_A9
EM2_A11
EM2_A18
EM2_A17
EM2_A19
EM2_A16
SPIO_CLK/I2C0_SCL
SPIO_SCS/I2C1_SCL
SPIO_ENA/I2C1_SDA
SPIO_SIMO
SPIO_SOMI/I2C0_SDA
RSVD1
DSP2_CLKIN
DSP3_CLKIN
JTG_TRST
JTG_TMS
JTG_TDO
JTG_EMU0
JTG_EMU1
JTG_RTCK
EM_CKE
EM_CLK
EM_WE_DQM[1]
EM_D[8]
EM_D[9]
EM_D[10]
EM_D[11]
EM_D[12]
EM_D[13]
EM_D[14]
EM_D[15]
EM_D[0]
EM_D[1]
EM_D[2]
EM_D[3]
EM_D[4]
EM_D[5]
EM_D[6]
EM_D[7]
EM_WE_DQM[0]
EM_WE
EM_CAS
EM2_CKE
EM2_CLK
EM2_UDQM
EM2_D8
EM2_D9
EM2_D10
EM2_D11
EM2_D12
EM2_D13
EM2_D14
EM2_D15
EM2_D0
EM2_D1
EM2_D2
EM2_D3
EM2_D4
EM2_D5
EM2_D6
EM2_D7
EM2_LDQM
EM2_WE
EM2_CAS
EM2_RAS
EM2_SDCS
EM2_BA0
EM2_BA1
EM2_A10
EM2_A0
EM2_A1
EM2_A2
EM2_A3
EM2_A4
EM2_A5
EM2_A6
EM2_A7
EM2_A8
EM2_A9
EM2_A11
EM2_A12
EM2_A13
EM2_A14
EM2_A15
EM2_A16
EM2_A17
EM2_A18
EM2_A19
EM2_BA0
EM2_BA1
EM2_A10
EM2_A0
EM2_A1
EM2_A2
EM2_A3
EM2_A4
EM2_A5
EM2_A6
EM2_A7
EM2_A8
EM2_A9
EM2_A11
EM2_A12
EM2_A13
EM2_A14
EM2_A15
EM2_A16
EM2_A17
EM2_A18
EM2_A19
EM2_WE
DSP2_RST
EM2_D0
EM2_D1
EM2_D2
EM2_D3
EM2_D4
EM2_D5
EM2_D6
EM2_D7
EM2_LDQM
EM2_WE
EM2_CAS
EM2_RAS
EM2_SDCS
EM2_BA0
EM2_BA1
EM2_A10
EM2_A0
EM2_A1
EM2_A2
EM2_A3
EM2_D15
EM2_D7
EM2_D14
EM2_D6
EM2_D13
EM2_D5
EM2_D12
EM2_D4
EM2_D11
EM2_D3
EM2_D10
EM2_D2
EM2_D9
EM2_D1
EM2_D8
EM2_D0
EM2_OE
EM2_FCS
EM2_BA1
EM2_D15
EM2_D14
EM2_D13
EM2_D12
EM2_D11
EM2_D10
EM2_D9
EM2_D8
EM2_UDQM
EM2_CLK
EM2_CKE
EM2_A15
EM2_A8
EM2_A5
EM2_A3
EM2_A2
EM2_A1
EM2_A0
EM2_A4
EM2_A6
EM2_A7
EM2_A9
EM2_A11
EM2_A12
EM2_A13
EM2_A14

SCHEMATIC DIAGRAM-17

U005 HDMI CIRCUIT PC BOARD-10
BAHDM-0132-1D
(PART-22) DSP 3RD SECTION

	TX-SR707/ DTR-40.1 TX-NR807/ DTR-50.1
R3511	220
R3510 R3516	330

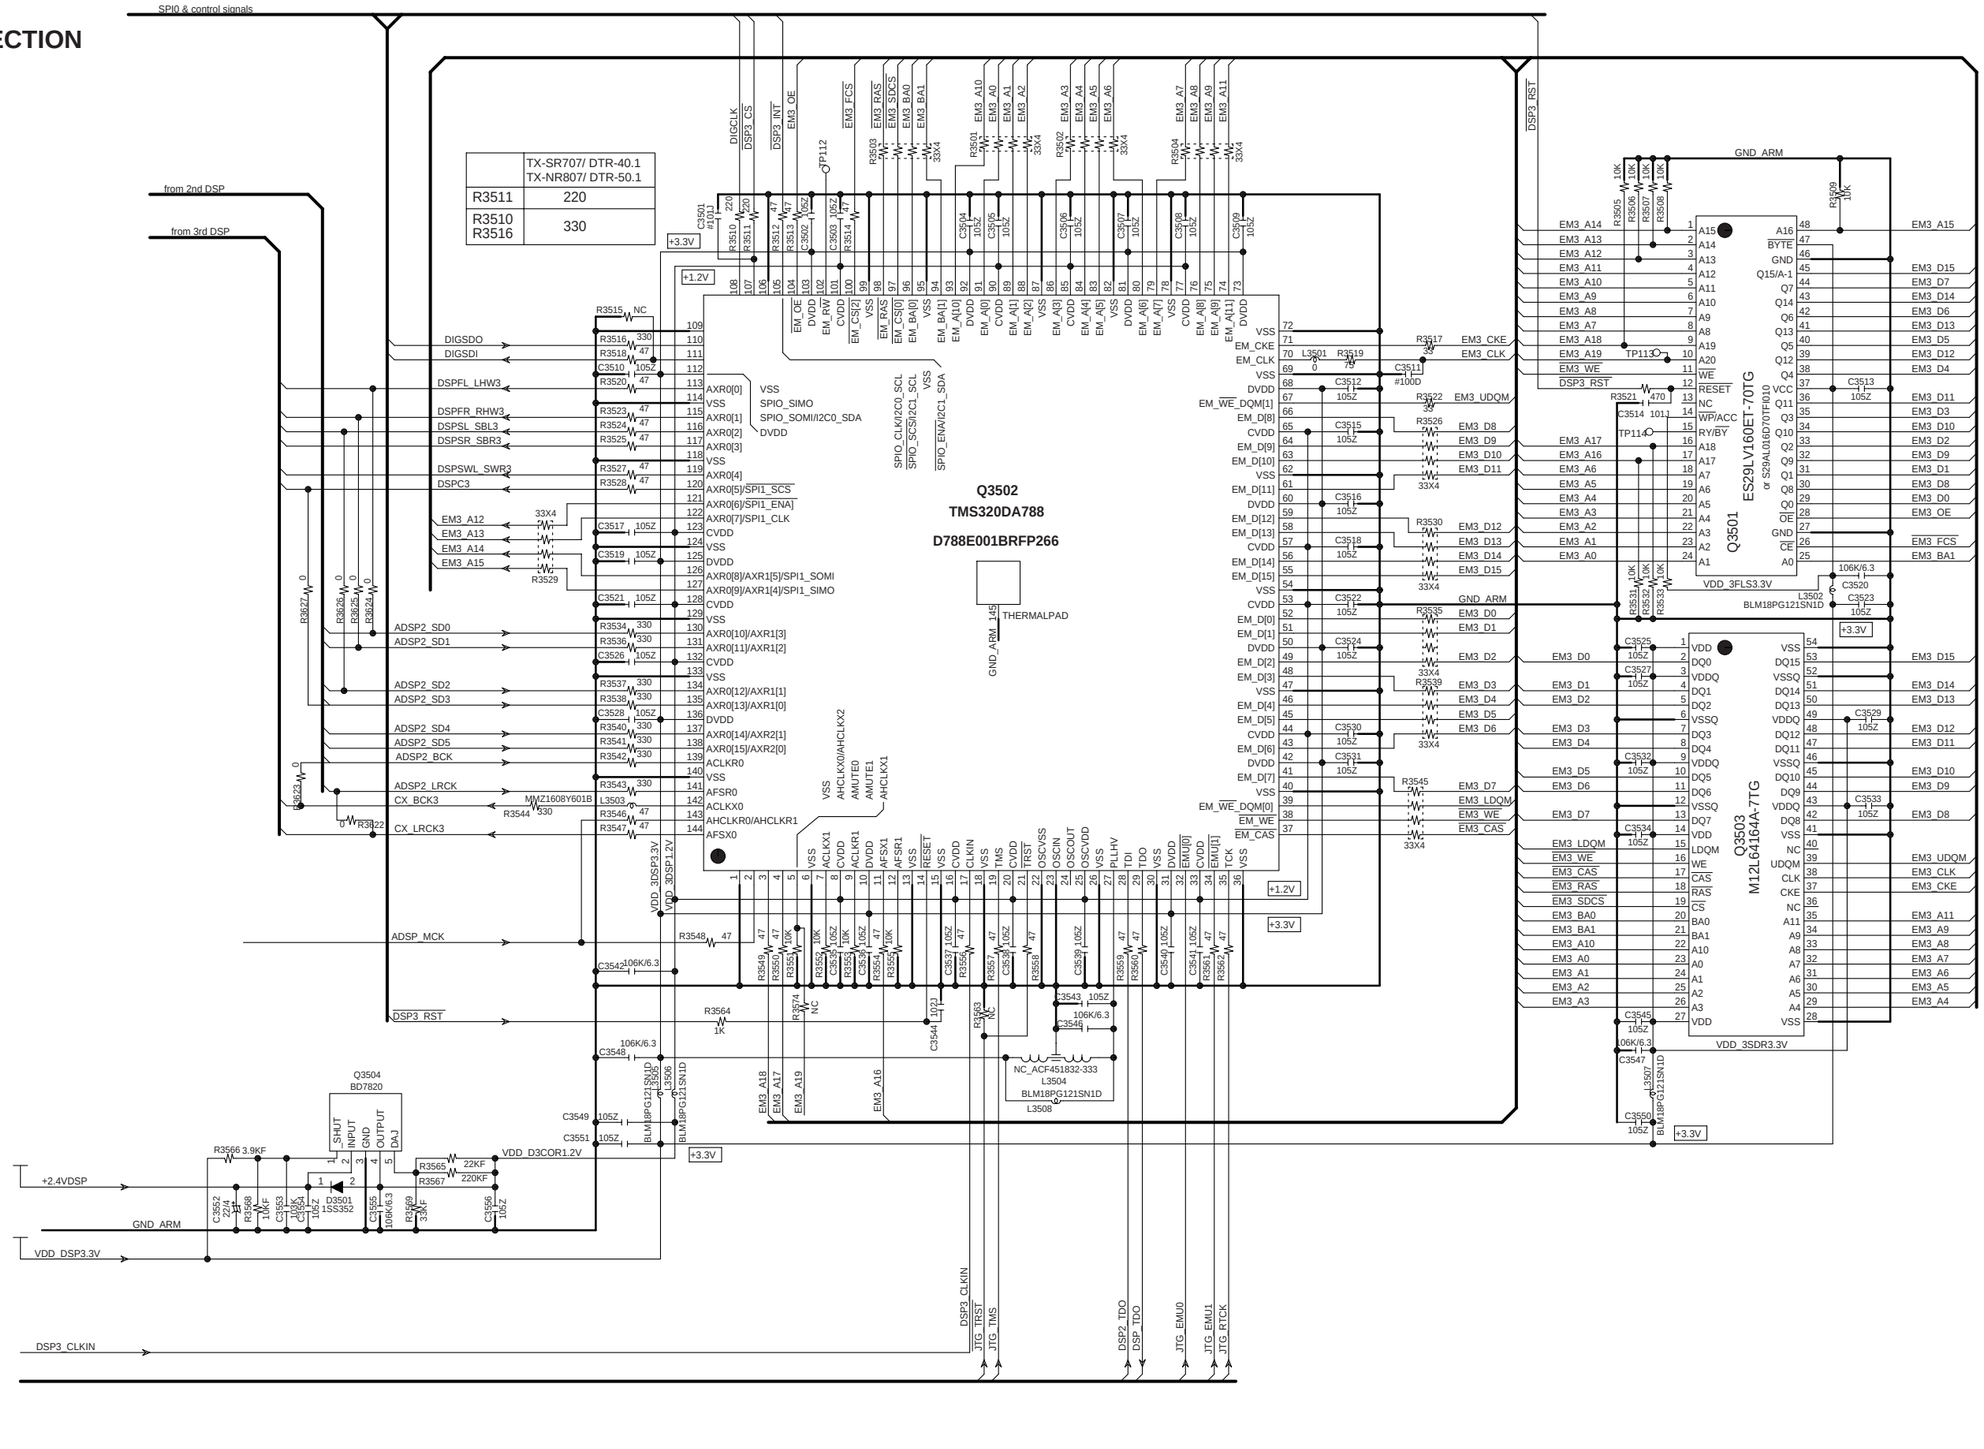

HT-RC180

SCHEMATIC DIAGRAM-18

U004 DISPLAY CIRCUIT PC BOARD-1 BADIS-0135-1A (PART-26)

BADIS-0135

To Primary power supply PC board BAPS-0140 (SD-19)

NSCT-5P876 JL9303A

JL9303 5J300606B15

FLAC1 FLAC2 +3.3VMPU -VP GNDDG

P7501:2009991154UL

CPU circuit PC board BACPU-0100 (SD-6) (Part-1J) TO BACPU-0100

GNDVD AUX2CV_IN -15VA +15VA AUX2_R GNDAUX2 GNDAUX2 AUX2_L MIC MICMUTE MICDET OPTF VOLA VOLB +5VMPU KEY3 KEY2 KEY1 KEYINT1 KEYINT0 +3.3VST +3.3VMPU GNDDG GNDDG DIGSDO DIGCLK GNDDG FLDRST FLDCS FLDICS LED_REMO REMO_IN REMIN KEY0 LEDPURE LEDZ4 LEDZ3 LEDZ2 GNDDG LEDSTBY

P7501B A2545WR2-2x20P(IDE40SIDE)

To Front digital input PC board BAETC-0138 (SD-19)

JL7560B NSCT-3P874

OPTF +5VMPU AUX2_R AUX2_L +15VA MICDET AUX2CV_IN GNDVD -15VA MICMUTE MIC GNDAUX2 +3.3VST GNDDG REMIN +3.3VMPU LED_REMO

RCA_3P

P7522

MSJ-035-05C B AG SR type(SILVER)

P7530

vishay RF1

U7560 TSOP34338RF1

LED_REMO

D7570 TSHL5300

GNDDG

NJM4580M-D

Q7534

Q7530

Q7533 RN2403

Q7531 RN1441

Q7532 RN1441

Q7540 DTA123JKA

Q7502 M66005-0001AHP SLAVE UPPER

Q7501 M66005-0001AHP MASTER LOWER

OR:2SC2712-Y(TE85L,F) Q7503

OR:2SC2712-Y(TE85L,F) Q7504

OR:2SC2712-GR Q7505

OR:2SC2712-GR Q7506

Q7500 HNA-16SL05T Q7500A FL HOLDER

Q7597 DTC123JKA

Q7598 DTC123JKA

P7590A NSAS-18P1798

NSAS-7P1799 P7591A

To Volume PC board BAETC-0139 (SD-19)

To Standby switch PC board BAETC-0136 (SD-19)

	S7613	S7614	S7615	S7616	S7623	S7624	S7625	S7626	S7627	S7628	S7629	S7632	S7636	S7637	S7647	S7648	S7640
TX-NR807(Dx)	ZONE2	ZONE3	-	OFF	TV/TAPE	TUNER	CD	PHONO	PORT	NET	DISPLAY	MEMORY	TONE	LEVEL	TUNING MODE	DIMMER	MUSIC OPTIMIZER
TX-NR807(xx)																RT/PTY/TP	
TX-NA807	-	RIHD	TONE	-								Re-EQ	-	-	LATE NIGHT	DIMMER	

KEYINT1 KEYINT0 KEY0_1

GNDDG

KEY1: GAME AUX1 AUX2 TAPE/TV TUNER CD PHONO PORT NETUSB

KEY2: SETUP MEMORY LMUSIC LMOVIE/TV MONITOR OUT TONE LEVEL TONE- TONE+ DISPLAY

KEY3: RETURN PRESET R PRESET UP ENTER PRESET DOWN PRESET L TUNING MODE DIMMER THX L.GAME

BADIS-0135

SCHEMATIC DIAGRAM-19

(PART-27)

U0041 STANDBY SWITCH PC BOARD BASW-0136-1A

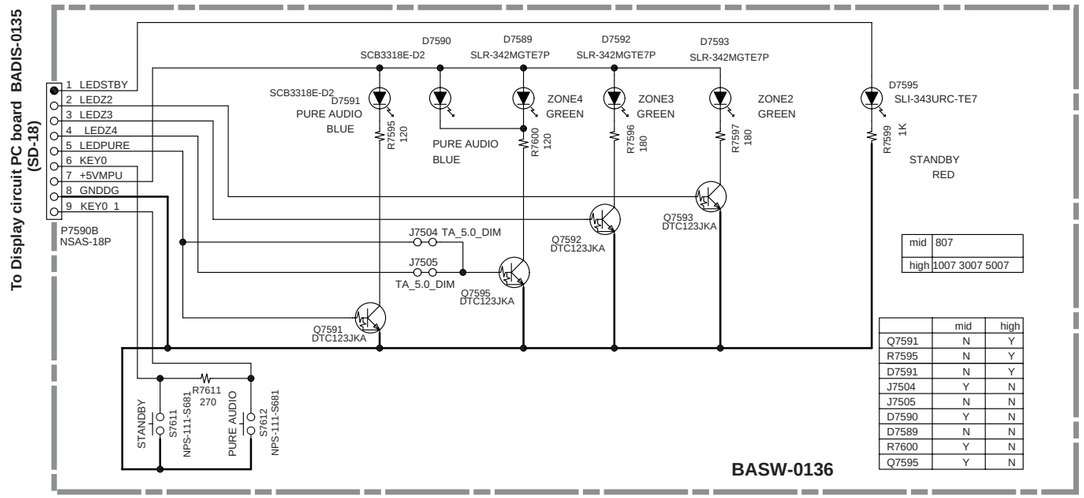

	mid	high
Q7591	N	Y
R7595	N	Y
D7591	N	Y
J7504	Y	N
J7505	N	N
D7590	Y	N
D7589	N	N
R7600	Y	N
Q7595	Y	N

mid	807
high	1007 3007 5007

U0043 FRONT DIGITAL INPUT PC BOARD BAETC-0138-1A

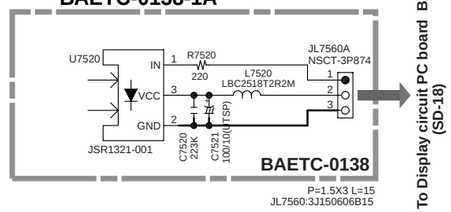

U0044 VOLUME LED PC BOARD BAETC-0139-1A

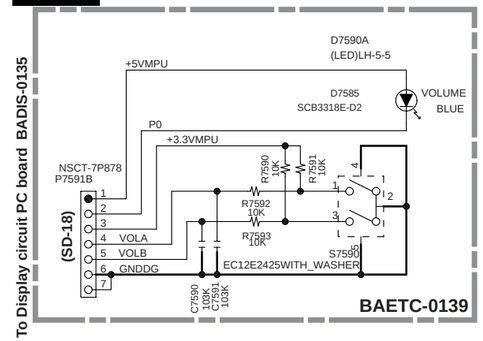

U0041 POWER SWITCH PC BOARD BASW-0143-1A

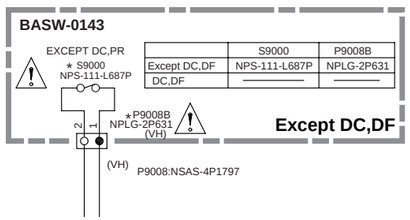

	S9000	P9008B
Except DC,DF	NPS-111-L687P	NPLG-2P631
DC,DF	———	———

U0045 FUSE PC BOARD BAPS-0140-1A

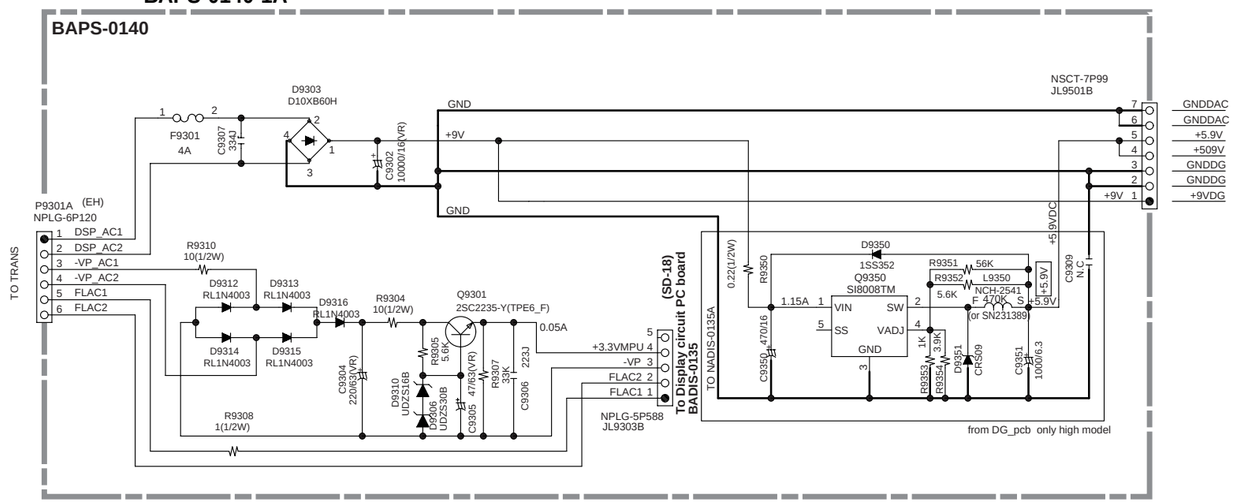

U0042 HEADPHONE TERMINAL PC BOARD BAETC-0137-1A

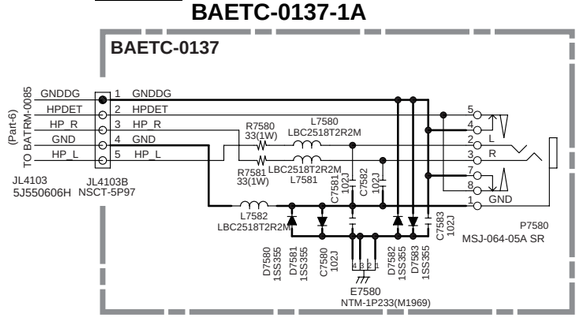

NR807/NA807 NC

C9302, C9307 to C9309, C9350, C9351
D9303, D9307, D9308, D9311, D9350, D9351
F9301A, F9301B, JL9501B, L9350, Q9350
R9309, R9350 to R9354

PRINTED CIRCUIT BOARD VIEW-1

U001

AMPLIFIRE CIRCUIT
PC BOARD
BAAMP-0072

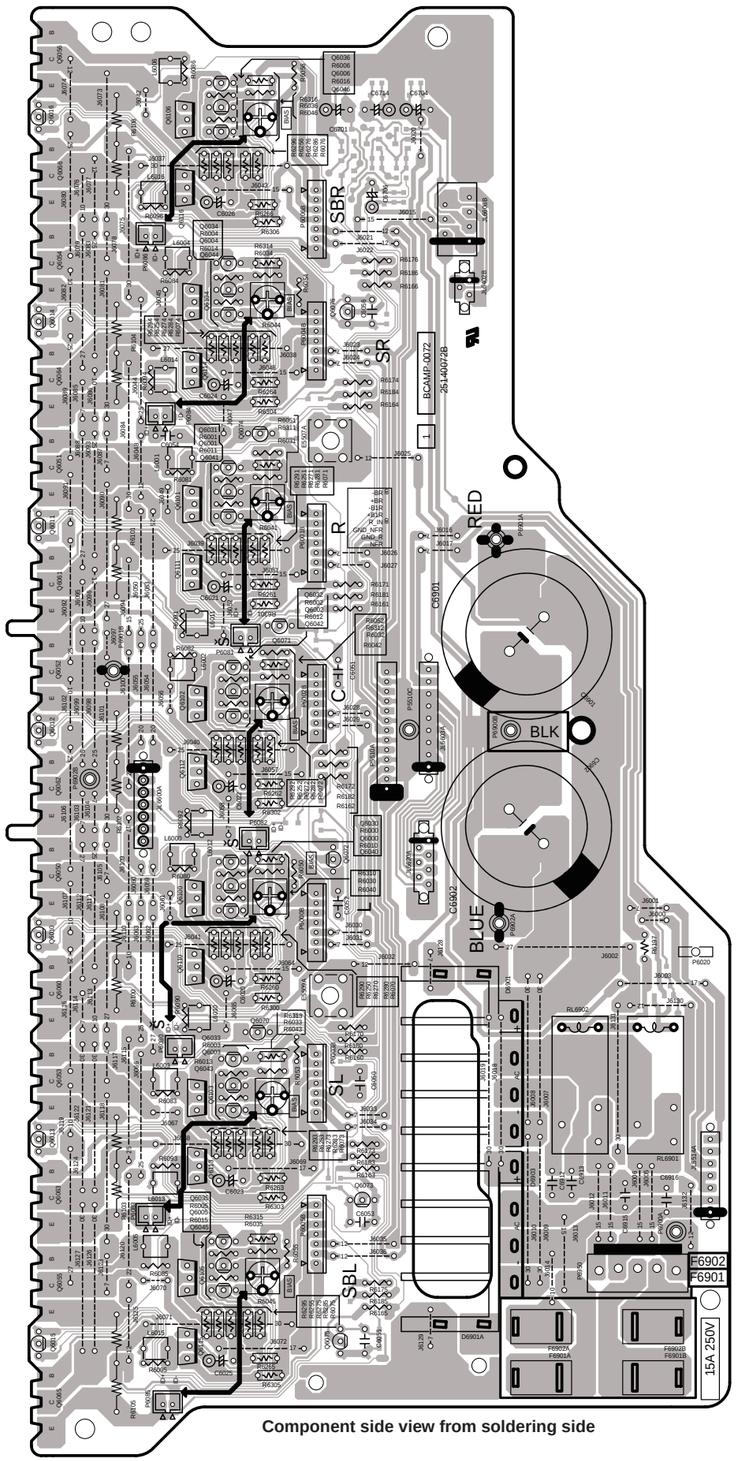

Component side view from soldering side

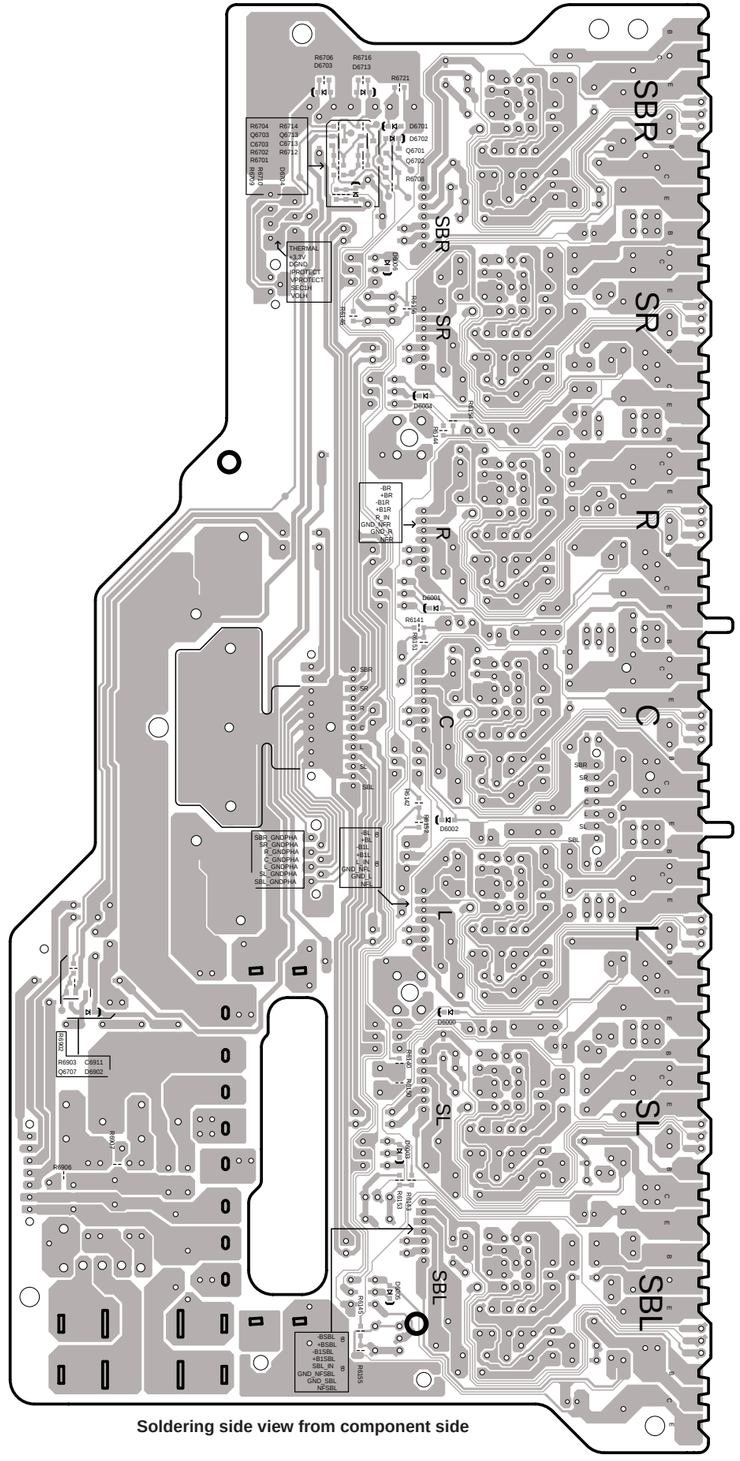

Soldering side view from component side

PRINTED CIRCUIT BOARD VIEW-2

U0011 AUDIO INPUT CIRCUIT PC BOARD
BAASP-0073

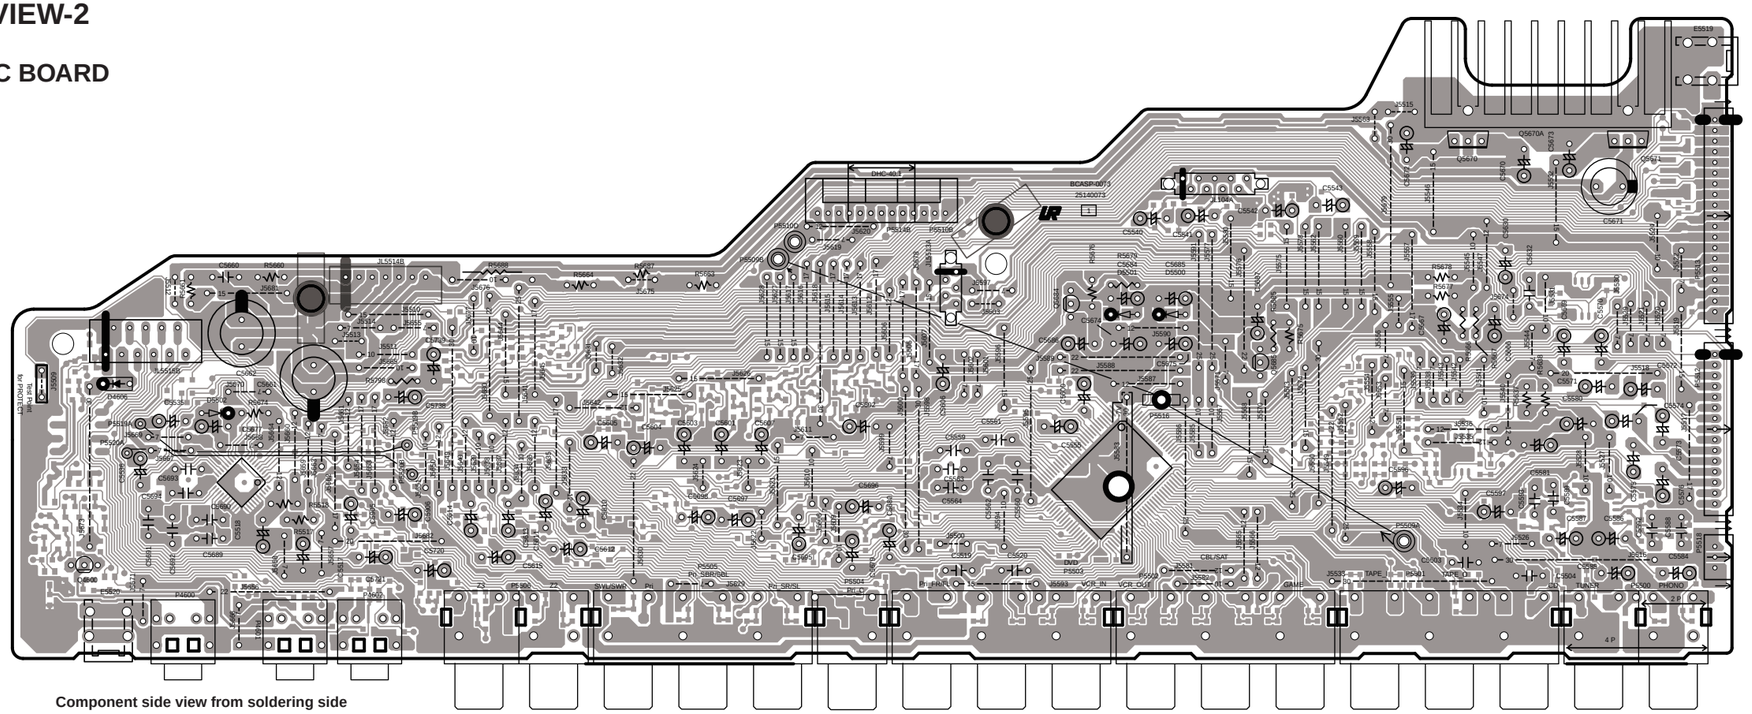

Component side view from soldering side

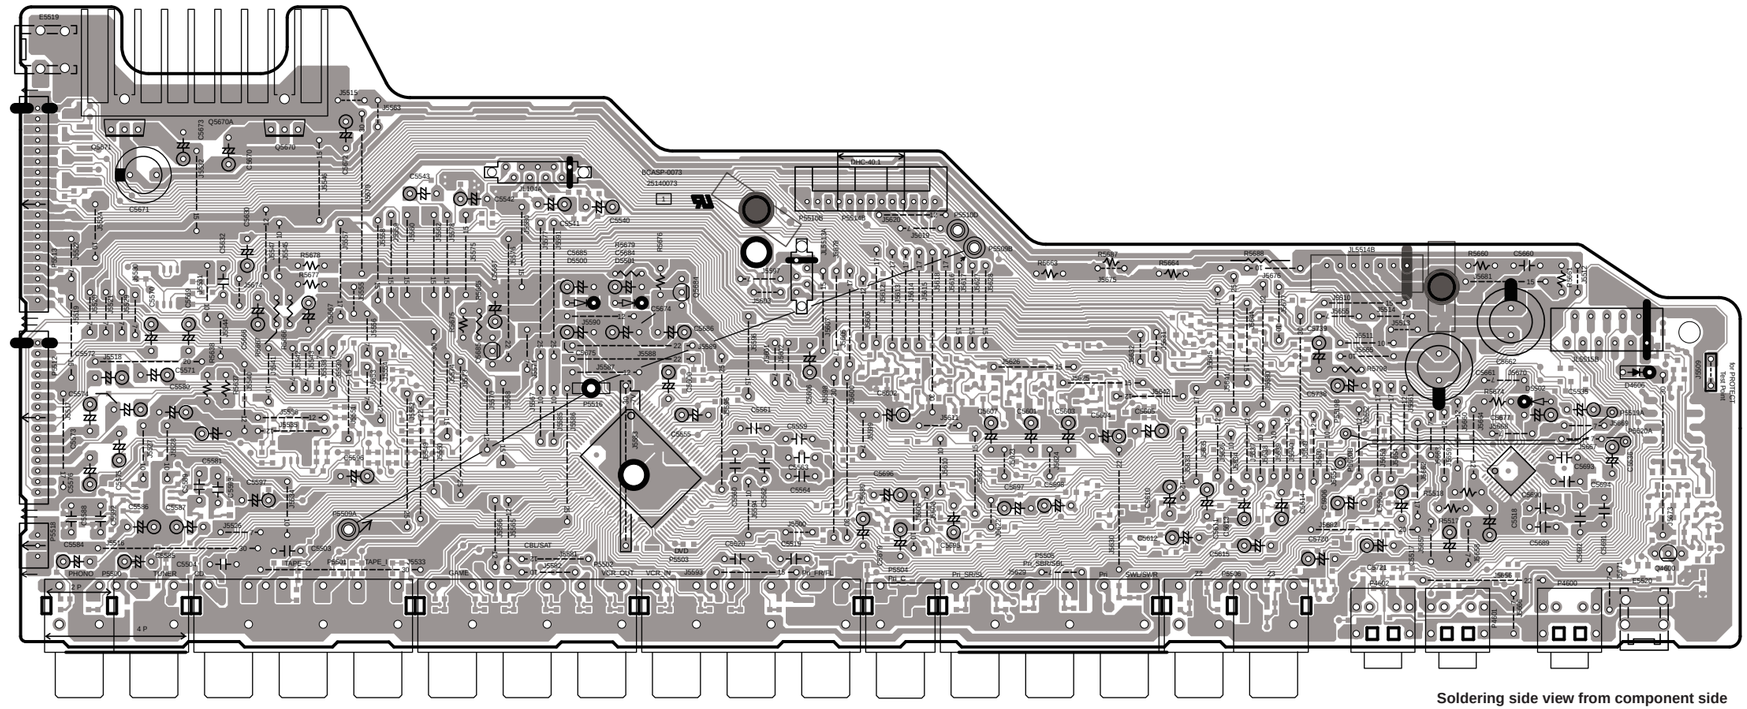

Soldering side view from component side

PRINTED CIRCUIT BOARD VIEW-3

U002 SPEAKER TERMINAL-1 PC BOARD
BATRM-0083

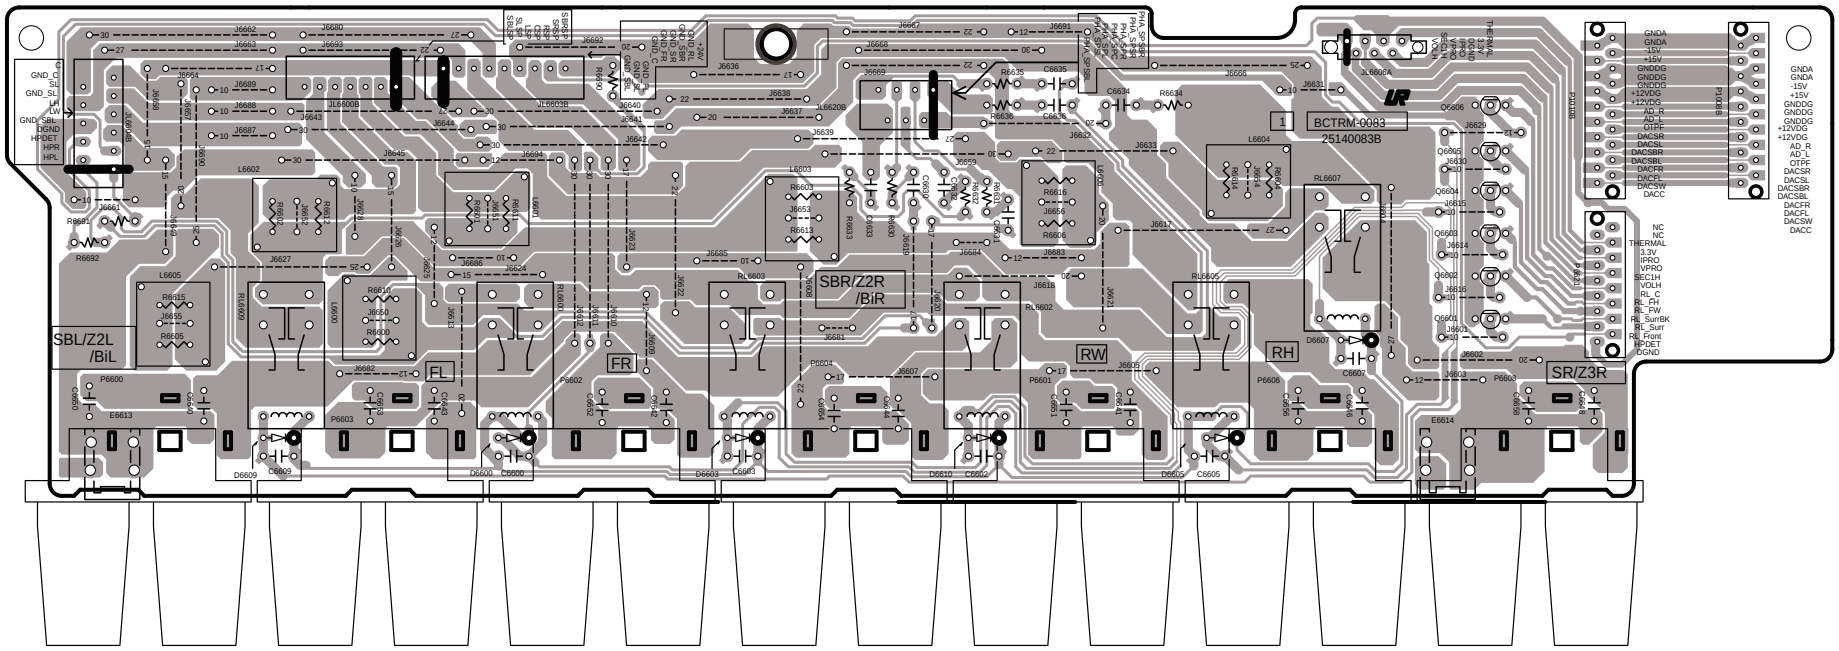

Soldering side view

PRINTED CIRCUIT BOARD VIEW-4

U0024 POWER AMP. INPUT CIRCUIT PC BOARD BACLA-0087

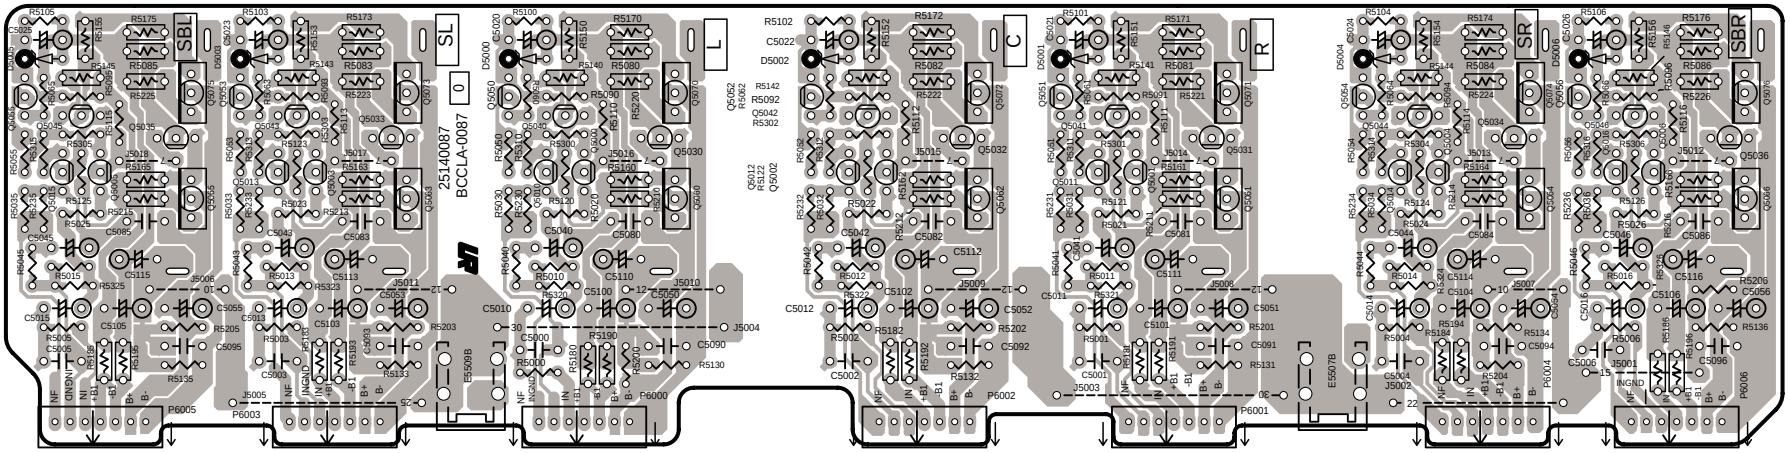

Soldering side view

U0012 THERMISTER PC BOARD BAETC-0074



Soldering side view

U0015 AC INLET TERMINAL PC BOARD BAETC-0089



Soldering side view

PRINTED CIRCUIT BOARD VIEW-5

U0021 PRIMARY POWER SUPPLY PC BOARD
BAPS-0084

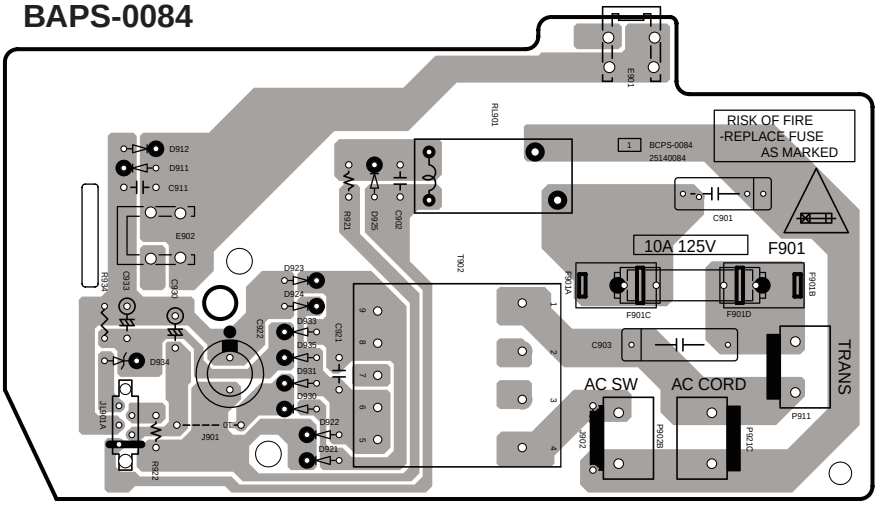

Soldering side view

U0022 SPEAKER TERMINAL-2 PC BOARD
BATRM-0085

Soldering side view

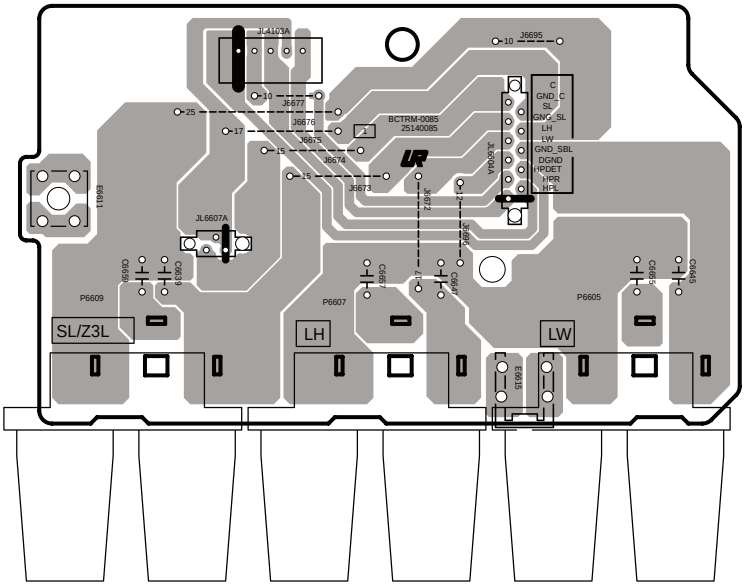

U008 CENTER SPEAKER TERMINAL PC BOARD
BATRM-0086

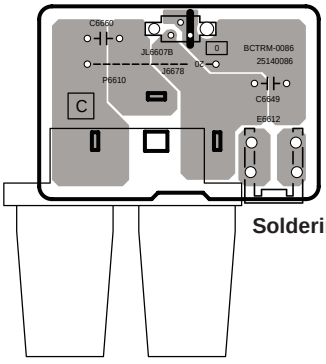

Soldering side view

PRINTED CIRCUIT BOARD VIEW-6

U003 DAC/DIR CIRCUIT PC BOARD BADG-0099

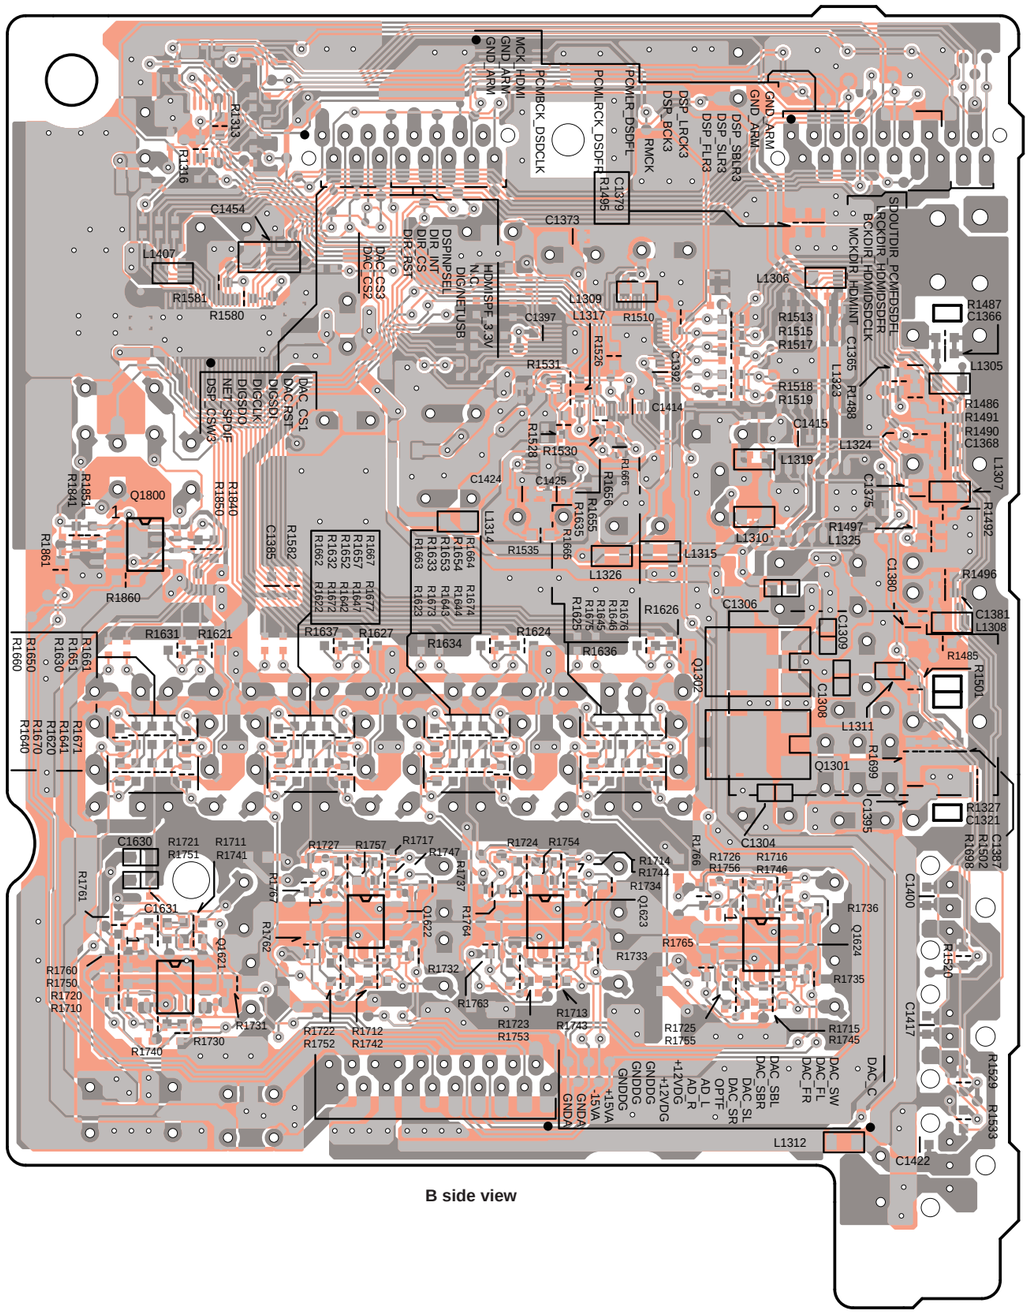

B side view

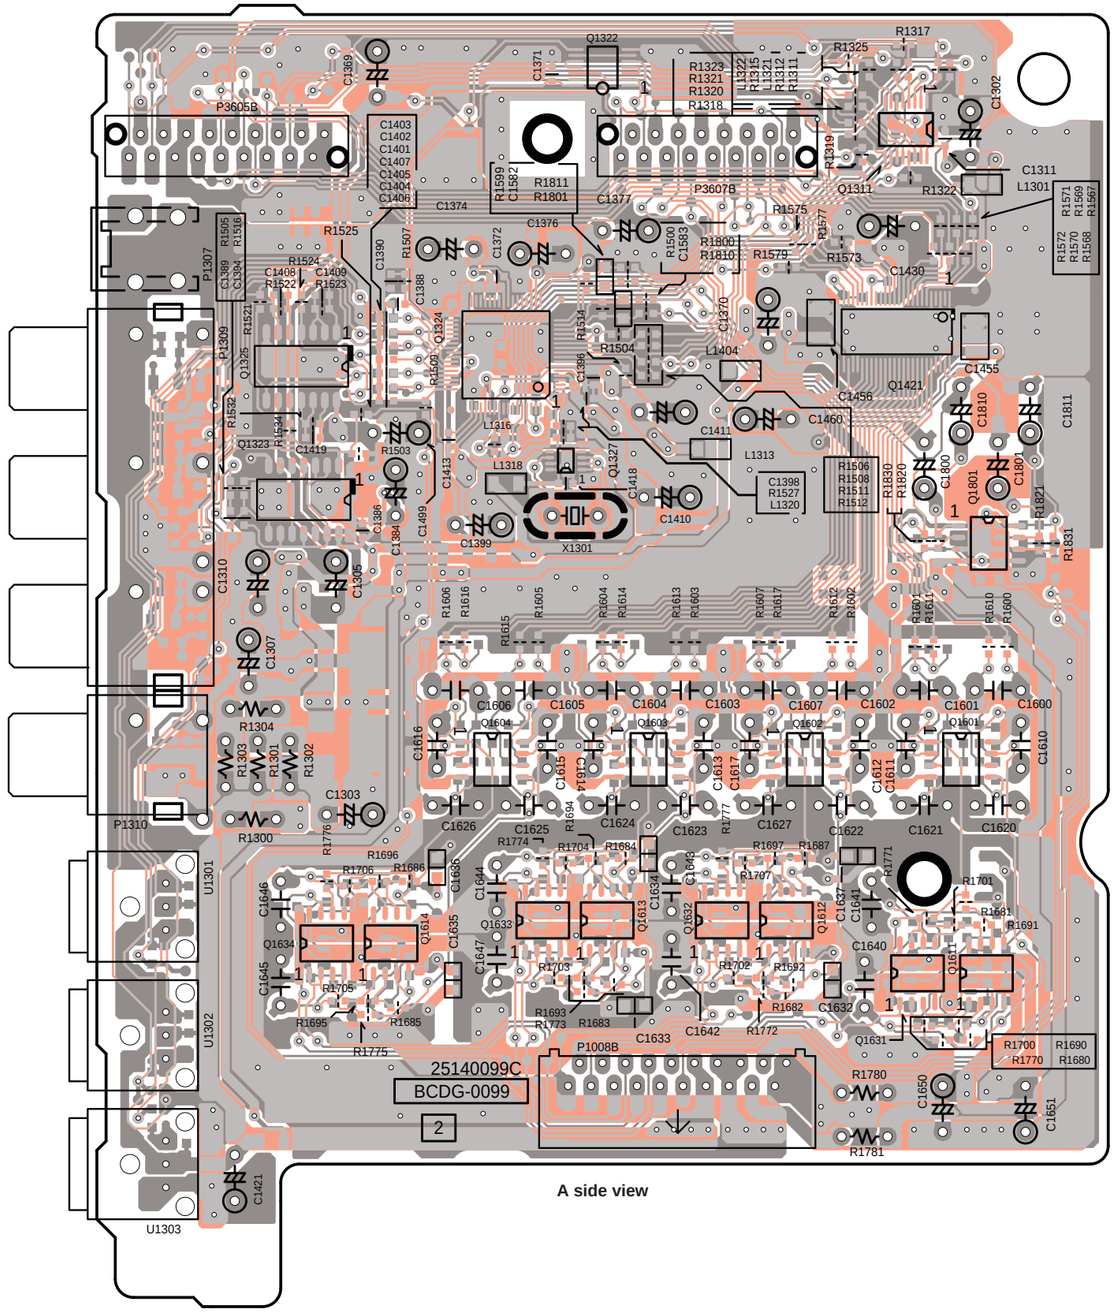

A side view

PRINTED CIRCUIT BOARD VIEW-7

U0031 CPU CIRCUIT PC BOARD BACPU-0100

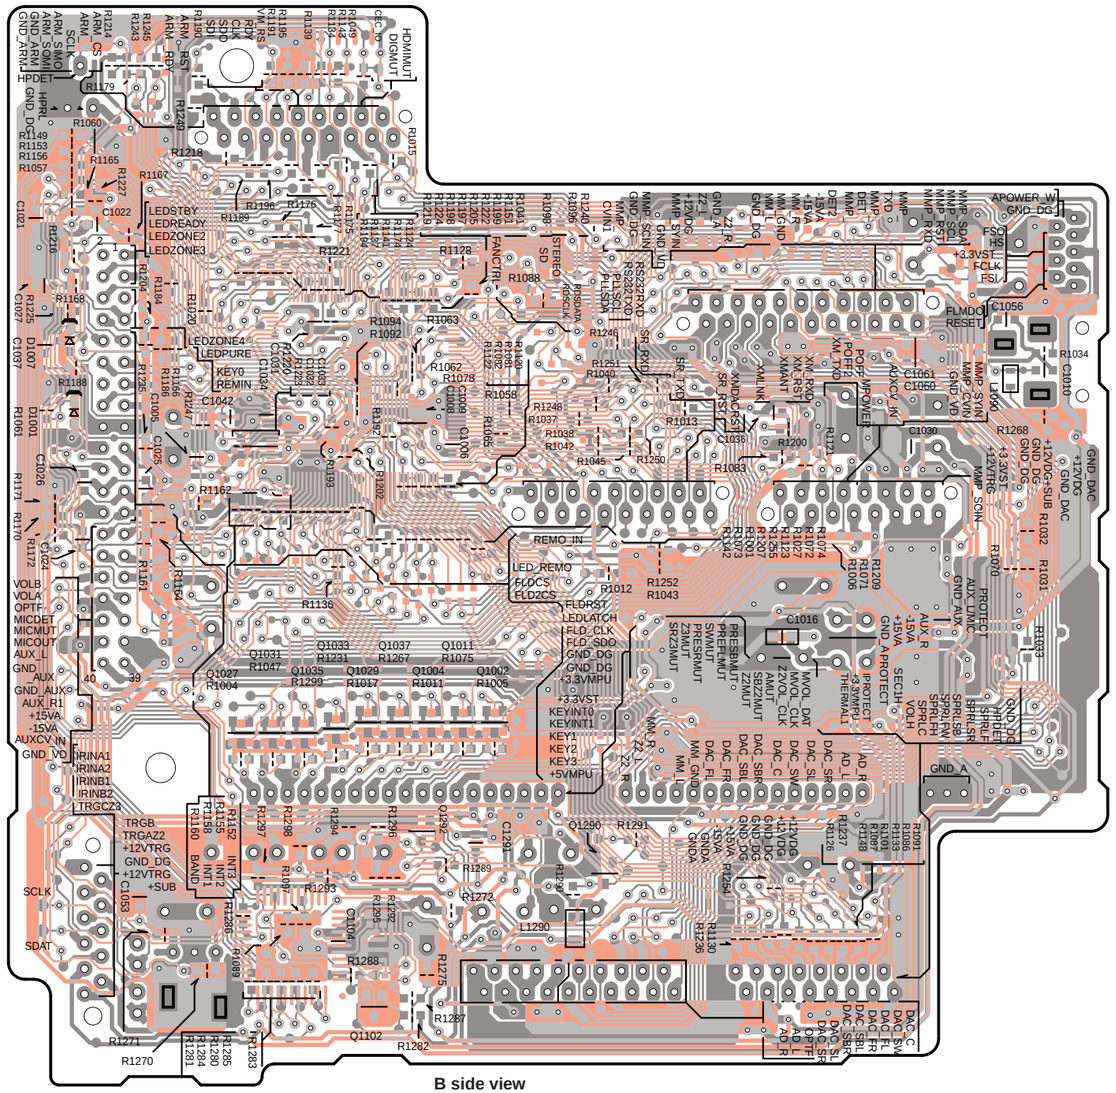

B side view

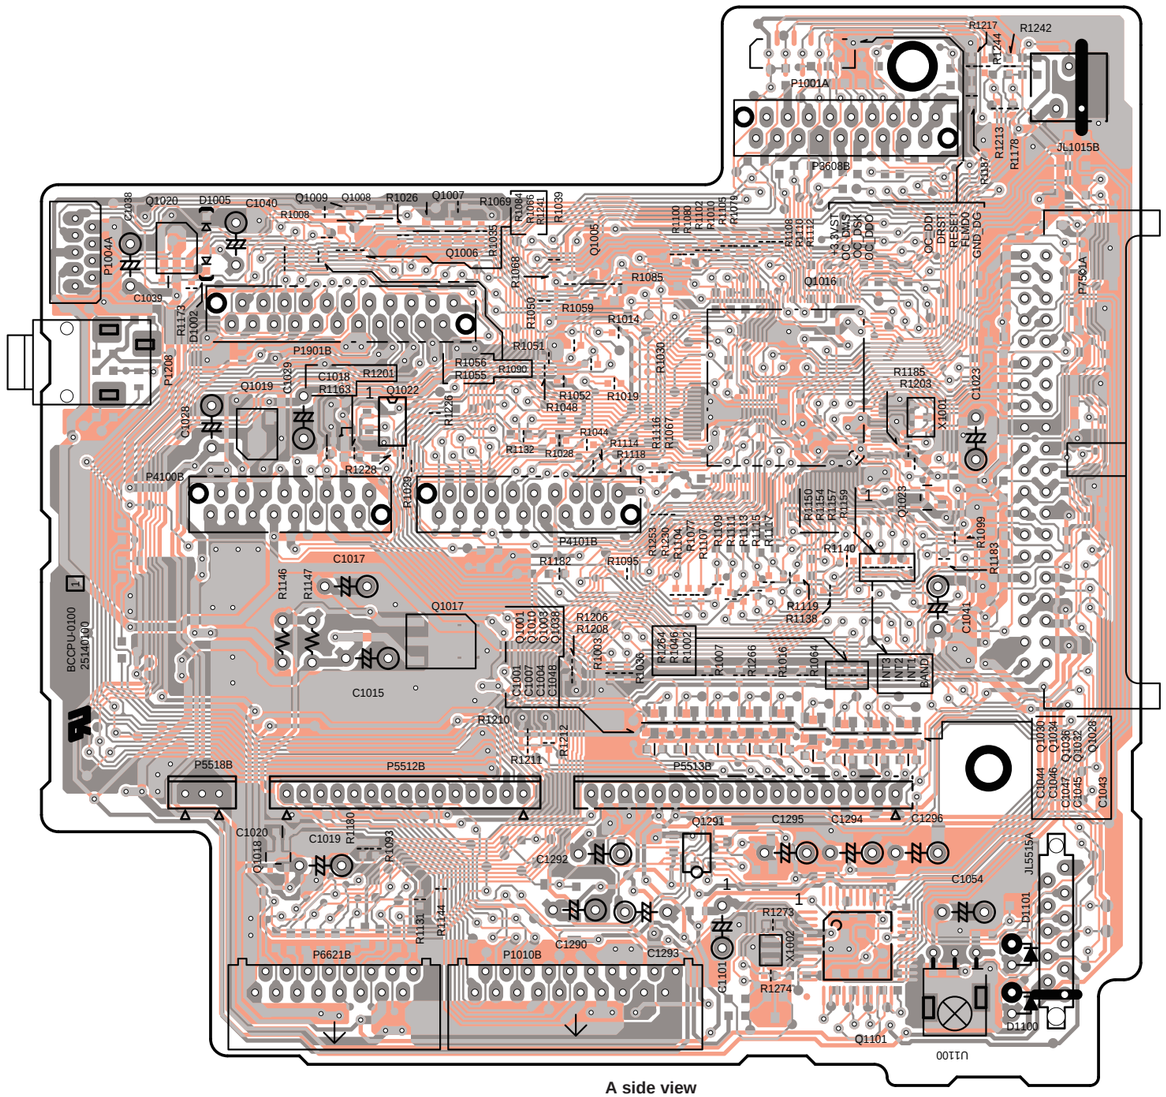

A side view

PRINTED CIRCUIT BOARD VIEW-8

U0032 VIDEO CIRCUIT PC BOARD
BAVD-0101

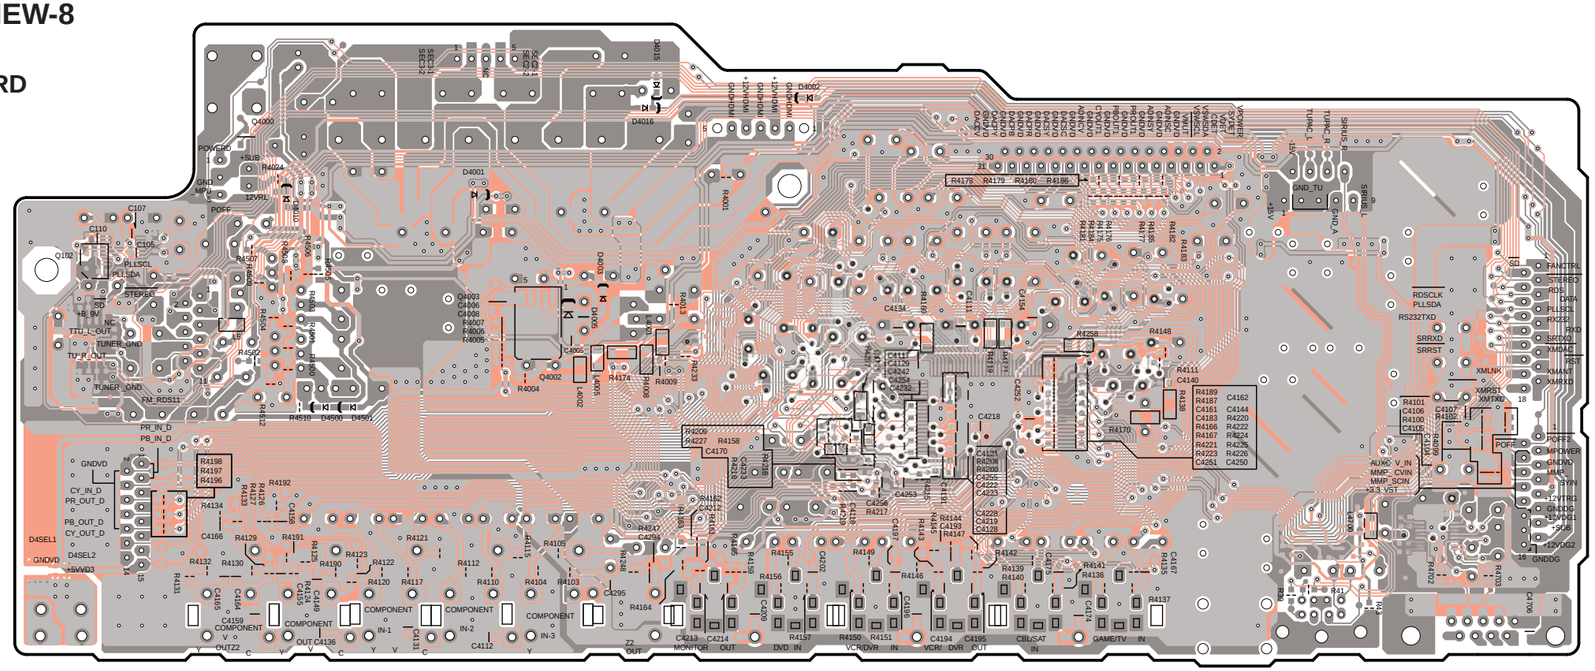

B side view

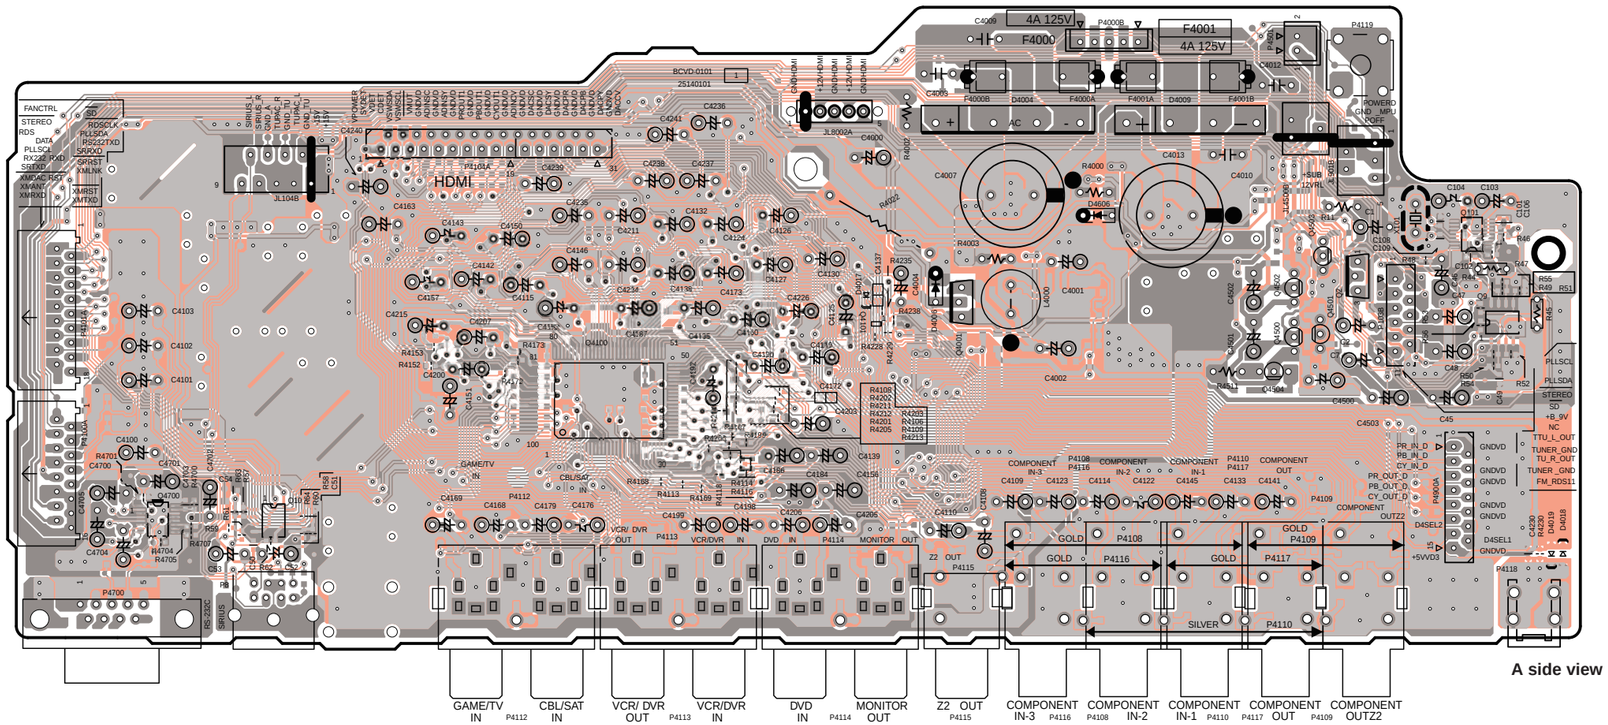

A side view

PRINTED CIRCUIT BOARD VIEW-9

U0033 UNIVERSAL PORT PC BOARD
BAETC-0103

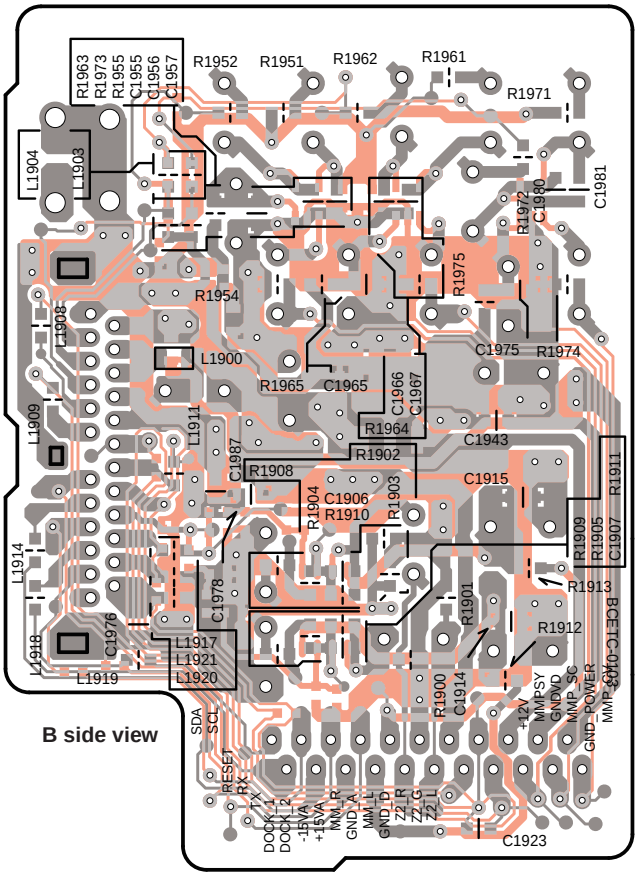

B side view

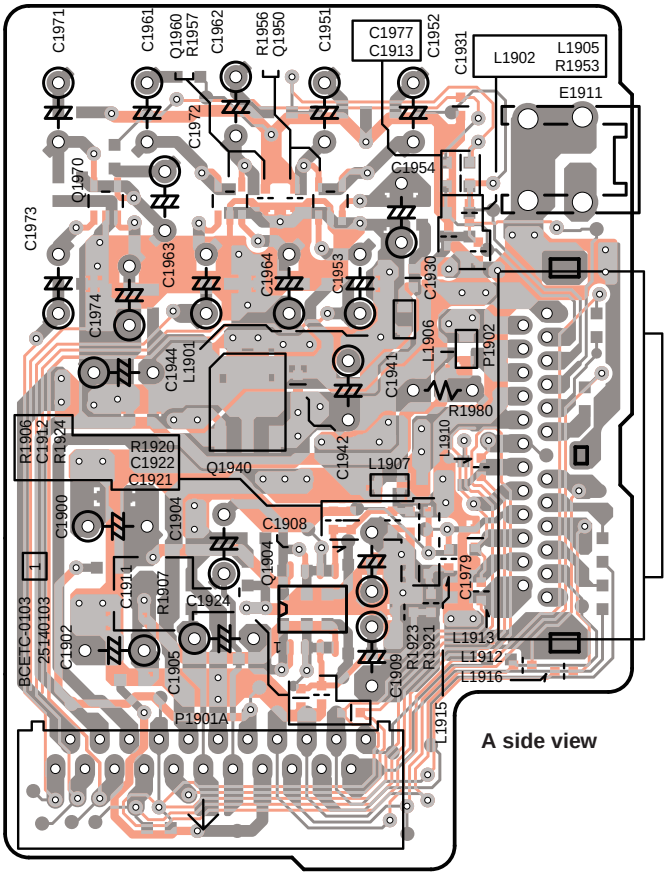

A side view

PRINTED CIRCUIT BOARD VIEW-10

U004

DISPLAY CIRCUIT BOARD
BADIS-0135

Component side view
from soldering side

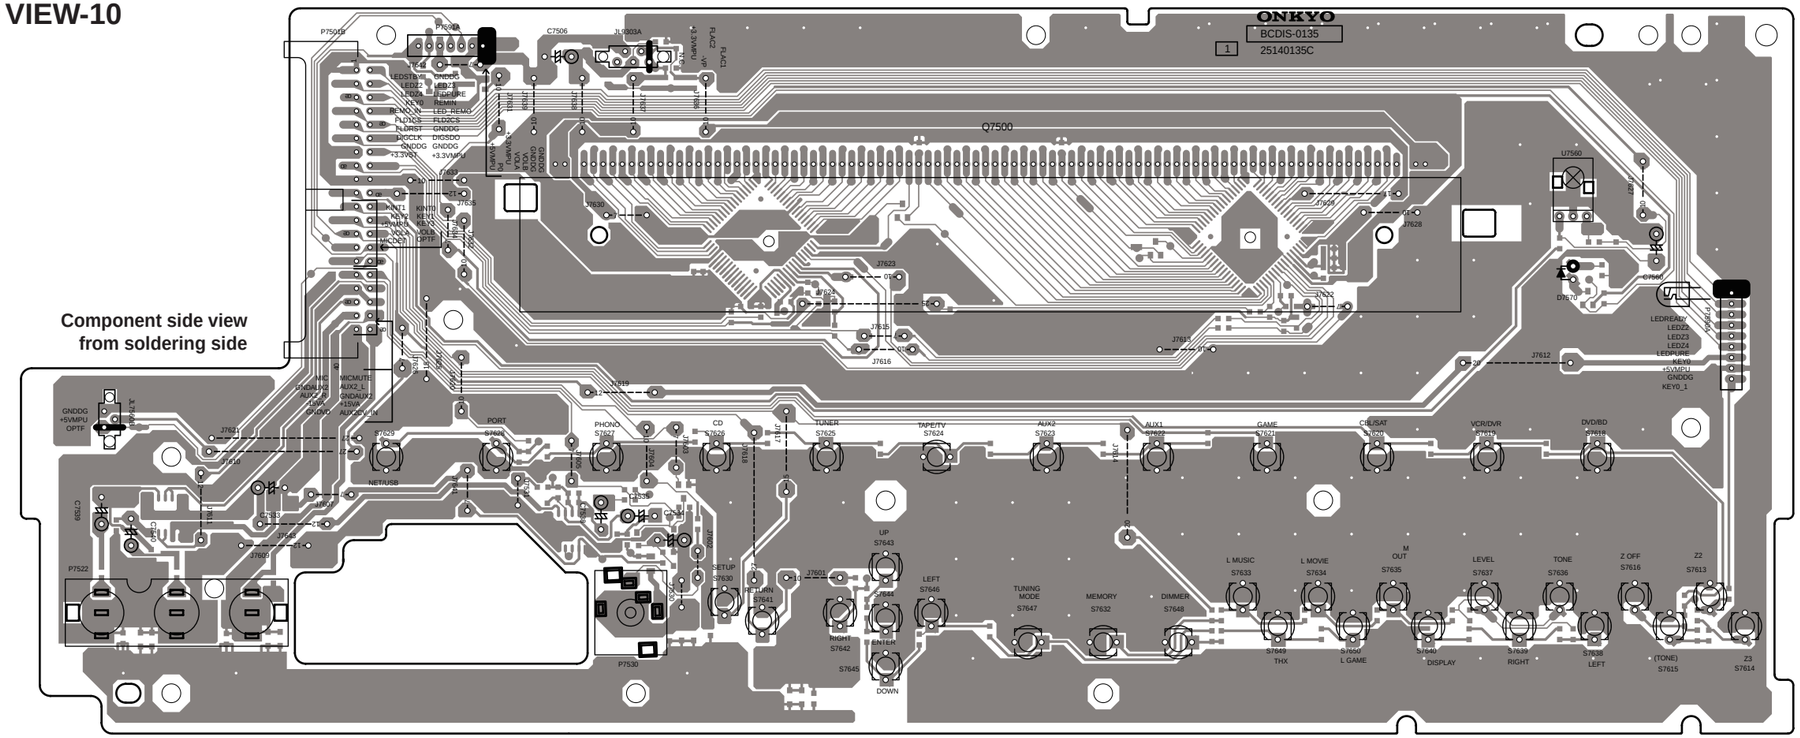

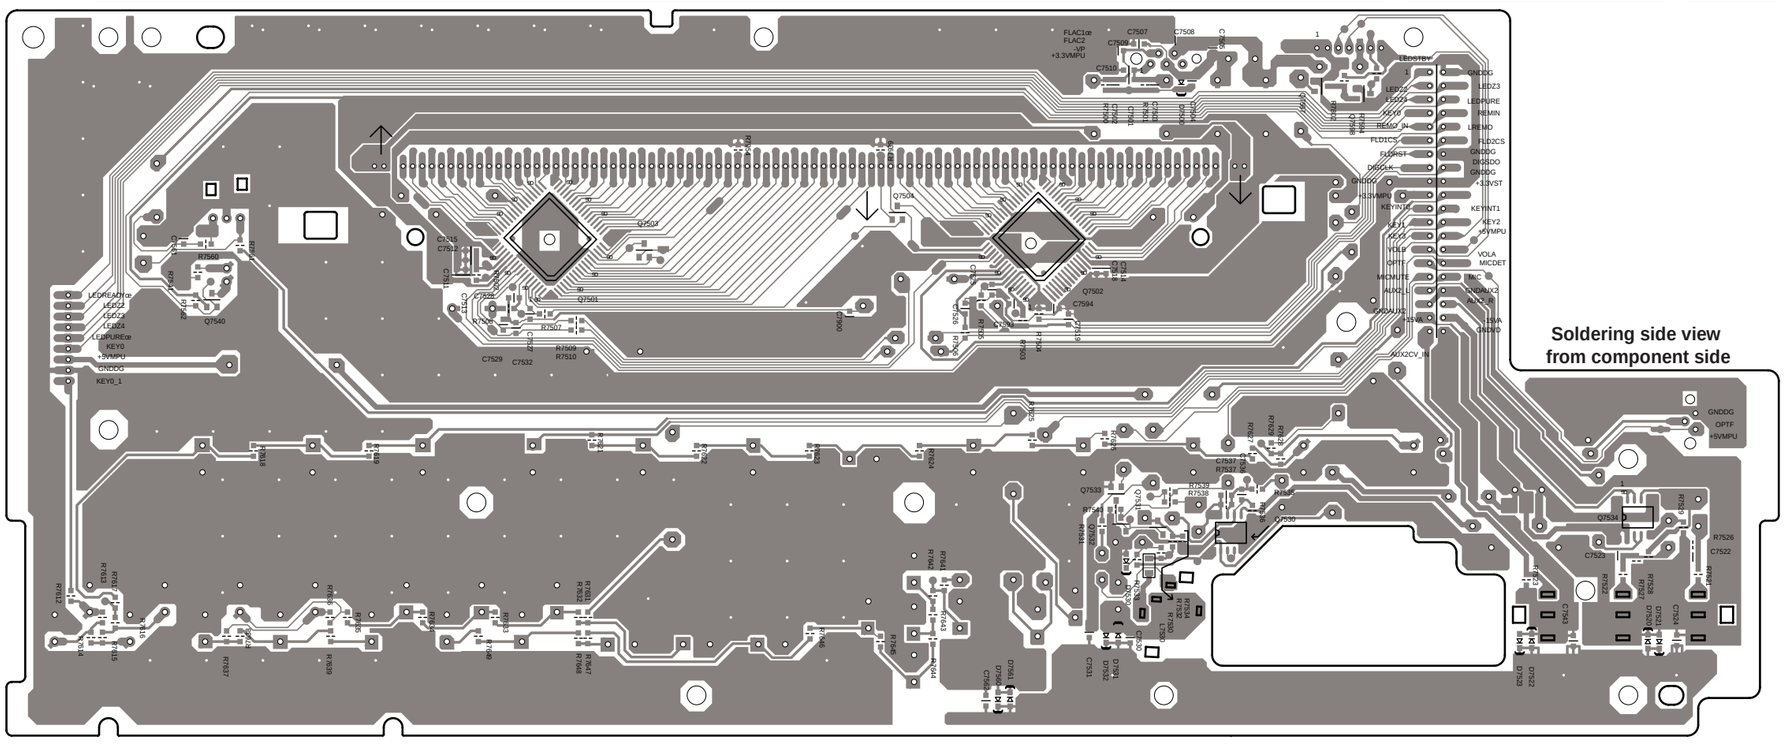

Soldering side view
from component side

PRINTED CIRCUIT BOARD VIEW-11

U0041 STANDBY SWITCH PC BOARD BASW-0136

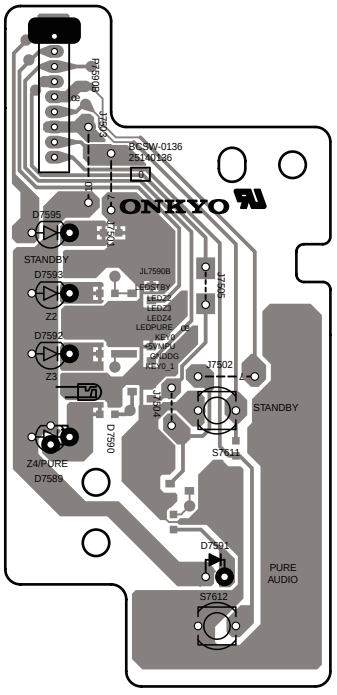

Component side view from soldering side

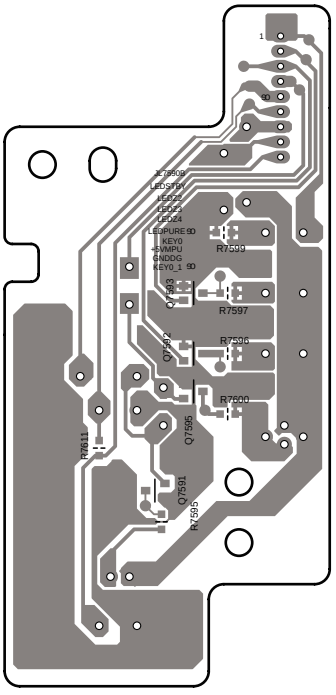

Soldering side view from component side

U0042 HEADPHONE TERMINAL PC BOARD BAETC-0137

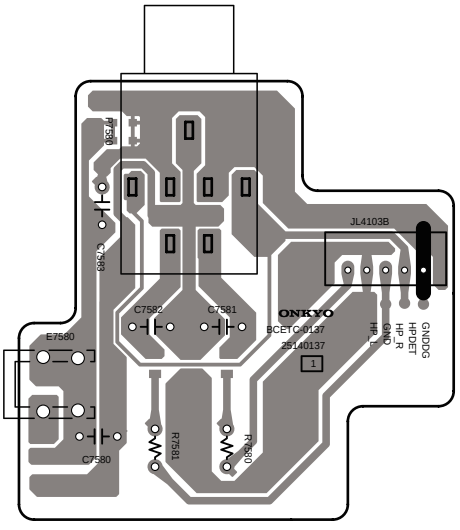

Component side view from soldering side

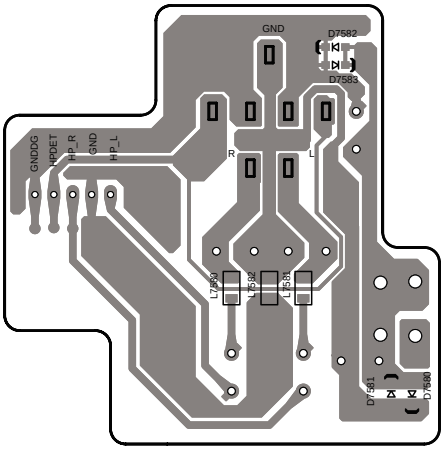

Soldering side view from component side

PRINTED CIRCUIT BOARD VIEW-12

U0045 FUSE PC BOARD BAPS-0140

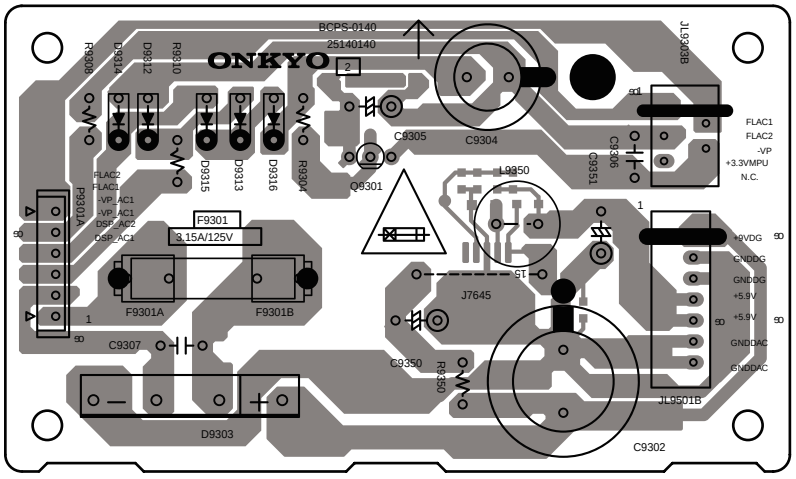

Component side view from soldering side

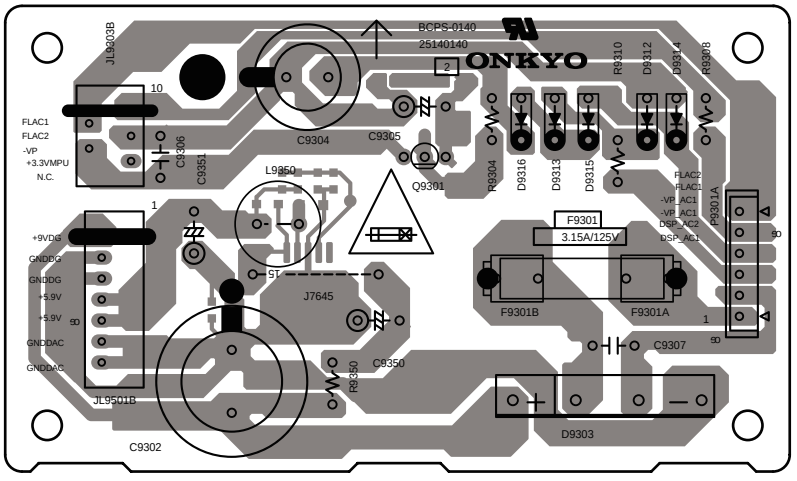

Soldering side view from component side

U0043 FRONT DIGITAL INPUT PC BOARD BAETC-0138



Component side view from soldering side



Soldering side view from component side

U0044 VOLUME LED PC BOARD BAETC-0139

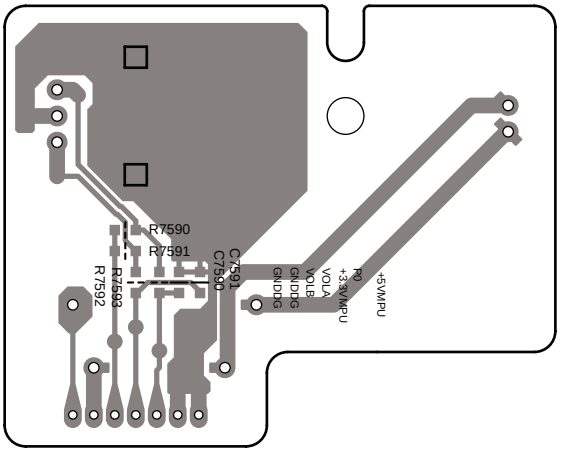

Component side view from soldering side

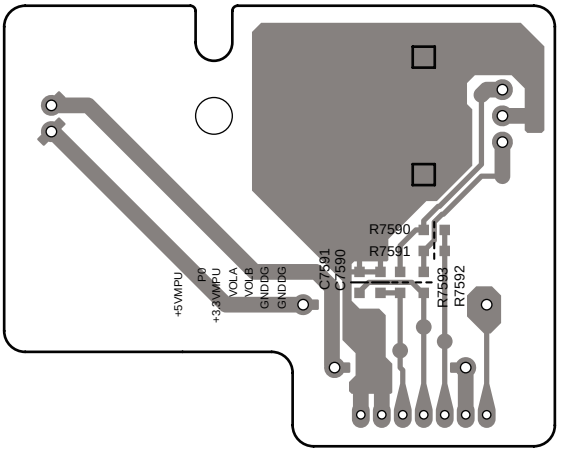

Soldering side view from component side

PRINTED CIRCUIT BOARD VIEW-13

U005 HDMI CIRCUIT PC BOARD BAHDM-0132-1B

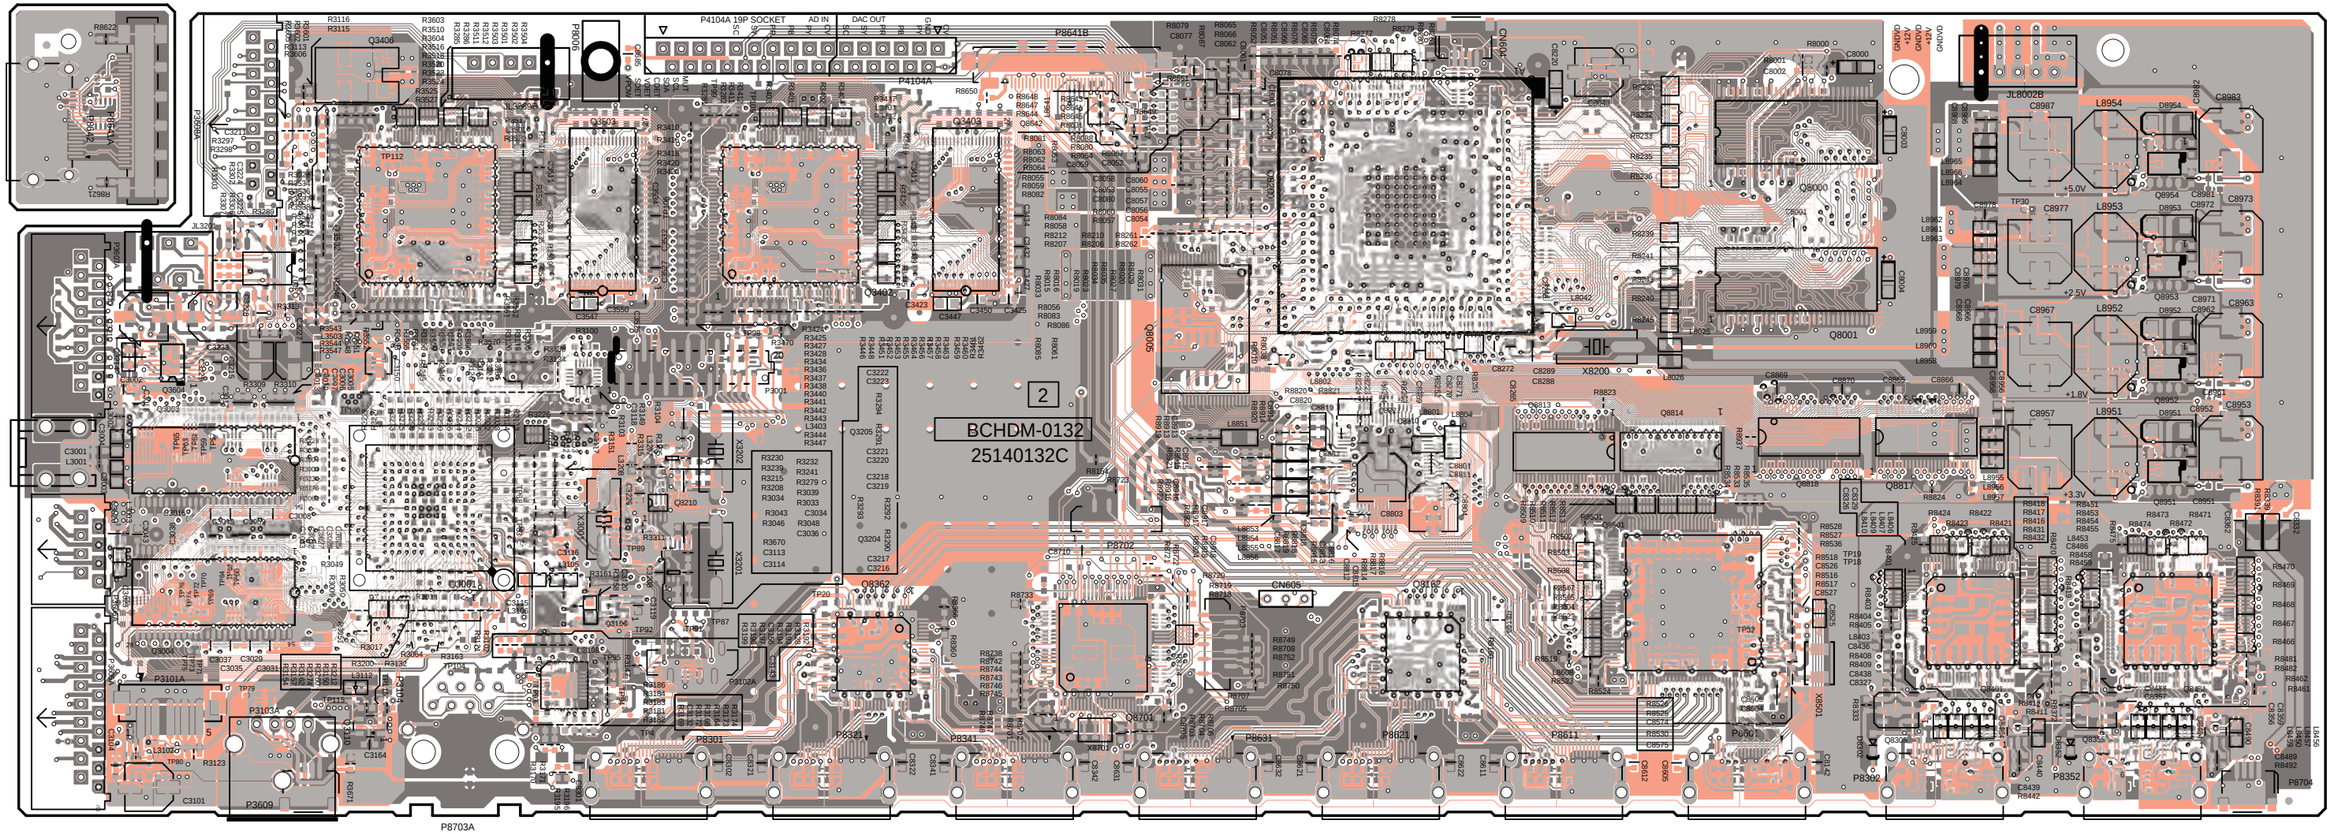

A-side view

A side pattern color

B side pattern color

PRINTED CIRCUIT BOARD VIEW-14

U005 HDMI CIRCUIT PC BOARD BAHDM-0132-1B

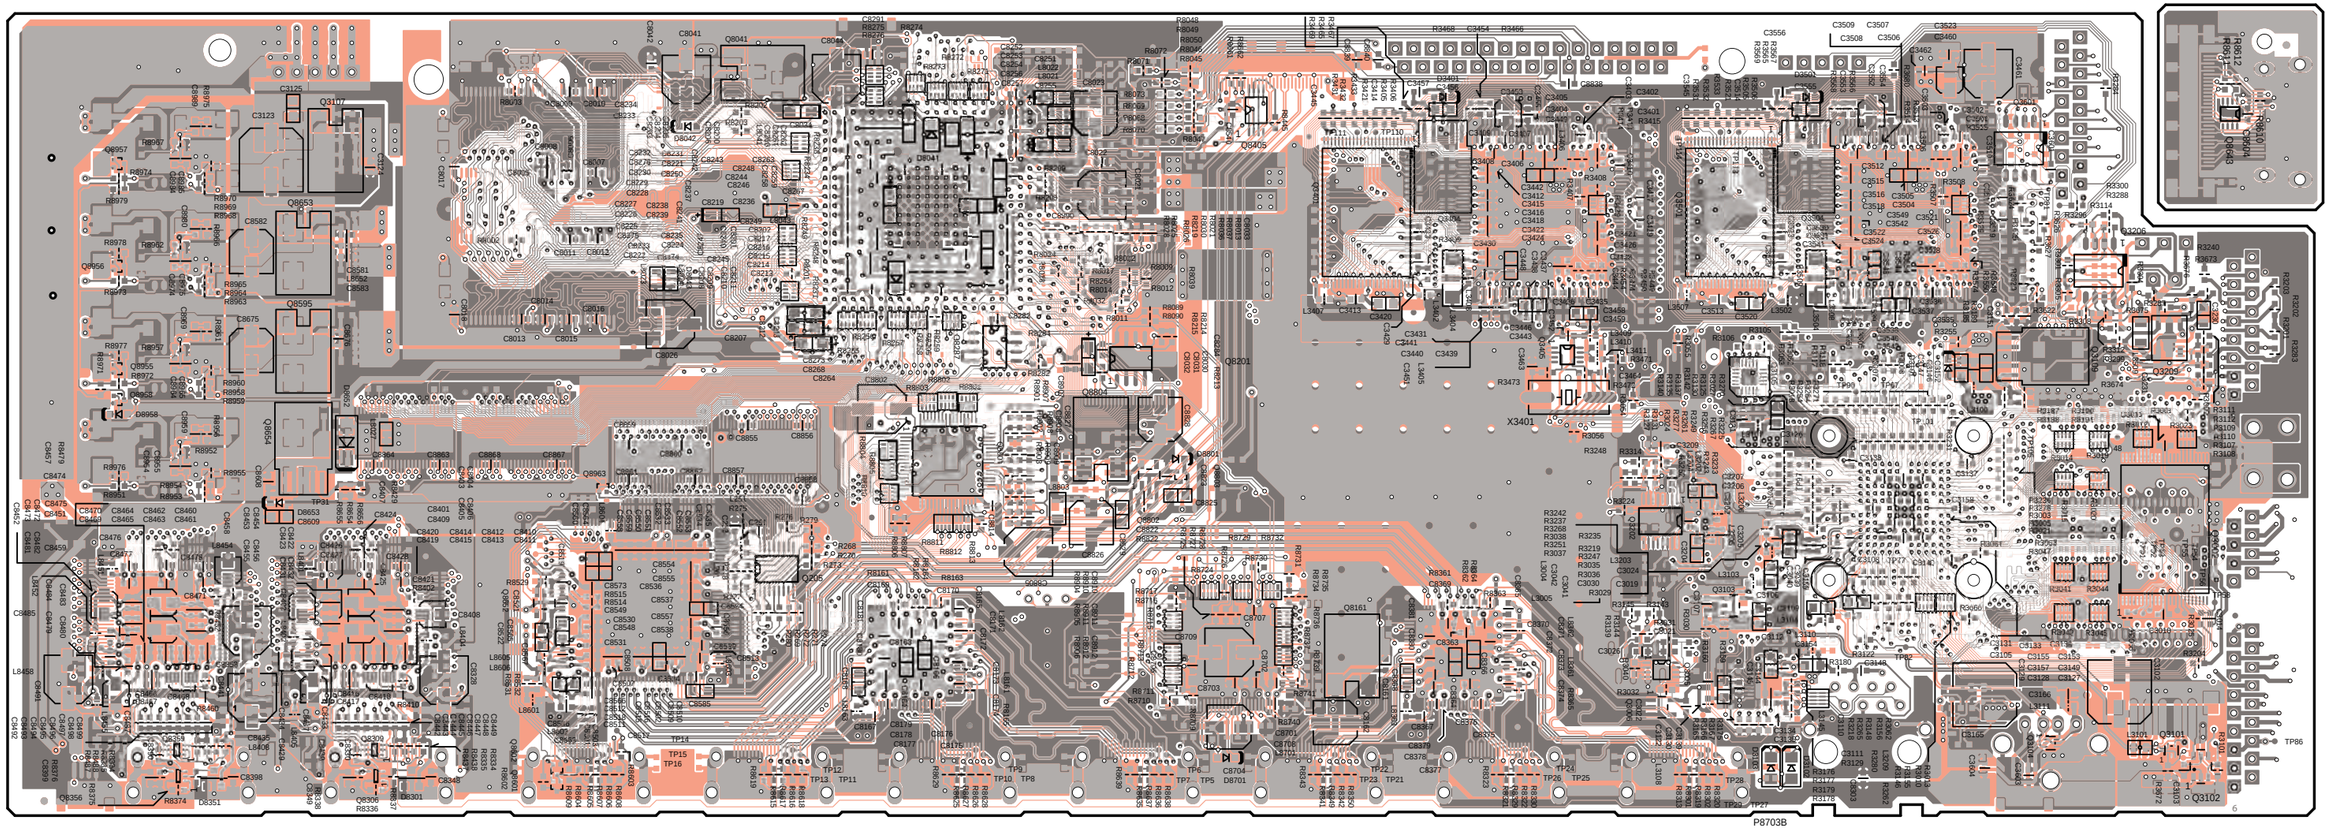

B-side view

A side pattern color

B side pattern color

PACKING PROCEDURE

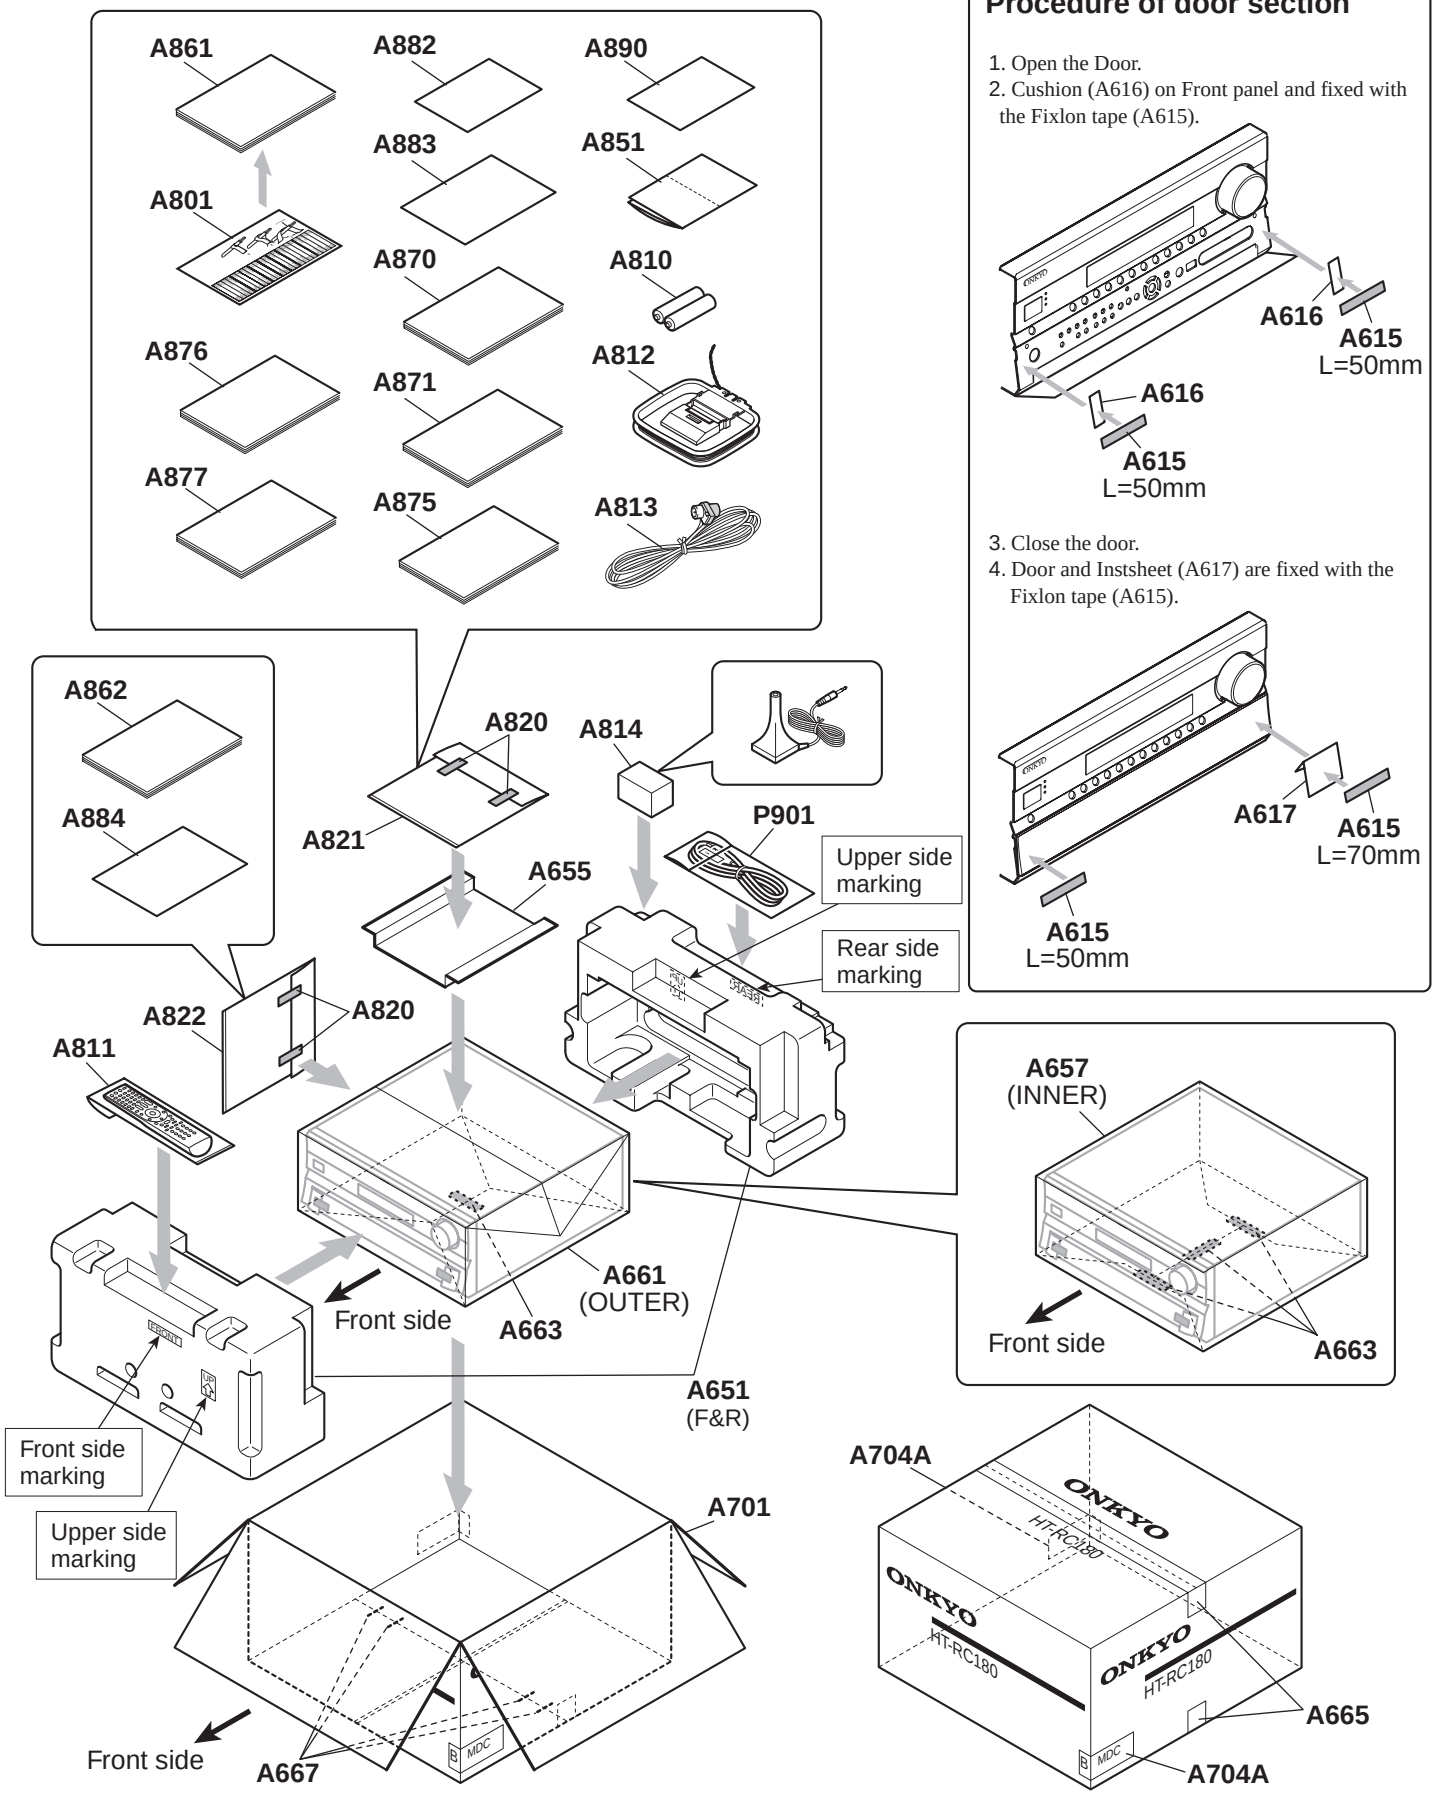

<Note>

Parts marked by '**NSP**' are generally unavailable because they are not in our Master Spare Parts List.

NOTE : THE COMPONENTS IDENTIFIED BY THE MARK ! ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE ONLY WITH PART NUMBER SPECIFIED.

EXPLODED VIEW PARTS LIST

	REF. NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
EXPLODED	**[SEMI CONDUCTOR]**					
EXPLODED	Q6050	TR	TTC0001(Q_T)TO3PN	1	2204130	
EXPLODED	Q6050A	ISO SHEET	AC238	2	223024	
EXPLODED	Q6050B	ISO SHEET	ISO SHEET	6	223041	
EXPLODED	Q6051	TR	TTC0001(Q_T)TO3PN	1	2204130	
EXPLODED	Q6052	TR	TTC0001(Q_T)TO3PN	1	2204130	
EXPLODED	Q6053	TR	TTC0001(Q_T)TO3PN	1	2204130	
EXPLODED	Q6054	TR	TTC0001(Q_T)TO3PN	1	2204130	
EXPLODED	Q6055	TR	TTC0001(Q_T)TO3PN	1	2204130	
EXPLODED	Q6056	TR	TTC0001(Q_T)TO3PN	1	2204130	
EXPLODED	Q6060	TR	TTA0001(Q_T)TO3PN	1	2204120	
EXPLODED	Q6061	TR	TTA0001(Q_T)TO3PN	1	2204120	
EXPLODED	Q6062	TR	TTA0001(Q_T)TO3PN	1	2204120	
EXPLODED	Q6063	TR	TTA0001(Q_T)TO3PN	1	2204120	
EXPLODED	Q6064	TR	TTA0001(Q_T)TO3PN	1	2204120	
EXPLODED	Q6065	TR	TTA0001(Q_T)TO3PN	1	2204120	
EXPLODED	Q6066	TR	TTA0001(Q_T)TO3PN	1	2204120	
EXPLODED	**[TRANS COIL]**					
EXPLODED	T901	P TRANS	NPT-1571D	1	2301935	!
EXPLODED	**[SW TRM]**					
EXPLODED	F4000	FUSE	4A-UL/T-233	1	252325GR	!
EXPLODED	F4000or	FUSE	4A-T/UL-ST2	(1)	252257GR	!
EXPLODED	F4001	FUSE	4A-UL/T-233	1	252325GR	!
EXPLODED	F4001or	FUSE	4A-T/UL-ST2	(1)	252257GR	!
EXPLODED	F6901	FUSE	15A-TUL-250V	1	252303GR	!
EXPLODED	F6902	FUSE	15A-TUL-250V	1	252303GR	!
EXPLODED	F901	FUSE	12A-TUL-250V	1	252301GR	!
EXPLODED	F901A	FUSE LABEL	12A/250V	1	29362325	

EXPLODED	P103	FFC	NCFC7-111012	1	2047111012	!
EXPLODED	P4104	FFC	NCFC7-191012	1	2047191012	!
EXPLODED	P500	WIRE TIE	BSK-1	15	260208	
EXPLODED	P691	FAN	D05X-12TL	1	24502317	
EXPLODED	P693	FAN	D09A-12PG13	1	24502328	
EXPLODED	P7501	SOCKET AS	NSAS-80P1788	1	2009991154UL	
EXPLODED	P9008	SOCKET AS	NSAS-3P1760	1	2009991127UL	
EXPLODED	**[CHASSIS SCREW]**					
EXPLODED	A001	CHASSIS	807	1	27100539	
EXPLODED	A003	LEG	---	4	27175419	
EXPLODED	A005	CUSHION	(LEG)	4	28141660	
EXPLODED	A007	CUSHION	(BUTYL)	1	28141748	
EXPLODED	A009	SCREW	3TTB+8B(3CM)SR	4	801637	
EXPLODED	A015	SCREW	4TTC+8C(3BC)	4	830440089GR	
EXPLODED	A017	SPACER	---	1	27270439	
EXPLODED	A018	RETAINER	(TR)	1	27142165	
EXPLODED	A021	BRACKET	(FAN-L)	1	27131046	
EXPLODED	A023	BUSHING	(FAN-L)	4	28170091A	
EXPLODED	A025	SCREW	3TTB+8B(3BC)	3	838430088GR	
EXPLODED	A029	HEAT SINK	---	1	27160620A	
EXPLODED	A031	SCREW	3SMS8W.SW+14B(CU)	14	801634	
EXPLODED	A033	SCREW	3TTB+8B(3CM)SR	1	801637	
EXPLODED	A041	RETAINER	(HT-L8)	1	27142110A	
EXPLODED	A043	RETAINER	(HT-R8)	1	27142111	
EXPLODED	A044	SCREW	3TTB+8B(3CM)SR	2	801637	
EXPLODED	A045	SCREW	3TTB+8B(3CM)SR	4	801637	
EXPLODED	A047	SCREW	3TTB+8B(3CM)SR	2	801637	
EXPLODED	A049	SCREW	3TTB+8B(3CM)SR	3	801637	
EXPLODED	A051	BRACKET	(FAN-S)	1	27131047	
EXPLODED	A052	CUSHION	T10 x 10 x 10EPT	1	28141813	
EXPLODED	A053	BUSHING	(FAN-S)	2	28170090	
EXPLODED	A054	CUSHION	10 x 10 x 2	2	28141783	
EXPLODED	A055	SCREW	3TTB+8B(3CM)SR	2	801637	
EXPLODED	A057	IB CUSHION	W15 x 3t TAPE	1	28141585	
EXPLODED	A059	SCREW	3TTB+8B(3CM)SR	2	801637	
EXPLODED	A061	RETAINER	(PC)	1	27142125	
EXPLODED	A063	RIVET	P-RIVET NRP-345	2	880009	
EXPLODED	A065	CUSHION	10 x 10 x 2	4	28141783	
EXPLODED	A067	CUSHION	(PCB)	2	28141789	
EXPLODED	A069	TAPE	(CLOTH-16U)	1	29110083	

EXPLODED	A071	CLAMP	WS-2NS	1	27300833	
EXPLODED	A075	HOLDER	HOLDER KGLS-8S	6	27190480	
EXPLODED	A077	HOLDER	KGPS-14RF	8	27190802	
EXPLODED	A079	HOLDER	KGLS-14S	1	27190164	
EXPLODED	A081	HOLDER	HOLDER KGLS-18S	4	27190470	
EXPLODED	A085	HOLDER	KGLS-12RT	1	27190266	
EXPLODED	A087	HOLDER	KGLS-10RT	1	27190428A	
EXPLODED	A089	HOLDER	KGLS-22RT	1	27190772	
EXPLODED	A091	HOLDER	SPM-4	4	27191154	
EXPLODED	A101	SCREW	3TTB+8B(3CM)SR	1	801637	
EXPLODED	A103	SCREW	3TTB+8B(3CM)SR	1	801637	
EXPLODED	A105	SCREW	4TTC+8C(3BC)	2	830440089GR	
EXPLODED	A107	SCREW	3TTB+8B(3CM)SR	2	801637	
EXPLODED	A109	SCREW	3TTB+8B(3BC)	2	838430088GR	
EXPLODED	A111	CUSHION	(BUTYL) d=3mm	1	28141748	
EXPLODED	A115	TAPE	(CLOTH-8U)	1	29110082	
EXPLODED	A121	LABEL	(PT)	1	29363408-1	
EXPLODED	A131	BRACKET	(F)807	1	27131065A	
EXPLODED	A133	BUSHING	L125	2	28170004	
EXPLODED	A135	HOLDER	(CLUMP) UA-0	2	27190432	
EXPLODED	A137	RETAINER	(SIDE)	2	27142107	
EXPLODED	A139	SCREW	3TTB+8B(3CM)SR	4	801637	
EXPLODED	A147	SCREW	3TTB+8B(3CM)SR	7	801637	
EXPLODED	A171	REAR PANEL	HTRC180DC	1	27124066	N
EXPLODED	A173	SCREW	3TTB+8B(3BC)	42	838430088GR	
EXPLODED	A175	SCREW	3P+6FN(3BC)	6	82143006GR	
EXPLODED	A177	SCREW	3P+6FN(3BC)	2	82143006GR	
EXPLODED	A183	SCREW	4TTB+10B(3BC)	2	838440108GR	
EXPLODED	A185	TRM	E Terminal	1	25060151	
EXPLODED	A189	WASHER	W3 x 10F(3BC)	1	87643010GR	
EXPLODED	A191	LABEL	(SP1)	1	29390790	
EXPLODED	A193	LABEL	(SP2)	1	29390791	
EXPLODED	**[CABINET]**					
EXPLODED	A205	F BRACKET	AS(BLACK)	1	27111561E	N
EXPLODED	A209	BUSHING	(DOOR)	2	28170095	
EXPLODED	A251	B PLATE	(B)	1	28133428	
EXPLODED	A255	FACET	(VOL)	1	28200040A	
EXPLODED	A257	SCREW	3TTB+8B(3CM)SR	2	801637	
EXPLODED	A321	RETAINER	(F)	1	27142155A	
EXPLODED	A325	SCREW	3TTB+10B(3BC)	1	838430108GR	

EXPLODED	A351	CUSHION	t5 x 30 x 5	1	28141562		
EXPLODED	A353	CUSHION	(T3 x W35 x D10)	1	28141741		
EXPLODED	A363	SCREW	3TTB+8B(3CM)SR	20	801637		
EXPLODED	A375	SCREW	3TTB+8B(3BC)	3	838430088GR		
EXPLODED	A377	SCREW	3TTB+8B(3BC)	3	838430088GR		
EXPLODED	A383	SCREW	3TTB+8B(3CM)SR	3	801637		
EXPLODED	A385	SCREW	3TTB+8B(3CM)SR	1	801637		
EXPLODED	A405	F PANEL	HTRC180(B)DC	1	27213300	N	
EXPLODED	A409	BADGE	---	1	28135244		
EXPLODED	A411	CLEAR PLT	(AS) NR807	1	28192265		
EXPLODED	A455	KNOB	(VOL)AS RC180B	1	28326791	N	
EXPLODED	A456	CUSHION	t0.9 x d48	1	28141824	N	
EXPLODED	A501	DOOR	HTRC180(B)DC	1	28148760	N	
EXPLODED	A511	RETAINER AS	(L)	1	27142166		
EXPLODED	A513	RETAINER AS	(R)	1	27142167		
EXPLODED	A515	SCREW	3TTB+8B(3CM)SR	3	801637		
EXPLODED	A519	HOLDER	(DAMPER)	1	27191334B	N	
EXPLODED	A521	SCREW	3TTB+8B(3CM)SR	1	801637		
EXPLODED	A523	DAMPER	002P Type-L	1	27301965		
EXPLODED	A525	SCREW	3TTB+8B(3CM)SR	1	801637		
EXPLODED	A529	PLATE	(LOCK)	1	27262843		
EXPLODED	A531	SCREW	3P+6FN(3BC)	2	82143006GR		
EXPLODED	A533	BRACKET	(L)	1	27131062B	N	
EXPLODED	A535	BRACKET	(R)	1	27131063B	N	
EXPLODED	A537	SCREW	3P+6FN(3BC)	2	82143006GR		
EXPLODED	A545	E-WASHER	ES-3S	1	8930301S		
EXPLODED	A603	COVER	(B) (Bent)	1	28210037		
EXPLODED	A603	COVER	(B) (Not Bent)	1	28210037Z		
EXPLODED	A605	LABEL	HOOKUP-ONKYO	1	29363194		
EXPLODED	A607	LABEL	(COVER)	1	29364123		
EXPLODED	A611	SCREW	3TTB+8B(3BC)	3	838430088GR		
EXPLODED	A613	SCREW	4TTB+8C(3BC)	6	838440089GR		
EXPLODED	**[TUNER UNIT]**						
EXPLODED	**U001**	**Power amplifier circuit PC board a'ssy**	**BAAMP-0072-1L ***	**1**	**1B2345072-1L**	N	
EXPLODED	U0011	Audio input circit PC board a'ssy	BAASP-0073-1L	1	1B2345073-1L	N	
EXPLODED	U0012	Thermister PC board a'ssy	BAETC-0074-1L	1	--	N	NSP
EXPLODED	U0013	Connection board	BAETC-0075-1L	1	--	N	NSP
EXPLODED	U0014	AC Inlet terminal PC board a'ssy	BAETC-0089-1L	1	--	N	NSP
EXPLODED	**U002**	**Speaker terminal-1 PC board a'ssy**	**BATRM-0083-1G ***	**1**	**1B2345083-1G**	N	
EXPLODED	U0021	Primary power supply PC board a'ssy	BAPS-0084-1G	1	1B2345084-1G	N	

EXPLODED	U0022	Speaker terminal-2 PC board a'ssy	BATRM-0085-1G	1	1B2345085-1G	N	
EXPLODED	U0023	Center speaker terminal PC board a'ssy	BATRM-0086-1G	1	1B2345086-1G	N	
EXPLODED	U0024	Power amp. Input circuit PC board a'ssy	BACLA-0087-1G	1	1B2345087-1G	N	
EXPLODED	**U003**	**DAC/ DIR circuit PC board a'ssy**	**BADG-0099-1P ***	**1**	**1B2345099-1P**	N	
EXPLODED	U0031	CPU Circuit PC board a'ssy	BACPU-0100-1P	1	1B2345100-1P	N	
EXPLODED	U0032	Video circuit PC board a'ssy	BAVD-0101-1P	1	1B2345101-1P	N	
EXPLODED	U0033	Universal port PC board a'ssy	BAETC-0103-1P	1	1B2345103-1P	N	
EXPLODED	**U004**	**Display circuit PC board a'ssy**	**BADIS-0135-1A ***	**1**	**1B2345135-1A**	N	
EXPLODED	U0041	Standby switch PC board a'ssy	BASW-0136-1A	1	1B2345136-1A	N	
EXPLODED	U0042	Headphone terminal PC board a'ssy	BAETC-0137-1A	1	--	N	NSP
EXPLODED	U0043	Front digital input PC board a'ssy	BAETC-0138-1A	1	--	N	NSP
EXPLODED	U0044	Volume LED PC board a'ssy	BAETC-0139-1A	1	--	N	NSP
EXPLODED	U0045	Fuse PC board a'ssy	BAPS-0140-1A	1	1B2345140-1A	N	
EXPLODED	U0046	Support PC board-1	BAETC-0145-1A	1	--	N	NSP
EXPLODED	U0047	Support PC board-2	BAETC-0142-1A	1	--	N	NSP
EXPLODED	U0049	FFC Support PC board	BAETC-0130-1A	1	--	N	NSP
EXPLODED	U00410	Support PC board-5	BAETC-0129-1A	1	--	N	NSP
EXPLODED	**U005**	**HDMI Circuit PC board a'ssy**	**BAHDM-0132-1D ***	**1**	**1B234532-1D**	N	
EXPLODED	U011	TUNER UNIT	FAEH06-A01US	1	240166		

PC BOARD PARTS LIST

PCB1	**U001**	POWER AMPLIFIER PC BOARD (BAAMP-0072-1L)
PCB1	**U0011**	AUDIO INPUT CIRCUIT PC BOARD (BAASP-0073-1L)
PCB1	**U0012**	TERMISTER PC BOARD (BAETC-0074-1L)
PCB1	**U0013**	CONNECTION BOARD (BAETC-0075-1L)
PCB1	**U0014**	AC INLET TERMINAL PC BOARD (BAETC-0089-1L)

	CIRCUIT NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
PCB1	**[SEMI CONDUCTOR]**					
PCB1	D4600	C-DIODE	1SS352	1	223234R2	
PCB1	D4601	C-DIODE	1SS352	1	223234R2	
PCB1	D4602	C-DIODE	1SS352	1	223234R2	
PCB1	D4603	C-DIODE	1SS352	1	223234R2	
PCB1	D4606	DIODE	RL1N4003	1	22380260T	
PCB1	D5500	ZENER D	MTZJ7.5B	1	224470752T	
PCB1	D5501	ZENER D	MTZJ7.5B	1	224470752T	
PCB1	D5502	ZENER D	MTZJ3.6B	1	224470362T	
PCB1	D5507	C-DIODE	1SS352	1	223234R2	

PCB1	D5507 or	C-DIODE	1SS355	(1)	223269R2
PCB1	D5507 or	C-DIODE	KDS4148U	(1)	223283R2
PCB1	D5507 or	C-DIODE	MA2J1110GL	(1)	223302R2
PCB1	D5508	C-DIODE	1SS352	1	223234R2
PCB1	D5508 or	C-DIODE	1SS355	(1)	223269R2
PCB1	D5508 or	C-DIODE	KDS4148U	(1)	223283R2
PCB1	D5508 or	C-DIODE	MA2J1110GL	(1)	223302R2
PCB1	D5511	C-DIODE	1SS352	1	223234R2
PCB1	D5512	C-DIODE	1SS352	1	223234R2
PCB1	D5513	C-DIODE	1SS352	1	223234R2
PCB1	D5514	C-DIODE	1SS352	1	223234R2
PCB1	D5517	C-DIODE	1SS352	1	223234R2
PCB1	D5517 or	C-DIODE	1SS355	(1)	223269R2
PCB1	D5517 or	C-DIODE	KDS4148U	(1)	223283R2
PCB1	D5517 or	C-DIODE	MA2J1110GL	(1)	223302R2
PCB1	D5518	C-DIODE	1SS352	1	223234R2
PCB1	D5518 or	C-DIODE	1SS355	(1)	223269R2
PCB1	D5518 or	C-DIODE	KDS4148U	(1)	223283R2
PCB1	D5518 or	C-DIODE	MA2J1110GL	(1)	223302R2
PCB1	D5520	C-DIODE	1SS352	1	223234R2
PCB1	D5521	ZENER D	UDZS8.2B	1	224550820R2
PCB1	D5522	ZENER D	UDZS3.6B	1	224550360R2
PCB1	D5523	C-DIODE	1SS352	1	223234R2
PCB1	D5601	C-DIODE	S1NB60-4062	1	22380318R2
PCB1	D6000	C-DIODE	1SS352	1	223234R2
PCB1	D6000 or	C-DIODE	1SS355	(1)	223269R2
PCB1	D6000 or	C-DIODE	KDS4148U	(1)	223283R2
PCB1	D6000 or	C-DIODE	MA2J1110GL	(1)	223302R2
PCB1	D6001	C-DIODE	1SS352	1	223234R2
PCB1	D6001 or	C-DIODE	1SS355	(1)	223269R2
PCB1	D6001 or	C-DIODE	KDS4148U	(1)	223283R2
PCB1	D6001 or	C-DIODE	MA2J1110GL	(1)	223302R2
PCB1	D6002	C-DIODE	1SS352	1	223234R2
PCB1	D6002 or	C-DIODE	1SS355	(1)	223269R2
PCB1	D6002 or	C-DIODE	KDS4148U	(1)	223283R2
PCB1	D6002 or	C-DIODE	MA2J1110GL	(1)	223302R2
PCB1	D6003	C-DIODE	1SS352	1	223234R2
PCB1	D6003 or	C-DIODE	1SS355	(1)	223269R2
PCB1	D6003 or	C-DIODE	KDS4148U	(1)	223283R2
PCB1	D6003 or	C-DIODE	MA2J1110GL	(1)	223302R2

PCB1	D6004	C-DIODE	1SS352	1	223234R2	
PCB1	D6004 or	C-DIODE	1SS355	(1)	223269R2	
PCB1	D6004 or	C-DIODE	KDS4148U	(1)	223283R2	
PCB1	D6004 or	C-DIODE	MA2J1110GL	(1)	223302R2	
PCB1	D6005	C-DIODE	1SS352	1	223234R2	
PCB1	D6005 or	C-DIODE	1SS355	(1)	223269R2	
PCB1	D6005 or	C-DIODE	KDS4148U	(1)	223283R2	
PCB1	D6005 or	C-DIODE	MA2J1110GL	(1)	223302R2	
PCB1	D6006	C-DIODE	1SS352	1	223234R2	
PCB1	D6006 or	C-DIODE	1SS355	(1)	223269R2	
PCB1	D6006 or	C-DIODE	KDS4148U	(1)	223283R2	
PCB1	D6006 or	C-DIODE	MA2J1110GL	(1)	223302R2	
PCB1	D6701	C-DIODE	1SS352	1	223234R2	
PCB1	D6701 or	C-DIODE	1SS355	(1)	223269R2	
PCB1	D6701 or	C-DIODE	KDS4148U	(1)	223283R2	
PCB1	D6701 or	C-DIODE	MA2J1110GL	(1)	223302R2	
PCB1	D6702	C-DIODE	1SS352	1	223234R2	
PCB1	D6702 or	C-DIODE	1SS355	(1)	223269R2	
PCB1	D6702 or	C-DIODE	KDS4148U	(1)	223283R2	
PCB1	D6702 or	C-DIODE	MA2J1110GL	(1)	223302R2	
PCB1	D6703	ZENER D	UDZS3.6B	1	224550360R2	
PCB1	D6704	ZENER D	UDZS3.6B	1	224550360R2	
PCB1	D6713	ZENER D	UDZS3.6B	1	224550360R2	
PCB1	D6901	DIODE	D10XB60H	1	22380337	
PCB1	D6901A	HEAT SINK	RAD-152	1	27160483	
PCB1	D6901B	TAPE	(CLOTH-8U)	1	29110082	
PCB1	D6901C	SCREW	3P+10FN(3BC)	2	82143010GR	
PCB1	D6902	C-DIODE	1SS352	1	223234R2	
PCB1	D6902 or	C-DIODE	1SS355	(1)	223269R2	
PCB1	D6902 or	C-DIODE	KDS4148U	(1)	223283R2	
PCB1	D6902 or	C-DIODE	MA2J1110GL	(1)	223302R2	
PCB1	D6903	DIODE	D10XB60H	1	22380337	
PCB1	Q4600	TR	2SB1240-R	1	2213794T	
PCB1	Q4601	TR	KRC102S	1	2216190R2	
PCB1	Q4602	TR	2SA1162-GR	1	2214375R2	
PCB1	Q4603	TR	KRC102S	1	2216190R2	
PCB1	Q5501	IC	R2A15220FP	1	22242600R3	N
PCB1	Q5502	IC	M61540FP	1	22242497R2	
PCB1	Q5503	IC	NJM4580M-D	1	22241448R2	
PCB1	Q5600	TR	RN1441	1	2215410R2	

PCB1	Q5601	TR	RN1441	1	2215410R2	
PCB1	Q5602	TR	RN1441	1	2215410R2	
PCB1	Q5603	TR	RN1441	1	2215410R2	
PCB1	Q5604	TR	RN1441	1	2215410R2	
PCB1	Q5605	TR	RN1441	1	2215410R2	
PCB1	Q5606	TR	RN1441	1	2215410R2	
PCB1	Q5607	TR	RN1441	1	2215410R2	
PCB1	Q5610	TR	RN1441	1	2215410R2	
PCB1	Q5611	TR	RN1441	1	2215410R2	
PCB1	Q5612	TR	RN1441	1	2215410R2	
PCB1	Q5613	TR	RN1441	1	2215410R2	
PCB1	Q5614	TR	RN1441	1	2215410R2	
PCB1	Q5615	TR	RN1441	1	2215410R2	
PCB1	Q5616	TR	RN1441	1	2215410R2	
PCB1	Q5617	TR	RN1441	1	2215410R2	
PCB1	Q5618	IC	NJM4580M-D	1	22241448R2	
PCB1	Q5630	IC	NJM4580M-D	1	22241448R2	
PCB1	Q5632	TR	RN1441	1	2215410R2	
PCB1	Q5633	TR	RN1441	1	2215410R2	
PCB1	Q5636	TR	RN1441	1	2215410R2	
PCB1	Q5637	TR	RN1441	1	2215410R2	
PCB1	Q5640	TR	RN1441	1	2215410R2	
PCB1	Q5641	TR	RN1441	1	2215410R2	
PCB1	Q5645	TR	2SC2712-GR	1	2213145R2	
PCB1	Q5646	TR	2SC2712-GR	1	2213145R2	
PCB1	Q5647	TR	2SA1162-GR	1	2214375R2	
PCB1	Q5670	IC	78M15HF(NJM78M15FA)	1	222780155JRC	
PCB1	Q5670 or	IC	UPC78M15AHF-AZ	(1)	222780155NEC	
PCB1	Q5670A	HEAT SINK	RAD-252	1	27160641	N
PCB1	Q5670B	SCREW	3P+10FN(3BC)	2	82143010GR	
PCB1	Q5671	IC	79M15HF(NJM79M15FA)	1	222790155JRC	
PCB1	Q5671 or	IC	79M15F(AN79M15F)	(1)	222790155MAT	
PCB1	Q5671 or	IC	UPC79M15HF-AZ	(1)	222790155NEC	
PCB1	Q5684	TR	2SC2235-O(TPE6_F)	1	2211653T	
PCB1	Q5685	TR	2SA965-O(TPE6_F)	1	2211643T	
PCB1	Q5708	TR	RN1441	1	2215410R2	
PCB1	Q5709	TR	RN1441	1	2215410R2	
PCB1	Q5903	TR	RN1441	1	2215410R2	
PCB1	Q5904	TR	RN1441	1	2215410R2	
PCB1	Q6000	TR	2SC1740S-S	1	2213285T	

PCB1	Q6001	TR	2SC1740S-S	1	2213285T	
PCB1	Q6002	TR	2SC1740S-S	1	2213285T	
PCB1	Q6003	TR	2SC1740S-S	1	2213285T	
PCB1	Q6004	TR	2SC1740S-S	1	2213285T	
PCB1	Q6005	TR	2SC1740S-S	1	2213285T	
PCB1	Q6006	TR	2SC1740S-S	1	2213285T	
PCB1	Q6010	TR	2SC1740S-S	1	2213285T	
PCB1	Q6011	TR	2SC1740S-S	1	2213285T	
PCB1	Q6012	TR	2SC1740S-S	1	2213285T	
PCB1	Q6013	TR	2SC1740S-S	1	2213285T	
PCB1	Q6014	TR	2SC1740S-S	1	2213285T	
PCB1	Q6015	TR	2SC1740S-S	1	2213285T	
PCB1	Q6016	TR	2SC1740S-S	1	2213285T	
PCB1	Q6030	TR	2SC2229-Y(TPE6_F)	1	2211634T	
PCB1	Q6030 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T	
PCB1	Q6031	TR	2SC2229-Y(TPE6_F)	1	2211634T	
PCB1	Q6031 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T	
PCB1	Q6032	TR	2SC2229-Y(TPE6_F)	1	2211634T	
PCB1	Q6032 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T	
PCB1	Q6033	TR	2SC2229-Y(TPE6_F)	1	2211634T	
PCB1	Q6033 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T	
PCB1	Q6034	TR	2SC2229-Y(TPE6_F)	1	2211634T	
PCB1	Q6034 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T	
PCB1	Q6035	TR	2SC2229-Y(TPE6_F)	1	2211634T	
PCB1	Q6035 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T	
PCB1	Q6036	TR	2SC2229-Y(TPE6_F)	1	2211634T	
PCB1	Q6036 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T	
PCB1	Q6040	TR	2SA949-O(TPE6_F)	1	2211353T	
PCB1	Q6040 or	TR	2SA949-Y(TPE6_F)	(1)	2211354T	
PCB1	Q6041	TR	2SA949-O(TPE6_F)	1	2211353T	
PCB1	Q6041 or	TR	2SA949-Y(TPE6_F)	(1)	2211354T	
PCB1	Q6042	TR	2SA949-O(TPE6_F)	1	2211353T	
PCB1	Q6042 or	TR	2SA949-Y(TPE6_F)	(1)	2211354T	
PCB1	Q6043	TR	2SA949-O(TPE6_F)	1	2211353T	
PCB1	Q6043 or	TR	2SA949-Y(TPE6_F)	(1)	2211354T	
PCB1	Q6044	TR	2SA949-O(TPE6_F)	1	2211353T	
PCB1	Q6044 or	TR	2SA949-Y(TPE6_F)	(1)	2211354T	
PCB1	Q6045	TR	2SA949-O(TPE6_F)	1	2211353T	
PCB1	Q6045 or	TR	2SA949-Y(TPE6_F)	(1)	2211354T	
PCB1	Q6046	TR	2SA949-O(TPE6_F)	1	2211353T	

PCB1	Q6046 or	TR	2SA949-Y(TPE6_F)	(1)	2211354T
PCB1	Q6070	TR	2SC2229-O(TPE6_F)	1	2211633T
PCB1	Q6070 or	TR	2SC2229-Y(TPE6_F)	(1)	2211634T
PCB1	Q6071	TR	2SC2229-O(TPE6_F)	1	2211633T
PCB1	Q6071 or	TR	2SC2229-Y(TPE6_F)	(1)	2211634T
PCB1	Q6072	TR	2SC2229-O(TPE6_F)	1	2211633T
PCB1	Q6072 or	TR	2SC2229-Y(TPE6_F)	(1)	2211634T
PCB1	Q6073	TR	2SC2229-O(TPE6_F)	1	2211633T
PCB1	Q6073 or	TR	2SC2229-Y(TPE6_F)	(1)	2211634T
PCB1	Q6074	TR	2SC2229-O(TPE6_F)	1	2211633T
PCB1	Q6074 or	TR	2SC2229-Y(TPE6_F)	(1)	2211634T
PCB1	Q6075	TR	2SC2229-O(TPE6_F)	1	2211633T
PCB1	Q6075 or	TR	2SC2229-Y(TPE6_F)	(1)	2211634T
PCB1	Q6076	TR	2SC2229-O(TPE6_F)	1	2211633T
PCB1	Q6076 or	TR	2SC2229-Y(TPE6_F)	(1)	2211634T
PCB1	Q6100	TR	2SA1930(ONK_Q)	1	2203000
PCB1	Q6100 or	TR	2SA2140-Q_P	(1)	2217151
PCB1	Q6101	TR	2SA1930(ONK_Q)	1	2203000
PCB1	Q6101 or	TR	2SA2140-Q_P	(1)	2217151
PCB1	Q6102	TR	2SA1930(ONK_Q)	1	2203000
PCB1	Q6102 or	TR	2SA2140-Q_P	(1)	2217151
PCB1	Q6103	TR	2SA1930(ONK_Q)	1	2203000
PCB1	Q6103 or	TR	2SA2140-Q_P	(1)	2217151
PCB1	Q6104	TR	2SA1930(ONK_Q)	1	2203000
PCB1	Q6104 or	TR	2SA2140-Q_P	(1)	2217151
PCB1	Q6105	TR	2SA1930(ONK_Q)	1	2203000
PCB1	Q6105 or	TR	2SA2140-Q_P	(1)	2217151
PCB1	Q6106	TR	2SA1930(ONK_Q)	1	2203000
PCB1	Q6106 or	TR	2SA2140-Q_P	(1)	2217151
PCB1	Q6110	TR	2SC5171(ONK_Q)	1	2203010
PCB1	Q6110 or	TR	2SC5993-Q_P	(1)	2217161
PCB1	Q6111	TR	2SC5171(ONK_Q)	1	2203010
PCB1	Q6111 or	TR	2SC5993-Q_P	(1)	2217161
PCB1	Q6112	TR	2SC5171(ONK_Q)	1	2203010
PCB1	Q6112 or	TR	2SC5993-Q_P	(1)	2217161
PCB1	Q6113	TR	2SC5171(ONK_Q)	1	2203010
PCB1	Q6113 or	TR	2SC5993-Q_P	(1)	2217161
PCB1	Q6114	TR	2SC5171(ONK_Q)	1	2203010
PCB1	Q6114 or	TR	2SC5993-Q_P	(1)	2217161
PCB1	Q6115	TR	2SC5171(ONK_Q)	1	2203010

PCB1	Q6115 or	TR	2SC5993-Q_P	(1)	2217161
PCB1	Q6116	TR	2SC5171(ONK_Q)	1	2203010
PCB1	Q6116 or	TR	2SC5993-Q_P	(1)	2217161
PCB1	Q6380	IC	LM61CIZ	1	22242212
PCB1	Q6380A	RETAINER	(PTH)	1	27141884-1
PCB1	Q6701	TR	2SC2712-GR	1	2213145R2
PCB1	Q6701 or	TR	KTC3875-GR	(1)	2216175R2
PCB1	Q6702	TR	2SC2712-GR	1	2213145R2
PCB1	Q6702 or	TR	KTC3875-GR	(1)	2216175R2
PCB1	Q6703	TR	2SA1163-BL(TE85L_F)	1	2216756R2
PCB1	Q6707	TR	2SC2712-GR	1	2213145R2
PCB1	Q6707 or	TR	KTC3875-GR	(1)	2216175R2
PCB1	Q6713	TR	2SA1163-BL(TE85L_F)	1	2216756R2
PCB1	**[TRANS COIL]**				
PCB1	L4602	EMIFIL	BK1608LM182-T	1	230958R1
PCB1	L4603	EMIFIL	BK1608LM182-T	1	230958R1
PCB1	L6000	FR CORE	*	1	5597-45502
PCB1	L6001	FR CORE	*	1	5597-45502
PCB1	L6002	FR CORE	*	1	5597-45502
PCB1	L6003	FR CORE	*	1	5597-45502
PCB1	L6004	FR CORE	*	1	5597-45502
PCB1	L6005	FR CORE	*	1	5597-45502
PCB1	L6006	FR CORE	*	1	5597-45502
PCB1	L6010	FR CORE	*	1	5597-45502
PCB1	L6011	FR CORE	*	1	5597-45502
PCB1	L6012	FR CORE	*	1	5597-45502
PCB1	L6013	FR CORE	*	1	5597-45502
PCB1	L6014	FR CORE	*	1	5597-45502
PCB1	L6015	FR CORE	*	1	5597-45502
PCB1	L6016	FR CORE	*	1	5597-45502
PCB1	**[CAPACITOR]**				
PCB1	C4604	C-CERA C	CC725CH1H-101J1	1	342101014R1
PCB1	C4605	C-CERA C	CK725F1E-104Z1	1	332161040R1
PCB1	C5503	UPZ C	2AUPZTF221JE	1	376332214T
PCB1	C5504	UPZ C	2AUPZTF221JE	1	376332214T
PCB1	C5505	C-CERA C	CC725CH1H-221J1	1	342102214R1
PCB1	C5506	C-CERA C	CC725CH1H-221J1	1	342102214R1
PCB1	C5507	C-CERA C	CC725CH1H-221J1	1	342102214R1
PCB1	C5508	C-CERA C	CC725CH1H-221J1	1	342102214R1
PCB1	C5509	C-CERA C	CC725CH1H-221J1	1	342102214R1

PCB1	C5510	C-CERA C	CC725CH1H-221J1	1	342102214R1	
PCB1	C5511	C-CERA C	CC725CH1H-221J1	1	342102214R1	
PCB1	C5512	C-CERA C	CC725CH1H-221J1	1	342102214R1	
PCB1	C5513	C-CERA C	CC725CH1H-221J1	1	342102214R1	
PCB1	C5514	C-CERA C	CC725CH1H-221J1	1	342102214R1	
PCB1	C5515	C-CERA C	CC725CH1H-221J1	1	342102214R1	
PCB1	C5516	C-CERA C	CC725CH1H-221J1	1	342102214R1	
PCB1	C5517	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	
PCB1	C5518	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	
PCB1	C5519	UPZ C	2AUPZTF221JE	1	376332214T	
PCB1	C5520	UPZ C	2AUPZTF221JE	1	376332214T	
PCB1	C5527	C-CERA C	CC725CH1H-221J1	1	342102214R1	
PCB1	C5528	C-CERA C	CC725CH1H-221J1	1	342102214R1	
PCB1	C5529	C-CERA C	CC725CH1H-221J1	1	342102214R1	
PCB1	C5530	C-CERA C	CC725CH1H-221J1	1	342102214R1	
PCB1	C5531	C-CERA C	CC725CH1H-221J1	1	342102214R1	
PCB1	C5532	C-CERA C	CC725CH1H-221J1	1	342102214R1	
PCB1	C5533	C-CERA C	CC725CH1H-221J1	1	342102214R1	
PCB1	C5534	C-CERA C	CC725CH1H-221J1	1	342102214R1	
PCB1	C5535	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB1	C5536	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB1	C5540	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB1	C5541	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB1	C5542	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB1	C5543	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB1	C5548	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB1	C5549	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB1	C5550	C-CERA C	CK725B1H-152K1	1	332101525R1	
PCB1	C5551	C-CERA C	CK725B1H-152K1	1	332101525R1	
PCB1	C5555	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB1	C5559	TF C	ECQ-V50V-473J	1	374724734T	
PCB1	C5560	TF C	ECQ-V50V-473J	1	374724734T	
PCB1	C5561	TF C	ECQ-V50V-224J	1	374722244T	
PCB1	C5562	TF C	ECQ-V50V-224J	1	374722244T	
PCB1	C5563	TF C	ECQ-V50V-223J	1	374722234T	
PCB1	C5564	TF C	ECQ-V50V-223J	1	374722234T	
PCB1	C5569	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C5570	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C5571	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C5572	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	

PCB1	C5573	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C5574	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C5575	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C5576	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C5579	C-CERA C	CC725CH1H-102J1	1	342101024R1	
PCB1	C5580	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	
PCB1	C5581	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	
PCB1	C5582	C-CERA C	CC725CH1H-102J1	1	342101024R1	
PCB1	C5583	C-CERA C	CC725CH1H-102J1	1	342101024R1	
PCB1	C5584	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB1	C5585	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB1	C5586	UTSP C	CE04W10V-220M(UTSP)	1	397532217T	
PCB1	C5587	UTSP C	CE04W10V-220M(UTSP)	1	397532217T	
PCB1	C5588	TF C	ECQ-V50V-123J	1	374721234T	
PCB1	C5589	TF C	ECQ-V50V-123J	1	374721234T	
PCB1	C5590	C-CERA C	CC725CH1H-101J1	1	342101014R1	
PCB1	C5591	C-CERA C	CC725CH1H-101J1	1	342101014R1	
PCB1	C5592	MKT C	B32529C0332J289	1	376493324T	
PCB1	C5593	MKT C	B32529C0332J289	1	376493324T	
PCB1	C5594	C-CERA C	CC725CH1H-101J1	1	342101014R1	
PCB1	C5595	C-CERA C	CC725CH1H-101J1	1	342101014R1	
PCB1	C5596	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB1	C5597	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB1	C5598	C-CERA C	CC725CH1H-102J1	1	342101024R1	
PCB1	C5600	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C5601	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C5602	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C5603	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C5604	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C5605	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C5606	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C5607	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C5608	C-FILM C	ECHU50V-561J	1	373025614R2	
PCB1	C5609	C-FILM C	ECHU50V-561J	1	373025614R2	
PCB1	C5610	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C5611	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C5612	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C5613	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C5614	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C5615	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	

PCB1	C5630	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C5631	C-CERA C	CC725CH1H-221J1	1	342102214R1	
PCB1	C5632	TF C	ECQ-V50V-103J	1	374721034T	
PCB1	C5660	MMT C	MMT50V-334J	1	375523344T	
PCB1	C5661	VR C	CE04W50V-470M(VR)	1	394684717S	
PCB1	C5662	VR C	CE04W50V-1000M(VR)	1	394681027S	
PCB1	C5666	UTSP C	CE04W25V-220M(UTSP)	1	397552217T	
PCB1	C5667	UTSP C	CE04W25V-220M(UTSP)	1	397552217T	
PCB1	C5670	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C5671	UTSP C	CE04W50V-220M(UTSP)	1	397582217T	
PCB1	C5672	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB1	C5673	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB1	C5674	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	
PCB1	C5675	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	
PCB1	C5677	UTSP C	CE04W25V-220M(UTSP)	1	397552217T	
PCB1	C5679	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C5680	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C5684	UTSP C	CE04W25V-220M(UTSP)	1	397552217T	
PCB1	C5685	UTSP C	CE04W25V-220M(UTSP)	1	397552217T	
PCB1	C5686	UTSP C	CE04W25V-220M(UTSP)	1	397552217T	
PCB1	C5687	UTSP C	CE04W25V-220M(UTSP)	1	397552217T	
PCB1	C5689	TF C	ECQ-V50V-333J	1	374723334T	
PCB1	C5690	TF C	ECQ-V50V-333J	1	374723334T	
PCB1	C5691	TF C	ECQ-V50V-473J	1	374724734T	
PCB1	C5692	TF C	ECQ-V50V-224J	1	374722244T	
PCB1	C5693	TF C	ECQ-V50V-473J	1	374724734T	
PCB1	C5694	TF C	ECQ-V50V-224J	1	374722244T	
PCB1	C5695	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C5696	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C5697	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C5698	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C5707	C-CERA C	CC725CH1H-221J1	1	342102214R1	
PCB1	C5708	C-CERA C	CC725CH1H-221J1	1	342102214R1	
PCB1	C5709	C-CERA C	CC725CH1H-221J1	1	342102214R1	
PCB1	C5720	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C5721	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C5722	C-CERA C	CC725CH1H-221J1	1	342102214R1	
PCB1	C5723	C-CERA C	CC725CH1H-221J1	1	342102214R1	
PCB1	C5724	C-CERA C	CC725CH1H-221J1	1	342102214R1	
PCB1	C5738	UTSP C	CE04W10V-100M(UTSP)	1	397531017T	

PCB1	C5739	UTSP C	CE04W25V-220M(UTSP)	1	397552217T	
PCB1	C5905	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C5906	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C5907	C-CERA C	CC725CH1H-221J1	1	342102214R1	
PCB1	C5908	C-CERA C	CC725CH1H-221J1	1	342102214R1	
PCB1	C5910	C-CERA C	CK725B1H-152K1	1	332101525R1	
PCB1	C5911	C-CERA C	CK725B1H-152K1	1	332101525R1	
PCB1	C6020	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C6021	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C6022	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C6023	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C6024	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C6025	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C6026	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C6050	TF C	ECQ-V50V-104J	1	374721044T	
PCB1	C6051	TF C	ECQ-V50V-104J	1	374721044T	
PCB1	C6052	TF C	ECQ-V50V-104J	1	374721044T	
PCB1	C6053	TF C	ECQ-V50V-104J	1	374721044T	
PCB1	C6054	TF C	ECQ-V50V-104J	1	374721044T	
PCB1	C6055	TF C	ECQ-V50V-104J	1	374721044T	
PCB1	C6056	TF C	ECQ-V50V-104J	1	374721044T	
PCB1	C6701	UTSP C	CE04W10V-220M(UTSP)	1	397532217T	
PCB1	C6703	C-CERA C	CK725F1H-104Z1	1	332151040R1	
PCB1	C6704	UTSP C	CE04W50V-1M(UTSP)	1	397580107T	
PCB1	C6706	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB1	C6710	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB1	C6713	C-CERA C	CK725F1H-104Z1	1	332151040R1	
PCB1	C6714	UTSP C	CE04W50V-2.2M(UTSP)	1	397580227T	
PCB1	C6901	ELECT C	CE69W71V-15000M	1	3504467	
PCB1	C6902	ELECT C	CE69W71V-15000M	1	3504467	
PCB1	C6911	C-CERA C	CC725CH1H-102J1	1	342101024R1	
PCB1	C6912	TF C	ECQ-V100V-334J	1	374733344T	
PCB1	C6913	TF C	ECQ-V100V-334J	1	374733344T	
PCB1	C6915	TF C	ECQ-V50V-104J	1	374721044T	
PCB1	C6916	TF C	ECQ-V50V-104J	1	374721044T	
PCB1	**[RESISTOR]**					
PCB1	R4600	C-CARBON R	RN72K1J-039JE	1	435030394R1	
PCB1	R4601	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R4602	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB1	R4603	C-CARBON R	RN72K1J-220JE	1	435032204R1	

PCB1	R4605	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R4606	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB1	R4608	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB1	R4612	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R4614	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R4616	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R4622	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5503	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB1	R5504	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB1	R5505	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB1	R5506	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB1	R5507	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB1	R5508	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB1	R5509	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB1	R5510	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB1	R5511	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB1	R5512	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB1	R5513	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB1	R5514	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB1	R5515	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB1	R5516	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB1	R5517	METAL O R	RS1WBJ-10	1	443621004T	
PCB1	R5518	METAL O R	RS1WBJ-10	1	443621004T	
PCB1	R5519	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB1	R5520	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB1	R5526	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB1	R5527	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB1	R5528	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB1	R5529	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB1	R5530	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB1	R5531	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB1	R5532	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB1	R5533	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB1	R5534	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB1	R5535	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5538	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB1	R5539	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB1	R5540	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5543	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5544	C-CARBON R	RN72K1J-224JE	1	435032244R1	

PCB1	R5545	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5546	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5547	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5548	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5549	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5550	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5551	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5552	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5553	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5554	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5555	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5556	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5557	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5558	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5559	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5560	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5561	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5562	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5563	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5564	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5565	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5567	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5568	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PCB1	R5569	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5570	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5571	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5572	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5573	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5574	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5575	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5576	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5577	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB1	R5578	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB1	R5579	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB1	R5580	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB1	R5582	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5583	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5585	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB1	R5586	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB1	R5587	C-CARBON R	RN72K1J-103JE	1	435031034R1	

PCB1	R5588	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB1	R5590	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PCB1	R5591	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PCB1	R5592	C-CARBON R	RN72K1J-332JE	1	435033324R1	
PCB1	R5593	C-CARBON R	RN72K1J-332JE	1	435033324R1	
PCB1	R5594	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB1	R5595	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB1	R5596	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PCB1	R5597	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PCB1	R5598	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB1	R5599	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB1	R5600	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5601	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5602	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5603	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5604	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5605	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5606	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5607	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5608	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5609	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5610	C-CARBON R	RN72K1J-121JE	1	435031214R1	
PCB1	R5611	C-CARBON R	RN72K1J-121JE	1	435031214R1	
PCB1	R5612	C-CARBON R	RN72K1J-121JE	1	435031214R1	
PCB1	R5613	C-CARBON R	RN72K1J-121JE	1	435031214R1	
PCB1	R5614	C-CARBON R	RN72K1J-121JE	1	435031214R1	
PCB1	R5615	C-CARBON R	RN72K1J-121JE	1	435031214R1	
PCB1	R5616	C-CARBON R	RN72K1J-121JE	1	435031214R1	
PCB1	R5617	C-CARBON R	RN72K1J-121JE	1	435031214R1	
PCB1	R5620	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB1	R5621	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB1	R5622	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB1	R5623	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB1	R5624	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB1	R5625	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB1	R5626	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB1	R5627	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB1	R5630	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB1	R5631	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB1	R5632	C-CARBON R	RN72K1J-153JE	1	435031534R1	

PCB1	R5633	C-CARBON R	RN72K1J-122JE	1	435031224R1	
PCB1	R5634	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB1	R5635	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5636	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5637	METAL O R	RS1/2WBJ-10	1	443521004T	
PCB1	R5638	METAL O R	RS1/2WBJ-10	1	443521004T	
PCB1	R5639	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB1	R5640	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB1	R5641	C-CARBON R	RN72K1J-563JE	1	435035634R1	
PCB1	R5642	C-CARBON R	RN72K1J-563JE	1	435035634R1	
PCB1	R5643	C-CARBON R	RN72K1J-474JE	1	435034744R1	
PCB1	R5644	C-CARBON R	RN72K1J-474JE	1	435034744R1	
PCB1	R5645	C-CARBON R	RN72K1J-561JE	1	435035614R1	
PCB1	R5646	C-CARBON R	RN72K1J-561JE	1	435035614R1	
PCB1	R5647	C-CARBON R	RN72K1J-274JE	1	435032744R1	
PCB1	R5648	C-CARBON R	RN72K1J-274JE	1	435032744R1	
PCB1	R5649	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PCB1	R5650	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PCB1	R5651	C-CARBON R	RN72K1J-122JE	1	435031224R1	
PCB1	R5652	C-CARBON R	RN72K1J-122JE	1	435031224R1	
PCB1	R5653	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB1	R5654	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB1	R5655	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5656	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5657	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5660	METAL R	RNU1WCJ-1.5	1	453630154T	
PCB1	R5661	METAL R	RNU1WCJ-1.5	1	453630154T	
PCB1	R5663	CEMENT R	RSS5WJ-15(BGR5NJ)	1	4800082	
PCB1	R5664	CEMENT R	RSS5WJ-15(BGR5NJ)	1	4800082	
PCB1	R5666	CARBON R	R16J-22	1	417342204T	
PCB1	R5667	CARBON R	R16J-22	1	417342204T	
PCB1	R5669	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5672	C-CARBON R	RN72K1J-100JE	1	435031004R1	
PCB1	R5673	C-CARBON R	RN72K1J-100JE	1	435031004R1	
PCB1	R5674	METAL O R	RS1WBJ-470	1	443624714T	
PCB1	R5675	METAL O R	RS1WBJ-22	1	443622204T	
PCB1	R5676	METAL O R	RS1WBJ-22	1	443622204T	
PCB1	R5677	METAL O R	RS1WBJ-22	1	443622204T	
PCB1	R5678	METAL O R	RS1WBJ-22	1	443622204T	
PCB1	R5679	CARBON R	R16J-1.2K	1	417341224T	

PCB1	R5681	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5682	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5683	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5684	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5685	CARBON R	R16J-1.2K	1	417341224T	
PCB1	R5692	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB1	R5693	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB1	R5694	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB1	R5695	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5696	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5711	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5712	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5714	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5715	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5716	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5732	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5733	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5734	C-CARBON R	RN72K1J-391JE	1	435033914R1	
PCB1	R5735	C-CARBON R	RN72K1J-391JE	1	435033914R1	
PCB1	R5738	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5739	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5740	C-CARBON R	RN72K1J-391JE	1	435033914R1	
PCB1	R5741	C-CARBON R	RN72K1J-391JE	1	435033914R1	
PCB1	R5744	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5745	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5746	C-CARBON R	RN72K1J-391JE	1	435033914R1	
PCB1	R5747	C-CARBON R	RN72K1J-391JE	1	435033914R1	
PCB1	R5750	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB1	R5751	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB1	R5752	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB1	R5753	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB1	R5754	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5755	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5756	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB1	R5757	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB1	R5782	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5783	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5788	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB1	R5789	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB1	R5790	C-CARBON R	RN72K1J-123JE	1	435031234R1	

PCB1	R5791	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PCB1	R5792	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB1	R5793	C-CARBON R	RN72K1J-333JE	1	435033334R1	
PCB1	R5794	C-CARBON R	RN72K1J-333JE	1	435033334R1	
PCB1	R5795	C-CARBON R	RN72K1J-333JE	1	435033334R1	
PCB1	R5796	C-CARBON R	RN72K1J-682JE	1	435036824R1	
PCB1	R5797	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB1	R5798	CARBON R	R16J-12K	1	417341234T	
PCB1	R5800	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB1	R5801	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB1	R5813	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5815	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5816	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5817	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5818	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5819	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5820	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5821	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5822	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5823	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5824	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5825	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5826	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5827	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5828	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5829	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5830	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5831	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5832	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5833	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5834	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5835	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5836	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5839	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5840	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5841	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5842	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5843	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5844	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5845	C-CARBON R	RN72K1J-000JE	1	435030004R1	

PCB1	R5846	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5847	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5848	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5849	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5850	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5851	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5852	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5853	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5854	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5855	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5856	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5857	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5858	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5859	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5860	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5861	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5863	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5864	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5865	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5866	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5867	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5868	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5871	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5872	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5873	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5874	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5875	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5876	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5877	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5878	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5879	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5880	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5881	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5883	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5884	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5885	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5886	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5887	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5889	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5890	C-CARBON R	RN72K1J-000JE	1	435030004R1	

PCB1	R5892	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5893	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5902	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5904	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5905	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5906	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5907	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5908	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5909	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5910	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5911	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB1	R5912	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB1	R5913	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB1	R5914	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB1	R5915	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5916	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R5917	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB1	R5918	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB1	R5921	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5922	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5923	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5924	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5925	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5928	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5929	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5930	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5931	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5932	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5933	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5934	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5935	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5936	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5937	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5938	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5939	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5940	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5941	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5942	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R5943	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	R6000	CARBON R	R16J-4.7K	1	417344724T	

PCB1	R6001	CARBON R	R16J-4.7K	1	417344724T	
PCB1	R6002	CARBON R	R16J-4.7K	1	417344724T	
PCB1	R6003	CARBON R	R16J-4.7K	1	417344724T	
PCB1	R6004	CARBON R	R16J-4.7K	1	417344724T	
PCB1	R6005	CARBON R	R16J-4.7K	1	417344724T	
PCB1	R6006	CARBON R	R16J-4.7K	1	417344724T	
PCB1	R6010	CARBON R	R16J-3.3K	1	417343324T	
PCB1	R6011	CARBON R	R16J-3.3K	1	417343324T	
PCB1	R6012	CARBON R	R16J-3.3K	1	417343324T	
PCB1	R6013	CARBON R	R16J-3.3K	1	417343324T	
PCB1	R6014	CARBON R	R16J-3.3K	1	417343324T	
PCB1	R6015	CARBON R	R16J-3.3K	1	417343324T	
PCB1	R6016	CARBON R	R16J-3.3K	1	417343324T	
PCB1	R6030	CARBON R	R16J-2.2K	1	417342224T	
PCB1	R6031	CARBON R	R16J-2.2K	1	417342224T	
PCB1	R6032	CARBON R	R16J-2.2K	1	417342224T	
PCB1	R6033	CARBON R	R16J-2.2K	1	417342224T	
PCB1	R6034	CARBON R	R16J-2.2K	1	417342224T	
PCB1	R6035	CARBON R	R16J-2.2K	1	417342224T	
PCB1	R6036	CARBON R	R16J-2.2K	1	417342224T	
PCB1	R6040	TRIM R	N06HR2KBC	1	5210390T	
PCB1	R6041	TRIM R	N06HR2KBC	1	5210390T	
PCB1	R6042	TRIM R	N06HR2KBC	1	5210390T	
PCB1	R6043	TRIM R	N06HR2KBC	1	5210390T	
PCB1	R6044	TRIM R	N06HR2KBC	1	5210390T	
PCB1	R6045	TRIM R	N06HR2KBC	1	5210390T	
PCB1	R6046	TRIM R	N06HR2KBC	1	5210390T	
PCB1	R6050	CARBON R	R16J-2.7K	1	417342724T	
PCB1	R6051	CARBON R	R16J-2.7K	1	417342724T	
PCB1	R6052	CARBON R	R16J-2.7K	1	417342724T	
PCB1	R6053	CARBON R	R16J-2.7K	1	417342724T	
PCB1	R6054	CARBON R	R16J-2.7K	1	417342724T	
PCB1	R6055	CARBON R	R16J-2.7K	1	417342724T	
PCB1	R6056	CARBON R	R16J-2.7K	1	417342724T	
PCB1	R6070	NF CARBON R	R25J-82	1	415478204T	
PCB1	R6071	NF CARBON R	R25J-82	1	415478204T	
PCB1	R6072	NF CARBON R	R25J-82	1	415478204T	
PCB1	R6073	NF CARBON R	R25J-82	1	415478204T	
PCB1	R6074	NF CARBON R	R25J-82	1	415478204T	
PCB1	R6075	NF CARBON R	R25J-82	1	415478204T	

PCB1	R6076	NF CARBON R	R25J-82	1	415478204T	
PCB1	R6080	CARBON R	R16J-10	1	417341004T	
PCB1	R6081	CARBON R	R16J-10	1	417341004T	
PCB1	R6082	CARBON R	R16J-10	1	417341004T	
PCB1	R6083	CARBON R	R16J-10	1	417341004T	
PCB1	R6084	CARBON R	R16J-10	1	417341004T	
PCB1	R6085	CARBON R	R16J-10	1	417341004T	
PCB1	R6086	CARBON R	R16J-10	1	417341004T	
PCB1	R6090	CARBON R	R16J-10	1	417341004T	
PCB1	R6091	CARBON R	R16J-10	1	417341004T	
PCB1	R6092	CARBON R	R16J-10	1	417341004T	
PCB1	R6093	CARBON R	R16J-10	1	417341004T	
PCB1	R6094	CARBON R	R16J-10	1	417341004T	
PCB1	R6095	CARBON R	R16J-10	1	417341004T	
PCB1	R6096	CARBON R	R16J-10	1	417341004T	
PCB1	R6100	METAL PR	MPR5W+5W 0R22	1	4000233	
PCB1	R6100 or	METAL PR	RGC55 0.22	(1)	4000132	
PCB1	R6101	METAL PR	MPR5W+5W 0R22	1	4000233	
PCB1	R6101 or	METAL PR	RGC55 0.22	(1)	4000132	
PCB1	R6102	METAL PR	MPR5W+5W 0R22	1	4000233	
PCB1	R6102 or	METAL PR	RGC55 0.22	(1)	4000132	
PCB1	R6103	METAL PR	MPR5W+5W 0R22	1	4000233	
PCB1	R6103 or	METAL PR	RGC55 0.22	(1)	4000132	
PCB1	R6104	METAL PR	MPR5W+5W 0R22	1	4000233	
PCB1	R6104 or	METAL PR	RGC55 0.22	(1)	4000132	
PCB1	R6105	METAL PR	MPR5W+5W 0R22	1	4000233	
PCB1	R6105 or	METAL PR	RGC55 0.22	(1)	4000132	
PCB1	R6106	METAL PR	MPR5W+5W 0R22	1	4000233	
PCB1	R6106 or	METAL PR	RGC55 0.22	(1)	4000132	
PCB1	R6140	C-CARBON R	RN72K1J-563JE	1	435035634R1	
PCB1	R6141	C-CARBON R	RN72K1J-563JE	1	435035634R1	
PCB1	R6142	C-CARBON R	RN72K1J-563JE	1	435035634R1	
PCB1	R6143	C-CARBON R	RN72K1J-563JE	1	435035634R1	
PCB1	R6144	C-CARBON R	RN72K1J-563JE	1	435035634R1	
PCB1	R6145	C-CARBON R	RN72K1J-563JE	1	435035634R1	
PCB1	R6146	C-CARBON R	RN72K1J-563JE	1	435035634R1	
PCB1	R6150	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB1	R6151	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB1	R6152	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB1	R6153	C-CARBON R	RN72K1J-103JE	1	435031034R1	

PCB1	R6154	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB1	R6155	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB1	R6156	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB1	R6160	CARBON R	R16J-33K	1	417343334T	
PCB1	R6161	CARBON R	R16J-33K	1	417343334T	
PCB1	R6162	CARBON R	R16J-33K	1	417343334T	
PCB1	R6163	CARBON R	R16J-33K	1	417343334T	
PCB1	R6164	CARBON R	R16J-33K	1	417343334T	
PCB1	R6165	CARBON R	R16J-33K	1	417343334T	
PCB1	R6166	CARBON R	R16J-33K	1	417343334T	
PCB1	R6170	CARBON R	R16J-47K	1	417344734T	
PCB1	R6171	CARBON R	R16J-47K	1	417344734T	
PCB1	R6172	CARBON R	R16J-47K	1	417344734T	
PCB1	R6173	CARBON R	R16J-47K	1	417344734T	
PCB1	R6174	CARBON R	R16J-47K	1	417344734T	
PCB1	R6175	CARBON R	R16J-47K	1	417344734T	
PCB1	R6176	CARBON R	R16J-47K	1	417344734T	
PCB1	R6180	CARBON R	R16J-47K	1	417344734T	
PCB1	R6181	CARBON R	R16J-47K	1	417344734T	
PCB1	R6182	CARBON R	R16J-47K	1	417344734T	
PCB1	R6183	CARBON R	R16J-47K	1	417344734T	
PCB1	R6184	CARBON R	R16J-47K	1	417344734T	
PCB1	R6185	CARBON R	R16J-47K	1	417344734T	
PCB1	R6186	CARBON R	R16J-47K	1	417344734T	
PCB1	R6197	METAL O R	RS1/2WBJ-33	1	443523304T	
PCB1	R6250	NF CARBON R	R25J-120	1	415471214T	
PCB1	R6251	NF CARBON R	R25J-120	1	415471214T	
PCB1	R6252	NF CARBON R	R25J-120	1	415471214T	
PCB1	R6253	NF CARBON R	R25J-120	1	415471214T	
PCB1	R6254	NF CARBON R	R25J-120	1	415471214T	
PCB1	R6255	NF CARBON R	R25J-120	1	415471214T	
PCB1	R6256	NF CARBON R	R25J-120	1	415471214T	
PCB1	R6260	NF CARBON R	R25J-120	1	415471214T	
PCB1	R6261	NF CARBON R	R25J-120	1	415471214T	
PCB1	R6262	NF CARBON R	R25J-120	1	415471214T	
PCB1	R6263	NF CARBON R	R25J-120	1	415471214T	
PCB1	R6264	NF CARBON R	R25J-120	1	415471214T	
PCB1	R6265	NF CARBON R	R25J-120	1	415471214T	
PCB1	R6266	NF CARBON R	R25J-120	1	415471214T	
PCB1	R6270	NF CARBON R	R25J-18	1	415471804T	

PCB1	R6271	NF CARBON R	R25J-18	1	415471804T	
PCB1	R6272	NF CARBON R	R25J-18	1	415471804T	
PCB1	R6273	NF CARBON R	R25J-18	1	415471804T	
PCB1	R6274	NF CARBON R	R25J-18	1	415471804T	
PCB1	R6275	NF CARBON R	R25J-18	1	415471804T	
PCB1	R6276	NF CARBON R	R25J-18	1	415471804T	
PCB1	R6280	NF CARBON R	R25J-18	1	415471804T	
PCB1	R6281	NF CARBON R	R25J-18	1	415471804T	
PCB1	R6282	NF CARBON R	R25J-18	1	415471804T	
PCB1	R6283	NF CARBON R	R25J-18	1	415471804T	
PCB1	R6284	NF CARBON R	R25J-18	1	415471804T	
PCB1	R6285	NF CARBON R	R25J-18	1	415471804T	
PCB1	R6286	NF CARBON R	R25J-18	1	415471804T	
PCB1	R6290	NF CARBON R	R25J-2.2	1	415470224T	
PCB1	R6291	NF CARBON R	R25J-2.2	1	415470224T	
PCB1	R6292	NF CARBON R	R25J-2.2	1	415470224T	
PCB1	R6293	NF CARBON R	R25J-2.2	1	415470224T	
PCB1	R6294	NF CARBON R	R25J-2.2	1	415470224T	
PCB1	R6295	NF CARBON R	R25J-2.2	1	415470224T	
PCB1	R6296	NF CARBON R	R25J-2.2	1	415470224T	
PCB1	R6300	NF CARBON R	R25J-2.2	1	415470224T	
PCB1	R6301	NF CARBON R	R25J-2.2	1	415470224T	
PCB1	R6302	NF CARBON R	R25J-2.2	1	415470224T	
PCB1	R6303	NF CARBON R	R25J-2.2	1	415470224T	
PCB1	R6304	NF CARBON R	R25J-2.2	1	415470224T	
PCB1	R6305	NF CARBON R	R25J-2.2	1	415470224T	
PCB1	R6306	NF CARBON R	R25J-2.2	1	415470224T	
PCB1	R6310	NF CARBON R	R25J-10	1	415471004T	
PCB1	R6311	NF CARBON R	R25J-10	1	415471004T	
PCB1	R6312	NF CARBON R	R25J-10	1	415471004T	
PCB1	R6313	NF CARBON R	R25J-10	1	415471004T	
PCB1	R6314	NF CARBON R	R25J-10	1	415471004T	
PCB1	R6315	NF CARBON R	R25J-10	1	415471004T	
PCB1	R6316	NF CARBON R	R25J-10	1	415471004T	
PCB1	R6701	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PCB1	R6702	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB1	R6704	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB1	R6706	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB1	R6708	C-CARBON R	RN72K1J-333JE	1	435033334R1	
PCB1	R6709	C-CARBON R	RN72K1J-392JE	1	435033924R1	

PCB1	R6710	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PCB1	R6712	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB1	R6714	C-CARBON R	RN72K1J-333JE	1	435033334R1	
PCB1	R6716	C-CARBON R	RN72K1J-563JE	1	435035634R1	
PCB1	R6902	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB1	R6903	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB1	R6907	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB1	**[SW TRM]**					
PCB1	E5507A	TRM	NTM-1P232(M1700)	1	25060301	
PCB1	E5509A	TRM	NTM-1P232(M1700)	1	25060301	
PCB1	E5519	TRM-423(SCREW)	NEJITANSI ST3	1	25060495	
PCB1	E5520	TRM-423(SCREW)	NEJITANSI ST3	1	25060495	
PCB1	F6901A	FUSE HOLDER	SN5051	1	250113	!
PCB1	F6901B	FUSE HOLDER	SN5051	1	250113	!
PCB1	F6902A	FUSE HOLDER	SN5051	1	250113	!
PCB1	F6902B	FUSE HOLDER	SN5051	1	250113	!
PCB1	JL104A	WIRE HOL	NSCT-9P880	1	25051093	
PCB1	JL4500A	WIRE HOL	NSCT-3P874	1	25051087	
PCB1	JL5513A	WIRE HOL	NSCT-5P876	1	25051089	
PCB1	JL5514A	WIRE HOL	NSCT-7P898	1	25051111	
PCB1	JL5514B	SOCKET	NSCT-7P99	1	25050271	
PCB1	JL6402A	WIRE HOL	NSCT-3P874	1	25051087	
PCB1	JL6402B	WIRE HOL	NSCT-3P874	1	25051087	
PCB1	JL6600A	WIRE HOL	NSCT-7P898	1	25051111	
PCB1	JL6603A	WIRE HOL	NSCT-9P900	1	25051113	
PCB1	JL6606B	WIRE TRAP	NPLG-7P590	1	25055628	
PCB1	JL6620A	WIRE HOL	NSCT-7P878	1	25051091	
PCB1	P001	PWB	BCAMP-0072	1	25140072B	N
PCB1	P002	PWB	BCASP-0073	{ 1}	25140073	N
PCB1	P003	PWB	BCETC-0074	{ 1}	25140074	N
PCB1	P004	PWB	BCETC-0075	{ 1}	25140075	
PCB1	P006	PWB	BCETC-0089	{ 1}	25140089	
PCB1	P4500	PLUG	NPLG-2P83	1	25055099	
PCB1	P5500	PIN JACK	NPJ-2PDWR558	1	25045776	
PCB1	P5501	PIN JACK	NPJ-6PDWWWRRR561	1	25045779	
PCB1	P5502	PIN JACK	NPJ-6PDWWWRRR561	1	25045779	
PCB1	P5503	PIN JACK	NPJ-6PDWWWRRR561	1	25045779	
PCB1	P5504	PIN JACK	NPJ-1PDG699	1	25045933	
PCB1	P5505	PIN JACK	NPJ-6PDLENTP701	1	25045935	
PCB1	P5506	PIN JACK	NPJ-4PDWWRR624	1	25045845	

PCB1	P5509	CRIMP AS	CRIMP AS	1	2069925170UL	
PCB1	P5510A	SOCKET AS	NSAS-26P1742	1	2009991118UL	
PCB1	P5510B	PLUG	NPLG-13P360	1	25055377	
PCB1	P5510C	CRIMP AS	CRIMP SR805_2	1	20799170UL	
PCB1	P5510D	CRIMP AS	CRIMP SR805_1	1	20799169UL	
PCB1	P5512	SOCKET	NSCT-15P2195	1	25052298	
PCB1	P5513	SOCKET	NSCT-19P2199	1	25052302	
PCB1	P5516	HOLDER	HOLDER(CLAMP)	1	27190540-1	
PCB1	P5518	SOCKET	NSCT-3P2183	1	25052286	
PCB1	P6000B	PLUG	NPLG-7P0962	1	25056012	
PCB1	P6001B	PLUG	NPLG-7P0962	1	25056012	
PCB1	P6002B	PLUG	NPLG-7P0962	1	25056012	
PCB1	P6003B	PLUG	NPLG-7P0962	1	25056012	
PCB1	P6004B	PLUG	NPLG-7P0962	1	25056012	
PCB1	P6005B	PLUG	NPLG-7P0962	1	25056012	
PCB1	P6006B	PLUG	NPLG-7P0962	1	25056012	
PCB1	P6011A	RETAINER	(BUS-D)	1	27142115A	
PCB1	P6020	HOLDER	HOLDER(CLAMP)	1	27190540-1	
PCB1	P6080	PLUG	NPLG-2P130	1	25055146	
PCB1	P6081	PLUG	NPLG-2P130	1	25055146	
PCB1	P6082	PLUG	NPLG-2P130	1	25055146	
PCB1	P6083	PLUG	NPLG-2P130	1	25055146	
PCB1	P6084	PLUG	NPLG-2P130	1	25055146	
PCB1	P6085	PLUG	NPLG-2P130	1	25055146	
PCB1	P6086	PLUG	NPLG-2P130	1	25055146	
PCB1	P6900	CRIMP AS	CRIMP AS	1	2069925170UL	
PCB1	P6901	CRIMP AS	CRIMP AS	1	2069925142UL	
PCB1	P6902	CRIMP AS	CRIMP AS	1	2069925208UL	
PCB1	P6950	PLUG	NPLG-5P152	1	25055168	
PCB1	P907	AC INLET	NPLG-2P913	1	25055960	!
PCB1	P921	SOCKET AS	NSAS-2P1796	1	2009991162UL	
PCB1	RL6901	RELAY	NRL-1P10A-DC12-140	1	25065584	!
PCB1	RL6902	RELAY	NRL-1P10A-DC12-140	1	25065584	!

PCB2	**U002**	SPEAKER TERMINAL-1 PC BOARD (BATRM-0083-1G)
PCB2	**U0021**	PRIMARY POWER SUPPLY PC BOARD (BAPS-0084-1G)
PCB2	**U0022**	SPEAKER TERMINAL-2 PC BOARD (BATRM-0085-1G)
PCB2	**U0023**	CENTER SPEAKER TERMINAL PC BOARD (BATRM-0086-1G)
PCB2	**U0024**	POWER AMP. INPUT CIRCUIT PC BOARD (BACLA-0087-1G)
PCB2		

	CIRCUIT NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
PCB2	[SEMI CONDUCTOR]					
PCB2	D5000	ZENER D	MTZJ5.6B	1	224470562T	
PCB2	D5001	ZENER D	MTZJ5.6B	1	224470562T	
PCB2	D5002	ZENER D	MTZJ5.6B	1	224470562T	
PCB2	D5003	ZENER D	MTZJ5.6B	1	224470562T	
PCB2	D5004	ZENER D	MTZJ5.6B	1	224470562T	
PCB2	D5005	ZENER D	MTZJ5.6B	1	224470562T	
PCB2	D5006	ZENER D	MTZJ5.6B	1	224470562T	
PCB2	D6600	DIODE	1SS133	1	223163T	
PCB2	D6603	DIODE	1SS133	1	223163T	
PCB2	D6605	DIODE	1SS133	1	223163T	
PCB2	D6607	DIODE	1SS133	1	223163T	
PCB2	D6609	DIODE	1SS133	1	223163T	
PCB2	D6610	DIODE	1SS133	1	223163T	
PCB2	D911	DIODE	1SS133	1	223163T	
PCB2	D912	DIODE	1SS133	1	223163T	
PCB2	D921	DIODE	1SS133	1	223163T	
PCB2	D922	DIODE	1SS133	1	223163T	
PCB2	D923	DIODE	1SS133	1	223163T	
PCB2	D924	DIODE	1SS133	1	223163T	
PCB2	D925	DIODE	1SS133	1	223163T	
PCB2	D930	DIODE	1SS133	1	223163T	
PCB2	D931	DIODE	1SS133	1	223163T	
PCB2	D933	DIODE	1SS133	1	223163T	
PCB2	D934	ZENER D	MTZJ3.6B	1	224470362T	
PCB2	D935	DIODE	1SS133	1	223163T	
PCB2	Q5000	TR	2SC2240-BL(TPE2_F)	1	2211406T	
PCB2	Q5001	TR	2SC2240-BL(TPE2_F)	1	2211406T	
PCB2	Q5002	TR	2SC2240-BL(TPE2_F)	1	2211406T	
PCB2	Q5003	TR	2SC2240-BL(TPE2_F)	1	2211406T	
PCB2	Q5004	TR	2SC2240-BL(TPE2_F)	1	2211406T	
PCB2	Q5005	TR	2SC2240-BL(TPE2_F)	1	2211406T	
PCB2	Q5006	TR	2SC2240-BL(TPE2_F)	1	2211406T	
PCB2	Q5010	TR	2SC2240-BL(TPE2_F)	1	2211406T	
PCB2	Q5011	TR	2SC2240-BL(TPE2_F)	1	2211406T	
PCB2	Q5012	TR	2SC2240-BL(TPE2_F)	1	2211406T	
PCB2	Q5013	TR	2SC2240-BL(TPE2_F)	1	2211406T	
PCB2	Q5014	TR	2SC2240-BL(TPE2_F)	1	2211406T	
PCB2	Q5015	TR	2SC2240-BL(TPE2_F)	1	2211406T	

PCB2	Q5016	TR	2SC2240-BL(TPE2_F)	1	2211406T	
PCB2	Q5030	TR	2SA949-Y(TPE6_F)	1	2211354T	
PCB2	Q5031	TR	2SA949-Y(TPE6_F)	1	2211354T	
PCB2	Q5032	TR	2SA949-Y(TPE6_F)	1	2211354T	
PCB2	Q5033	TR	2SA949-Y(TPE6_F)	1	2211354T	
PCB2	Q5034	TR	2SA949-Y(TPE6_F)	1	2211354T	
PCB2	Q5035	TR	2SA949-Y(TPE6_F)	1	2211354T	
PCB2	Q5036	TR	2SA949-Y(TPE6_F)	1	2211354T	
PCB2	Q5040	TR	2SA949-Y(TPE6_F)	1	2211354T	
PCB2	Q5041	TR	2SA949-Y(TPE6_F)	1	2211354T	
PCB2	Q5042	TR	2SA949-Y(TPE6_F)	1	2211354T	
PCB2	Q5043	TR	2SA949-Y(TPE6_F)	1	2211354T	
PCB2	Q5044	TR	2SA949-Y(TPE6_F)	1	2211354T	
PCB2	Q5045	TR	2SA949-Y(TPE6_F)	1	2211354T	
PCB2	Q5046	TR	2SA949-Y(TPE6_F)	1	2211354T	
PCB2	Q5050	TR	2SC2240-BL(TPE2_F)	1	2211406T	
PCB2	Q5050 or	TR	2SC2240-GR	(1)	2211405T	
PCB2	Q5051	TR	2SC2240-BL(TPE2_F)	1	2211406T	
PCB2	Q5051 or	TR	2SC2240-GR	(1)	2211405T	
PCB2	Q5052	TR	2SC2240-BL(TPE2_F)	1	2211406T	
PCB2	Q5052 or	TR	2SC2240-GR	(1)	2211405T	
PCB2	Q5053	TR	2SC2240-BL(TPE2_F)	1	2211406T	
PCB2	Q5053 or	TR	2SC2240-GR	(1)	2211405T	
PCB2	Q5054	TR	2SC2240-BL(TPE2_F)	1	2211406T	
PCB2	Q5054 or	TR	2SC2240-GR	(1)	2211405T	
PCB2	Q5055	TR	2SC2240-BL(TPE2_F)	1	2211406T	
PCB2	Q5055 or	TR	2SC2240-GR	(1)	2211405T	
PCB2	Q5056	TR	2SC2240-BL(TPE2_F)	1	2211406T	
PCB2	Q5056 or	TR	2SC2240-GR	(1)	2211405T	
PCB2	Q5060	TR	2SA1360-Y	1	2202094	
PCB2	Q5060 or	TR	2SA1360-O	(1)	2202093	
PCB2	Q5061	TR	2SA1360-Y	1	2202094	
PCB2	Q5061 or	TR	2SA1360-O	(1)	2202093	
PCB2	Q5062	TR	2SA1360-Y	1	2202094	
PCB2	Q5062 or	TR	2SA1360-O	(1)	2202093	
PCB2	Q5063	TR	2SA1360-Y	1	2202094	
PCB2	Q5063 or	TR	2SA1360-O	(1)	2202093	
PCB2	Q5064	TR	2SA1360-Y	1	2202094	
PCB2	Q5064 or	TR	2SA1360-O	(1)	2202093	
PCB2	Q5065	TR	2SA1360-Y	1	2202094	

PCB2	Q5065 or	TR	2SA1360-O	(1)	2202093	
PCB2	Q5066	TR	2SA1360-Y	1	2202094	
PCB2	Q5066 or	TR	2SA1360-O	(1)	2202093	
PCB2	Q5070	TR	2SC3423-Y	1	2202104	
PCB2	Q5070 or	TR	2SC3423-O	(1)	2202103	
PCB2	Q5071	TR	2SC3423-Y	1	2202104	
PCB2	Q5071 or	TR	2SC3423-O	(1)	2202103	
PCB2	Q5072	TR	2SC3423-Y	1	2202104	
PCB2	Q5072 or	TR	2SC3423-O	(1)	2202103	
PCB2	Q5073	TR	2SC3423-Y	1	2202104	
PCB2	Q5073 or	TR	2SC3423-O	(1)	2202103	
PCB2	Q5074	TR	2SC3423-Y	1	2202104	
PCB2	Q5074 or	TR	2SC3423-O	(1)	2202103	
PCB2	Q5075	TR	2SC3423-Y	1	2202104	
PCB2	Q5075 or	TR	2SC3423-O	(1)	2202103	
PCB2	Q5076	TR	2SC3423-Y	1	2202104	
PCB2	Q5076 or	TR	2SC3423-O	(1)	2202103	
PCB2	Q6601	TR	RN1226	1	2214680T	
PCB2	Q6602	TR	RN1226	1	2214680T	
PCB2	Q6603	TR	RN1226	1	2214680T	
PCB2	Q6604	TR	RN1226	1	2214680T	
PCB2	Q6605	TR	RN1226	1	2214680T	
PCB2	Q6606	TR	RN1226	1	2214680T	
PCB2	**[TRANS COIL]**					
PCB2	L6600	S COIL	SC-0.8X11.5X12.5T-6.5L	1	231393S	
PCB2	L6601	S COIL	SC-0.8X11.5X12.5T-6.5L	1	231393S	
PCB2	L6602	S COIL	SC-0.8X11.5X12.5T-6.5L	1	231393S	
PCB2	L6603	S COIL	SC-0.8X11.5X12.5T-6.5L	1	231393S	
PCB2	L6604	S COIL	SC-0.8X11.5X12.5T-6.5L	1	231393S	
PCB2	L6605	S COIL	SC-0.8X11.5X12.5T-6.5L	1	231393S	
PCB2	L6606	S COIL	SC-0.8X11.5X12.5T-6.5L	1	231393S	
PCB2	T902	P TRANS	NPT-1520JQ	1	2301812A	!
PCB2	**[CAPACITOR]**					
PCB2	C5000	UPZ C	2AUPZTF101JE	1	376331014T	
PCB2	C5001	UPZ C	2AUPZTF101JE	1	376331014T	
PCB2	C5002	UPZ C	2AUPZTF101JE	1	376331014T	
PCB2	C5003	UPZ C	2AUPZTF101JE	1	376331014T	
PCB2	C5004	UPZ C	2AUPZTF101JE	1	376331014T	
PCB2	C5005	UPZ C	2AUPZTF101JE	1	376331014T	
PCB2	C5006	UPZ C	2AUPZTF101JE	1	376331014T	

PCB2	C5010	UTSJ C	CE04W25V-47M(UTSJ)	1	398054707T	
PCB2	C5011	UTSJ C	CE04W25V-47M(UTSJ)	1	398054707T	
PCB2	C5012	UTSJ C	CE04W25V-47M(UTSJ)	1	398054707T	
PCB2	C5013	UTSJ C	CE04W25V-47M(UTSJ)	1	398054707T	
PCB2	C5014	UTSJ C	CE04W25V-47M(UTSJ)	1	398054707T	
PCB2	C5015	UTSJ C	CE04W25V-47M(UTSJ)	1	398054707T	
PCB2	C5016	UTSJ C	CE04W25V-47M(UTSJ)	1	398054707T	
PCB2	C5020	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB2	C5021	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB2	C5022	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB2	C5023	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB2	C5024	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB2	C5025	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB2	C5026	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB2	C5040	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	
PCB2	C5041	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	
PCB2	C5042	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	
PCB2	C5043	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	
PCB2	C5044	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	
PCB2	C5045	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	
PCB2	C5046	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	
PCB2	C5050	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB2	C5051	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB2	C5052	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB2	C5053	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB2	C5054	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB2	C5055	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB2	C5056	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB2	C5080	CERA C	CC45SL50V-040C	1	345020401T	
PCB2	C5081	CERA C	CC45SL50V-040C	1	345020401T	
PCB2	C5082	CERA C	CC45SL50V-040C	1	345020401T	
PCB2	C5083	CERA C	CC45SL50V-040C	1	345020401T	
PCB2	C5084	CERA C	CC45SL50V-040C	1	345020401T	
PCB2	C5085	CERA C	CC45SL50V-040C	1	345020401T	
PCB2	C5086	CERA C	CC45SL50V-040C	1	345020401T	
PCB2	C5090	UPZ C	2AUPZTF101JE	1	376331014T	
PCB2	C5091	UPZ C	2AUPZTF101JE	1	376331014T	
PCB2	C5092	UPZ C	2AUPZTF101JE	1	376331014T	
PCB2	C5093	UPZ C	2AUPZTF101JE	1	376331014T	
PCB2	C5094	UPZ C	2AUPZTF101JE	1	376331014T	

PCB2	C5095	UPZ C	2AUPZTF101JE	1	376331014T	
PCB2	C5096	UPZ C	2AUPZTF101JE	1	376331014T	
PCB2	C5100	VR C	CE04W100V-22M(VR)	1	394692207T	
PCB2	C5101	VR C	CE04W100V-22M(VR)	1	394692207T	
PCB2	C5102	VR C	CE04W100V-22M(VR)	1	394692207T	
PCB2	C5103	VR C	CE04W100V-22M(VR)	1	394692207T	
PCB2	C5104	VR C	CE04W100V-22M(VR)	1	394692207T	
PCB2	C5105	VR C	CE04W100V-22M(VR)	1	394692207T	
PCB2	C5106	VR C	CE04W100V-22M(VR)	1	394692207T	
PCB2	C5110	VR C	CE04W100V-22M(VR)	1	394692207T	
PCB2	C5111	VR C	CE04W100V-22M(VR)	1	394692207T	
PCB2	C5112	VR C	CE04W100V-22M(VR)	1	394692207T	
PCB2	C5113	VR C	CE04W100V-22M(VR)	1	394692207T	
PCB2	C5114	VR C	CE04W100V-22M(VR)	1	394692207T	
PCB2	C5115	VR C	CE04W100V-22M(VR)	1	394692207T	
PCB2	C5116	VR C	CE04W100V-22M(VR)	1	394692207T	
PCB2	C6600	TF C	ECQ-V50V-103J	1	374721034T	
PCB2	C6602	TF C	ECQ-V50V-103J	1	374721034T	
PCB2	C6603	TF C	ECQ-V50V-103J	1	374721034T	
PCB2	C6605	TF C	ECQ-V50V-103J	1	374721034T	
PCB2	C6607	TF C	ECQ-V50V-103J	1	374721034T	
PCB2	C6609	TF C	ECQ-V50V-103J	1	374721034T	
PCB2	C6630	TF C	ECQ-V50V-473J	1	374724734T	
PCB2	C6631	TF C	ECQ-V50V-473J	1	374724734T	
PCB2	C6632	TF C	ECQ-V50V-473J	1	374724734T	
PCB2	C6633	TF C	ECQ-V50V-473J	1	374724734T	
PCB2	C6634	TF C	ECQ-V50V-473J	1	374724734T	
PCB2	C6635	TF C	ECQ-V50V-473J	1	374724734T	
PCB2	C6636	TF C	ECQ-V50V-473J	1	374724734T	
PCB2	C6650	MKT C	B32529C0102J289	1	376491024T	
PCB2	C6651	MKT C	B32529C0102J289	1	376491024T	
PCB2	C6652	MKT C	B32529C0102J289	1	376491024T	
PCB2	C6653	MKT C	B32529C0102J289	1	376491024T	
PCB2	C6654	MKT C	B32529C0102J289	1	376491024T	
PCB2	C6655	MKT C	B32529C0102J289	1	376491024T	
PCB2	C6656	MKT C	B32529C0102J289	1	376491024T	
PCB2	C6657	MKT C	B32529C0102J289	1	376491024T	
PCB2	C6658	MKT C	B32529C0102J289	1	376491024T	
PCB2	C6659	MKT C	B32529C0102J289	1	376491024T	
PCB2	C6660	MKT C	B32529C0102J289	1	376491024T	

PCB2	C901	IS C	ECQU2A103MLC	1	3800039S	!
PCB2	C901 or	IS C	RE275V-103M	(1)	3500196S	!
PCB2	C901 or	IS C	LE103-C3.5	(1)	3800042S	!
PCB2	C902	TF C	ECQ-V50V-104J	1	374721044T	
PCB2	C903	PLA C	MKP R46 104M	1	3800041S	
PCB2	C911	MKT C	B32529C0102J289	1	376491024T	
PCB2	C921	TF C	ECQ-V50V-223J	1	374722234T	
PCB2	C922	UTSP C	CE04W25V-470M(UTSP)	1	397554717T	
PCB2	C930	UTSP C	CE04W25V-220M(UTSP)	1	397552217T	
PCB2	C933	UTSP C	CE04W50V-4.7M(UTSP)	1	397580477T	
PCB2	**[RESISTOR]**					
PCB2	R5000	CARBON R	R16J-1.5K	1	417341524T	
PCB2	R5001	CARBON R	R16J-1.5K	1	417341524T	
PCB2	R5002	CARBON R	R16J-1.5K	1	417341524T	
PCB2	R5003	CARBON R	R16J-1.5K	1	417341524T	
PCB2	R5004	CARBON R	R16J-1.5K	1	417341524T	
PCB2	R5005	CARBON R	R16J-1.5K	1	417341524T	
PCB2	R5006	CARBON R	R16J-1.5K	1	417341524T	
PCB2	R5010	CARBON R	R16J-33K	1	417343334T	
PCB2	R5011	CARBON R	R16J-33K	1	417343334T	
PCB2	R5012	CARBON R	R16J-33K	1	417343334T	
PCB2	R5013	CARBON R	R16J-33K	1	417343334T	
PCB2	R5014	CARBON R	R16J-33K	1	417343334T	
PCB2	R5015	CARBON R	R16J-33K	1	417343334T	
PCB2	R5016	CARBON R	R16J-33K	1	417343334T	
PCB2	R5020	CARBON R	R16J-330	1	417343314T	
PCB2	R5021	CARBON R	R16J-330	1	417343314T	
PCB2	R5022	CARBON R	R16J-330	1	417343314T	
PCB2	R5023	CARBON R	R16J-330	1	417343314T	
PCB2	R5024	CARBON R	R16J-330	1	417343314T	
PCB2	R5025	CARBON R	R16J-330	1	417343314T	
PCB2	R5026	CARBON R	R16J-330	1	417343314T	
PCB2	R5030	CARBON R	R16J-33K	1	417343334T	
PCB2	R5031	CARBON R	R16J-33K	1	417343334T	
PCB2	R5032	CARBON R	R16J-33K	1	417343334T	
PCB2	R5033	CARBON R	R16J-33K	1	417343334T	
PCB2	R5034	CARBON R	R16J-33K	1	417343334T	
PCB2	R5035	CARBON R	R16J-33K	1	417343334T	
PCB2	R5036	CARBON R	R16J-33K	1	417343334T	
PCB2	R5040	CARBON R	R16J-1K	1	417341024T	

PCB2	R5041	CARBON R	R16J-1K	1	417341024T	
PCB2	R5042	CARBON R	R16J-1K	1	417341024T	
PCB2	R5043	CARBON R	R16J-1K	1	417341024T	
PCB2	R5044	CARBON R	R16J-1K	1	417341024T	
PCB2	R5045	CARBON R	R16J-1K	1	417341024T	
PCB2	R5046	CARBON R	R16J-1K	1	417341024T	
PCB2	R5050	CARBON R	R16J-5.6K	1	417345624T	
PCB2	R5051	CARBON R	R16J-5.6K	1	417345624T	
PCB2	R5052	CARBON R	R16J-5.6K	1	417345624T	
PCB2	R5053	CARBON R	R16J-5.6K	1	417345624T	
PCB2	R5054	CARBON R	R16J-5.6K	1	417345624T	
PCB2	R5055	CARBON R	R16J-5.6K	1	417345624T	
PCB2	R5056	CARBON R	R16J-5.6K	1	417345624T	
PCB2	R5060	CARBON R	R16J-2.7K	1	417342724T	
PCB2	R5061	CARBON R	R16J-2.7K	1	417342724T	
PCB2	R5062	CARBON R	R16J-2.7K	1	417342724T	
PCB2	R5063	CARBON R	R16J-2.7K	1	417342724T	
PCB2	R5064	CARBON R	R16J-2.7K	1	417342724T	
PCB2	R5065	CARBON R	R16J-2.7K	1	417342724T	
PCB2	R5066	CARBON R	R16J-2.7K	1	417342724T	
PCB2	R5080	NF CARBON R	R25J-1.0K	1	415471024T	
PCB2	R5081	NF CARBON R	R25J-1.0K	1	415471024T	
PCB2	R5082	NF CARBON R	R25J-1.0K	1	415471024T	
PCB2	R5083	NF CARBON R	R25J-1.0K	1	415471024T	
PCB2	R5084	NF CARBON R	R25J-1.0K	1	415471024T	
PCB2	R5085	NF CARBON R	R25J-1.0K	1	415471024T	
PCB2	R5086	NF CARBON R	R25J-1.0K	1	415471024T	
PCB2	R5090	CARBON R	R16J-100K	1	417341044T	
PCB2	R5091	CARBON R	R16J-100K	1	417341044T	
PCB2	R5092	CARBON R	R16J-100K	1	417341044T	
PCB2	R5093	CARBON R	R16J-100K	1	417341044T	
PCB2	R5094	CARBON R	R16J-100K	1	417341044T	
PCB2	R5095	CARBON R	R16J-100K	1	417341044T	
PCB2	R5096	CARBON R	R16J-100K	1	417341044T	
PCB2	R5100	CARBON R	R16J-100K	1	417341044T	
PCB2	R5101	CARBON R	R16J-100K	1	417341044T	
PCB2	R5102	CARBON R	R16J-100K	1	417341044T	
PCB2	R5103	CARBON R	R16J-100K	1	417341044T	
PCB2	R5104	CARBON R	R16J-100K	1	417341044T	
PCB2	R5105	CARBON R	R16J-100K	1	417341044T	

PCB2	R5106	CARBON R	R16J-100K	1	417341044T	
PCB2	R5110	CARBON R	R16J-2.2K	1	417342224T	
PCB2	R5111	CARBON R	R16J-2.2K	1	417342224T	
PCB2	R5112	CARBON R	R16J-2.2K	1	417342224T	
PCB2	R5113	CARBON R	R16J-2.2K	1	417342224T	
PCB2	R5114	CARBON R	R16J-2.2K	1	417342224T	
PCB2	R5115	CARBON R	R16J-2.2K	1	417342224T	
PCB2	R5116	CARBON R	R16J-2.2K	1	417342224T	
PCB2	R5120	CARBON R	R16J-2.2K	1	417342224T	
PCB2	R5121	CARBON R	R16J-2.2K	1	417342224T	
PCB2	R5122	CARBON R	R16J-2.2K	1	417342224T	
PCB2	R5123	CARBON R	R16J-2.2K	1	417342224T	
PCB2	R5124	CARBON R	R16J-2.2K	1	417342224T	
PCB2	R5125	CARBON R	R16J-2.2K	1	417342224T	
PCB2	R5126	CARBON R	R16J-2.2K	1	417342224T	
PCB2	R5130	CARBON R	R16J-18K	1	417341834T	
PCB2	R5131	CARBON R	R16J-18K	1	417341834T	
PCB2	R5132	CARBON R	R16J-18K	1	417341834T	
PCB2	R5133	CARBON R	R16J-18K	1	417341834T	
PCB2	R5134	CARBON R	R16J-18K	1	417341834T	
PCB2	R5135	CARBON R	R16J-18K	1	417341834T	
PCB2	R5136	CARBON R	R16J-18K	1	417341834T	
PCB2	R5140	NF CARBON R	R25J-820	1	415478214T	
PCB2	R5141	NF CARBON R	R25J-820	1	415478214T	
PCB2	R5142	NF CARBON R	R25J-820	1	415478214T	
PCB2	R5143	NF CARBON R	R25J-820	1	415478214T	
PCB2	R5144	NF CARBON R	R25J-820	1	415478214T	
PCB2	R5145	NF CARBON R	R25J-820	1	415478214T	
PCB2	R5146	NF CARBON R	R25J-820	1	415478214T	
PCB2	R5150	NF CARBON R	R25J-1.0K	1	415471024T	
PCB2	R5151	NF CARBON R	R25J-1.0K	1	415471024T	
PCB2	R5152	NF CARBON R	R25J-1.0K	1	415471024T	
PCB2	R5153	NF CARBON R	R25J-1.0K	1	415471024T	
PCB2	R5154	NF CARBON R	R25J-1.0K	1	415471024T	
PCB2	R5155	NF CARBON R	R25J-1.0K	1	415471024T	
PCB2	R5156	NF CARBON R	R25J-1.0K	1	415471024T	
PCB2	R5160	NF CARBON R	R25J-820	1	415478214T	
PCB2	R5161	NF CARBON R	R25J-820	1	415478214T	
PCB2	R5162	NF CARBON R	R25J-820	1	415478214T	
PCB2	R5163	NF CARBON R	R25J-820	1	415478214T	

PCB2	R5164	NF CARBON R	R25J-820	1	415478214T	
PCB2	R5165	NF CARBON R	R25J-820	1	415478214T	
PCB2	R5166	NF CARBON R	R25J-820	1	415478214T	
PCB2	R5170	NF CARBON R	R25J-820	1	415478214T	
PCB2	R5171	NF CARBON R	R25J-820	1	415478214T	
PCB2	R5172	NF CARBON R	R25J-820	1	415478214T	
PCB2	R5173	NF CARBON R	R25J-820	1	415478214T	
PCB2	R5174	NF CARBON R	R25J-820	1	415478214T	
PCB2	R5175	NF CARBON R	R25J-820	1	415478214T	
PCB2	R5176	NF CARBON R	R25J-820	1	415478214T	
PCB2	R5180	NF CARBON R	R25J-10	1	415471004T	
PCB2	R5181	NF CARBON R	R25J-10	1	415471004T	
PCB2	R5182	NF CARBON R	R25J-10	1	415471004T	
PCB2	R5183	NF CARBON R	R25J-10	1	415471004T	
PCB2	R5184	NF CARBON R	R25J-10	1	415471004T	
PCB2	R5185	NF CARBON R	R25J-10	1	415471004T	
PCB2	R5186	NF CARBON R	R25J-10	1	415471004T	
PCB2	R5190	NF CARBON R	R25J-10	1	415471004T	
PCB2	R5191	NF CARBON R	R25J-10	1	415471004T	
PCB2	R5192	NF CARBON R	R25J-10	1	415471004T	
PCB2	R5193	NF CARBON R	R25J-10	1	415471004T	
PCB2	R5194	NF CARBON R	R25J-10	1	415471004T	
PCB2	R5195	NF CARBON R	R25J-10	1	415471004T	
PCB2	R5196	NF CARBON R	R25J-10	1	415471004T	
PCB2	R5200	CARBON R	R16J-18K	1	417341834T	
PCB2	R5201	CARBON R	R16J-18K	1	417341834T	
PCB2	R5202	CARBON R	R16J-18K	1	417341834T	
PCB2	R5203	CARBON R	R16J-18K	1	417341834T	
PCB2	R5204	CARBON R	R16J-18K	1	417341834T	
PCB2	R5205	CARBON R	R16J-18K	1	417341834T	
PCB2	R5206	CARBON R	R16J-18K	1	417341834T	
PCB2	R5210	NF CARBON R	R25J-120	1	415471214T	
PCB2	R5211	NF CARBON R	R25J-120	1	415471214T	
PCB2	R5212	NF CARBON R	R25J-120	1	415471214T	
PCB2	R5213	NF CARBON R	R25J-120	1	415471214T	
PCB2	R5214	NF CARBON R	R25J-120	1	415471214T	
PCB2	R5215	NF CARBON R	R25J-120	1	415471214T	
PCB2	R5216	NF CARBON R	R25J-120	1	415471214T	
PCB2	R5220	NF CARBON R	R25J-120	1	415471214T	
PCB2	R5221	NF CARBON R	R25J-120	1	415471214T	

PCB2	R5222	NF CARBON R	R25J-120	1	415471214T	
PCB2	R5223	NF CARBON R	R25J-120	1	415471214T	
PCB2	R5224	NF CARBON R	R25J-120	1	415471214T	
PCB2	R5225	NF CARBON R	R25J-120	1	415471214T	
PCB2	R5226	NF CARBON R	R25J-120	1	415471214T	
PCB2	R5300	CARBON R	R16J-330	1	417343314T	
PCB2	R5301	CARBON R	R16J-330	1	417343314T	
PCB2	R5302	CARBON R	R16J-330	1	417343314T	
PCB2	R5303	CARBON R	R16J-330	1	417343314T	
PCB2	R5304	CARBON R	R16J-330	1	417343314T	
PCB2	R5305	CARBON R	R16J-330	1	417343314T	
PCB2	R5306	CARBON R	R16J-330	1	417343314T	
PCB2	R5310	CARBON R	R16J-330	1	417343314T	
PCB2	R5311	CARBON R	R16J-330	1	417343314T	
PCB2	R5312	CARBON R	R16J-330	1	417343314T	
PCB2	R5313	CARBON R	R16J-330	1	417343314T	
PCB2	R5314	CARBON R	R16J-330	1	417343314T	
PCB2	R5315	CARBON R	R16J-330	1	417343314T	
PCB2	R5316	CARBON R	R16J-330	1	417343314T	
PCB2	R6600	CARBON R	R16J-22	1	417342204T	
PCB2	R6601	CARBON R	R16J-22	1	417342204T	
PCB2	R6602	CARBON R	R16J-22	1	417342204T	
PCB2	R6603	CARBON R	R16J-22	1	417342204T	
PCB2	R6604	CARBON R	R16J-22	1	417342204T	
PCB2	R6605	CARBON R	R16J-22	1	417342204T	
PCB2	R6606	CARBON R	R16J-22	1	417342204T	
PCB2	R6610	CARBON R	R16J-22	1	417342204T	
PCB2	R6611	CARBON R	R16J-22	1	417342204T	
PCB2	R6612	CARBON R	R16J-22	1	417342204T	
PCB2	R6613	CARBON R	R16J-22	1	417342204T	
PCB2	R6614	CARBON R	R16J-22	1	417342204T	
PCB2	R6615	CARBON R	R16J-22	1	417342204T	
PCB2	R6616	CARBON R	R16J-22	1	417342204T	
PCB2	R6630	METAL R	RNU1WCJ-8.2	1	453630824T	
PCB2	R6631	METAL R	RNU1WCJ-8.2	1	453630824T	
PCB2	R6632	METAL R	RNU1WCJ-8.2	1	453630824T	
PCB2	R6633	METAL R	RNU1WCJ-8.2	1	453630824T	
PCB2	R6634	METAL R	RNU1WCJ-8.2	1	453630824T	
PCB2	R6635	METAL R	RNU1WCJ-8.2	1	453630824T	
PCB2	R6636	METAL R	RNU1WCJ-8.2	1	453630824T	

PCB2	R6690	METAL R	RNU1WCJ-8.2	1	453630824T	
PCB2	R6691	METAL O R	RS1/2WBJ-390	1	443523914T	
PCB2	R6692	METAL O R	RS1/2WBJ-390	1	443523914T	
PCB2	R921	METAL O R	RS1/2WBJ-47	1	443524704T	
PCB2	R922	METAL O R	RS1/2WBJ-68	1	443526804T	
PCB2	R934	CARBON R	R16J-33K	1	417343334T	
PCB2	**[SW TRM]**					
PCB2	E5507B	TRM	NTM-1P233(M1969)	1	25060302	
PCB2	E5509B	TRM	NTM-1P233(M1969)	1	25060302	
PCB2	E6611	TRM	NTM-1P232(M1700)	1	25060301	
PCB2	E6612	TRM-423(SCREW)	NEJITANSI ST3	1	25060495	
PCB2	E901	TRM-423(SCREW)	NEJITANSI ST3	1	25060495	
PCB2	E902	TRM	NTM-1P233(M1969)	1	25060302	
PCB2	F901A	FUSE HOLDER	SN5051	1	250113	!
PCB2	F901B	FUSE HOLDER	SN5051	1	250113	!
PCB2	JL4103A	SOCKET	NSCT-5P97	1	25050269	
PCB2	JL6600B	SOCKET	NSCT-7P99	1	25050271	
PCB2	JL6603B	SOCKET	NSCT-9P101	1	25050273	
PCB2	JL6604A	WIRE HOL	NSCT-11P882	1	25051095	
PCB2	JL6604B	WIRE TRAP	NPLG-11P594	1	25055632	
PCB2	JL6606A	WIRE HOL	NSCT-7P878	1	25051091	
PCB2	JL6607A	WIRE HOL	NSCT-3P874	1	25051087	
PCB2	JL6607B	WIRE HOL	NSCT-3P874	1	25051087	
PCB2	JL6620B	WIRE TRAP	NPLG-7P590	1	25055628	
PCB2	JL901A	WIRE HOL	NSCT-5P876	1	25051089	
PCB2	P001	PWB	BCTRM-0083	1	25140083B	N
PCB2	P002	PWB	BCPS-0084	{ 1}	25140084	N
PCB2	P003	PWB	BCTRM-0085	{ 1}	25140085	N
PCB2	P004	PWB	BCTRM-0086	{ 1}	25140086	
PCB2	P005	PWB	BCCLA-0087	{ 1}	25140087	
PCB2	P1008B	SOCKET	IMSA-9142S-20A	1	25053232	
PCB2	P1010B	SOCKET	IMSA-9142S-20A	1	25053232	
PCB2	P6000A	SOCKET	NSCT-7P2187	1	25052290	
PCB2	P6001A	SOCKET	NSCT-7P2187	1	25052290	
PCB2	P6002A	SOCKET	NSCT-7P2187	1	25052290	
PCB2	P6003A	SOCKET	NSCT-7P2187	1	25052290	
PCB2	P6004A	SOCKET	NSCT-7P2187	1	25052290	
PCB2	P6005A	SOCKET	NSCT-7P2187	1	25052290	
PCB2	P6006A	SOCKET	NSCT-7P2187	1	25052290	
PCB2	P6600	TRM	NTM-2PDMCR400	1	25060472	

PCB2	P6601	TRM	NTM-2PDMCR400	1	25060472	
PCB2	P6602	TRM	NTM-2PDMCR400	1	25060472	
PCB2	P6603	TRM	NTM-2PDMCR400	1	25060472	
PCB2	P6604	TRM	NTM-2PDMCR400	1	25060472	
PCB2	P6605	TRM	NTM-2PDMCR400	1	25060472	
PCB2	P6606	TRM	NTM-2PDMCR400	1	25060472	
PCB2	P6607	TRM	NTM-2PDMCR400	1	25060472	
PCB2	P6608	TRM	NTM-2PDMCR400	1	25060472	
PCB2	P6609	TRM	NTM-2PDMCR400	1	25060472	
PCB2	P6610	TRM	NTM-2PDMCR400	1	25060472	
PCB2	P6621	SOCKET	IMSA-9142S-16A	1	25053230	
PCB2	P902B	PLUG	NPLG-2P631	1	25055675	!
PCB2	P902Bor	PLUG	1-1123724-2	(1)	25056402	!
PCB2	P911	PLUG	NPLG-2P631	1	25055675	!
PCB2	P911 or	PLUG	1-1123724-2	(1)	25056402	!
PCB2	P921C	PLUG	NPLG-2P631	1	25055675	!
PCB2	P921Cor	PLUG	1-1123724-2	(1)	25056402	!
PCB2	RL6600	RELAY	NRL-2P5A-DC24-193	1	25065703	
PCB2	RL6602	RELAY	NRL-2P5A-DC24-193	1	25065703	
PCB2	RL6603	RELAY	NRL-2P5A-DC24-193	1	25065703	
PCB2	RL6605	RELAY	NRL-2P5A-DC24-193	1	25065703	
PCB2	RL6607	RELAY	NRL-2P5A-DC24-193	1	25065703	
PCB2	RL6609	RELAY	NRL-2P5A-DC24-193	1	25065703	
PCB2	RL901	RELAY	NRL-1P10A-DC9-186	1	25065683	!
PCB2	**[TUNER UNIT]**					
PCB2	Q5030A	RETAINER	(CLA)	1	27142123	
PCB2	Q5031A	RETAINER	(CLA)	1	27142123	
PCB2	Q5032A	RETAINER	(CLA)	1	27142123	
PCB2	Q5033A	RETAINER	(CLA)	1	27142123	
PCB2	Q5034A	RETAINER	(CLA)	1	27142123	
PCB2	Q5035A	RETAINER	(CLA)	1	27142123	
PCB2	Q5036A	RETAINER	(CLA)	1	27142123	

PCB3	**U003**	DAC/ DIR CIRCUIT PC BOARD (BADG-0099-1P)
PCB3	**U0031**	CPU CIRCUIT PC BOARD (BACPU-0100-1P)
PCB3	**U0032**	VIDEO CIRCUIT PC BOARD (BAVD-0101-1P)
PCB3	**U0033**	UNIVERSAL PORT PC BOARD (BAETC-0103-1P)

PCB3

	CIRCUIT NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
PCB3	**[TUNER UNIT]**					

PCB3	U1301	PHT CP	JSR1165-001recieving	1	24120143
PCB3	U1302	PHT CP	JSR1165-001recieving	1	24120143
PCB3	**[SEMI CONDUCTOR]**				
PCB3	D1001	C-DIODE	1SS352	1	223234R2
PCB3	D1001 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D1001 or	C-DIODE	KDS4148U	(1)	223283R2
PCB3	D1002	C-DIODE	1SS352	1	223234R2
PCB3	D1002 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D1002 or	C-DIODE	KDS4148U	(1)	223283R2
PCB3	D1005	C-DIODE	1SS352	1	223234R2
PCB3	D1005 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D1005 or	C-DIODE	KDS4148U	(1)	223283R2
PCB3	D1007	C-DIODE	1SS352	1	223234R2
PCB3	D1007 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D1007 or	C-DIODE	KDS4148U	(1)	223283R2
PCB3	D4001	C-DIODE	1SS352	1	223234R2
PCB3	D4001 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D4001 or	C-DIODE	KDS4148U	(1)	223283R2
PCB3	D4002	ZENER D	UDZS5.6B	1	224550560R2
PCB3	D4002 or	ZENER D	MAZ8056-M	(1)	224750562R2
PCB3	D4003	C-DIODE	1SS352	1	223234R2
PCB3	D4003 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D4003 or	C-DIODE	KDS4148U	(1)	223283R2
PCB3	D4004	DIODE	D5SBA20	1	22380130F
PCB3	D4005	DIODE	RB070M-30	1	22380361R2
PCB3	D4006	DIODE	RL1N4003	1	22380260T
PCB3	D4009	DIODE	D3SBA20	1	22380271F
PCB3	D4010	C-DIODE	1SS352	1	223234R2
PCB3	D4010 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D4010 or	C-DIODE	KDS4148U	(1)	223283R2
PCB3	D4015	C-DIODE	1SS352	1	223234R2
PCB3	D4015 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D4015 or	C-DIODE	KDS4148U	(1)	223283R2
PCB3	D4016	C-DIODE	1SS352	1	223234R2
PCB3	D4016 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D4016 or	C-DIODE	KDS4148U	(1)	223283R2
PCB3	D4017	ZENER D	UDZS3.3B	1	224550330R2
PCB3	D4500	C-DIODE	1SS352	1	223234R2
PCB3	D4500 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D4500 or	C-DIODE	KDS4148U	(1)	223283R2

PCB3	D4501	C-DIODE	1SS352	1	223234R2	
PCB3	D4501 or	C-DIODE	MA2J111	(1)	223279R2	
PCB3	D4501 or	C-DIODE	KDS4148U	(1)	223283R2	
PCB3	D4606	DIODE	RL1N4003	1	22380260T	
PCB3	Q10	IC	NJM4580M-D	1	22241448R2	
PCB3	Q1001	TR	KRC104S	1	2216210R2	
PCB3	Q1001 or	TR	RN1404	(1)	2214490R2	
PCB3	Q1002	TR	KRA102S	1	2216220R2	
PCB3	Q1002 or	TR	RN2402	(1)	2214530R2	
PCB3	Q1003	TR	KRC104S	1	2216210R2	
PCB3	Q1003 or	TR	RN1404	(1)	2214490R2	
PCB3	Q1004	TR	KRA102S	1	2216220R2	
PCB3	Q1004 or	TR	RN2402	(1)	2214530R2	
PCB3	Q1005	TR	KRC102S	1	2216190R2	
PCB3	Q1005 or	TR	RN1402	(1)	2214470R2	
PCB3	Q1005 or	TR	DTC114EKA	(1)	2216250R2	
PCB3	Q1006	TR	KRA107S	1	2216350R2	
PCB3	Q1006 or	TR	RN2407(TE85L_F)	(1)	2216360R2	
PCB3	Q1006 or	TR	DTA114YKA	(1)	2216480R2	
PCB3	Q1007	TR	KRC102S	1	2216190R2	
PCB3	Q1007 or	TR	RN1402	(1)	2214470R2	
PCB3	Q1007 or	TR	DTC114EKA	(1)	2216250R2	
PCB3	Q1008	TR	KRA107S	1	2216350R2	
PCB3	Q1008 or	TR	RN2407(TE85L_F)	(1)	2216360R2	
PCB3	Q1008 or	TR	DTA114YKA	(1)	2216480R2	
PCB3	Q1009	TR	KRC102S	1	2216190R2	
PCB3	Q1009 or	TR	RN1402	(1)	2214470R2	
PCB3	Q1009 or	TR	DTC114EKA	(1)	2216250R2	
PCB3	Q1010	TR	KRC104S	1	2216210R2	
PCB3	Q1010 or	TR	RN1404	(1)	2214490R2	
PCB3	Q1011	TR	KRA102S	1	2216220R2	
PCB3	Q1011 or	TR	RN2402	(1)	2214530R2	
PCB3	Q1016	IC (MIAN MICROPROCESSOR)	MPD70F3746GJ-GAE-AX(0298)	1	222W0079R302980	
PCB3	Q1017	IC	XC6202P502FR	1	22242331R2	
PCB3	Q1018	IC	XC6213B332MR	1	22242277R2	
PCB3	Q1019	IC	S-812C33AUA-C2N	1	22242222R2	
PCB3	Q1020	IC	S-812C56AUA-C3K	1	22242207R2	
PCB3	Q1022	IC	R1EX25064ASA00A	1	22242581R2	
PCB3	Q1023	IC	NJU7706F27A3	1	22242614R2	
PCB3	Q1027	TR	KRA102S	1	2216220R2	

PCB3	Q1028	TR	KRC104S	1	2216210R2	
PCB3	Q1029	TR	KRA102S	1	2216220R2	
PCB3	Q1030	TR	KRC104S	1	2216210R2	
PCB3	Q1031	TR	KRA102S	1	2216220R2	
PCB3	Q1032	TR	KRC104S	1	2216210R2	
PCB3	Q1033	TR	KRA102S	1	2216220R2	
PCB3	Q1034	TR	KRC104S	1	2216210R2	
PCB3	Q1035	TR	KRA102S	1	2216220R2	
PCB3	Q1036	TR	KRC104S	1	2216210R2	
PCB3	Q1037	TR	KRA102S	1	2216220R2	
PCB3	Q1038	TR	KRC104S	1	2216210R2	
PCB3	Q1101	IC	S3F80K9	1	22242602R3	
PCB3	Q1102	TR	2SC2712-GR	1	2213145R2	
PCB3	Q1290	TR	2SC2712-GR	1	2213145R2	
PCB3	Q1291	IC	TC4066BFT	1	22284066MR2TO	
PCB3	Q1292	TR	2SC2712-GR	1	2213145R2	
PCB3	Q1301	IC	TA4805BF(TE16L_NQ)	1	22278005DBR2TO	
PCB3	Q1301A	RETAINER	(REG)	1	27142168	N
PCB3	Q1302	IC	TA48033BF(TE16L_NQ)	1	22278033DBR2TO	
PCB3	Q1311	IC	TC74VHC157FT	1	22274157ER2TO	
PCB3	Q1322	IC	TC74VHCT00AFT（EKJ)	1	22274000G1R2TO	
PCB3	Q1322 or	IC	TC74VHCT00AFT	(1)	22274000GR2TO	
PCB3	Q1324	IC	CS42516-CQZ(R)-D	1	22242294R2	
PCB3	Q1325	IC	74HCU04F	1	222740046R2	
PCB3	Q1325 or	IC	TC74HCU04AF	(1)	222740046R2TO	
PCB3	Q1327	IC	TC7WU04FU(TE12L_F)	1	22240935R2	
PCB3	Q1421	IC	PCM1690DCAR	1	22242599R2	N
PCB3	Q1601	IC	NJM4580M-D	1	22241448R2	
PCB3	Q1602	IC	NJM4580M-D	1	22241448R2	
PCB3	Q1603	IC	NJM4580M-D	1	22241448R2	
PCB3	Q1604	IC	NJM4580M-D	1	22241448R2	
PCB3	Q1800	IC	NJM4580M-D	1	22241448R2	
PCB3	Q1801	IC	NJM4580M-D	1	22241448R2	
PCB3	Q1904	IC	NJM4580M-D	1	22241448R2	
PCB3	Q1940	IC	XC6202P502FR	1	22242331R2	
PCB3	Q1950	IC	NJM2505AF	1	22242490R2	
PCB3	Q1960	IC	NJM2505AF	1	22242490R2	
PCB3	Q1970	IC	NJM2505AF	1	22242490R2	
PCB3	Q2	IC	78M09HF(NJM78M09FA)	1	222780095JRC	
PCB3	Q4000	TR	KRC105S	1	2217290R2	

PCB3	Q4000 or	TR	RN1405	(1)	2214500R2	
PCB3	Q4001	IC	78M05(NJM78M05FA)	1	222780055JRC	
PCB3	Q4002	IC	SI8008TM	1	22242323R2	
PCB3	Q4003	TR	KRC105S	1	2217290R2	
PCB3	Q4003 or	TR	RN1405	(1)	2214500R2	
PCB3	Q4100	IC	NJW1325	1	22242596R3	
PCB3	Q4101	TR ARRAY	UM6K1N	1	226066R2	
PCB3	Q4500	TR	2SA950-Y	1	2211504T	
PCB3	Q4500 or	TR	2SA950-O	(1)	2211503T	
PCB3	Q4501	TR	2SC1815-GR	1	2211255T	
PCB3	Q4502	TR	2SA950-Y	1	2211504T	
PCB3	Q4502 or	TR	2SA950-O	(1)	2211503T	
PCB3	Q4503	TR	2SC1815-GR	1	2211255T	
PCB3	Q4504	TR	2SA854S-R	1	2217394T	
PCB3	Q4504 or	TR	2SB1240-R	(1)	2213794T	
PCB3	Q9	IC	NJM4580M-D	1	22241448R2	
PCB3	**[TRANS COIL]**					
PCB3	L1090	CHOKE COIL	BLM21PG221SN1	1	230949R2	
PCB3	L1290	CHOKE COIL	LBC2518T470M	1	231364M470R2	
PCB3	L1301	CHOKE COIL	LBC2518T470M	1	231364M470R2	
PCB3	L1305	CHOKE COIL	LBC2518T2R2M	1	231364M022R2	
PCB3	L1306	CHOKE COIL	LBC2518T470M	1	231364M470R2	
PCB3	L1307	CHOKE COIL	LBC2518T2R2M	1	231364M022R2	
PCB3	L1308	CHOKE COIL	LBC2518T2R2M	1	231364M022R2	
PCB3	L1309	CHOKE COIL	LBC2518T4R7M	1	231364M047R2	
PCB3	L1312	CHOKE COIL	LBC2518T470M	1	231364M470R2	
PCB3	L1313	CHOKE COIL	LBC2518T4R7M	1	231364M047R2	
PCB3	L1314	CHOKE COIL	LBC2518T4R7M	1	231364M047R2	
PCB3	L1315	CHOKE COIL	LBC2518T4R7M	1	231364M047R2	
PCB3	L1316	EMIFIL	BK1608LM182-T	1	230958R1	
PCB3	L1317	EMIFIL	BK1608LM182-T	1	230958R1	
PCB3	L1318	CHOKE COIL	LBC2518T470M	1	231364M470R2	
PCB3	L1319	CHOKE COIL	LBC2518T470M	1	231364M470R2	
PCB3	L1320	EMIFIL	BK1608LM182-T	1	230958R1	
PCB3	L1321	EMIFIL	BK1608LM182-T	1	230958R1	
PCB3	L1322	EMIFIL	BK1608LM182-T	1	230958R1	
PCB3	L1323	EMIFIL	BK1608HS102-T	1	230955R2	
PCB3	L1324	EMIFIL	BK1608HS102-T	1	230955R2	
PCB3	L1325	EMIFIL	BK1608HS102-T	1	230955R2	
PCB3	L1404	CHOKE COIL	LBC2518T4R7M	1	231364M047R2	

PCB3	L1407	CHOKE COIL	LBC2518T4R7M	1	231364M047R2	
PCB3	L1900	CHOKE COIL	BLM21PG221SN1	1	230949R2	
PCB3	L1901	CHOKE COIL	BLM21PG221SN1	1	230949R2	
PCB3	L1902	EMIFIL	BK1608LM182-T	1	230958R1	
PCB3	L1903	EMIFIL	BK1608LM182-T	1	230958R1	
PCB3	L1904	EMIFIL	BK1608LM182-T	1	230958R1	
PCB3	L1905	EMIFIL	BK1608LM182-T	1	230958R1	
PCB3	L1906	CHOKE COIL	BLM21PG221SN1	1	230949R2	
PCB3	L1907	CHOKE COIL	BLM21PG221SN1	1	230949R2	
PCB3	L1908	EMIFIL	BK1608LM182-T	1	230958R1	
PCB3	L1909	EMIFIL	BK1608LM182-T	1	230958R1	
PCB3	L1910	EMIFIL	BK1608LM182-T	1	230958R1	
PCB3	L1911	EMIFIL	BK1608LM182-T	1	230958R1	
PCB3	L1912	EMIFIL	BK1608LM182-T	1	230958R1	
PCB3	L1913	EMIFIL	BK1608LM182-T	1	230958R1	
PCB3	L1914	EMIFIL	BK1608LM182-T	1	230958R1	
PCB3	L1915	EMIFIL	BK1608LM182-T	1	230958R1	
PCB3	L1916	EMIFIL	BK1608LM182-T	1	230958R1	
PCB3	L1917	EMIFIL	BK1608LM182-T	1	230958R1	
PCB3	L1918	EMIFIL	BK1608LM182-T	1	230958R1	
PCB3	L1919	EMIFIL	BK1608LM182-T	1	230958R1	
PCB3	L1920	EMIFIL	BK1608LM182-T	1	230958R1	
PCB3	L1921	EMIFIL	BK1608LM182-T	1	230958R1	
PCB3	L4000	COIL	0182-7310-470K-RB	1	231389	
PCB3	L4001	CHOKE COIL	LBC2518T4R7M	1	231364M047R2	
PCB3	L4005	CHOKE COIL	LBC2518T4R7M	1	231364M047R2	
PCB3	L4700	CHOKE COIL	LBC2518T470M	1	231364M470R2	
PCB3	L5	CHOKE COIL	LBC2518T100M	1	231364M100R2	
PCB3	X1001	CERA LOCK	CSTCR5M00G53-B0	1	3010356R2	
PCB3	X1002	CERA LOCK	CSTCE8M00G55-R0	1	3010416R2	
PCB3	X1301	CRYSTAL	HC-49US24.576MHz	1	3010423T	
PCB3	**[CAPACITOR]**					
PCB3	C1	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB3	C1001	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB3	C1004	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB3	C1005	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1006	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1007	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB3	C1008	C-CERA C	CC725CH1H-101J1	1	342101014R1	
PCB3	C1009	C-CERA C	CC725CH1H-101J1	1	342101014R1	

PCB3	C1010	C-CERA C	CC725CH1H-101J1	1	342101014R1	
PCB3	C1015	UTSP C	CE04W25V-100M(UTSP)	1	397551017T	
PCB3	C1017	UTSP C	CE04W10V-100M(UTSP)	1	397531017T	
PCB3	C1019	UTSP C	CE04W10V-100M(UTSP)	1	397531017T	
PCB3	C1020	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB3	C1021	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB3	C1022	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB3	C1023	ELECT C	CE04W25V-4.7M(MA)	1	355750479T	
PCB3	C1024	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB3	C1025	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB3	C1026	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB3	C1027	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB3	C1028	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB3	C1029	UTSP C	CE04W10V-100M(UTSP)	1	397531017T	
PCB3	C1030	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1031	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1032	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1033	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1034	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1036	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1037	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1038	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB3	C1039	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1040	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	
PCB3	C1041	ELECT C	CE04W16V-10M	1	355741009T	
PCB3	C1042	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1043	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB3	C1044	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB3	C1045	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB3	C1046	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB3	C1047	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB3	C1048	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB3	C1053	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB3	C1054	UTSP C	CE04W10V-220M(UTSP)	1	397532217T	
PCB3	C1060	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB3	C1061	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB3	C1101	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	
PCB3	C1104	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1290	UTSP C	CE04W25V-100M(UTSP)	1	397551017T	
PCB3	C1291	C-CERA C	CK725F1E-104Z1	1	332161040R1	

PCB3	C1292	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB3	C1293	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB3	C1294	UTSP C	CE04W50V-22M(UTSP)	1	397582207T	
PCB3	C1295	UTSP C	CE04W50V-22M(UTSP)	1	397582207T	
PCB3	C1296	UTSP C	CE04W50V-22M(UTSP)	1	397582207T	
PCB3	C1302	UTSP C	CE04W10V-100M(UTSP)	1	397531017T	
PCB3	C1303	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB3	C1304	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1305	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	
PCB3	C1306	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1307	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB3	C1308	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1309	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1310	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	
PCB3	C1311	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1365	C-CERA C	CK725B1C-104K1	1	332121045R1	
PCB3	C1366	C-CERA C	CC725CH1H-101J1	1	342101014R1	
PCB3	C1368	C-CERA C	CC725CH1H-101J1	1	342101014R1	
PCB3	C1369	UTSP C	CE04W10V-100M(UTSP)	1	397531017T	
PCB3	C1370	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	
PCB3	C1371	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1372	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1373	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1374	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	
PCB3	C1375	C-CERA C	CK725B1C-104K1	1	332121045R1	
PCB3	C1376	UTSP C	CE04W10V-100M(UTSP)	1	397531017T	
PCB3	C1377	UTSJ C	CE04W50V-47M(UTSJ)	1	398084707T	
PCB3	C1379	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1380	C-CERA C	CK725B1C-104K1	1	332121045R1	
PCB3	C1381	C-CERA C	CC725CH1H-101J1	1	342101014R1	
PCB3	C1388	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB3	C1390	C-CERA C	CK725B1H-223K1	1	332102235R1	
PCB3	C1392	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1396	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1397	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB3	C1398	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1399	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	
PCB3	C1400	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1401	C-CERA C	CC725CH1H-330J1	1	342103304R1	
PCB3	C1402	C-CERA C	CC725CH1H-330J1	1	342103304R1	

PCB3	C1403	C-CERA C	CC725CH1H-330J1	1	342103304R1	
PCB3	C1404	C-CERA C	CC725CH1H-330J1	1	342103304R1	
PCB3	C1405	C-CERA C	CC725CH1H-330J1	1	342103304R1	
PCB3	C1406	C-CERA C	CC725CH1H-330J1	1	342103304R1	
PCB3	C1408	C-CERA C	CC725CH1H-080D1	1	342100802R1	
PCB3	C1409	C-CERA C	CC725CH1H-080D1	1	342100802R1	
PCB3	C1410	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	
PCB3	C1411	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	
PCB3	C1413	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1414	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1415	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1417	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1418	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1419	C-CERA C	CC725CH1H-080D1	1	342100802R1	
PCB3	C1421	UTSP C	CE04W10V-220M(UTSP)	1	397532217T	
PCB3	C1424	C-CERA C	CC725CH1H-060D1	1	342100602R1	
PCB3	C1425	C-CERA C	CC725CH1H-060D1	1	342100602R1	
PCB3	C1430	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	
PCB3	C1454	C-FILM C	ECHU16V-104J	1	373041044R2	
PCB3	C1455	C-FILM C	ECHU16V-104J	1	373041044R2	
PCB3	C1456	C-FILM C	ECHU16V-104J	1	373041044R2	
PCB3	C1460	UTSJ C	CE04W50V-47M(UTSJ)	1	398084707T	
PCB3	C1499	UTSP C	CE04W10V-100M(UTSP)	1	397531017T	
PCB3	C1582	C-FILM C	ECHU50V-222J	1	373022224R2	
PCB3	C1583	C-FILM C	ECHU50V-222J	1	373022224R2	
PCB3	C1600	UPZ C	2AUPZTF471JE	1	376334714T	
PCB3	C1601	UPZ C	2AUPZTF471JE	1	376334714T	
PCB3	C1602	UPZ C	2AUPZTF471JE	1	376334714T	
PCB3	C1603	UPZ C	2AUPZTF471JE	1	376334714T	
PCB3	C1604	UPZ C	2AUPZTF471JE	1	376334714T	
PCB3	C1605	UPZ C	2AUPZTF471JE	1	376334714T	
PCB3	C1606	UPZ C	2AUPZTF471JE	1	376334714T	
PCB3	C1607	UPZ C	2AUPZTF471JE	1	376334714T	
PCB3	C1610	CERA C	CC45SL50V-101J	1	345021014T	
PCB3	C1611	CERA C	CC45SL50V-101J	1	345021014T	
PCB3	C1612	CERA C	CC45SL50V-101J	1	345021014T	
PCB3	C1613	CERA C	CC45SL50V-101J	1	345021014T	
PCB3	C1614	CERA C	CC45SL50V-101J	1	345021014T	
PCB3	C1615	CERA C	CC45SL50V-101J	1	345021014T	
PCB3	C1616	CERA C	CC45SL50V-101J	1	345021014T	

PCB3	C1617	CERA C	CC45SL50V-101J	1	345021014T	
PCB3	C1620	CERA C	CC45SL50V-101J	1	345021014T	
PCB3	C1621	CERA C	CC45SL50V-101J	1	345021014T	
PCB3	C1622	CERA C	CC45SL50V-101J	1	345021014T	
PCB3	C1623	CERA C	CC45SL50V-101J	1	345021014T	
PCB3	C1624	CERA C	CC45SL50V-101J	1	345021014T	
PCB3	C1625	CERA C	CC45SL50V-101J	1	345021014T	
PCB3	C1626	CERA C	CC45SL50V-101J	1	345021014T	
PCB3	C1627	CERA C	CC45SL50V-101J	1	345021014T	
PCB3	C1650	UTSP C	CE04W25V-220M(UTSP)	1	397552217T	
PCB3	C1651	UTSP C	CE04W25V-220M(UTSP)	1	397552217T	
PCB3	C1800	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB3	C1801	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB3	C1810	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB3	C1811	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB3	C1900	UTSP C	CE04W25V-100M(UTSP)	1	397551017T	
PCB3	C1902	UTSP C	CE04W25V-100M(UTSP)	1	397551017T	
PCB3	C1904	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB3	C1905	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB3	C1906	C-CERA C	CC725CH1H-101J1	1	342101014R1	
PCB3	C1907	C-CERA C	CC725CH1H-101J1	1	342101014R1	
PCB3	C1908	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB3	C1909	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB3	C1911	C-CERA C	CC725CH1H-101J1	1	342101014R1	
PCB3	C1912	C-CERA C	CC725CH1H-101J1	1	342101014R1	
PCB3	C1913	C-CERA C	CC725CH1H-470J1	1	342104704R1	
PCB3	C1914	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1915	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1921	C-CERA C	CC725CH1H-471J1	1	342104714R1	
PCB3	C1922	C-CERA C	CC725CH1H-471J1	1	342104714R1	
PCB3	C1923	C-CERA C	CC725CH1H-221J1	1	342102214R1	
PCB3	C1924	C-CERA C	CC725CH1H-221J1	1	342102214R1	
PCB3	C1930	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1931	C-CERA C	CC725CH1H-470J1	1	342104704R1	
PCB3	C1941	UTSP C	CE04W25V-100M(UTSP)	1	397551017T	
PCB3	C1942	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1943	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1944	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB3	C1951	VR C	CE04W6.3V-470M(VR)	1	394624717T	
PCB3	C1952	VR C	CE04W6.3V-470M(VR)	1	394624717T	

PCB3	C1953	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB3	C1954	UTSP C	CE04W10V-100M(UTSP)	1	397531017T	
PCB3	C1955	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1956	C-CERA C	CC725CH1H-470J1	1	342104704R1	
PCB3	C1957	C-CERA C	CC725CH1H-470J1	1	342104704R1	
PCB3	C1961	VR C	CE04W6.3V-470M(VR)	1	394624717T	
PCB3	C1962	VR C	CE04W6.3V-470M(VR)	1	394624717T	
PCB3	C1963	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB3	C1964	UTSP C	CE04W10V-100M(UTSP)	1	397531017T	
PCB3	C1965	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1966	C-CERA C	CC725CH1H-470J1	1	342104704R1	
PCB3	C1967	C-CERA C	CC725CH1H-470J1	1	342104704R1	
PCB3	C1971	VR C	CE04W6.3V-470M(VR)	1	394624717T	
PCB3	C1972	VR C	CE04W6.3V-470M(VR)	1	394624717T	
PCB3	C1973	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB3	C1974	UTSP C	CE04W10V-100M(UTSP)	1	397531017T	
PCB3	C1975	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C1976	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB3	C1977	C-CERA C	CC725CH1H-470J1	1	342104704R1	
PCB3	C1978	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB3	C1979	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB3	C1980	C-CERA C	CC725CH1H-470J1	1	342104704R1	
PCB3	C1981	C-CERA C	CC725CH1H-470J1	1	342104704R1	
PCB3	C2	VR C	CE04W16V-100M(VR)	1	394641017T	
PCB3	C4000	UTSP C	CE04W50V-4.7M(UTSP)	1	397580477T	
PCB3	C4001	VR C	CE04W16V-470M(VR)	1	394644717T	
PCB3	C4002	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	
PCB3	C4003	TF C	ECQ-V50V-334J	1	374723344T	
PCB3	C4004	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	
PCB3	C4005	C-CERA C	CK725B1H-223K1	1	332102235R1	
PCB3	C4006	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C4007	ELECT C	CE04W35V-4700M(VZ)	1	394564727S	
PCB3	C4009	TF C	ECQ-V50V-334J	1	374723344T	
PCB3	C4010	TF C	ECQ-V50V-334J	1	374723344T	
PCB3	C4012	TF C	ECQ-V50V-334J	1	374723344T	
PCB3	C4013	ELECT C	CE04W35V-4700M(VZ)	1	394564727S	
PCB3	C4100	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB3	C4101	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB3	C4102	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB3	C4103	UTSP C	CE04W50V-2.2M(UTSP)	1	397580227T	

PCB3	C4111	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C4112	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB3	C4114	UTSP C	CE04W50V-1M(UTSP)	1	397580107T	
PCB3	C4115	VR C	CE04W6.3V-470M(VR)	1	394624717T	
PCB3	C4119	VR C	CE04W6.3V-470M(VR)	1	394624717T	
PCB3	C4121	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C4122	UTSP C	CE04W50V-1M(UTSP)	1	397580107T	
PCB3	C4123	UTSP C	CE04W50V-2.2M(UTSP)	1	397580227T	
PCB3	C4129	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C4131	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB3	C4132	VR C	CE04W6.3V-470M(VR)	1	394624717T	
PCB3	C4133	UTSP C	CE04W50V-1M(UTSP)	1	397580107T	
PCB3	C4134	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C4135	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB3	C4136	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB3	C4137	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB3	C4138	VR C	CE04W6.3V-470M(VR)	1	394624717T	
PCB3	C4139	UTSP C	CE04W50V-22M(UTSP)	1	397582207T	
PCB3	C4140	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C4141	UTSP C	CE04W50V-1M(UTSP)	1	397580107T	
PCB3	C4143	VR C	CE04W6.3V-470M(VR)	1	394624717T	
PCB3	C4144	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C4145	UTSP C	CE04W50V-2.2M(UTSP)	1	397580227T	
PCB3	C4146	VR C	CE04W6.3V-470M(VR)	1	394624717T	
PCB3	C4150	VR C	CE04W6.3V-470M(VR)	1	394624717T	
PCB3	C4151	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB3	C4152	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB3	C4154	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C4156	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB3	C4157	VR C	CE04W6.3V-470M(VR)	1	394624717T	
PCB3	C4159	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB3	C4160	VR C	CE04W6.3V-470M(VR)	1	394624717T	
PCB3	C4161	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C4162	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C4163	VR C	CE04W6.3V-470M(VR)	1	394624717T	
PCB3	C4167	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB3	C4168	UTSP C	CE04W50V-1M(UTSP)	1	397580107T	
PCB3	C4169	UTSP C	CE04W50V-2.2M(UTSP)	1	397580227T	
PCB3	C4173	VR C	CE04W6.3V-470M(VR)	1	394624717T	
PCB3	C4174	C-CERA C	CK725B1H-102K1	1	332101025R1	

PCB3	C4175	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB3	C4176	UTSP C	CE04W50V-1M(UTSP)	1	397580107T	
PCB3	C4179	UTSP C	CE04W50V-2.2M(UTSP)	1	397580227T	
PCB3	C4183	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C4184	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB3	C4186	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB3	C4187	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB3	C4192	UTSP C	CE04W50V-1M(UTSP)	1	397580107T	
PCB3	C4193	C-CERA C	CC725CH1H-151J1	1	342101514R1	
PCB3	C4194	C-CERA C	CC725CH1H-151J1	1	342101514R1	
PCB3	C4195	C-CERA C	CC725CH1H-151J1	1	342101514R1	
PCB3	C4196	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB3	C4197	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB3	C4198	UTSP C	CE04W50V-1M(UTSP)	1	397580107T	
PCB3	C4199	UTSP C	CE04W50V-2.2M(UTSP)	1	397580227T	
PCB3	C4200	UTSP C	CE04W50V-1M(UTSP)	1	397580107T	
PCB3	C4202	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB3	C4203	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB3	C4205	UTSP C	CE04W50V-1M(UTSP)	1	397580107T	
PCB3	C4206	UTSP C	CE04W50V-2.2M(UTSP)	1	397580227T	
PCB3	C4207	UTSP C	CE04W50V-1M(UTSP)	1	397580107T	
PCB3	C4209	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB3	C4211	VR C	CE04W6.3V-470M(VR)	1	394624717T	
PCB3	C4212	C-CERA C	CC725CH1H-151J1	1	342101514R1	
PCB3	C4213	C-CERA C	CC725CH1H-151J1	1	342101514R1	
PCB3	C4214	C-CERA C	CC725CH1H-151J1	1	342101514R1	
PCB3	C4215	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB3	C4218	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C4219	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C4226	VR C	CE04W6.3V-470M(VR)	1	394624717T	
PCB3	C4228	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C4234	VR C	CE04W6.3V-470M(VR)	1	394624717T	
PCB3	C4235	VR C	CE04W6.3V-470M(VR)	1	394624717T	
PCB3	C4236	UTSP C	CE04W50V-2.2M(UTSP)	1	397580227T	
PCB3	C4237	UTSP C	CE04W50V-1M(UTSP)	1	397580107T	
PCB3	C4238	UTSP C	CE04W50V-1M(UTSP)	1	397580107T	
PCB3	C4239	UTSP C	CE04W50V-1M(UTSP)	1	397580107T	
PCB3	C4240	UTSP C	CE04W50V-1M(UTSP)	1	397580107T	
PCB3	C4241	UTSP C	CE04W50V-2.2M(UTSP)	1	397580227T	
PCB3	C4253	C-CERA C	CK725F1E-104Z1	1	332161040R1	

PCB3	C4254	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C4255	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C4256	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C4500	UTSP C	CE04W25V-220M(UTSP)	1	397552217T	
PCB3	C4501	UTSP C	CE04W25V-220M(UTSP)	1	397552217T	
PCB3	C4502	UTSP C	CE04W25V-220M(UTSP)	1	397552217T	
PCB3	C4503	UTSP C	CE04W25V-220M(UTSP)	1	397552217T	
PCB3	C47	ELECT C	CE04W35V-10M(S)	1	353761009T	
PCB3	C4700	UTSP C	CE04W50V-1M(UTSP)	1	397580107T	
PCB3	C4701	UTSP C	CE04W50V-1M(UTSP)	1	397580107T	
PCB3	C4702	VR C	CE04W16V-100M(VR)	1	394641017T	
PCB3	C4703	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C4704	UTSP C	CE04W50V-1M(UTSP)	1	397580107T	
PCB3	C4705	UTSP C	CE04W50V-1M(UTSP)	1	397580107T	
PCB3	C4706	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB3	C48	ELECT C	CE04W35V-10M(S)	1	353761009T	
PCB3	C52	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB3	C53	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB3	C7	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB3	**[RESISTOR]**					
PCB3	R1001	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1002	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB3	R1003	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB3	R1004	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB3	R1005	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB3	R1006	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1007	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB3	R1008	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB3	R1010	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1011	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB3	R1012	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1013	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1014	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1015	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1016	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB3	R1017	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB3	R1019	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1020	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB3	R1026	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB3	R1027	C-CARBON R	RN72K1J-473JE	1	435034734R1	

PCB3	R1028	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1029	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1031	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1032	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1033	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1034	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB3	R1035	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1036	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB3	R1037	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1038	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1039	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1040	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1041	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1042	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1043	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1044	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1045	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1046	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB3	R1047	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB3	R1048	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1049	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1050	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1051	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1052	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1055	C-CARBON R	RN72K1J-273JE	1	435032734R1	
PCB3	R1056	C-CARBON R	RN72K1J-273JE	1	435032734R1	
PCB3	R1057	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1058	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1059	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1060	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1061	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1062	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1063	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1064	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB3	R1065	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1066	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1067	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB3	R1068	C-CARBON R	RN72K1J-273JE	1	435032734R1	
PCB3	R1069	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB3	R1070	C-CARBON R	RN72K1J-103JE	1	435031034R1	

PCB3	R1071	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1072	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1073	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1074	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1075	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB3	R1077	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1078	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1079	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1080	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1081	C-CARBON R	RN72K1J-272JE	1	435032724R1	
PCB3	R1082	C-CARBON R	RN72K1J-272JE	1	435032724R1	
PCB3	R1083	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1084	C-CARBON R	RN72K1J-272JE	1	435032724R1	
PCB3	R1085	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1086	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1087	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1088	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1089	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1090	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1091	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1092	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1093	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1094	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1095	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1096	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1097	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB3	R1098	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1099	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R11	METAL O R	RS1/2WBJ-10	1	443521004T	
PCB3	R1101	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1104	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1107	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1109	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1111	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1113	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1114	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1115	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1116	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1117	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1118	C-CARBON R	RN72K1J-470JE	1	435034704R1	

PCB3	R1119	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1120	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1121	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1122	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1123	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1124	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1126	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1128	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1130	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1131	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1132	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1133	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1134	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1136	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB3	R1137	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1138	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB3	R1139	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1140	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1141	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1142	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1143	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1144	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1146	METAL R	RNU1WCJ-1.5	1	453630154T	
PCB3	R1147	METAL R	RNU1WCJ-1.5	1	453630154T	
PCB3	R1148	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1149	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1150	C-CARBON R	RN72K1J-333JE	1	435033334R1	
PCB3	R1151	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1152	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1153	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1154	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1155	C-CARBON R	RN72K1J-333JE	1	435033334R1	
PCB3	R1156	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1158	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB3	R1159	C-CARBON R	RN72K1J-333JE	1	435033334R1	
PCB3	R1160	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB3	R1161	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB3	R1162	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB3	R1164	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB3	R1165	C-CARBON R	RN72K1J-472JE	1	435034724R1	

PCB3	R1166	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB3	R1167	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB3	R1168	C-CARBON R	RN72K1J-272JE	1	435032724R1	
PCB3	R1170	C-CARBON R	RN72K1J-272JE	1	435032724R1	
PCB3	R1171	C-CARBON R	RN72K1J-272JE	1	435032724R1	
PCB3	R1172	C-CARBON R	RN72K1J-272JE	1	435032724R1	
PCB3	R1173	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1175	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1176	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1177	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1178	C-CARBON R	RN72K1J-272JE	1	435032724R1	
PCB3	R1179	C-CARBON R	RN72K1J-272JE	1	435032724R1	
PCB3	R1180	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1182	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1183	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1184	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1185	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB3	R1186	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1187	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1188	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1189	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1190	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1191	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1192	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1193	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1194	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1195	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1196	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1197	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1198	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1199	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1200	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1201	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1202	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1203	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1204	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB3	R1205	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB3	R1207	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1209	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1210	C-CARBON R	RN72K1J-473JE	1	435034734R1	

PCB3	R1211	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1212	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1213	C-CARBON R	RN72K1J-272JE	1	435032724R1	
PCB3	R1214	C-CARBON R	RN72K1J-272JE	1	435032724R1	
PCB3	R1217	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1218	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1219	C-CARBON R	RN72K1J-332JE	1	435033324R1	
PCB3	R1220	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1221	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1222	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1223	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1224	C-CARBON R	RN72K1J-332JE	1	435033324R1	
PCB3	R1225	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1226	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1228	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1230	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1231	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB3	R1235	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB3	R1240	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1241	C-CARBON R	RN72K1J-272JE	1	435032724R1	
PCB3	R1242	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1243	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1244	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1245	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1246	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1248	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1249	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB3	R1250	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1251	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1252	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1253	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1254	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1255	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1264	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB3	R1266	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB3	R1267	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB3	R1268	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1270	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB3	R1271	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB3	R1272	C-CARBON R	RN72K1J-100JE	1	435031004R1	

PCB3	R1273	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB3	R1274	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB3	R1275	C-CARBON R	RN72K1J-823JE	1	435038234R1	
PCB3	R1280	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1281	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1282	C-CARBON R	RN72K1J-273JE	1	435032734R1	
PCB3	R1283	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1284	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1285	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1286	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1287	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1288	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1289	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB3	R1290	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1291	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB3	R1292	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1293	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1294	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1295	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1296	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1297	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1298	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R1299	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB3	R1300	THERMISTOR	FUSB090F	1	4000252T	
PCB3	R1301	METAL R	RNU1WCJ-4.7	1	453630474T	
PCB3	R1302	METAL R	RNU1WCJ-4.7	1	453630474T	
PCB3	R1303	METAL O R	RS1WBJ-22	1	443622204T	
PCB3	R1304	METAL O R	RS1WBJ-22	1	443622204T	
PCB3	R1311	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB3	R1312	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB3	R1313	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB3	R1315	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB3	R1316	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB3	R1317	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1318	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1319	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB3	R1320	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB3	R1321	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1322	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB3	R1323	C-CARBON R	RN72K1J-331JE	1	435033314R1	

PCB3	R1325	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1485	C-CARBON R	RN72K1J-100JE	1	435031004R1	
PCB3	R1486	C-CARBON R	RN72K1J-100JE	1	435031004R1	
PCB3	R1487	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R1488	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB3	R1490	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R1491	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB3	R1492	C-CARBON R	RN72K1J-100JE	1	435031004R1	
PCB3	R1496	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R1497	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB3	R1500	C-CARBON R	RN72K1J-392JE	1	435033924R1	
PCB3	R1504	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1506	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1507	C-CARBON R	RN72K1J-152JE	1	435031524R1	
PCB3	R1508	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB3	R1509	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB3	R1510	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB3	R1511	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB3	R1512	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1513	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB3	R1514	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB3	R1515	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB3	R1517	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB3	R1518	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB3	R1519	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB3	R1520	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1521	C-CARBON R	RN72K1J-823JE	1	435038234R1	
PCB3	R1522	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1523	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1524	C-CARBON R	RN72K1J-823JE	1	435038234R1	
PCB3	R1525	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1526	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1527	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1528	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1529	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1530	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1531	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R1532	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1534	C-CARBON R	RN72K1J-823JE	1	435038234R1	
PCB3	R1535	C-CARBON R	RN72K1J-105JE	1	435031054R1	

PCB3	R1567	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB3	R1568	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB3	R1569	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB3	R1570	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB3	R1571	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB3	R1572	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB3	R1573	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R1575	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB3	R1577	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB3	R1579	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB3	R1580	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB3	R1581	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB3	R1599	C-CARBON R	RN72K1J-392JE	1	435033924R1	
PCB3	R1600	C-CARBON R	RN72K1J-153JE	1	435031534R1	
PCB3	R1601	C-CARBON R	RN72K1J-153JE	1	435031534R1	
PCB3	R1602	C-CARBON R	RN72K1J-153JE	1	435031534R1	
PCB3	R1603	C-CARBON R	RN72K1J-153JE	1	435031534R1	
PCB3	R1604	C-CARBON R	RN72K1J-153JE	1	435031534R1	
PCB3	R1605	C-CARBON R	RN72K1J-153JE	1	435031534R1	
PCB3	R1606	C-CARBON R	RN72K1J-153JE	1	435031534R1	
PCB3	R1607	C-CARBON R	RN72K1J-153JE	1	435031534R1	
PCB3	R1610	C-CARBON R	RN72K1J-153JE	1	435031534R1	
PCB3	R1611	C-CARBON R	RN72K1J-153JE	1	435031534R1	
PCB3	R1612	C-CARBON R	RN72K1J-153JE	1	435031534R1	
PCB3	R1613	C-CARBON R	RN72K1J-153JE	1	435031534R1	
PCB3	R1614	C-CARBON R	RN72K1J-153JE	1	435031534R1	
PCB3	R1615	C-CARBON R	RN72K1J-153JE	1	435031534R1	
PCB3	R1616	C-CARBON R	RN72K1J-153JE	1	435031534R1	
PCB3	R1617	C-CARBON R	RN72K1J-153JE	1	435031534R1	
PCB3	R1620	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1621	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1622	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1623	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1624	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1625	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1626	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1627	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1630	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PCB3	R1631	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PCB3	R1632	C-CARBON R	RN72K1J-123JE	1	435031234R1	

PCB3	R1633	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PCB3	R1634	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PCB3	R1635	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PCB3	R1636	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PCB3	R1637	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PCB3	R1640	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1641	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1642	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1643	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1644	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1645	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1646	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1647	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1650	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PCB3	R1651	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PCB3	R1652	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PCB3	R1653	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PCB3	R1654	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PCB3	R1655	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PCB3	R1656	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PCB3	R1657	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PCB3	R1660	C-CARBON R	RN72K1J-182JE	1	435031824R1	
PCB3	R1661	C-CARBON R	RN72K1J-182JE	1	435031824R1	
PCB3	R1662	C-CARBON R	RN72K1J-182JE	1	435031824R1	
PCB3	R1663	C-CARBON R	RN72K1J-182JE	1	435031824R1	
PCB3	R1664	C-CARBON R	RN72K1J-182JE	1	435031824R1	
PCB3	R1665	C-CARBON R	RN72K1J-182JE	1	435031824R1	
PCB3	R1666	C-CARBON R	RN72K1J-182JE	1	435031824R1	
PCB3	R1667	C-CARBON R	RN72K1J-182JE	1	435031824R1	
PCB3	R1670	C-CARBON R	RN72K1J-182JE	1	435031824R1	
PCB3	R1671	C-CARBON R	RN72K1J-182JE	1	435031824R1	
PCB3	R1672	C-CARBON R	RN72K1J-182JE	1	435031824R1	
PCB3	R1673	C-CARBON R	RN72K1J-182JE	1	435031824R1	
PCB3	R1674	C-CARBON R	RN72K1J-182JE	1	435031824R1	
PCB3	R1675	C-CARBON R	RN72K1J-182JE	1	435031824R1	
PCB3	R1676	C-CARBON R	RN72K1J-182JE	1	435031824R1	
PCB3	R1677	C-CARBON R	RN72K1J-182JE	1	435031824R1	
PCB3	R1770	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB3	R1771	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB3	R1772	C-CARBON R	RN72K1J-000JE	1	435030004R1	

PCB3	R1773	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB3	R1774	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB3	R1775	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB3	R1776	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB3	R1777	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB3	R1780	METAL O R	RS1/2WBJ-22	1	443522204T	
PCB3	R1781	METAL O R	RS1/2WBJ-22	1	443522204T	
PCB3	R1800	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB3	R1801	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB3	R1810	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB3	R1811	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB3	R1820	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1821	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1830	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1831	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1840	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1841	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1850	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1851	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1860	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1861	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R1900	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB3	R1901	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB3	R1902	C-CARBON R	RN72K1J-105JE	1	435031054R1	
PCB3	R1904	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PCB3	R1905	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PCB3	R1906	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PCB3	R1907	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PCB3	R1908	C-CARBON R	RN72K1J-471JE	1	435034714R1	
PCB3	R1909	C-CARBON R	RN72K1J-471JE	1	435034714R1	
PCB3	R1910	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PCB3	R1911	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PCB3	R1912	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB3	R1913	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB3	R1920	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PCB3	R1921	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PCB3	R1951	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB3	R1952	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB3	R1953	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R1954	C-CARBON R	RN72K1J-222JE	1	435032224R1	

PCB3	R1955	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB3	R1956	C-CARBON R	RN72K1J-105JE	1	435031054R1	
PCB3	R1961	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB3	R1962	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB3	R1963	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R1964	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB3	R1965	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB3	R1971	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB3	R1972	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB3	R1973	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R1974	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB3	R1975	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB3	R1980	THERMISTOR	FUSB090F	1	4000252T	
PCB3	R39	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB3	R4000	METAL R	RNU1/2WCJ-4.7	1	453530474T	
PCB3	R4001	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R4002	METAL R	RNU1WCJ-0.22	1	453632294T	
PCB3	R4003	METAL R	RNU1/2WCJ-0.47	1	453534794T	
PCB3	R4004	C-CARBON R	RN72K1J-562JE	1	435035624R1	
PCB3	R4005	C-CARBON R	RN72K1J-152JE	1	435031524R1	
PCB3	R4006	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB3	R4007	C-CARBON R	RN72K1J-392JE	1	435033924R1	
PCB3	R4008	C-CARBON R	RN72K2E-022JE	1	435220224R1	
PCB3	R4022	METAL O R	RS2WBJ-3.3	1	441720334F	
PCB3	R4024	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R41	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB3	R4106	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB3	R4107	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB3	R4108	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB3	R4109	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB3	R4110	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R4111	C-CARBON R	RN72K1J-392JE	1	435033924R1	
PCB3	R4112	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R4113	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB3	R4115	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R4116	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB3	R4117	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R4118	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB3	R4119	C-CARBON R	RN72K2E-022JE	1	435220224R1	
PCB3	R4120	C-CARBON R	RN72K1J-750JE	1	435037504R1	

PCB3	R4121	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R4122	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R4123	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB3	R4124	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R4125	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB3	R4126	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R4127	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB3	R4135	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R4136	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R4137	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R4138	C-CARBON R	RN72K2E-022JE	1	435220224R1	
PCB3	R4139	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R4140	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R4141	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R4142	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R4143	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R4144	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R4145	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB3	R4146	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB3	R4147	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB3	R4148	C-CARBON R	RN72K1J-392JE	1	435033924R1	
PCB3	R4149	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R4150	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R4151	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R4152	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB3	R4153	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB3	R4155	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R4156	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R4157	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R4158	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB3	R4159	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R4160	C-CARBON R	RN72K2E-022JE	1	435220224R1	
PCB3	R4161	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R4162	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R4163	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB3	R4164	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB3	R4165	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB3	R4166	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB3	R4167	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB3	R4168	C-CARBON R	RN72K1J-101JE	1	435031014R1	

PCB3	R4169	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB3	R4170	C-CARBON R	RN72K2E-022JE	1	435220224R1	
PCB3	R4171	C-CARBON R	RN72K2E-022JE	1	435220224R1	
PCB3	R4172	C-CARBON R	RN72K1J-682JE	1	435036824R1	
PCB3	R4173	C-CARBON R	RN72K1J-682JE	1	435036824R1	
PCB3	R4174	C-CARBON R	RN72K2E-022JE	1	435220224R1	
PCB3	R4175	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB3	R4176	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB3	R4177	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB3	R4181	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB3	R4182	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB3	R4183	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB3	R4187	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB3	R4189	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB3	R4200	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB3	R4201	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R4202	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB3	R4205	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB3	R4206	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB3	R4207	C-CARBON R	RN72K2E-022JE	1	435220224R1	
PCB3	R4208	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB3	R4209	C-CARBON R	RN72K1J-392JE	1	435033924R1	
PCB3	R4211	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R4212	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R4213	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB3	R4214	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB3	R4215	C-CARBON R	RN72K1J-105JE	1	435031054R1	
PCB3	R4216	C-CARBON R	RN72K1J-105JE	1	435031054R1	
PCB3	R4217	C-CARBON R	RN72K1J-105JE	1	435031054R1	
PCB3	R4218	C-CARBON R	RN72K1J-105JE	1	435031054R1	
PCB3	R4219	C-CARBON R	RN72K1J-105JE	1	435031054R1	
PCB3	R4220	C-CARBON R	RN72K1J-105JE	1	435031054R1	
PCB3	R4221	C-CARBON R	RN72K1J-105JE	1	435031054R1	
PCB3	R4222	C-CARBON R	RN72K1J-105JE	1	435031054R1	
PCB3	R4223	C-CARBON R	RN72K1J-105JE	1	435031054R1	
PCB3	R4224	C-CARBON R	RN72K1J-105JE	1	435031054R1	
PCB3	R4225	C-CARBON R	RN72K1J-105JE	1	435031054R1	
PCB3	R4226	C-CARBON R	RN72K1J-105JE	1	435031054R1	
PCB3	R4227	C-CARBON R	RN72K1J-682JE	1	435036824R1	
PCB3	R4228	C-CARBON R	RN72K1J-222JE	1	435032224R1	

PCB3	R4229	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB3	R4233	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB3	R4235	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB3	R4238	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB3	R4258	C-CARBON R	RN72K2E-022JE	1	435220224R1	
PCB3	R43	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB3	R44	NF CARBON R	R25J-10	1	415471004T	
PCB3	R45	NF CARBON R	R25J-10	1	415471004T	
PCB3	R4500	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PCB3	R4501	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB3	R4502	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R4503	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R4504	C-CARBON R	RN72K1J-151JE	1	435031514R1	
PCB3	R4505	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PCB3	R4506	C-CARBON R	RN72K1J-122JE	1	435031224R1	
PCB3	R4507	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R4508	C-CARBON R	RN72K1J-182JE	1	435031824R1	
PCB3	R4509	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB3	R4510	C-CARBON R	RN72K1J-562JE	1	435035624R1	
PCB3	R4511	METAL R	RNU1WCJ-1	1	453630104T	
PCB3	R4512	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PCB3	R4700	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R4701	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R4702	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB3	R4703	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB3	R4704	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R4705	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB3	R4707	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB3	R49	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R50	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R51	C-CARBON R	RN72K1J-273JE	1	435032734R1	
PCB3	R52	C-CARBON R	RN72K1J-273JE	1	435032734R1	
PCB3	R53	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PCB3	R54	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R55	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R56	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PCB3	R57	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R58	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R59	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R60	C-CARBON R	RN72K1J-103JE	1	435031034R1	

PCB3	R61	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R62	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R63	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R64	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	**[SW TRM]**					
PCB3	E1911	TRM-423(SCREW)	NEJITANSI ST3	1	25060495	
PCB3	F4000A	FUSE HOL	NSCT-1P2031	1	25052133T	!
PCB3	F4000B	FUSE HOL	NSCT-1P2031	1	25052133T	!
PCB3	F4001A	FUSE HOL	NSCT-1P2031	1	25052133T	!
PCB3	F4001B	FUSE HOL	NSCT-1P2031	1	25052133T	!
PCB3	JL104B	WIRE TRAP	NPLG-9P592	1	25055630	
PCB3	JL4500B	WIRE TRAP	NPLG-3P586	1	25055624	
PCB3	JL8002A	WIRE HOL	NSCT-5P896	1	25051109	
PCB3	JL901B	WIRE TRAP	NPLG-5P588	1	25055626	
PCB3	P001	PWB	BCDG-0099	1	25140099C	N
PCB3	P002	PWB	BCCPU-0100	{ 1}	25140100	N
PCB3	P003	PWB	BCVD-0101	{ 1}	25140101	N
PCB3	P005	PWB	BCETC-0103	{ 1}	25140103	N
PCB3	P1004A	SOCKET	NSCT-9P2243	1	25052346	
PCB3	P1008B	PLUG	IMSA-9142B-20A	1	25056600	
PCB3	P1010B	PLUG	IMSA-9142B-20A	1	25056600	
PCB3	P103B	SOCKET	NSCT-11P2104	1	25052207	
PCB3	P1208	ST JACK	MSJ-035-22	1	25045887	
PCB3	P1307	TRM-423(SCREW)	NEJITANSI ST3	1	25060495	
PCB3	P1309	PIN JACK	NPJ-3PDO656	1	25045884	
PCB3	P1309 or	PIN JACK	NPJ-3PDO465	(1)	25045666	
PCB3	P1901A	PLUG	IMSA-9142B-22A	1	25056601	N
PCB3	P1901B	SOCKET	IMSA-9142S-22A	1	25053233	N
PCB3	P1902	SOCKET	NNA1-01-006	1	25053357	
PCB3	P3605B	SOCKET	IMSA-9142S-18A	1	25053231	
PCB3	P3607B	SOCKET	IMSA-9142S-16A	1	25053230	
PCB3	P3608B	SOCKET	IMSA-9142S-18A	1	25053231	
PCB3	P4000B	PLUG	NPLG-5P119	1	25055135	
PCB3	P4100A	PLUG	IMSA-9142B-16A	1	25056598	
PCB3	P4100B	SOCKET	IMSA-9142S-16A	1	25053230	
PCB3	P4101A	PLUG	IMSA-9142B-18A	1	25056599	
PCB3	P4101B	SOCKET	IMSA-9142S-18A	1	25053231	
PCB3	P4104A	SOCKET	NSCT-19P2112	1	25052215	
PCB3	P4110	PIN JACK	NPJ-9PDGLRGLRGLR563	1	25045781	
PCB3	P4110 or	PIN JACK	NPJ-9PDGLR519	(1)	25045731	

PCB3	P4112	PIN JACK	NPJ-10PDBY621	1	25045842	
PCB3	P4112 or	PIN JACK	NPJ-10PDBY478	(1)	25045681	
PCB3	P4113	PIN JACK	NPJ-10PDBY621	1	25045842	
PCB3	P4113 or	PIN JACK	NPJ-10PDBY478	(1)	25045681	
PCB3	P4114	PIN JACK	NPJ-10PDBY621	1	25045842	
PCB3	P4114 or	PIN JACK	NPJ-10PDBY478	(1)	25045681	
PCB3	P4118	TRM-423(SCREW)	NEJITANSI ST3	1	25060495	
PCB3	P4119	RETAINER	(JOINT)	1	27142069	
PCB3	P4501	PLUG	NPLG-2P83	1	25055099	
PCB3	P5512B	PLUG	NPLG-15P0970	1	25056020	
PCB3	P5513B	PLUG	NPLG-19P0974	1	25056024	
PCB3	P5518B	PLUG	NPLG-3P0958	1	25056008	
PCB3	P6621B	PLUG	IMSA-9142B-16A	1	25056598	
PCB3	P7501A	PLUG	A2545WR2-2x20P(IDE40SIDE)	1	25056643	N

PCB4 **U004** DISPLAY CIRCUIT PC BOARD (BADIS-0135-1A)
PCB4 **U0041** STANDBY SWITCH PC BOARD (BASW-0136-1A)
PCB4 **U0042** HEADPHONE TERMINAL PC BOARD (BAETC-0137-1A)
PCB4 **U0043** FRONT DIGITAL INPUT PC BOARD (BAETC-0138-1A)
PCB4 **U0044** VOLUME LED PC BOARD (BAETC-0139-1A)
PCB4 **U0045** FUSE LED PC BOARD (BAPS-0140-1A)
PCB4 **U0046** SUPPORT PC BOARD-1 (BAETC-0145-1A)
PCB4 **U0047** SUPPORT PC BOARD-2 (BAETC-0142-1A)
PCB4 **U0048** SUPPORT PC BOARD-3 (BAETC-0128-1A)
PCB4 **U0049** FFC SUPPORT PC BOARD (BAETC-0130-1A)
PCB4 **U00410** SUPPORT PC BOARD-5 (BAETC-0129-1A)

	CIRCUIT NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
PCB4	**[TUNER UNIT]**					
PCB4	U7520	PHT CP	JSR1321-001	1	24120138	
PCB4	U7560	REMO SENS	TSOP34338RF1F	1	24130017	
PCB4	**[SEMI CONDUCTOR]**					
PCB4	D7500	ZENER D	UDZS10B	1	224551000R2	
PCB4	D7520	C-DIODE	1SS355	1	223269R2	
PCB4	D7520 or	C-DIODE	1SS352	(1)	223234R2	
PCB4	D7520 or	C-DIODE	MA2J111	(1)	223279R2	
PCB4	D7520 or	C-DIODE	KDS4148U	(1)	223283R2	
PCB4	D7521	C-DIODE	1SS355	1	223269R2	
PCB4	D7521 or	C-DIODE	1SS352	(1)	223234R2	
PCB4	D7521 or	C-DIODE	MA2J111	(1)	223279R2	

PCB4	D7521 or	C-DIODE	KDS4148U	(1)	223283R2	
PCB4	D7522	C-DIODE	1SS355	1	223269R2	
PCB4	D7522 or	C-DIODE	1SS352	(1)	223234R2	
PCB4	D7522 or	C-DIODE	MA2J111	(1)	223279R2	
PCB4	D7522 or	C-DIODE	KDS4148U	(1)	223283R2	
PCB4	D7523	C-DIODE	1SS355	1	223269R2	
PCB4	D7523 or	C-DIODE	1SS352	(1)	223234R2	
PCB4	D7523 or	C-DIODE	MA2J111	(1)	223279R2	
PCB4	D7523 or	C-DIODE	KDS4148U	(1)	223283R2	
PCB4	D7530	ZENER D	UDZS5.1B	1	224550510R2	
PCB4	D7531	C-DIODE	1SS355	1	223269R2	
PCB4	D7531 or	C-DIODE	1SS352	(1)	223234R2	
PCB4	D7531 or	C-DIODE	MA2J111	(1)	223279R2	
PCB4	D7531 or	C-DIODE	KDS4148U	(1)	223283R2	
PCB4	D7532	C-DIODE	1SS355	1	223269R2	
PCB4	D7532 or	C-DIODE	1SS352	(1)	223234R2	
PCB4	D7532 or	C-DIODE	MA2J111	(1)	223279R2	
PCB4	D7532 or	C-DIODE	KDS4148U	(1)	223283R2	
PCB4	D7560	C-DIODE	1SS355	1	223269R2	
PCB4	D7560 or	C-DIODE	1SS352	(1)	223234R2	
PCB4	D7560 or	C-DIODE	MA2J111	(1)	223279R2	
PCB4	D7560 or	C-DIODE	KDS4148U	(1)	223283R2	
PCB4	D7561	C-DIODE	1SS355	1	223269R2	
PCB4	D7561 or	C-DIODE	1SS352	(1)	223234R2	
PCB4	D7561 or	C-DIODE	MA2J111	(1)	223279R2	
PCB4	D7561 or	C-DIODE	KDS4148U	(1)	223283R2	
PCB4	D7570	SPCF D	TSAL5300	1	225488	N
PCB4	D7580	C-DIODE	1SS355	1	223269R2	
PCB4	D7580 or	C-DIODE	1SS352	(1)	223234R2	
PCB4	D7580 or	C-DIODE	MA2J111	(1)	223279R2	
PCB4	D7580 or	C-DIODE	KDS4148U	(1)	223283R2	
PCB4	D7581	C-DIODE	1SS355	1	223269R2	
PCB4	D7581 or	C-DIODE	1SS352	(1)	223234R2	
PCB4	D7581 or	C-DIODE	MA2J111	(1)	223279R2	
PCB4	D7581 or	C-DIODE	KDS4148U	(1)	223283R2	
PCB4	D7582	C-DIODE	1SS355	1	223269R2	
PCB4	D7582 or	C-DIODE	1SS352	(1)	223234R2	
PCB4	D7582 or	C-DIODE	MA2J111	(1)	223279R2	
PCB4	D7582 or	C-DIODE	KDS4148U	(1)	223283R2	
PCB4	D7583	C-DIODE	1SS355	1	223269R2	

PCB4	D7583 or	C-DIODE	1SS352	(1)	223234R2
PCB4	D7583 or	C-DIODE	MA2J111	(1)	223279R2
PCB4	D7583 or	C-DIODE	KDS4148U	(1)	223283R2
PCB4	D7585	LED	SCB3318E-D2	1	225487
PCB4	D7590	LED	SCB3318E-D2	1	225487
PCB4	D7592	LED	SLR-342MGTE7P	1	225455T
PCB4	D7593	LED	SLR-342MGTE7P	1	225455T
PCB4	D7595	LED	SLI-343URC-TE7	1	225449T
PCB4	D9306	ZENER D	UDZS30B	1	224553000R2
PCB4	D9310	ZENER D	UDZS16B	1	224551600R2
PCB4	D9312	DIODE	RL1N4003	1	22380260T
PCB4	D9313	DIODE	RL1N4003	1	22380260T
PCB4	D9314	DIODE	RL1N4003	1	22380260T
PCB4	D9315	DIODE	RL1N4003	1	22380260T
PCB4	D9316	DIODE	RL1N4003	1	22380260T
PCB4	Q7500	FL TUBE	HNA-16SL05T	1	212271A
PCB4	Q7500A	HOLDER	(FL)	1	27191303
PCB4	Q7501	IC	M66005-0001AHP	1	22242208R3
PCB4	Q7502	IC	M66005-0001AHP	1	22242208R3
PCB4	Q7503	TR	2SC2712-GR	1	2213145R2
PCB4	Q7504	TR	2SC2712-GR	1	2213145R2
PCB4	Q7530	IC	NJM4580M-D	1	22241448R2
PCB4	Q7532	TR	RN1441	1	2215410R2
PCB4	Q7533	TR	RN2403	1	2214540R2
PCB4	Q7533 or	TR	KRA103S	(1)	2216230R2
PCB4	Q7534	IC	NJM4580M-D	1	22241448R2
PCB4	Q7540	TR	DTA123JKA	1	2214090R2
PCB4	Q7592	TR	DTC123JKA	1	2216690R2
PCB4	Q7593	TR	DTC123JKA	1	2216690R2
PCB4	Q7595	TR	DTC123JKA	1	2216690R2
PCB4	Q7597	TR	DTC123JKA	1	2216690R2
PCB4	Q7598	TR	DTC123JKA	1	2216690R2
PCB4	Q9301	TR	2SC2235-Y(TPE6_F)	1	2211654T
PCB4	**[TRANS COIL]**				
PCB4	L7520	CHOKE COIL	LBC2518T2R2M	1	231364M022R2
PCB4	L7530	CHOKE COIL	LBC2518T2R2M	1	231364M022R2
PCB4	L7580	CHOKE COIL	LBC2518T2R2M	1	231364M022R2
PCB4	L7581	CHOKE COIL	LBC2518T2R2M	1	231364M022R2
PCB4	L7582	CHOKE COIL	LBC2518T2R2M	1	231364M022R2
PCB4	**[CAPACITOR]**				

PCB4	C7501	C-CERA C	CK725B1H-223K1	1	332102235R1	
PCB4	C7502	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB4	C7503	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB4	C7504	C-CERA C	CK725B1H-473K1	1	332104735R1	
PCB4	C7505	C-CERA C	CK725B1H-473K1	1	332104735R1	
PCB4	C7506	ELECT C	CE04W50V-33M	1	355783309T	
PCB4	C7511	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB4	C7512	C-CERA C	CC725CH1H-180J1	1	342101804R1	
PCB4	C7513	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB4	C7514	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB4	C7518	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB4	C7519	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB4	C7520	C-CERA C	CK725B1H-223K1	1	332102235R1	
PCB4	C7521	UTSP C	CE04W10V-100M(UTSP)	1	397531017T	
PCB4	C7522	C-CERA C	CC725CH1H-221J1	1	342102214R1	
PCB4	C7523	C-CERA C	CC725CH1H-221J1	1	342102214R1	
PCB4	C7524	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB4	C7530	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB4	C7531	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB4	C7533	ELECT C	CE04W35V-47M	1	355764709T	
PCB4	C7534	ELECT C	CE04W16V-47M	1	355744709T	
PCB4	C7535	ELECT C	CE04W35V-10M(S)	1	353761009T	
PCB4	C7536	C-CERA C	CC725CH1H-101J1	1	342101014R1	
PCB4	C7537	C-CERA C	CC725CH1H-330J1	1	342103304R1	
PCB4	C7538	ELECT C	CE04W35V-10M(S)	1	353761009T	
PCB4	C7539	ELECT C	CE04W35V-10M(S)	1	353761009T	
PCB4	C7540	ELECT C	CE04W35V-10M(S)	1	353761009T	
PCB4	C7543	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB4	C7560	ELECT C	CE04W6.3V-220M	1	355722219T	
PCB4	C7561	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB4	C7562	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB4	C7580	MKT C	B32529C0102J289	1	376491024T	
PCB4	C7581	MKT C	B32529C0102J289	1	376491024T	
PCB4	C7582	MKT C	B32529C0102J289	1	376491024T	
PCB4	C7583	MKT C	B32529C0102J289	1	376491024T	
PCB4	C7590	C-CERA C	CK725B1H-103K1	1	332101035R1	
PCB4	C7591	C-CERA C	CK725B1H-103K1	1	332101035R1	
PCB4	C7900	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB4	C9304	VR C	CE04W63V-220M(VR)	1	394672217T	
PCB4	C9305	VR C	CE04W63V-47M(VR)	1	394674707T	

PCB4	C9306	TF C	ECQ-V50V-223J	1	374722234T	
PCB4	**[RESISTOR]**					
PCB4	R7500	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB4	R7501	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB4	R7502	C-CARBON R	RN72K1J-273JE	1	435032734R1	
PCB4	R7503	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB4	R7504	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB4	R7505	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB4	R7506	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB4	R7507	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB4	R7508	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB4	R7509	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB4	R7510	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB4	R7520	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB4	R7521	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB4	R7522	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB4	R7523	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB4	R7526	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PCB4	R7527	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PCB4	R7528	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB4	R7529	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB4	R7530	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB4	R7531	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB4	R7532	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB4	R7533	C-CARBON R	RN72K1J-182JE	1	435031824R1	
PCB4	R7534	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB4	R7535	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB4	R7536	C-CARBON R	RN72K1J-333JE	1	435033334R1	
PCB4	R7537	C-CARBON R	RN72K1J-333JE	1	435033334R1	
PCB4	R7538	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB4	R7539	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB4	R7540	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB4	R7541	C-CARBON R	RN72K1J-180JE	1	435031804R1	
PCB4	R7560	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB4	R7561	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB4	R7562	C-CARBON R	RN72K1J-105JE	1	435031054R1	
PCB4	R7580	METAL O R	RS1WBJ-33	1	443623304T	
PCB4	R7581	METAL O R	RS1WBJ-33	1	443623304T	
PCB4	R7590	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB4	R7591	C-CARBON R	RN72K1J-103JE	1	435031034R1	

PCB4	R7592	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB4	R7593	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB4	R7594	C-CARBON R	RN72K1J-121JE	1	435031214R1	
PCB4	R7596	C-CARBON R	RN72K1J-181JE	1	435031814R1	
PCB4	R7597	C-CARBON R	RN72K1J-181JE	1	435031814R1	
PCB4	R7599	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB4	R7600	C-CARBON R	RN72K1J-121JE	1	435031214R1	
PCB4	R7611	C-CARBON R	RN72K1J-271JE	1	435032714R1	
PCB4	R7612	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB4	R7613	C-CARBON R	RN72K1J-471JE	1	435034714R1	
PCB4	R7614	C-CARBON R	RN72K1J-561JE	1	435035614R1	
PCB4	R7615	C-CARBON R	RN72K1J-821JE	1	435038214R1	
PCB4	R7616	C-CARBON R	RN72K1J-122JE	1	435031224R1	
PCB4	R7617	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB4	R7618	C-CARBON R	RN72K1J-392JE	1	435033924R1	
PCB4	R7619	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PCB4	R7621	C-CARBON R	RN72K1J-271JE	1	435032714R1	
PCB4	R7622	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB4	R7623	C-CARBON R	RN72K1J-471JE	1	435034714R1	
PCB4	R7624	C-CARBON R	RN72K1J-561JE	1	435035614R1	
PCB4	R7625	C-CARBON R	RN72K1J-821JE	1	435038214R1	
PCB4	R7626	C-CARBON R	RN72K1J-122JE	1	435031224R1	
PCB4	R7627	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB4	R7628	C-CARBON R	RN72K1J-392JE	1	435033924R1	
PCB4	R7629	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PCB4	R7631	C-CARBON R	RN72K1J-271JE	1	435032714R1	
PCB4	R7632	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB4	R7633	C-CARBON R	RN72K1J-471JE	1	435034714R1	
PCB4	R7634	C-CARBON R	RN72K1J-561JE	1	435035614R1	
PCB4	R7635	C-CARBON R	RN72K1J-821JE	1	435038214R1	
PCB4	R7636	C-CARBON R	RN72K1J-122JE	1	435031224R1	
PCB4	R7637	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB4	R7638	C-CARBON R	RN72K1J-392JE	1	435033924R1	
PCB4	R7639	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PCB4	R7641	C-CARBON R	RN72K1J-271JE	1	435032714R1	
PCB4	R7642	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB4	R7643	C-CARBON R	RN72K1J-471JE	1	435034714R1	
PCB4	R7644	C-CARBON R	RN72K1J-561JE	1	435035614R1	
PCB4	R7645	C-CARBON R	RN72K1J-821JE	1	435038214R1	
PCB4	R7646	C-CARBON R	RN72K1J-122JE	1	435031224R1	

PCB4	R7647	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB4	R7648	C-CARBON R	RN72K1J-392JE	1	435033924R1	
PCB4	R7649	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PCB4	R7802	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB4	R7939	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB4	R7954	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB4	R9304	METAL O R	RS1/2WBJ-10	1	443521004T	
PCB4	R9305	C-CARBON R	RN72K1J-562JE	1	435035624R1	
PCB4	R9307	C-CARBON R	RN72K1J-333JE	1	435033334R1	
PCB4	R9308	METAL R	RNU1/2WCJ-1	1	453530104T	
PCB4	R9310	METAL O R	RS1/2WBJ-10	1	443521004T	
PCB4	**[SW TRM]**					
PCB4	E7580	TRM	NTM-1P233(M1969)	1	25060302	
PCB4	E7601	TRM-423(SCREW)	NEJITANSI ST3	1	25060495	
PCB4	JL4103B	SOCKET	NSCT-5P97	1	25050269	
PCB4	JL7560A	WIRE HOL	NSCT-3P874	1	25051087	
PCB4	JL7560B	WIRE HOL	NSCT-3P874	1	25051087	
PCB4	JL9303A	WIRE HOL	NSCT-5P876	1	25051089	
PCB4	JL9303B	WIRE TRAP	NPLG-5P588	1	25055626	
PCB4	P7501B	PLUG	A2545WR2-2x20P(IDE40SIDE)	1	25056643	
PCB4	P7522	PIN JACK	NPJ-3PDB693	1	25045925	
PCB4	P7530	ST JACK	MSJ-035-05C B AG SR type	1	25045879	
PCB4	P7556	PWB	BCDIS-0135	1	25140135C	N
PCB4	P7557	PWB	BCSW-0136	{ 1}	25140136	
PCB4	P7558	PWB	BCETC-0137	{ 1}	25140137	
PCB4	P7559	PWB	BCETC-0138	{ 1}	25140138	
PCB4	P7560	PWB	BCETC-0139	{ 1}	25140139	
PCB4	P7561	PWB	BCPS-0140	{ 1}	25140140	
PCB4	P7563	PWB	BCETC-0145	{ 1}	25140145	
PCB4	P7564	PWB	BCETC-0130	{ 1}	25140130	N
PCB4	P7565	PWB	BCETC-0142	{ 1}	25140142	
PCB4	P7567	PWB	BCETC-0128	{ 1}	25140128	
PCB4	P7568	PWB	BCETC-0129	{ 1}	25140129	N
PCB4	P7580	ST JACK	MSJ-064-05A SR	1	25045783	
PCB4	P7590A	SOCKET AS	NSAS-18P1798	1	200AA391810UL	
PCB4	P7591A	SOCKET AS	NSAS-7P1799	1	200AA391415UL	
PCB4	P9301A	PLUG	NPLG-6P120	1	25055136	
PCB4	S7590	R ENCODE	EC12E2425WITH WASHER	1	25065655W	
PCB4	S7611	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7612	PUSH SW	NPS-111-S681	1	25035718T	

PCB4	S7613	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7614	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7615	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7616	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7618	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7619	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7620	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7621	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7622	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7623	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7624	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7625	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7626	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7627	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7628	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7629	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7630	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7632	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7633	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7634	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7635	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7636	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7637	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7638	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7639	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7640	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7641	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7642	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7643	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7644	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7645	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7646	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7647	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7648	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7649	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	S7650	PUSH SW	NPS-111-S681	1	25035718T	
PCB4	**[CHASSIS SCREW]**					
PCB4	D7570A	HOLDER	(LED)LH-5-5	1	27191312	

PCB5 **U005** HDMI CIRCUIT PC BOARD (BAHDM-0132-1D)

	CIRCUIT NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
PCB5	**[SEMI CONDUCTOR]**					
PCB5	D3101	C-DIODE	KDS4148U	1	223283R2	
PCB5	D3101 or	C-DIODE	1SS352	(1)	223234R2	
PCB5	D3401	C-DIODE	KDS4148U	1	223283R2	
PCB5	D3401 or	C-DIODE	1SS352	(1)	223234R2	
PCB5	D8041	DIODE	RB070M-30	1	22380361R2	
PCB5	D8043	DIODE	RB070M-30	1	22380361R2	
PCB5	D8301	C-DIODE	1SS226(TE85L_F)	1	223266R2	
PCB5	D8302	C-DIODE	KDS4148U	1	223283R2	
PCB5	D8302 or	C-DIODE	1SS352	(1)	223234R2	
PCB5	D8652	C-DIODE	1SR154-400	1	22380284R2	
PCB5	D8653	C-DIODE	KDS4148U	1	223283R2	
PCB5	D8653 or	C-DIODE	1SS352	(1)	223234R2	
PCB5	D8701	C-DIODE	KDS4148U	1	223283R2	
PCB5	D8701 or	C-DIODE	1SS352	(1)	223234R2	
PCB5	D8951	DIODE	RSX501LA-20	1	22380364R2	
PCB5	D8952	DIODE	RSX501LA-20	1	22380364R2	
PCB5	D8953	DIODE	RSX501LA-20	1	22380364R2	
PCB5	D8954	DIODE	RSX501LA-20	1	22380364R2	
PCB5	D8958	C-DIODE	1SS352	1	223234R2	
PCB5	D8958 or	C-DIODE	MA2J111	(1)	223279R2	
PCB5	D8958 or	C-DIODE	KDS4148U	(1)	223283R2	
PCB5	Q205	IC	TC74VHC157FT	1	22274157ER2TO	
PCB5	Q3001	IC	D830K011AZKB300ZrevC	1	22242617R3	N
PCB5	Q3002	IC (DSP)	NAND256W3A2BN6E (0309)	1	222W0092R303096	
PCB5	Q3003	IC	IS42S16160C-7TL	1	22242592R3	
PCB5	Q3003 or	IC	K4S561632J-UC75	(1)	22242524AR3	
PCB5	Q3004	IC	IS42S16160C-7TL	1	22242592R3	
PCB5	Q3004 or	IC	K4S561632J-UC75	(1)	22242524AR3	
PCB5	Q3005	IC	TC7W32FU	1	22241162R2	
PCB5	Q3006	IC	S-80127CNMC-JKM-T2	1	22241642R2	
PCB5	Q3103	IC	BH18LB1WG-TR	1	22242562R2	
PCB5	Q3106	IC	BH33FB1WG-TR	1	22242585R2	
PCB5	Q3107	IC	BA33BC0FP	1	22278033DR2RH	
PCB5	Q3107 or	IC	TA48033BF(TE16L_NQ)	(1)	22278033DBR2TO	
PCB5	Q3107 or	IC	TA48033AF(TE16L_NQ)	(1)	22278033DR2TO	
PCB5	Q3108	IC	KSZ8041NL	1	22242591R2	
PCB5	Q3109	IC	BD7820	1	22242300R2	

PCB5	Q3202	IC	TC74VHC157FT	1	22274157ER2TO	
PCB5	Q3204	IC	TC7SZU04FU	1	22242512R2TO	
PCB5	Q3205	IC	TC7SZU04FU	1	22242512R2TO	
PCB5	Q3206	IC	NE5532APSR	1	22242283R2	
PCB5	Q3207	IC	NE5532APSR	1	22242283R2	
PCB5	Q3210	IC	TC7WH241FU(TE12L_F)	1	22242076R2TO	
PCB5	Q3401	IC	ES29LV160ET-70TG (0324)	1	222W0069R303247	
PCB5	Q3401 or	IC	S29AL016D70TFI010 (0324)	(1)	222W0063R303247	
PCB5	Q3401 or	IC	S29AL016J70TFI010 (0324)	(1)	222W0100R303247	
PCB5	Q3401 or	IC	MX29LV160DTTI-7 (0324)	(1)	222W0104R303247	
PCB5	Q3402	IC	D788E001BRFP266Z	1	22242502R3	
PCB5	Q3403	IC	K4S641632K-UC60	1	22242462R2	
PCB5	Q3403 or	IC	K4S641632N-LC60	(1)	22242603R2	
PCB5	Q3403 or	IC	EM638165TS-7G	(1)	22242607R2	
PCB5	Q3404	IC	BD7820	1	22242300R2	
PCB5	Q3405	IC	TC7WU04FU(TE12L_F)	1	22240935R2	
PCB5	Q3406	IC	TA48033AF(TE16L_NQ)	1	22278033DR2TO	
PCB5	Q3406 or	IC	TA48033BF(TE16L_NQ)	(1)	22278033DBR2TO	
PCB5	Q3604	IC	PCM1754DBQR	1	22242598R2	
PCB5	Q8000	IC	HY5DU561622ETP-4-C	1	22242450R3	
PCB5	Q8000 or	IC	HY5DU561622FTP-4-C	(1)	22242577R3	
PCB5	Q8001	IC	HY5DU561622ETP-4-C	1	22242450R3	
PCB5	Q8001 or	IC	HY5DU561622FTP-4-C	(1)	22242577R3	
PCB5	Q8005	IC (VSP)	MX29LV320CTTC-70G(0311)	1	222W0052R30311A	
PCB5	Q8005 or	IC (VSP)	MX29LV320DTTI-70G(0311)	(1)	222W0109R30311A	N
PCB5	Q8041	IC	TA48018BF(TE16L_NQ)	1	22278018DBR2TO	
PCB5	Q8161	IC	TA48018BF(TE16L_NQ)	1	22278018DBR2TO	
PCB5	Q8162	IC	SII9185ACTU	1	22242471R3	
PCB5	Q8200	IC	FLI30336	1	22242469R3	
PCB5	Q8201	IC	BR24S32FJ-WE2	1	22242569R2	
PCB5	Q8201 or	IC	24LC32A-I/SN	(1)	22242521R2	
PCB5	Q8305	IC	S-812C50BUC-C5ET2G	1	22242407R2	
PCB5	Q8306	IC	NC7SZ08P5X_F042	1	22242482R2	
PCB5	Q8306 or	IC	TC7SZ08FU(TE85L_F)	(1)	22242071R2TO	
PCB5	Q8309	TR ARRAY	UM6K1N	1	226066R2	
PCB5	Q8362	IC	SII9185ACTU	1	22242471R3	
PCB5	Q8401	IC	SII9134CTU	1	22242394R3	
PCB5	Q8404	IC	BH18LB1WG-TR	1	22242562R2	
PCB5	Q8405	IC	SN74CB3Q3305PWR	1	22242258R2	
PCB5	Q8501	IC	SII9233ACTU	1	22242582R3	

PCB5	Q8595	IC	TA48018BF(TE16L_NQ)	1	22278018DBR2TO	
PCB5	Q8652	IC	BH33FB1WG-TR	1	22242585R2	
PCB5	Q8654	IC	BD7820	1	22242300R2	
PCB5	Q8701	IC (HDMI/ VIDEO)	MPD70F3739GC-UEU-AX(0299)	1	222W0102R302995	N
PCB5	Q8813	IC	TC74VCX162827	1	22242395R2	
PCB5	Q8814	IC	TC74VCX162827	1	22242395R2	
PCB5	Q8817	IC	TC74VCX162827	1	22242395R2	
PCB5	Q8818	IC	TC74VCX162827	1	22242395R2	
PCB5	Q8951	IC	MP1593DN	1	22242601R2	N
PCB5	Q8952	IC	MP1593DN	1	22242601R2	N
PCB5	Q8953	IC	MP1593DN	1	22242601R2	N
PCB5	Q8954	IC	MP1593DN	1	22242601R2	N
PCB5	Q8955	TR	DTC144EE	1	2216390R2	
PCB5	Q8955 or	TR	KRC404E	(1)	2216450R2	
PCB5	Q8956	TR	DTC144EE	1	2216390R2	
PCB5	Q8956 or	TR	KRC404E	(1)	2216450R2	
PCB5	Q8957	TR	DTC144EE	1	2216390R2	
PCB5	Q8957 or	TR	KRC404E	(1)	2216450R2	
PCB5	Q8958	TR	DTC144EE	1	2216390R2	
PCB5	Q8958 or	TR	KRC404E	(1)	2216450R2	
PCB5	Q8963	TR	DTC144EE	1	2216390R2	
PCB5	Q8963 or	TR	KRC404E	(1)	2216450R2	
PCB5	**[TRANS COIL]**					
PCB5	L251	CORE	BLM18PG181SN1D	1	2350005R1	
PCB5	L261	EMIFIL	BK1608LM182-T	1	230958R1	
PCB5	L3001	CORE	BLM18PG121SN1D	1	2350006R1	
PCB5	L3002	CORE	BLM18PG121SN1D	1	2350006R1	
PCB5	L3003	CORE	BLM18PG121SN1D	1	2350006R1	
PCB5	L3004	CORE	BLM18PG121SN1D	1	2350006R1	
PCB5	L3005	CORE	BLM18PG121SN1D	1	2350006R1	
PCB5	L3103	CORE	BLM18PG121SN1D	1	2350006R1	
PCB5	L3104	CORE	BLM18PG121SN1D	1	2350006R1	
PCB5	L3105	CORE	BLM18PG121SN1D	1	2350006R1	
PCB5	L3106	CORE	BLM18PG121SN1D	1	2350006R1	
PCB5	L3107	CORE	BLM18PG121SN1D	1	2350006R1	
PCB5	L3108	CORE	BLM18PG121SN1D	1	2350006R1	
PCB5	L3109	CORE	BLM18PG121SN1D	1	2350006R1	
PCB5	L3110	CORE	BLM18PG121SN1D	1	2350006R1	
PCB5	L3202	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	L3203	CORE	MMZ1608Y601BT	1	2350004R1	

PCB5	L3204	CORE	MMZ1608Y601BT	1	2350004R1	
PCB5	L3205	CORE	BLM18PG121SN1D	1	2350006R1	
PCB5	L3206	CORE	BLM18PG121SN1D	1	2350006R1	
PCB5	L3207	CORE	MMZ1608Y601BT	1	2350004R1	
PCB5	L3208	CORE	MMZ1608Y601BT	1	2350004R1	
PCB5	L3209	CORE	MMZ1608Y601BT	1	2350004R1	
PCB5	L3401	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	L3402	CORE	BLM18PG121SN1D	1	2350006R1	
PCB5	L3403	CORE	MMZ1608Y601BT	1	2350004R1	
PCB5	L3405	CORE	BLM18PG121SN1D	1	2350006R1	
PCB5	L3406	CORE	BLM18PG121SN1D	1	2350006R1	
PCB5	L3407	CORE	BLM18PG121SN1D	1	2350006R1	
PCB5	L3408	CORE	BLM18PG121SN1D	1	2350006R1	
PCB5	L3409	CORE	BLM18PG121SN1D	1	2350006R1	
PCB5	L3410	CORE	MMZ1608Y601BT	1	2350004R1	
PCB5	L3411	CORE	MMZ1608Y601BT	1	2350004R1	
PCB5	L3509	CHOKE COIL	LBC2518T470M	1	231364M470R2	
PCB5	L8021	CHOKE COIL	BLM21PG221SN1	1	230949R2	
PCB5	L8022	CHOKE COIL	BLM21PG221SN1	1	230949R2	
PCB5	L8023	CHOKE COIL	BLM21PG221SN1	1	230949R2	
PCB5	L8024	CHOKE COIL	BLM21PG221SN1	1	230949R2	
PCB5	L8025	CHOKE COIL	BLM21PG221SN1	1	230949R2	
PCB5	L8026	CHOKE COIL	BLM21PG221SN1	1	230949R2	
PCB5	L8027	CHOKE COIL	BLM21PG221SN1	1	230949R2	
PCB5	L8041	CHOKE COIL	BLM21PG221SN1	1	230949R2	
PCB5	L8042	CHOKE COIL	BLM21PG221SN1	1	230949R2	
PCB5	L8043	CHOKE COIL	BLM21PG221SN1	1	230949R2	
PCB5	L8161	CORE	BLM18PG181SN1D	1	2350005R1	
PCB5	L8162	CORE	BLM18PG181SN1D	1	2350005R1	
PCB5	L8163	CORE	BLM18PG181SN1D	1	2350005R1	
PCB5	L8361	CORE	BLM18PG181SN1D	1	2350005R1	
PCB5	L8362	CORE	BLM18PG181SN1D	1	2350005R1	
PCB5	L8363	CORE	BLM18PG181SN1D	1	2350005R1	
PCB5	L8401	CORE	BLM18PG181SN1D	1	2350005R1	
PCB5	L8402	CORE	BLM18PG181SN1D	1	2350005R1	
PCB5	L8403	CORE	BLM18PG181SN1D	1	2350005R1	
PCB5	L8404	CORE	BLM18PG181SN1D	1	2350005R1	
PCB5	L8405	CORE	BLM18PG181SN1D	1	2350005R1	
PCB5	L8406	C-R NET	MNR12E0APJ000	1	43464900002R2	
PCB5	L8407	C-R NET	MNR12E0APJ000	1	43464900002R2	

PCB5	L8408	CORE	BLM18PG181SN1D	1	2350005R1	
PCB5	L8409	C-R NET	MNR12E0APJ000	1	43464900002R2	
PCB5	L8410	C-R NET	MNR12E0APJ000	1	43464900002R2	
PCB5	L8601	CORE	BLM18PG181SN1D	1	2350005R1	
PCB5	L8602	CORE	BLM18PG181SN1D	1	2350005R1	
PCB5	L8603	CORE	BLM18PG181SN1D	1	2350005R1	
PCB5	L8604	CORE	BLM18PG181SN1D	1	2350005R1	
PCB5	L8605	CORE	BLM18PG181SN1D	1	2350005R1	
PCB5	L8606	CORE	BLM18PG181SN1D	1	2350005R1	
PCB5	L8608	EMIFIL	BK1608LM182-T	1	230958R1	
PCB5	L8641	CORE	BLM18PG181SN1D	1	2350005R1	
PCB5	L8701	CORE	BLM18PG181SN1D	1	2350005R1	
PCB5	L8951	CHOKE COIL	0182-7E08Q-100M-RA	1	231396M100R2	
PCB5	L8952	CHOKE COIL	0182-7E08Q-6R8N-RA	1	231395P068R2	
PCB5	L8953	CHOKE COIL	0182-7E08Q-6R8N-RA	1	231395P068R2	
PCB5	L8954	CHOKE COIL	0182-7E08Q-100M-RA	1	231396M100R2	
PCB5	L8955	CHOKE COIL	BLM21PG221SN1	1	230949R2	
PCB5	L8956	CHOKE COIL	BLM21PG221SN1	1	230949R2	
PCB5	L8957	CHOKE COIL	BLM21PG221SN1	1	230949R2	
PCB5	L8958	CHOKE COIL	BLM21PG221SN1	1	230949R2	
PCB5	L8959	CHOKE COIL	BLM21PG221SN1	1	230949R2	
PCB5	L8960	CHOKE COIL	BLM21PG221SN1	1	230949R2	
PCB5	L8961	CHOKE COIL	BLM21PG221SN1	1	230949R2	
PCB5	L8962	CHOKE COIL	BLM21PG221SN1	1	230949R2	
PCB5	L8963	CHOKE COIL	BLM21PG221SN1	1	230949R2	
PCB5	L8964	CHOKE COIL	BLM21PG221SN1	1	230949R2	
PCB5	L8965	CHOKE COIL	BLM21PG221SN1	1	230949R2	
PCB5	L8966	CHOKE COIL	BLM21PG221SN1	1	230949R2	
PCB5	X3001	CRYSTAL	HC-49SMD24.000MHz	1	3010479R2	
PCB5	X3001 or	CRYSTAL	HC-49USSMD24.00MHz	(1)	3010471R2	
PCB5	X3201	CRYSTAL	HC-49/U03C 12.288MHz	1	3010323R2	
PCB5	X3202	CRYSTAL	HC-49SMD11.2896MHz	1	3010480R2	
PCB5	X3202 or	CRYSTAL	HC-49USSMD11.2896MHz	(1)	3010472R2	
PCB5	X3401	CRYSTAL	HC-49USSMD17.734MHz	1	3010442R2	
PCB5	X8200	CRYSTAL	HC-49USSMD19.6608M	1	3010458R2	
PCB5	X8501	CRYSTAL	DSX530GAK27.0000MHZ	1	3010474R2	N
PCB5	X8701	CERA LOCK	CSTCR5M00G53-B0	1	3010356R2	
PCB5	**[CAPACITOR]**					
PCB5	C251	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C252	C-CERA C	CK725F1A-105Z1	1	332181050R1	

PCB5	C3001	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3002	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3003	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C3004	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C3005	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3006	C-CERA C	CC725CH1H-102J1	1	342101024R1	
PCB5	C3007	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3008	C-CERA C	CC725CH1H-102J1	1	342101024R1	
PCB5	C3009	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3010	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3011	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3012	C-CERA C	CC725CH1H-102J1	1	342101024R1	
PCB5	C3013	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3014	C-CERA C	CC725CH1H-102J1	1	342101024R1	
PCB5	C3015	C-CERA C	CC725CH1H-102J1	1	342101024R1	
PCB5	C3016	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3017	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3018	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3019	C-CERA C	CC725CH1H-102J1	1	342101024R1	
PCB5	C3020	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3021	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3022	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3023	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C3024	C-CERA C	CC725CH1H-102J1	1	342101024R1	
PCB5	C3025	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3026	C-CERA C	CK725B1C-104K1	1	332121045R1	
PCB5	C3027	C-CERA C	CC725CH1H-102J1	1	342101024R1	
PCB5	C3028	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3029	C-CERA C	CC725CH1H-102J1	1	342101024R1	
PCB5	C3030	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3031	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3032	C-CERA C	CC725CH1H-102J1	1	342101024R1	
PCB5	C3033	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3034	C-CERA C	CC725CH1H-120J1	1	342101204R1	
PCB5	C3035	C-CERA C	CC725CH1H-102J1	1	342101024R1	
PCB5	C3036	C-CERA C	CC725CH1H-120J1	1	342101204R1	
PCB5	C3037	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3038	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3039	C-CERA C	CK725B1H-103K1	1	332101035R1	
PCB5	C3040	C-CERA C	CK725F1A-105Z1	1	332181050R1	

PCB5	C3041	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C3042	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3043	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3105	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3106	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C3107	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3108	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3109	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C3110	C-CERA C	CK725B1A-224K1	1	332132245R1	
PCB5	C3112	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C3113	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3114	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3115	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C3116	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C3117	C-CERA C	CC725CH1H-102J1	1	342101024R1	
PCB5	C3118	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3119	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3120	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C3121	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3122	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3123	CHIP ELECT C	CEWX10V-220M	1	398132217R2	
PCB5	C3124	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3125	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C3126	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C3127	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3128	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3129	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3130	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C3131	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3132	C-CERA C	CC725CH1H-101J1	1	342101014R1	
PCB5	C3133	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3134	C-CERA C	CK725B1C-104K1	1	332121045R1	
PCB5	C3135	C-CERA C	CK725B1C-104K1	1	332121045R1	
PCB5	C3136	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3137	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3138	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3139	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3140	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3143	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3144	C-CERA C	CK725F1A-105Z1	1	332181050R1	

PCB5	C3145	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C3146	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3147	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C3148	C-CERA C	CK725B1H-223K1	1	332102235R1	
PCB5	C3149	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3150	CHIP ELECT C	CEWX4V-22M	1	3981G2207R2	
PCB5	C3151	C-CERA C	CK725B1H-103K1	1	332101035R1	
PCB5	C3152	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C3153	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3154	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C3155	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3156	C-CERA C	CC725CH1H-102J1	1	342101024R1	
PCB5	C3157	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3158	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3159	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3202	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3204	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C3205	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3206	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3207	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C3208	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3209	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3210	CHIP ELECT C	CEWX16V-100M	1	398141017R2	
PCB5	C3211	C-CERA C	CK725B1H-222K1	1	332102225R1	
PCB5	C3213	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3214	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C3215	CHIP ELECT C	CEWX16V-10M	1	398141007R2	
PCB5	C3216	C-CERA C	CC725CH1H-120J1	1	342101204R1	
PCB5	C3219	C-CERA C	CC725CH1H-120J1	1	342101204R1	
PCB5	C3220	C-CERA C	CC725CH1H-120J1	1	342101204R1	
PCB5	C3223	C-CERA C	CC725CH1H-120J1	1	342101204R1	
PCB5	C3224	C-CERA C	CK725B1H-152K1	1	332101525R1	
PCB5	C3225	C-CERA C	CK725B1H-152K1	1	332101525R1	
PCB5	C3226	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3227	CHIP ELECT C	CEWX16V-10M	1	398141007R2	
PCB5	C3228	C-CERA C	CK725B1H-222K1	1	332102225R1	
PCB5	C3229	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3230	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C3231	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3233	CHIP ELECT C	CEWX16V-100M	1	398141017R2	

PCB5	C3402	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3403	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3404	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3405	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3406	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3407	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3408	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3409	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3410	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3412	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3413	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3414	C-CERA C	CC725CH1H-102J1	1	342101024R1	
PCB5	C3415	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3416	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3417	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3418	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3419	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3420	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C3421	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3422	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3423	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3424	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3425	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3426	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3427	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3428	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3429	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3430	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3431	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3432	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3433	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3434	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3435	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3436	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3437	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3438	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3439	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3440	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3441	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3442	C-CERA C	CK725B0J-106K	1	332091065R2	

PCB5	C3443	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3444	C-CERA C	CC725CH1H-102J1	1	342101024R1	
PCB5	C3445	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3446	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C3447	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C3448	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C3449	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3450	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3451	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3452	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3453	CHIP ELECT C	CEWX4V-22M	1	3981G2207R2	
PCB5	C3454	C-CERA C	CK725B1H-103K1	1	332101035R1	
PCB5	C3455	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3456	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C3457	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3458	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C3459	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3461	CHIP ELECT C	CEWX4V-220M	1	3981G2217R2	
PCB5	C3462	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C3463	C-CERA C	CC725CH1H-060D1	1	342100602R1	
PCB5	C3464	C-CERA C	CC725CH1H-060D1	1	342100602R1	
PCB5	C8000	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2	
PCB5	C8000 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2	
PCB5	C8001	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8002	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8003	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2	
PCB5	C8003 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2	
PCB5	C8004	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2	
PCB5	C8004 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2	
PCB5	C8005	C-CERA C	CK725B1H-103K1	1	332101035R1	
PCB5	C8006	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8007	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8008	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8009	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8010	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8011	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8012	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8013	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8014	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8015	C-CERA C	CK725F1A-105Z1	1	332181050R1	

PCB5	C8016	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8017	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8018	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8021	CHIP ELECT C	CEWX16V-100M	1	398141017R2	
PCB5	C8022	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8023	CHIP ELECT C	CEWX4V-100M	1	3981G1017R2	
PCB5	C8026	CHIP ELECT C	CEWX4V-220M	1	3981G2217R2	
PCB5	C8030	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2	
PCB5	C8030 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2	
PCB5	C8031	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8032	C-CERA C	CK725B1H-103K1	1	332101035R1	
PCB5	C8033	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8034	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2	
PCB5	C8034 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2	
PCB5	C8041	CHIP ELECT C	CEWX16V-100M	1	398141017R2	
PCB5	C8042	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8043	CHIP ELECT C	CEWX4V-220M	1	3981G2217R2	
PCB5	C8044	CHIP ELECT C	CEWX4V-220M	1	3981G2217R2	
PCB5	C8051	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8052	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8053	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8054	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8055	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8056	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8057	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8058	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8059	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8060	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8061	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8062	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8063	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8064	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8065	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8066	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8077	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8078	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8079	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8080	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8142	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	C8161	C-CERA C	CK725F1A-105Z1	1	332181050R1	

PCB5	C8162	CHIP ELECT C	CEWX4V-100M	1	3981G1017R2	
PCB5	C8163	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8164	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C8165	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8166	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C8167	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8168	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C8169	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8170	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8171	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8172	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8173	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8174	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8175	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8176	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8177	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8178	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8179	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8180	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8181	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8200	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2	
PCB5	C8200 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2	
PCB5	C8201	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2	
PCB5	C8201 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2	
PCB5	C8202	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8203	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8204	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8205	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8206	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8207	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8208	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8209	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8210	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8211	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8212	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8213	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8214	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8215	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8216	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8217	C-CERA C	CK725F1E-104Z1	1	332161040R1	

PCB5	C8218	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8219	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2	
PCB5	C8219 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2	
PCB5	C8220	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2	
PCB5	C8220 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2	
PCB5	C8221	C-CERA C	CK725B1H-103K1	1	332101035R1	
PCB5	C8222	C-CERA C	CK725B1H-103K1	1	332101035R1	
PCB5	C8223	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8224	C-CERA C	CK725B1H-103K1	1	332101035R1	
PCB5	C8225	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8226	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8227	C-CERA C	CK725B1H-103K1	1	332101035R1	
PCB5	C8228	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8229	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8230	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8231	C-CERA C	CK725B1H-103K1	1	332101035R1	
PCB5	C8232	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8233	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8234	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8235	C-CERA C	CK725B1H-103K1	1	332101035R1	
PCB5	C8236	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2	
PCB5	C8236 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2	
PCB5	C8237	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2	
PCB5	C8237 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2	
PCB5	C8238	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8239	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8240	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8241	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8242	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8243	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8244	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8245	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8246	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8247	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8248	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8249	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8250	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8251	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2	
PCB5	C8251 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2	
PCB5	C8252	C-CERA C	CK725F1E-104Z1	1	332161040R1	

PCB5	C8253	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8254	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8255	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2	
PCB5	C8255 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2	
PCB5	C8256	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8257	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8258	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2	
PCB5	C8258 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2	
PCB5	C8259	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8260	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2	
PCB5	C8260 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2	
PCB5	C8261	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8262	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8263	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8264	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2	
PCB5	C8264 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2	
PCB5	C8265	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8266	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8267	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8268	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2	
PCB5	C8268 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2	
PCB5	C8269	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8270	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8271	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8272	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8273	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2	
PCB5	C8273 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2	
PCB5	C8274	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8275	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8276	C-CERA C	CK725B1H-103K1	1	332101035R1	
PCB5	C8284	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8288	C-CERA C	CC725CH1H-330J1	1	342103304R1	
PCB5	C8289	C-CERA C	CC725CH1H-330J1	1	342103304R1	
PCB5	C8290	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8291	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8326	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8327	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8328	CHIP ELECT C	CEWX16V-22M	1	398142207R2	
PCB5	C8329	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8330	C-CERA C	CK725F1A-105Z1	1	332181050R1	

PCB5	C8332	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8341	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	C8342	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	C8348	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	C8349	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	C8362	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8364	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C8365	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8366	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C8367	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8368	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C8369	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8370	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8371	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8372	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8373	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8374	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8375	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8376	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8377	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8378	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8379	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8380	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8381	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8401	CHIP ELECT C	CEWX4V-22M	1	3981G2207R2	
PCB5	C8402	CHIP ELECT C	CEWX4V-22M	1	3981G2207R2	
PCB5	C8403	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8404	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8405	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8406	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8408	CHIP ELECT C	CEWX4V-22M	1	3981G2207R2	
PCB5	C8409	CHIP ELECT C	CEWX4V-22M	1	3981G2207R2	
PCB5	C8410	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8411	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8412	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8413	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8414	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8415	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8416	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8417	C-CERA C	CK725F1A-105Z1	1	332181050R1	

PCB5	C8418	CHIP ELECT C	CEWX4V-22M	1	3981G2207R2	
PCB5	C8419	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8420	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8421	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8422	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8423	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8424	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8425	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8426	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8427	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8428	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8429	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8430	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8431	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8432	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8433	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8434	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8435	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8436	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8437	CHIP ELECT C	CEWX4V-22M	1	3981G2207R2	
PCB5	C8438	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8439	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8440	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C8441	CHIP ELECT C	CEWX4V-220M	1	3981G2217R2	
PCB5	C8501	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8502	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C8503	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8504	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8505	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8506	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C8507	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8508	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8509	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8510	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8511	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8512	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8513	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8514	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8515	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8516	C-CERA C	CK725F1A-105Z1	1	332181050R1	

PCB5	C8517	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8518	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8519	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8521	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8522	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C8525	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C8527	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8529	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C8530	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8531	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8532	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8533	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8534	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8535	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8536	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8537	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8538	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8539	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8540	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8548	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8549	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8550	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8551	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8552	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8553	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8554	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8555	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8556	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8557	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8558	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8559	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8560	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C8563	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8564	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C8565	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C8566	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB5	C8567	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8573	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8574	C-CERA C	CC725CH1H-070D1	1	342100702R1	
PCB5	C8575	C-CERA C	CC725CH1H-070D1	1	342100702R1	

PCB5	C8584	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C8585	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C8605	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	C8608	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8609	C-CERA C	CK725B0J-106K	1	332091065R2	
PCB5	C8611	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	C8612	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	C8621	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	C8622	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	C8631	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	C8632	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	C8675	CHIP ELECT C	CEWX4V-100M	1	3981G1017R2	
PCB5	C8676	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8701	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8702	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8703	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8704	CHIP ELECT C	CEWX50V-4.7M	1	398180477R2	
PCB5	C8705	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8706	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8707	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8708	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8709	CHIP ELECT C	CEWX4V-220M	1	3981G2217R2	
PCB5	C8710	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8838	C-CERA C	CC725CH1H-470J1	1	342104704R1	
PCB5	C8839	C-CERA C	CC725CH1H-470J1	1	342104704R1	
PCB5	C8840	C-CERA C	CC725CH1H-470J1	1	342104704R1	
PCB5	C8855	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8856	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8857	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8858	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8859	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8860	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8861	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8862	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8863	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8864	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8865	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8866	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8867	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8868	C-CERA C	CK725F1E-104Z1	1	332161040R1	

PCB5	C8869	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8870	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB5	C8951	C-CERA C	CK725B1C-104K1	1	332121045R1	
PCB5	C8952	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8953	CD C	UCD1E221MNL1GS	1	396652217R2	
PCB5	C8954	C-CERA C	CK725B1H-103K1	1	332101035R1	
PCB5	C8955	C-CERA C	CK725B1H-332K1	1	332103325R1	
PCB5	C8956	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8957	CHIP ELECT C	CEWT10V-470M	1	395734717R2	
PCB5	C8958	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8961	C-CERA C	CK725B1A-224K1	1	332132245R1	
PCB5	C8962	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8963	CD C	UCD1E221MNL1GS	1	396652217R2	
PCB5	C8964	C-CERA C	CK725B1H-332K1	1	332103325R1	
PCB5	C8965	C-CERA C	CK725B1H-332K1	1	332103325R1	
PCB5	C8966	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8967	CHIP ELECT C	CEWT10V-470M	1	395734717R2	
PCB5	C8968	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8971	C-CERA C	CK725B1C-104K1	1	332121045R1	
PCB5	C8972	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8973	CD C	UCD1E221MNL1GS	1	396652217R2	
PCB5	C8974	C-CERA C	CK725B1H-332K1	1	332103325R1	
PCB5	C8975	C-CERA C	CK725B1H-332K1	1	332103325R1	
PCB5	C8976	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8977	CHIP ELECT C	CEWT10V-470M	1	395734717R2	
PCB5	C8978	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8979	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8981	C-CERA C	CK725B1H-223K1	1	332102235R1	
PCB5	C8982	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8983	CD C	UCD1E221MNL1GS	1	396652217R2	
PCB5	C8984	C-CERA C	CK725B1H-103K1	1	332101035R1	
PCB5	C8985	C-CERA C	CK725B1H-222K1	1	332102225R1	
PCB5	C8986	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	C8987	CHIP ELECT C	CEWT10V-470M	1	395734717R2	
PCB5	C8988	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PCB5	**[RESISTOR]**					
PCB5	R268	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB5	R269	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB5	R270	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB5	R271	C-CARBON R	RN72K1J-470JE	1	435034704R1	

PCB5	R272	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB5	R273	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB5	R274	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R275	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB5	R276	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB5	R277	C-CARBON R	RN72K1J-151JE	1	435031514R1	
PCB5	R278	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB5	R279	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB5	R280	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3009	C-CARBON R	RN72K1J-330JE	1	435033304R1	
PCB5	R3010	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R3011	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R3012	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R3013	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R3014	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R3015	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R3016	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3017	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R3018	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3019	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R3020	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R3021	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3022	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3023	C-R NET	RM7LJ470X04	1	43484747004R2	
PCB5	R3024	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3025	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB5	R3026	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3028	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3029	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB5	R3032	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3033	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3034	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3035	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3036	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3037	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3038	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3039	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3040	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3041	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R3042	C-R NET	RM7LJ330X04	1	43484733004R2	

PCB5	R3043	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R3044	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R3045	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R3047	C-CARBON R	RN72K1J-560JE	1	435035604R1	
PCB5	R3048	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R3049	C-CARBON R	RN72K1J-560JE	1	435035604R1	
PCB5	R3050	C-CARBON R	RN72K1J-560JE	1	435035604R1	
PCB5	R3051	C-CARBON R	RN72K1J-560JE	1	435035604R1	
PCB5	R3052	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3053	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3054	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3055	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB5	R3056	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB5	R3060	C-CARBON R	RN72K1J-680JE	1	435036804R1	
PCB5	R3061	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3062	C-CARBON R	RN72K1J-680JE	1	435036804R1	
PCB5	R3063	C-CARBON R	RN72K1J-680JE	1	435036804R1	
PCB5	R3064	C-CARBON R	RN72K1J-680JE	1	435036804R1	
PCB5	R3065	C-CARBON R	RN72K1J-680JE	1	435036804R1	
PCB5	R3066	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB5	R3101	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3102	C-CARBON R	RN72K1J-153JE	1	435031534R1	
PCB5	R3108	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3110	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3111	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3113	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3115	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3117	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3119	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB5	R3121	C-CARBON R	RN72K1J-153JE	1	435031534R1	
PCB5	R3122	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB5	R3123	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R3124	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB5	R3125	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3126	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3127	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3128	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB5	R3129	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3130	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3131	C-CARBON R	RN72K1J-470JE	1	435034704R1	

PCB5	R3132	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3133	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3134	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3135	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3136	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R3137	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R3139	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB5	R3140	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3143	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3144	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB5	R3145	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3146	C-CARBON R	RN72K1J-390JE	1	435033904R1	
PCB5	R3147	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R3148	C-CARBON R	RN72K1J-390JE	1	435033904R1	
PCB5	R3149	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB5	R3150	C-CARBON R	RN72K1J-330JE	1	435033304R1	
PCB5	R3151	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3152	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3154	C-CARBON R	RN72K1J-390JE	1	435033904R1	
PCB5	R3155	C-CARBON R	RN72K1J-390JE	1	435033904R1	
PCB5	R3156	C-CARBON R	RN72K1J-390JE	1	435033904R1	
PCB5	R3157	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R3158	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R3159	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R3160	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R3162	C-CARBON R	RN72K1J-390JE	1	435033904R1	
PCB5	R3163	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R3164	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB5	R3168	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R3169	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R3170	C-CARBON R	RN72K1J-391FE	1	435033912R1	
PCB5	R3171	C-CARBON R	RN72K1J-222FE	1	435032222R1	
PCB5	R3172	C-CARBON R	RN72K1J-392FE	1	435033922R1	
PCB5	R3173	C-CARBON R	RN72K1J-390JE	1	435033904R1	
PCB5	R3174	C-CARBON R	RN72K1J-390JE	1	435033904R1	
PCB5	R3176	C-CARBON R	MCR03EZPF49R9(49.9_1%)	1	4100037R2	
PCB5	R3177	C-CARBON R	MCR03EZPF49R9(49.9_1%)	1	4100037R2	
PCB5	R3178	C-CARBON R	MCR03EZPF49R9(49.9_1%)	1	4100037R2	
PCB5	R3179	C-CARBON R	MCR03EZPF49R9(49.9_1%)	1	4100037R2	
PCB5	R3180	C-CARBON R	RN72K1J-100FE	1	435031002R1	

PCB5	R3181	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3182	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB5	R3183	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3184	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3185	C-CARBON R	RN72K1J-392FE	1	435033922R1	
PCB5	R3186	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB5	R3187	C-CARBON R	RN72K1J-223FE	1	435032232R1	
PCB5	R3188	C-CARBON R	RN72K1J-224FE	1	435032242R1	
PCB5	R3189	C-CARBON R	RN72K1J-103FE	1	435031032R1	
PCB5	R3190	C-CARBON R	RN72K1J-393FE	1	435033932R1	
PCB5	R3191	C-CARBON R	RN72K1J-105FE	1	435031052R1	
PCB5	R3192	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB5	R3193	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB5	R3194	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB5	R3195	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB5	R3196	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB5	R3199	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB5	R3200	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3201	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3202	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3203	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3204	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3205	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3208	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R3212	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R3215	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB5	R3218	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R3219	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB5	R3221	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3224	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R3225	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R3226	C-R NET	RM7LJ470X04	1	43484747004R2	
PCB5	R3227	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3228	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3229	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3230	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB5	R3231	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3232	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB5	R3233	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB5	R3234	C-CARBON R	RN72K1J-470JE	1	435034704R1	

PCB5	R3236	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3237	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB5	R3238	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3239	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB5	R3240	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3241	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB5	R3242	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB5	R3243	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R3244	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3245	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3246	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3247	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB5	R3248	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R3249	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3250	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3251	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3252	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R3253	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3254	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3255	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3256	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3257	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3259	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R3260	C-CARBON R	RN72K1J-390JE	1	435033904R1	
PCB5	R3261	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3262	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB5	R3264	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3265	C-CARBON R	RN72K1J-390JE	1	435033904R1	
PCB5	R3267	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3268	C-CARBON R	RN72K1J-390JE	1	435033904R1	
PCB5	R3270	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3271	C-CARBON R	RN72K1J-390JE	1	435033904R1	
PCB5	R3272	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3273	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3274	C-CARBON R	RN72K1J-390JE	1	435033904R1	
PCB5	R3275	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R3276	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3277	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R3278	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3279	C-CARBON R	RN72K1J-470JE	1	435034704R1	

PCB5	R3280	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3281	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3282	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3283	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3284	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3285	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3286	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3287	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R3288	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PCB5	R3289	C-CARBON R	RN72K1J-152JE	1	435031524R1	
PCB5	R3290	C-CARBON R	RN72K1J-105JE	1	435031054R1	
PCB5	R3291	C-CARBON R	RN72K1J-105JE	1	435031054R1	
PCB5	R3292	C-CARBON R	RN72K1J-561FE	1	435035612R1	
PCB5	R3293	C-CARBON R	RN72K1J-560JE	1	435035604R1	
PCB5	R3294	C-CARBON R	RN72K1J-561FE	1	435035612R1	
PCB5	R3295	C-CARBON R	RN72K1J-560JE	1	435035604R1	
PCB5	R3296	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PCB5	R3297	C-CARBON R	RN72K1J-332JE	1	435033324R1	
PCB5	R3298	C-CARBON R	RN72K1J-182JE	1	435031824R1	
PCB5	R3299	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R3300	C-CARBON R	RN72K1J-153JE	1	435031534R1	
PCB5	R3301	C-CARBON R	RN72K1J-153JE	1	435031534R1	
PCB5	R3302	C-CARBON R	RN72K1J-332JE	1	435033324R1	
PCB5	R3303	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB5	R3304	C-CARBON R	RN72K1J-153JE	1	435031534R1	
PCB5	R3305	C-CARBON R	RN72K1J-153JE	1	435031534R1	
PCB5	R3306	C-CARBON R	RN72K1J-332JE	1	435033324R1	
PCB5	R3307	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB5	R3308	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PCB5	R3309	C-CARBON R	RN72K1J-332JE	1	435033324R1	
PCB5	R3310	C-CARBON R	RN72K1J-182JE	1	435031824R1	
PCB5	R3311	C-CARBON R	RN72K1J-471JE	1	435034714R1	
PCB5	R3312	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PCB5	R3313	C-CARBON R	RN72K1J-152JE	1	435031524R1	
PCB5	R3314	C-CARBON R	RN72K1J-391JE	1	435033914R1	
PCB5	R3315	C-CARBON R	RN72K1J-560JE	1	435035604R1	
PCB5	R3401	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R3402	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R3403	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R3404	C-R NET	RM7LJ330X04	1	43484733004R2	

PCB5	R3405	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3406	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3407	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3408	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3409	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3410	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB5	R3411	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB5	R3412	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3413	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3414	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3416	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB5	R3417	C-CARBON R	RN72K1J-330JE	1	435033304R1	
PCB5	R3418	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3419	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB5	R3420	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3421	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB5	R3422	C-CARBON R	RN72K1J-330JE	1	435033304R1	
PCB5	R3423	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3424	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3425	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3426	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R3427	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3428	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3429	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R3430	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R3431	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3432	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3433	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3435	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R3436	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB5	R3437	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB5	R3438	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB5	R3439	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R3440	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB5	R3441	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB5	R3442	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB5	R3443	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB5	R3444	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB5	R3445	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R3446	C-CARBON R	RN72K1J-470JE	1	435034704R1	

PCB5	R3447	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3448	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3449	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3450	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3451	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3452	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3453	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3454	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3455	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3456	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3457	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3458	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3459	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3460	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3461	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3462	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB5	R3464	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB5	R3465	C-CARBON R	RN72K1J-223FE	1	435032232R1	
PCB5	R3466	C-CARBON R	RN72K1J-392FE	1	435033922R1	
PCB5	R3467	C-CARBON R	RN72K1J-224FE	1	435032242R1	
PCB5	R3468	C-CARBON R	RN72K1J-103FE	1	435031032R1	
PCB5	R3469	C-CARBON R	RN72K1J-333FE	1	435033332R1	
PCB5	R3470	C-CARBON R	RN72K1J-391JE	1	435033914R1	
PCB5	R3471	C-CARBON R	RN72K1J-391JE	1	435033914R1	
PCB5	R3472	C-CARBON R	RN72K1J-105JE	1	435031054R1	
PCB5	R3473	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R3570	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R3622	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R3623	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R3624	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R3625	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R3626	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R3627	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R3670	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R3671	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R3672	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R3673	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R3674	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R8000	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8001	C-CARBON R	RN72K1J-103JE	1	435031034R1	

PCB5	R8002	C-CARBON R	RN72K1J-271JE	1	435032714R1	
PCB5	R8003	C-CARBON R	RN72K1J-271JE	1	435032714R1	
PCB5	R8010	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8011	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8012	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R8013	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8014	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8015	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8016	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8017	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8018	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8019	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8020	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8021	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8022	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8026	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8028	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8029	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8033	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8034	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R8035	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R8036	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8038	C-CARBON R	RN72K1J-330JE	1	435033304R1	
PCB5	R8045	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB5	R8046	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB5	R8047	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB5	R8048	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB5	R8049	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB5	R8050	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB5	R8051	C-CARBON R	RN72K1J-680JE	1	435036804R1	
PCB5	R8052	C-CARBON R	RN72K1J-471JE	1	435034714R1	
PCB5	R8053	C-CARBON R	RN72K1J-680JE	1	435036804R1	
PCB5	R8054	C-CARBON R	RN72K1J-471JE	1	435034714R1	
PCB5	R8055	C-CARBON R	RN72K1J-680JE	1	435036804R1	
PCB5	R8056	C-CARBON R	RN72K1J-471JE	1	435034714R1	
PCB5	R8057	C-CARBON R	RN72K1J-680JE	1	435036804R1	
PCB5	R8058	C-CARBON R	RN72K1J-471JE	1	435034714R1	
PCB5	R8059	C-CARBON R	RN72K1J-680JE	1	435036804R1	
PCB5	R8060	C-CARBON R	RN72K1J-680JE	1	435036804R1	
PCB5	R8061	C-CARBON R	RN72K1J-680JE	1	435036804R1	

PCB5	R8062	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R8063	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R8064	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R8065	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8066	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8067	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8068	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB5	R8069	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB5	R8070	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB5	R8071	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB5	R8072	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB5	R8073	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB5	R8074	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8075	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8076	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8079	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R8080	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R8081	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R8082	C-CARBON R	RN72K1J-680JE	1	435036804R1	
PCB5	R8083	C-CARBON R	RN72K1J-471JE	1	435034714R1	
PCB5	R8084	C-CARBON R	RN72K1J-471JE	1	435034714R1	
PCB5	R8085	C-CARBON R	RN72K1J-471JE	1	435034714R1	
PCB5	R8086	C-CARBON R	RN72K1J-471JE	1	435034714R1	
PCB5	R8087	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R8088	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R8089	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB5	R8090	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB5	R8160	C-CARBON R	RN72K1J-332JE	1	435033324R1	
PCB5	R8161	C-CARBON R	RN72K1J-681JE	1	435036814R1	
PCB5	R8162	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB5	R8165	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8201	C-CARBON R	RN72K1J-330JE	1	435033304R1	
PCB5	R8202	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R8203	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R8205	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R8206	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8207	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8208	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8209	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8210	C-CARBON R	RN72K1J-103JE	1	435031034R1	

PCB5	R8212	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8213	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8214	C-CARBON R	RN72K1J-272JE	1	435032724R1	
PCB5	R8215	C-CARBON R	RN72K1J-272JE	1	435032724R1	
PCB5	R8219	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8223	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8224	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8230	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R8231	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R8232	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R8233	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R8234	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R8235	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R8236	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R8238	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R8239	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R8240	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R8241	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R8243	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R8245	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R8248	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R8249	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R8251	C-R NET	RM7LJ220X04	1	43484722004R2	
PCB5	R8252	C-R NET	RM7LJ220X04	1	43484722004R2	
PCB5	R8253	C-R NET	RM7LJ220X04	1	43484722004R2	
PCB5	R8254	C-R NET	RM7LJ220X04	1	43484722004R2	
PCB5	R8255	C-R NET	RM7LJ220X04	1	43484722004R2	
PCB5	R8256	C-R NET	RM7LJ220X04	1	43484722004R2	
PCB5	R8257	C-R NET	RM7LJ220X04	1	43484722004R2	
PCB5	R8258	C-R NET	RM7LJ220X04	1	43484722004R2	
PCB5	R8259	C-R NET	RM7LJ220X04	1	43484722004R2	
PCB5	R8264	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8271	C-R NET	RM7LJ220X04	1	43484722004R2	
PCB5	R8272	C-R NET	RM7LJ220X04	1	43484722004R2	
PCB5	R8273	C-R NET	RM7LJ220X04	1	43484722004R2	
PCB5	R8274	C-R NET	RM7LJ220X04	1	43484722004R2	
PCB5	R8275	C-R NET	RM7LJ220X04	1	43484722004R2	
PCB5	R8276	C-R NET	RM7LJ220X04	1	43484722004R2	
PCB5	R8277	C-R NET	RM7LJ220X04	1	43484722004R2	
PCB5	R8278	C-R NET	RM7LJ220X04	1	43484722004R2	

PCB5	R8279	C-R NET	RM7LJ220X04	1	43484722004R2	
PCB5	R8280	C-CARBON R	RN72K1J-120JE	1	435031204R1	
PCB5	R8282	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R8333	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8334	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB5	R8335	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB5	R8336	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB5	R8337	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB5	R8338	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB5	R8339	C-CARBON R	RN72K2E-470JE	1	435224704R1	
PCB5	R8343	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8349	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB5	R8350	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB5	R8360	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8361	C-CARBON R	RN72K1J-681JE	1	435036814R1	
PCB5	R8362	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB5	R8365	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8401	C-R NET	RM7LJ220X04	1	43484722004R2	
PCB5	R8402	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R8403	C-R NET	RM7LJ220X04	1	43484722004R2	
PCB5	R8404	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R8405	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R8408	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R8409	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB5	R8410	C-CARBON R	RN72K1J-681JE	1	435036814R1	
PCB5	R8411	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB5	R8416	C-R NET	RM7LJ220X04	1	43484722004R2	
PCB5	R8417	C-R NET	RM7LJ220X04	1	43484722004R2	
PCB5	R8418	C-R NET	RM7LJ220X04	1	43484722004R2	
PCB5	R8419	C-R NET	RM7LJ220X04	1	43484722004R2	
PCB5	R8420	C-R NET	RM7LJ220X04	1	43484722004R2	
PCB5	R8421	C-R NET	RM7LJ220X04	1	43484722004R2	
PCB5	R8422	C-R NET	RM7LJ220X04	1	43484722004R2	
PCB5	R8423	C-R NET	RM7LJ220X04	1	43484722004R2	
PCB5	R8424	C-R NET	RM7LJ220X04	1	43484722004R2	
PCB5	R8425	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R8429	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R8431	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB5	R8432	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R8442	C-CARBON R	RN72K1J-102JE	1	435031024R1	

PCB5	R8501	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R8502	C-CARBON R	RN72K1J-120JE	1	435031204R1	
PCB5	R8503	C-R NET	RM7LJ000X04	1	43484700004R2	
PCB5	R8504	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R8505	C-R NET	RM7LJ000X04	1	43484700004R2	
PCB5	R8507	C-R NET	RM7LJ000X04	1	43484700004R2	
PCB5	R8508	C-R NET	RM7LJ000X04	1	43484700004R2	
PCB5	R8509	C-R NET	RM7LJ000X04	1	43484700004R2	
PCB5	R8510	C-R NET	RM7LJ000X04	1	43484700004R2	
PCB5	R8511	C-R NET	RM7LJ000X04	1	43484700004R2	
PCB5	R8512	C-R NET	RM7LJ000X04	1	43484700004R2	
PCB5	R8513	C-R NET	RM7LJ000X04	1	43484700004R2	
PCB5	R8516	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB5	R8517	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB5	R8518	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB5	R8519	C-CARBON R	RN72K1J-151JE	1	435031514R1	
PCB5	R8522	C-R NET	RM7LJ330X04	1	43484733004R2	
PCB5	R8523	C-CARBON R	RN72K1J-330JE	1	435033304R1	
PCB5	R8524	C-CARBON R	RN72K1J-330JE	1	435033304R1	
PCB5	R8525	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB5	R8526	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB5	R8527	C-CARBON R	RN72K1J-562JE	1	435035624R1	
PCB5	R8528	C-CARBON R	RN72K1J-562JE	1	435035624R1	
PCB5	R8529	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8530	C-CARBON R	RN72K1J-105JE	1	435031054R1	
PCB5	R8531	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R8533	C-CARBON R	RN72K1J-562JE	1	435035624R1	
PCB5	R8534	C-CARBON R	RN72K1J-562JE	1	435035624R1	
PCB5	R8535	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R8536	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R8601	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R8602	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R8607	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB5	R8608	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB5	R8609	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R8617	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB5	R8618	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB5	R8619	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8627	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB5	R8628	C-CARBON R	RN72K1J-473JE	1	435034734R1	

PCB5	R8629	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8637	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB5	R8638	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB5	R8639	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8647	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB5	R8648	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB5	R8649	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R8650	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R8651	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R8654	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PCB5	R8655	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB5	R8656	C-CARBON R	RN72K1J-333JE	1	435033334R1	
PCB5	R8701	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8702	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8703	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8705	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R8706	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R8707	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R8708	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8709	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8710	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8711	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB5	R8712	C-R NET	RM7LJ222X04	1	43484722204R2	
PCB5	R8713	C-R NET	RM7LJ222X04	1	43484722204R2	
PCB5	R8714	C-R NET	RM7LJ222X04	1	43484722204R2	
PCB5	R8715	C-R NET	RM7LJ103X04	1	43484710304R2	
PCB5	R8716	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8717	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8718	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R8719	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8720	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R8721	C-CARBON R	RN72K1J-220JE	1	435032204R1	
PCB5	R8722	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8723	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8733	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8742	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8744	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8746	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8747	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8749	C-CARBON R	RN72K1J-220JE	1	435032204R1	

PCB5	R8750	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R8751	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R8752	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R8823	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R8824	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PCB5	R8937	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8951	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8952	C-CARBON R	RN72K1J-683JE	1	435036834R1	
PCB5	R8953	C-CARBON R	RN72K1J-183FE	1	435031832R1	
PCB5	R8954	C-CARBON R	RN72K1J-224FE	1	435032242R1	
PCB5	R8955	C-CARBON R	RN72K1J-103FE	1	435031032R1	
PCB5	R8957	C-CARBON R	RN72K1J-333JE	1	435033334R1	
PCB5	R8958	C-CARBON R	RN72K1J-333FE	1	435033332R1	
PCB5	R8959	C-CARBON R	RN72K1J-562FE	1	435035622R1	
PCB5	R8960	C-CARBON R	RN72K1J-103FE	1	435031032R1	
PCB5	R8962	C-CARBON R	RN72K1J-333JE	1	435033334R1	
PCB5	R8963	C-CARBON R	RN72K1J-153FE	1	435031532R1	
PCB5	R8964	C-CARBON R	RN72K1J-333FE	1	435033332R1	
PCB5	R8965	C-CARBON R	RN72K1J-103FE	1	435031032R1	
PCB5	R8967	C-CARBON R	RN72K1J-683JE	1	435036834R1	
PCB5	R8968	C-CARBON R	RN72K1J-333FE	1	435033332R1	
PCB5	R8969	C-CARBON R	RN72K1J-394FE	1	435033942R1	
PCB5	R8970	C-CARBON R	RN72K1J-103FE	1	435031032R1	
PCB5	R8971	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB5	R8972	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8973	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8974	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8976	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB5	R8977	C-CARBON R	RN72K1J-562JE	1	435035624R1	
PCB5	R8978	C-CARBON R	RN72K1J-682JE	1	435036824R1	
PCB5	R8979	C-CARBON R	RN72K1J-562JE	1	435035624R1	
PCB5	**[SW TRM]**					
PCB5	JL3201	WIRE TRAP	NPLG-5P588	1	25055626	
PCB5	JL8002B	SOCKET	NSCT-5P97	1	25050269	
PCB5	P005	PWB	BCHDM-0132	1	25140132C	N
PCB5	P3001	SOCKET(B to B)	IMSA-9850S-20Y900	1	25052813R2	
PCB5	P3102A	SOCKET	NSCT-9P2472	1	25052575R2	
PCB5	P3104	SOCKET	SI-60073-F	1	25053307	
PCB5	P3104 or	SOCKET	J0026D21NL	(1)	25053250	
PCB5	P3605A	PLUG	IMSA-9142B-18A	1	25056599	

PCB5	P3607A	PLUG	IMSA-9142B-16A	1	25056598	
PCB5	P3608A	PLUG	IMSA-9142B-18A	1	25056599	
PCB5	P3609	SOCKET	04FMN-SMT-A-TF	1	25052821R2	
PCB5	P4104A	SOCKET	NSCT-19P2112	1	25052215	
PCB5	P8005A	TRM-423(SCREW)	NEJITANSI ST3	1	25060495	
PCB5	P8006	HOLDER	(ｸﾗﾝﾌﾟ) UA-0	1	27190432	
PCB5	P8302	SOCKET	YKF45-7037V	1	25053253R3	
PCB5	P8341	SOCKET	YKF45-7037V	1	25053253R3	
PCB5	P8601	SOCKET	YKF45-7037V	1	25053253R3	
PCB5	P8611	SOCKET	YKF45-7037V	1	25053253R3	
PCB5	P8621	SOCKET	YKF45-7037V	1	25053253R3	
PCB5	P8631	SOCKET	YKF45-7037V	1	25053253R3	
PCB5	P8641B	SOCKET	FX16-31S-0.5SH	1	25053365R2	
PCB5	P8702	SOCKET	NSCT-9P2472	1	25052575R2	
PCB5	P8704	SOCKET	04FMN-SMT-A-TF	1	25052821R2	

HT-RC180

PACKING PROCEDURE PARTS LIST

PACKING	REF. NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
PACKING	[PACKING]					
EXPLODED	A615	TAPE	FIXLON #817 W12	1	29110207	N
EXPLODED	A615or	TAPE	SLIONTEC 9514	(1)	29110201	
EXPLODED	A616	CUSHION	EPE t2.5x40x10	2	28141819	
EXPLODED	A617	INST SHEET	TXNR807 door	1	29355770	
PACKING	A651	PAD	F & R 1set	1	29092465A	
PACKING	A655	SHEET	(ACC)	1	29096104	
PACKING	A657	SHEET	T0.515 x 1300 x 900	1	29096066	
PACKING	A661	POLY BAG	(W1020 x D770)	1	29100253	
PACKING	A663	TAPE	NITTO NO.29	1	29110149	
PACKING	A665	PP TAPE	W50 SBT-70	1	29110200	
PACKING	A667	STAPLE	FUKAN-BARI	4	282321	
PACKING	A701	CARTON	HTRC180DC	1	29055060A	N
PACKING	A704A	UPC LABEL	HTRC180BMDC	1	29390965	N
PACKING	[ACCESSARY]					
PACKING	A801	LABEL	(SPCABLE)2009	1	29390881	
PACKING	A810	BATTERY	R6/AA(UM-3)	2	3010194	
PACKING	A810or	BATTERY	R6/AA(UM-3)	(2)	3010054	
PACKING	A811	REMO CON	RC-745M	1	24140745	

PACKING	A812	ANT COIL	NMA-3057	1	232140	
PACKING	A813	FM ANT AS	Type W	1	292191	
PACKING	A814	MIC	MIC-7000	1	245044	
PACKING	A820	TAPE	NITTO NO.29	1	29110149	
PACKING	A821	POLY BAG	w250 x d350	1	29100250A	
PACKING	A822	POLY BAG	w250 x d350	1	29100250A	
PACKING	A847	INST SHEET	WINDOWS7	1	29355775	
PACKING	A851	WRNTY CARD	(ONKYO)	1	29365135	
PACKING	A861	INS MANUAL	En(TX-NR807)	1	29400021	
PACKING	A862	INS MANUAL	U2FrEs(TX-NR807)	1	29400022	
PACKING	A870	INS MANUAL	U3EnFrEs(SIRIUS)	1	29400030B	
PACKING	A871	INS MANUAL	En(QSS)(TX-NR807)	1	29400031	
PACKING	A875	INS MANUAL	U9(RC736/737/738/739)	1	29344962	
PACKING	A876	INS MANUAL	U2JaEn(Software_807/HT-RC180)	1	29400164	N
PACKING	A877	INS MANUAL	U3EnFrEs(Pand/Rhap/InSir_ONK)	1	29400165	N
PACKING	A882	HANDBILL	(SIRIUS)	1	29380149	
PACKING	A883	INST SHEET	En(2009E_RIHD)	1	29355745	
PACKING	A884	INST SHEET	U2FrEs(2009E_RIHD)	1	29355746	
PACKING	A890	HANDBILL	(UP-A1)US	1	29380155	
PACKING	P901	AC CORD	AS-UC-2	1	253352ATES	!
PACKING	P901or	AC CORD	AS-UC-2	(1)	253297KAW	!

ONKYO CORPORATION
Service Dept. Technical Support : 2-1, Nisshin-cho, Neyagawa-shi, OSAKA 572-8540, JAPAN
Tel: 072-831-8023 Fax: 072-831-8163

ONKYO U.S.A. CORPORATION
18 Park Way, Upper Saddle River, N.J. 07458, U.S.A.
Tel: 201-785-2600 Fax: 201-785-2650 http://www.us.onkyo.com/

ONKYO EUROPE ELECTRONICS GmbH (DUISBURG OFFICE)
Hafennr.7602, Logport Office-Center, Bliersheimerstr.80B, 47229 Duisburg, Germany
Tel: +49-2065-90198-00 Fax: +49-2065-90198-40 http://www.eu.onkyo.com/

ONKYO EUROPE UK Office
Suite 1, Gregories Court, Gregories Road, Beaconsfield, Buckinghamshire, HP9 1HQ
UNITED KINGDOM Tel: +44-(0)1494-681515 Fax: +44(0)-1494-680452

ONKYO CHINA LIMITED
Units 2102-2107, Metroplaza Tower I, 223 Hing Fong Road, Kwai Chung,
N.T., HONG KONG Tel: 852-2429-3118 Fax: 852-2428-9039
http://www.ch.onkyo.com/

ONKYO
HOMEPAGE
http://www.onkyo.com/