Pioneer

Service Manual

SC-75

ORDER NO.
RRV4461

AV RECEIVER

SC-75
SC-1528-K
SC-1523-K
SC-LX57

THIS MANUAL IS APPLICABLE TO THE FOLLOWING MODEL(S) AND TYPE(S).

Model	Type	Power Requirement	Remarks
SC-75	CUXJ	AC 120V	
SC-1528-K	CUXJ	AC 120V	
SC-1523-K	UXJCB	AC 120V	
SC-LX57	JXJ	AC 100V	

THIS SERVICE MANUAL SHOULD BE USED TOGETHER WITH THE FOLLOWING MANUAL(S).

Model No.	Order No.	Remarks
SC-75, SC-1528-K, SC-1523-K	RRV4449	BLOCK DIAGRAM, EXPLODED VIEWS AND PARTS LIST etc.

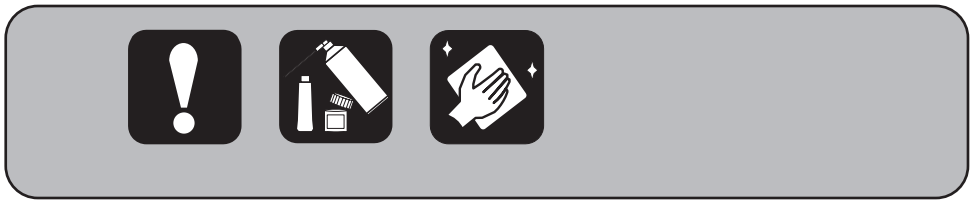

PIONEER CORPORATION 1-1, Shin-ogura, Saiwai-ku, Kawasaki-shi, Kanagawa 212-0031, Japan
PIONEER ELECTRONICS (USA) INC. P.O. Box 1760, Long Beach, CA 90801-1760, U.S.A.
PIONEER EUROPE NV Haven 1087, Keetberglaan 1, 9120 Melsele, Belgium
PIONEER ELECTRONICS ASIACENTRE PTE. LTD. 253 Alexandra Road, #04-01, Singapore 159936
ⓒ**PIONEER CORPORATION 2013**

K-FZV JULY 2013 Printed in Japan

SAFETY INFORMATION

This service manual is intended for qualified service technicians ; it is not meant for the casual do-it-yourselfer. Qualified technicians have the necessary test equipment and tools, and have been trained to properly and safely repair complex products such as those covered by this manual.
Improperly performed repairs can adversely affect the safety and reliability of the product and may void the warranty. If you are not qualified to perform the repair of this product properly and safely, you should not risk trying to do so and refer the repair to a qualified service technician.

WARNING
This product contains lead in solder and certain electrical parts contain chemicals which are known to the state of California to cause cancer, birth defects or other reproductive harm.

Health & Safety Code Section 25249.6 - Proposition 65

NOTICE
(FOR CANADIAN MODEL ONLY)
Fuse symbols (fast operating fuse) and/or (slow operating fuse) on PCB indicate that replacement parts must be of identical designation.

REMARQUE
(POUR MODÈLE CANADIEN SEULEMENT)
Les symboles de fusible (fusible de type rapide) et/ou (fusible de type lent) sur CCI indiquent que les pièces de remplacement doivent avoir la même désignation.

(FOR USA MODEL ONLY)

1. SAFETY PRECAUTIONS

The following check should be performed for the continued protection of the customer and service technician.

LEAKAGE CURRENT CHECK

Measure leakage current to a known earth ground (water pipe, conduit, etc.) by connecting a leakage current tester such as Simpson Model 229-2 or equivalent between the earth ground and all exposed metal parts of the appliance (input/output terminals, screwheads, metal overlays, control shaft, etc.). Plug the AC line cord of the appliance directly into a 120V AC 60 Hz outlet and turn the AC power switch on. Any current measured must not exceed 0.5 mA.

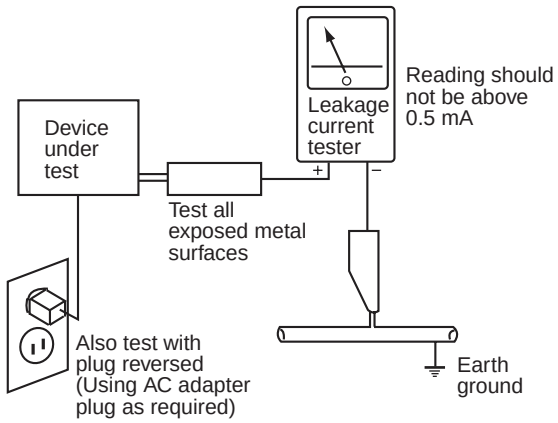

AC Leakage Test

ANY MEASUREMENTS NOT WITHIN THE LIMITS OUTLINED ABOVE ARE INDICATIVE OF A POTENTIAL SHOCK HAZARD AND MUST BE CORRECTED BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.

2. PRODUCT SAFETY NOTICE

Many electrical and mechanical parts in the appliance have special safety related characteristics. These are often not evident from visual inspection nor the protection afforded by them necessarily can be obtained by using replacement components rated for voltage, wattage, etc. Replacement parts which have these special safety characteristics are identified in this Service Manual.

Electrical components having such features are identified by marking with a ⚠ on the schematics and on the parts list in this Service Manual.
The use of a substitute replacement component which does not have the same safety characteristics as the PIONEER recommended replacement one, shown in the parts list in this Service Manual, may create shock, fire, or other hazards.

Product Safety is continuously under review and new instructions are issued from time to time. For the latest information, always consult the current PIONEER Service Manual. A subscription to, or additional copies of, PIONEER Service Manual may be obtained at a nominal charge from PIONEER.

CONTENTS

SAFETY INFORMATION 2
10. SCHEMATIC DIAGRAM 6
10.1 OVERALL WIRING DIAGRAM 6
10.2 AUDIO ASSY (1/4) 8
10.3 AUDIO ASSY (2/4) 10
10.4 AUDIO ASSY (3/4) 12
10.5 AUDIO ASSY (4/4) 14
10.6 DAC HIGH ASSY (1/3) 16
10.7 DAC HIGH ASSY (2/3) 18
10.8 DAC HIGH ASSY (3/3) 20
10.9 FRONT HDMI USB ASSY 22
10.10 USB RECT_S ASSY 24
10.11 DIGITAL MAIN ASSY (1/12) 26
10.12 DIGITAL MAIN ASSY (2/12) 28
10.13 DIGITAL MAIN ASSY (3/12) 30
10.14 DIGITAL MAIN ASSY (4/12) 32
10.15 DIGITAL MAIN ASSY (5/12) 34
10.16 DIGITAL MAIN ASSY (6/12) 36
10.17 DIGITAL MAIN ASSY (7/12) 38
10.18 DIGITAL MAIN ASSY (8/12) 40
10.19 DIGITAL MAIN ASSY (9/12) 42
10.20 DIGITAL MAIN ASSY (10/12) 44
10.21 DIGITAL MAIN ASSY (11/12) 46
10.22 DIGITAL MAIN ASSY (12/12) 48
10.23 INTERFACE_S ASSY 50
10.24 COMPONENT ASSY (1/3) 52
10.25 COMPONENT ASSY (2/3) 54
10.26 COMPONENT ASSY (3/3) 56
10.27 COMPOSITE ASSY 58
10.28 MIC HP ASSY 60
10.29 DISPLAY ASSY (1/2) 62
10.30 DISPLAY ASSY (2/2) 64
10.31 VOL ASSY 66
10.32 POWER SW ASSY and ENCODER ASSY 67
10.33 IR BUFFER_S ASSY (1/2) 68
10.34 IR BUFFER_S ASSY (2/2) 70
10.35 BUFFER GND_S ASSY and IR INTERFACE_S ASSY 72
10.36 D-AMP_S ASSY (1/10) 74
10.37 D-AMP_S ASSY (2/10) 76
10.38 D-AMP_S ASSY (3/10) 78
10.39 D-AMP_S ASSY (4/10) 80
10.40 D-AMP_S ASSY (5/10) 82
10.41 D-AMP_S ASSY (6/10) 84
10.42 D-AMP_S ASSY (7/10) 86
10.43 D-AMP_S ASSY (8/10) 88
10.44 D-AMP_S ASSY (9/10) 90
10.45 D-AMP_S ASSY (10/10) 92
10.46 PRIMARY ASSY (1/2) 94
10.47 PRIMARY ASSY (2/2) 96
10.48 A-REG_S ASSY 98
10.49 IR REG_S ASSY (1/2) 100
10.50 IR REG_S ASSY (2/2) 102
10.51 V-REG_S ASSY (1/3) 103
10.52 V-REG_S ASSY (2/3) 104
10.53 V-REG_S ASSY (3/3) 106
10.54 VREG CHILD_S ASSY 107
10.55 CONNECT_S ASSY 108
10.56 A-DAC BRIDGE ASSY 109
10.57 D-AUDIO BRIDGE ASSY 110
10.58 D-DAC BRIDGE ASSY 111
10.59 PRE BRIDGE_S ASSY 112
10.60 FAN CONNECT, MIC HP GUARD, BIND DM CABLE_S, P WIRE GUARD_S, FFC GUARD_S, BINDFAN CABLE_S and TRANS VREG STYL_S ASSYS 113
10.61 VREG GUARD, PANEL GUARD and IR EDGE GUARD_S ASSYS 114

11. PCB CONNECTION DIAGRAM 116
11.1 AUDIO ASSY 116
11.2 DAC HIGH ASSY 120
11.3 FRONT HDMI USB ASSY and USB RECT_S ASSY 122
11.4 DIGITAL MAIN ASSY 124
11.5 INTERFACE_S ASSY 128
11.6 COMPONENT ASSY 132
11.7 COMPOSITE ASSY 134
11.8 MIC HP, DISPLAY, VOL, POWER SW and ENCODER ASSYS 136
11.9 IR BUFFER_S ASSY 140
11.10 BUFFER GND ASSY and IR INTERFACE_S ASSY 144
11.11 D-AMP_S ASSY 146
11.12 PRIMARY ASSY 152
11.13 A-REG_S ASSY and IR REG_S ASSY 154
11.14 V-REG_S ASSY 158
11.15 VREG CHILD_S ASSY, CONNECT_S ASSY and A-DAC BRIDGE ASSY 160
11.16 D-AUDIO BRIDGE, D-DAC BRIDGE, PRE BRIDGE_S and FAN CONNECT ASSYS 162
11.17 MIC HP GUARD, BIND DM CABLE_S and P WIRE GUARD_S ASSYS 164
11.18 FFC GUARD_S, BAINDFAN CABLE_S and TRANS VREG STYL_S ASSYS 165
11.19 VREG GUARD, PANEL GUARD and IR EDGE GUARD_S ASSYS 166
12. PCB PARTS LIST 167

A

B

C

D

E

F

10. SCHEMATIC DIAGRAM
10.1 OVERALL WIRING DIAGRAM

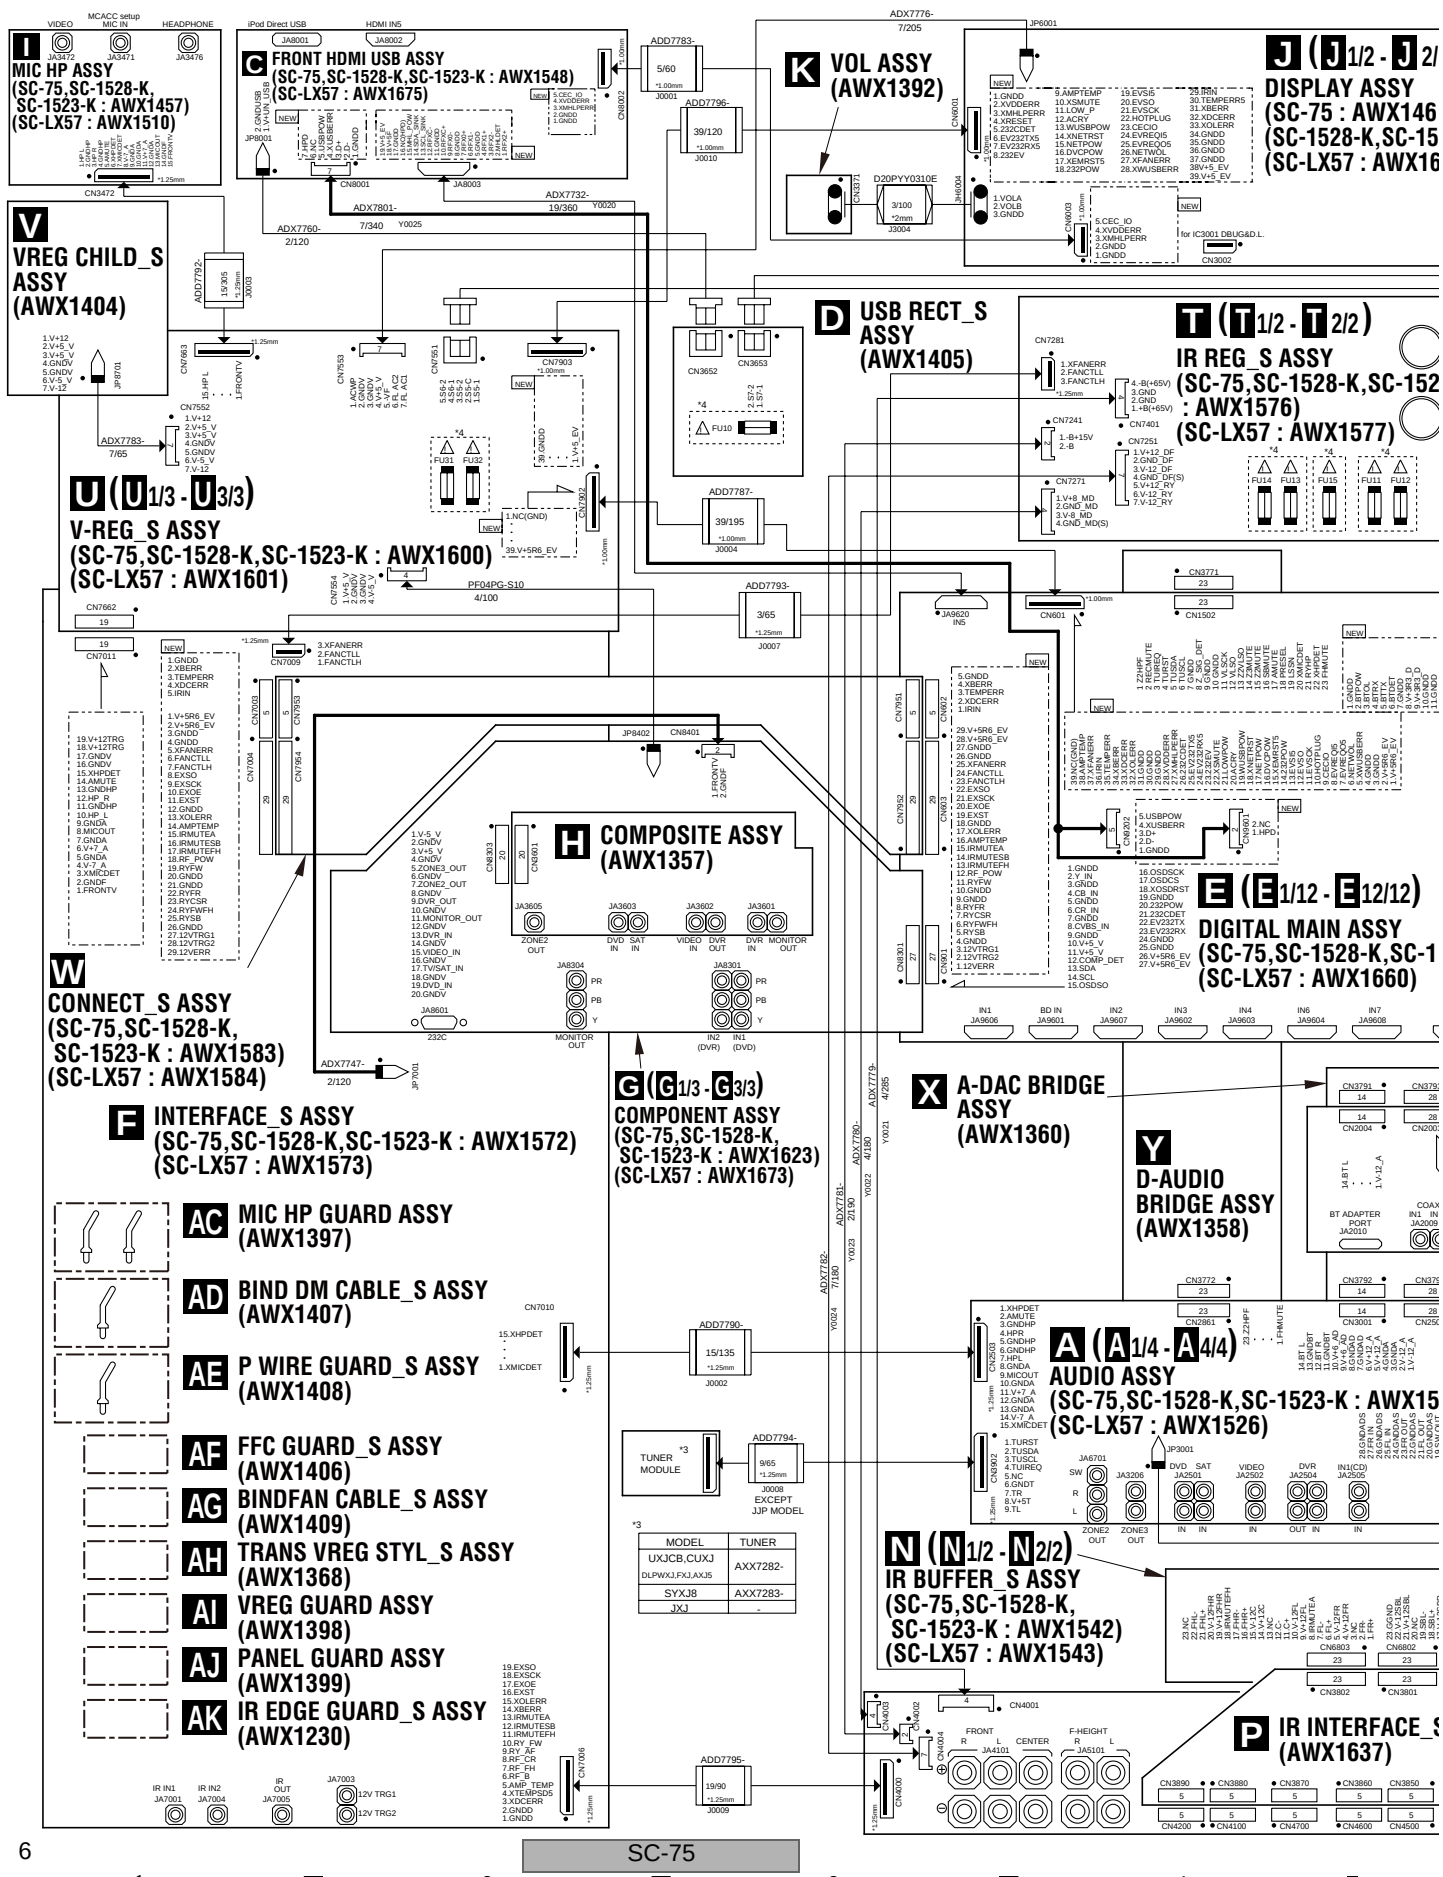

- When ordering service parts, be sure to refer to "EXPLODED VIEWS and PARTS LIST" or "PCB PARTS LIST".
- The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.

CAUTION - FOR CONTINUED PROTECTION AGAINST RISK OF FIRE, REPLACE WITH SAME TYPE AND RATINGS OF FUSE.

The ⚠ mark found on some component parts should be replaced with same parts (safety regulation authorized) of identical designation.

J (J1/2 - J 2/2) DISPLAY ASSY (SC-75 : AWX1465) (SC-1528-K,SC-1523-K : AWX1505) (SC-LX57 : AWX1682)

M ENCODER ASSY (AWX1396)

L POWER SW ASSY (SC-75, SC-LX57 : AWX1653) (SC-1528-K,SC-1523-K : AWX1654)

S A-REG_S ASSY (SC-75,SC-1528-K,SC-1523-K : AWX1596) (SC-LX57 : AWX1597)

*4 ⚠

MODEL		FU1	FU4	FU10	FU11,FU12	FU13,FU14	FU15	FU21,FU22	FU31,FU32
SC-75 SC-1528-K SC-1523-K	UXJCB CUXJ	REK1154-(10A/125V)	REK1139-(T2A H/250V)	REK1151-(6A/125V)	REK1143-(1.25A/125V)	REK1142-(1A/125V)	REK1143-(1.25A/125V)	REK1143-(1.25A/125V)	REK1144-(1.6A/125V)
SC-LX57	JXJ	REK1154-(10A/125V)	REK1139-(T2A H/250V)	REK1151-(6A/125V)	REK1143-(1.25A/125V)	REK1142-(1A/125V)	REK1143-(1.25A/125V)	REK1143-(1.25A/125V)	REK1144-(1.6A/125V)
SC-LX57-K SC-LX57-S	SYXJ8	AEK1061-(T5A L/250V)	REK1104-(T4A H/250V)	AEK1061-(T5A L/250V)	AEK7073-(T1A L/250V)	AEK7072-(T800mA L/250V)	AEK7073-(T1A L/250V)	AEK7073-(T1A L/250V)	AEK7072-(T800mA L/250V)
SC-LX57	DLPWXJ AXJ5	AEK1061-(T5A L/250V)	REK1104-(T4A H/250V)	AEK1061-(T5A L/250V)	AEK7073-(T1A L/250V)	AEK7072-(T800mA L/250V)	AEK7073-(T1A L/250V)	AEK7073-(T1A L/250V)	AEK7072-(T800mA L/250V)
SC-LX57	FXJ	DEK1045-(T10A L/250V)	REK1139-(T2A H/250V)	AEK1061-(T5A L/250V)	AEK7073-(T1A L/250V)	AEK7072-(T800mA L/250V)	AEK7073-(T1A L/250V)	AEK7073-(T1A L/250V)	AEK7072-(T800mA L/250V)

E (E1/12 - E12/12) AL MAIN ASSY (,SC-1528-K,SC-1523-K : AWX1422) (57 : AWX1660)

Z D-DAC BRIDGE ASSY(AWX1359)

B (B1/3 - B3/3) DAC HIGH ASSY (SC-75,SC-1528-K, SC-1523-K : AWX1515) (SC-LX57 : AWX1517)

AB FAN CONNECT ASSY (AWX1361)

R (R1/2 - R2/2) PRIMARY ASSY (SC-75,SC-1528-K,SC-1523-K : AWX1614) (SC-LX57 : AWX1466)

-1523-K : AWX1525)

AA PRE BRIDGE_S ASSY (AWX1367)

O BUFFER GND_S ASSY (AWX1544)

IR INTERFACE_S ASSY (AWX1637)

Q (Q1/10 - Q10/10) D-AMP_S ASSY (SC-75,SC-1528-K,SC-1523-K : AWX1429) (SC-LX57 : AWX1431)

*OPTION

MODEL		MICROPHONE	REMO-COM	iPod CABLE
SC-75 SC-1523-K SC-1528-K	UXJCB CUXJ	APM7011-	AXD7698-	——
SC-LX57	JXJ	APM7011-	AXD7699-	——
SC-LX57-K SC-LX57-S	SYXJ8	APM7011-	AXD7698-	——
SC-LX57	DLPWXJ	APM7011-	AXD7698-	ADE7136-
SC-LX57	AXJ5 FXJ	APM7011-	AXD7698-	ADE7136-

*1 ⚠

MODEL		MAIN TRANS	AC CORD
SC-75 SC-1528-K SC-1523-K	UXJCB CUXJ	ATS7455-A	ADG7118-A
SC-LX57-K SC-LX57-S	SYXJ8	ATS7452-A	ADG7123-A
SC-LX57	FXJ	ATS7454-A	ADG7120-A
SC-LX57	DLPWXJ	ATS7452-A	ADG7123-A
SC-LX57	AXJ5	ATS7452-A	ADG7122-A
SC-LX57	JXJ	ATS7453-A	ADG7121-A

10.2 AUDIO ASSY (1/4)

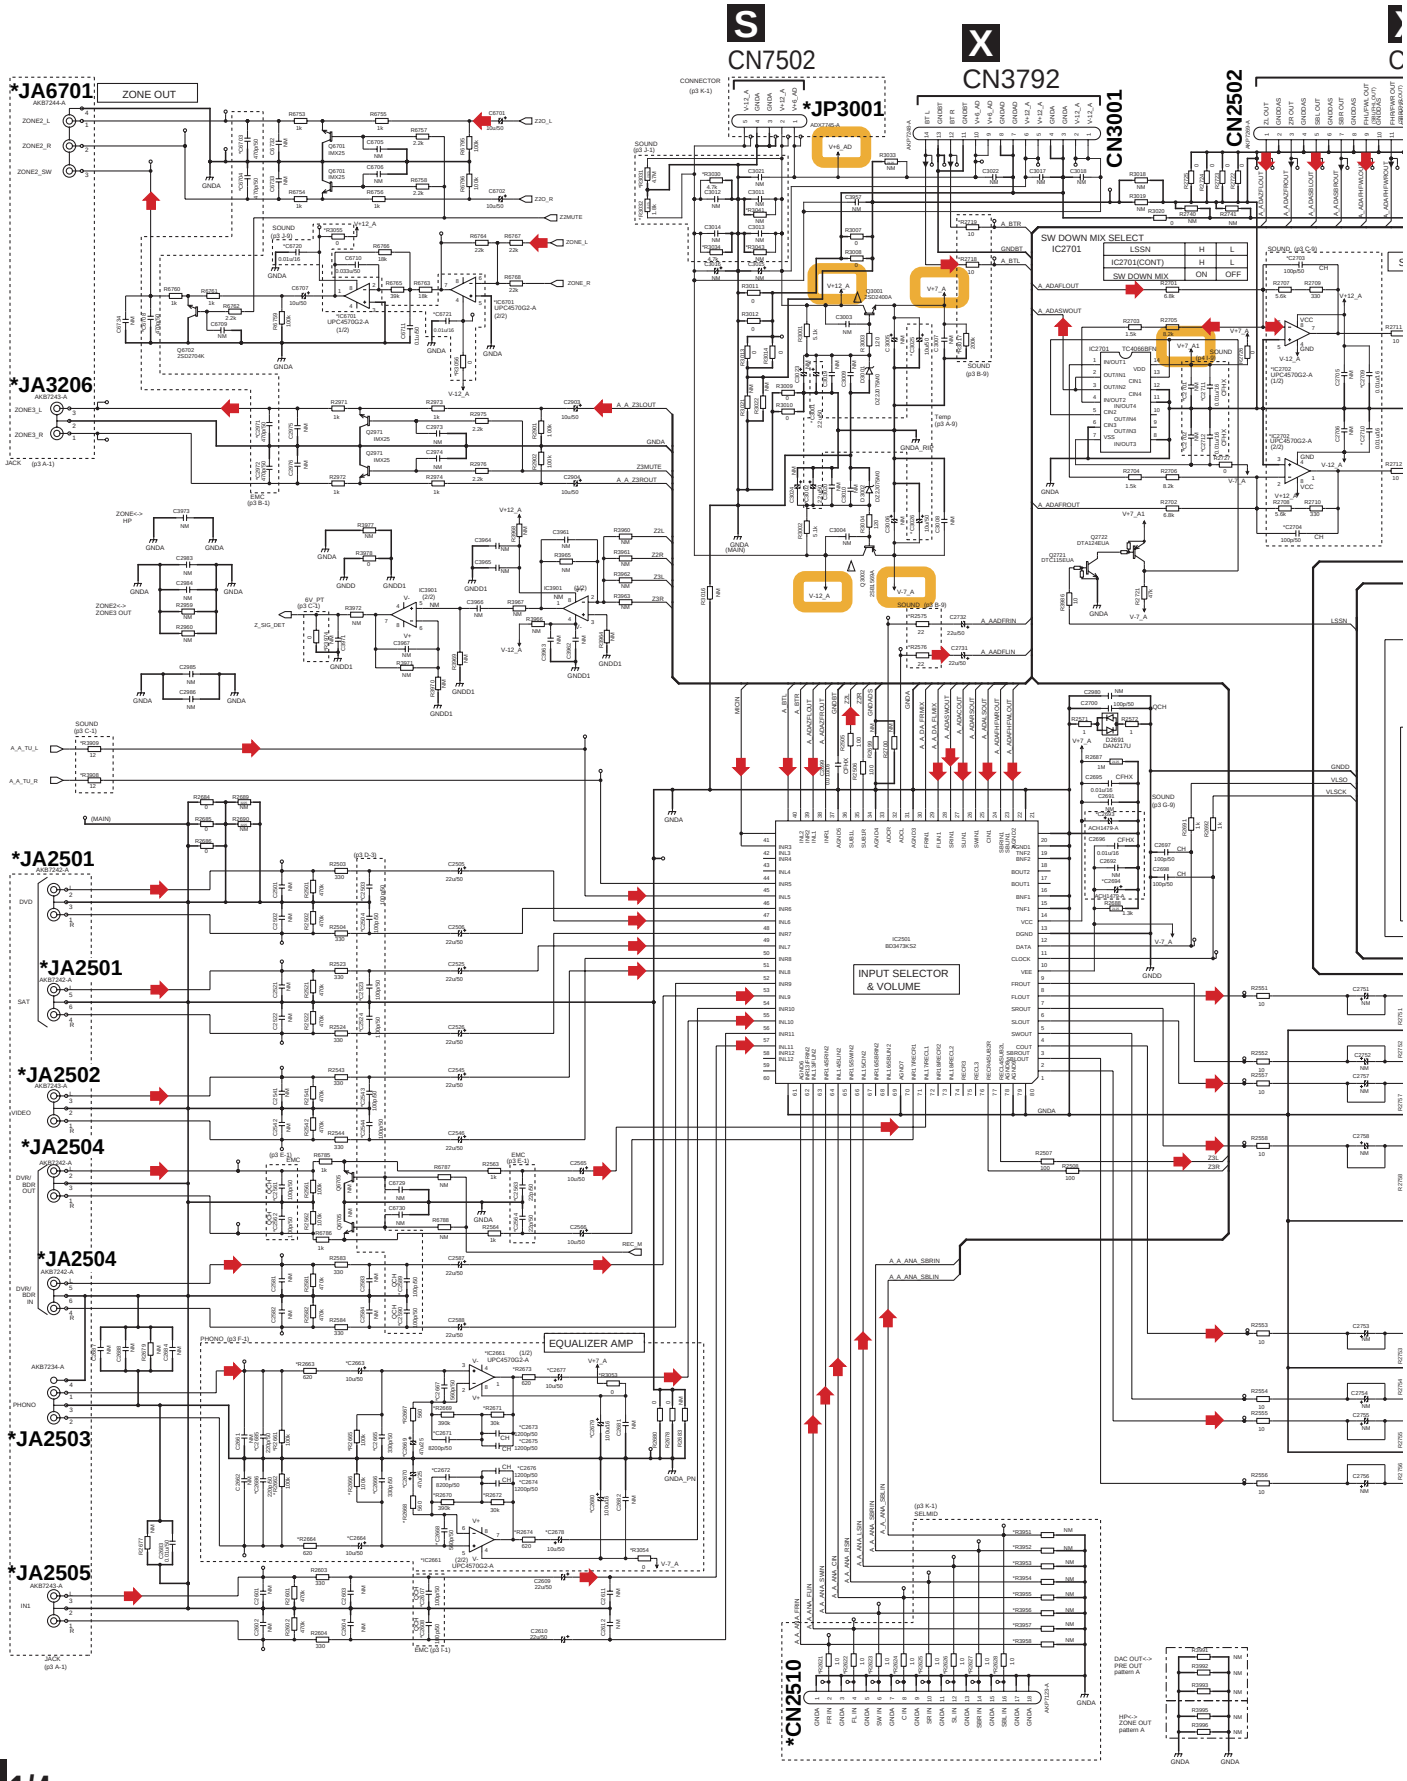

A1/4

A 1/4 AUDIO ASSY (1/4) (AWX1525)

X
CN3794

CN2502

CN2503

F
CN7010

CN2861

Y
CN3772

A 2/4

A 2/4

*CN3902

TUNER MODULE

A 1/4

: Audio Signal Route

IC6703 CONT	HPF
H	ON
L	OFF

NOTE L: RESISTORS
Unit: k-k Ω , M-M Ω or Ω unless otherwise noted.
Rated Power: 1/10w unless otherwise noted.
Tolerances: (J)5% unless otherwise noted.
2125 : RS1/8SQ
NO MARKED : RS1/10SR
2012 MARKED
No marked Ceramic Capacitors are CKSRYB.
No marked Electrolytic Capacitors are CEAK(SC series)
CH:CCSRCH CFHX:CFHXSQ unless otherwise noted.
Unit: p-pF or u-uF unless otherwise noted.
Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
1000p or less : CCSRCH, Over 1000p : CKSRYB
3 :NM: No Mount

The Δ mark found on some component parts should be replaced with same parts (safety regulation authorized) of identical designation.

- When ordering service parts, be sure to refer to "EXPLODED VIEWS and PARTS LIST" or "PCB PARTS LIST".
- The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- : The power supply is shown with the marked box.

10.3 AUDIO ASSY (2/4)

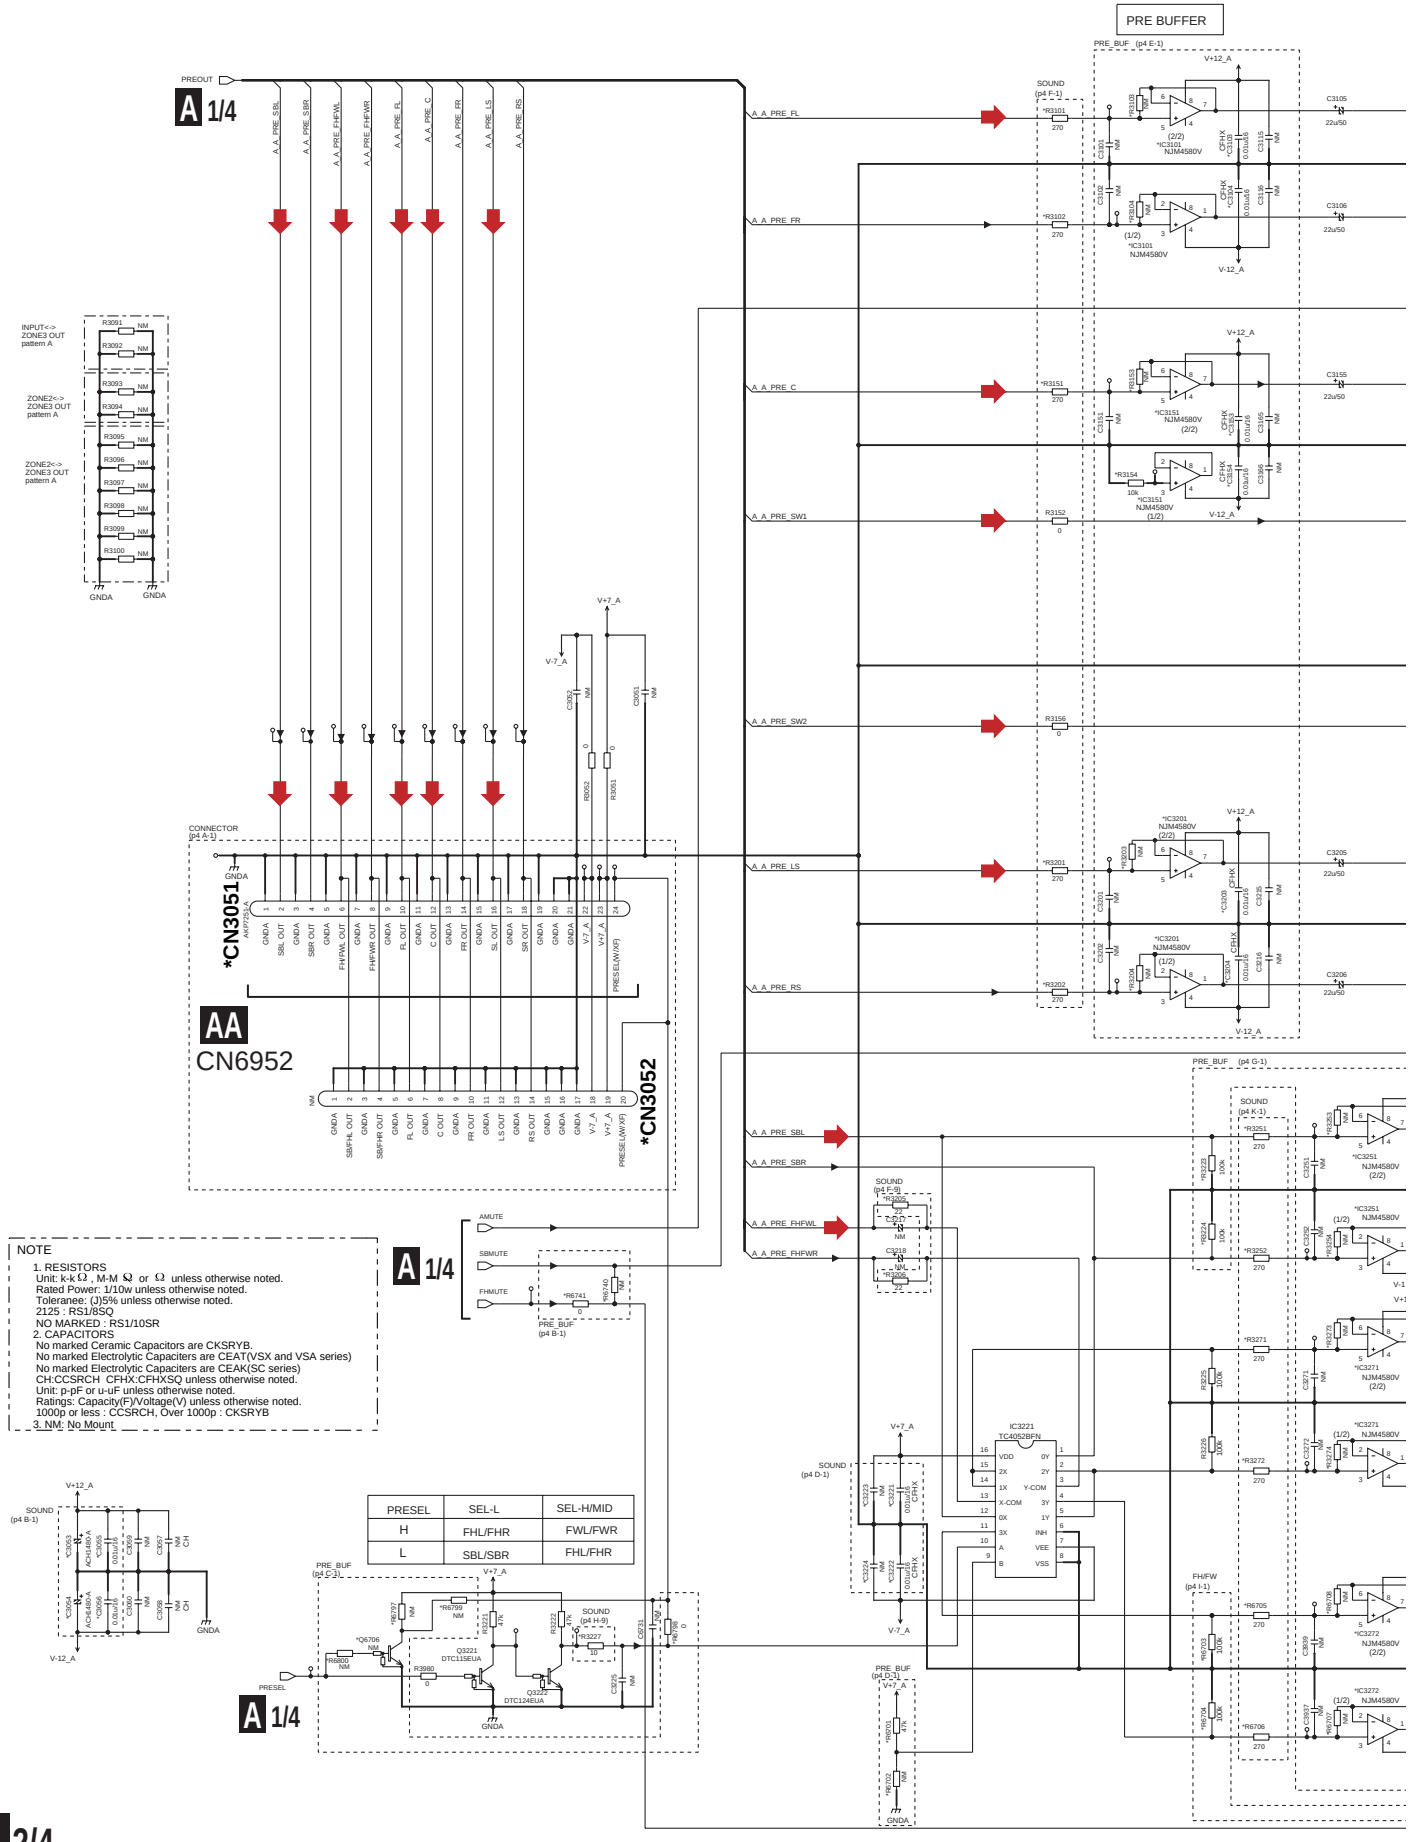

A2/4 AUDIO ASSY (2/4) (AWX1525)

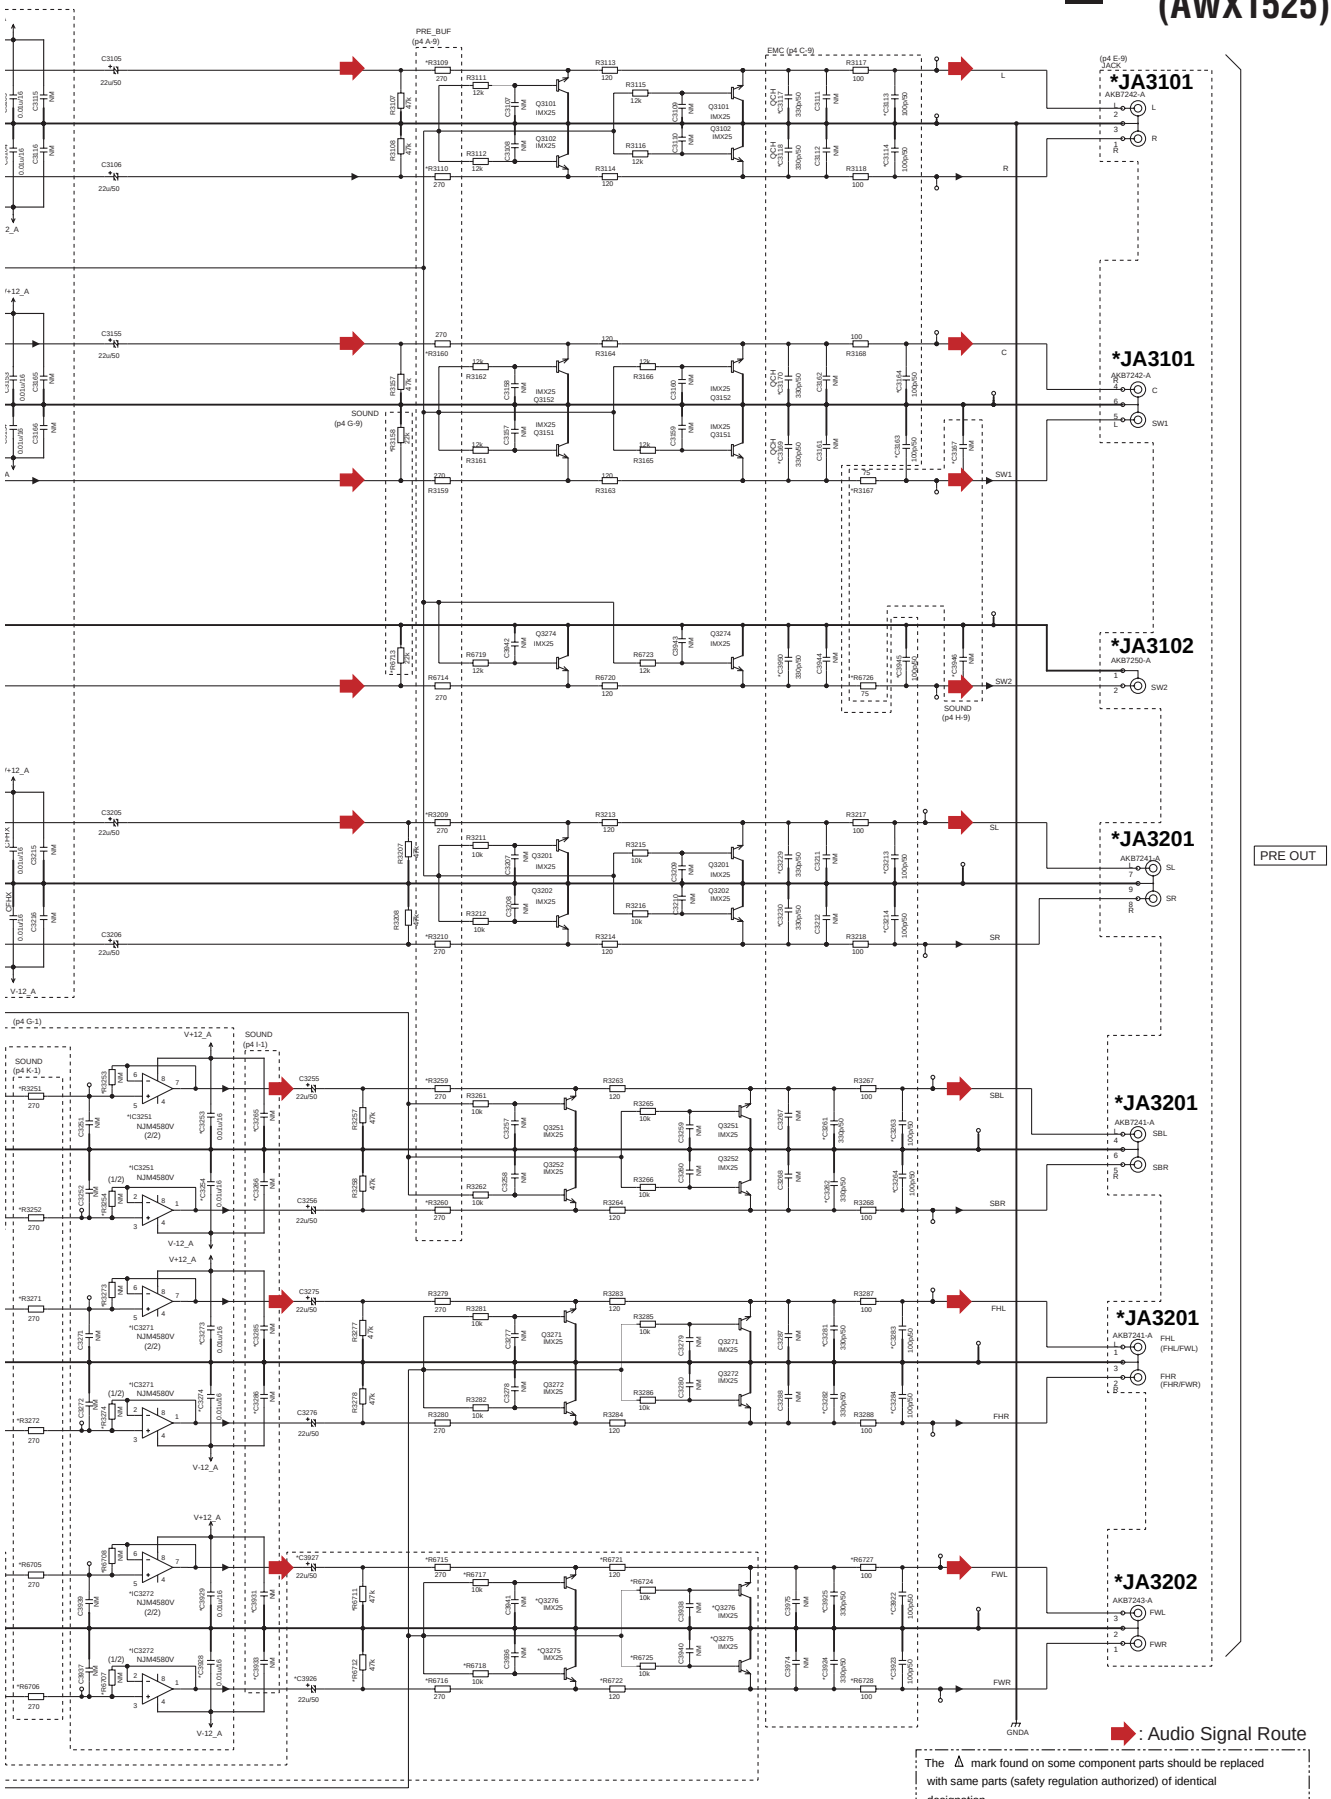

10.4 AUDIO ASSY (3/4)

JACK(pl A-1)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
JA3286	AKB7247-A	AKB7247-A	AKB7247-A	AKB7247-A	AKB7247-A	AKB7247-A	AKB7247-A	AKB7243-A	AKB7243-A	AKB7243-A	AKB7243-A	AKB7247-A	AKB7247-A	AKB7247-A	AKB7247-A
JA6701	AKB7248-A	AKB7248-A	AKB7249-A	AKB7249-A	AKB7249-A	AKB7249-A	AKB7249-A	AKB7244-A	AKB7244-A	AKB7244-A	AKB7244-A	AKB7249-A	AKB7249-A	AKB7249-A	AKB7249-A

JACK(pl F-1)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
JA2501	AKB7246-A	AKB7246-A	AKB7246-A	AKB7246-A	AKB7246-A	AKB7246-A	AKB7246-A	AKB7242-A	AKB7242-A	AKB7242-A	AKB7242-A	AKB7246-A	AKB7246-A	AKB7246-A	AKB7246-A
JA2502	AKB7247-A	AKB7247-A	AKB7247-A	AKB7247-A	AKB7247-A	AKB7247-A	AKB7247-A	AKB7243-A	AKB7243-A	AKB7243-A	AKB7243-A	AKB7247-A	AKB7247-A	AKB7247-A	AKB7247-A
JA2503	NM	NM	NM	NM	NM	NM	NM	AKB7234-A	AKB7234-A	AKB7234-A	AKB7234-A	AKB7233-A	AKB7233-A	AKB7233-A	AKB7233-A
JA2504	AKB7246-A	AKB7246-A	AKB7246-A	AKB7246-A	AKB7246-A	AKB7246-A	AKB7246-A	AKB7242-A	AKB7242-A	AKB7242-A	AKB7242-A	AKB7246-A	AKB7246-A	AKB7246-A	AKB7246-A
JA2505	AKB7247-A	AKB7247-A	AKB7247-A	AKB7247-A	AKB7247-A	AKB7247-A	AKB7247-A	AKB7243-A	AKB7243-A	AKB7243-A	AKB7243-A	AKB7247-A	AKB7247-A	AKB7247-A	AKB7247-A

EMC(pl A-2)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
C2971	470p/50	470p/50	NM	470p/50	470p/50	470p/50	NM	470p/50	470p/50	NM	470p/50	470p/50	470p/50	NM	470p/50
C2972	470p/50	470p/50	NM	470p/50	470p/50	470p/50	NM	470p/50	470p/50	NM	470p/50	470p/50	470p/50	NM	470p/50
C6703	470p/50	470p/50	NM	470p/50	470p/50	470p/50	NM	470p/50	470p/50	NM	470p/50	470p/50	470p/50	NM	470p/50
C6704	470p/50	470p/50	NM	470p/50	470p/50	470p/50	NM	470p/50	470p/50	NM	470p/50	470p/50	470p/50	NM	470p/50
C6708	470p/50	470p/50	NM	470p/50	470p/50	470p/50	NM	470p/50	470p/50	NM	470p/50	470p/50	470p/50	NM	470p/50

6V_PT(pl D-3)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
R3974	NM	NM	NM	NM	0	0	0	0	0	0	0	0	0	0	0

SOUND(pl B-1)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
R3908	0	0	NM	0	0	0	NM	0	12	NM	12	0	0	NM	0
R3909	0	0	NM	0	0	0	NM	0	12	NM	12	0	0	NM	0

EMC(pl B-3)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
C2503	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50
C2504	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50
C2523	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50
C2524	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50
C2543	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50
C2544	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50
C2589	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50
C2590	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50

EMC(pl H-2)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
C2561	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50
C2562	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50

EMC(pl H-4)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
C2563	22p/50	22p/50	NM	22p/50	22p/50	22p/50	NM	22p/50	22p/50	NM	22p/50	22p/50	22p/50	NM	22p/50
C2564	22p/50	22p/50	NM	22p/50	22p/50	22p/50	NM	22p/50	22p/50	NM	22p/50	22p/50	22p/50	NM	22p/50

PHONO(pl I-2)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
C2663	NM	NM	NM	NM	NM	NM	NM	10u/50	10u/50	10u/50	10u/50	10u/50	10u/50	10u/50	10u/50
C2664	NM	NM	NM	NM	NM	NM	NM	10u/50	10u/50	10u/50	10u/50	10u/50	10u/50	10u/50	10u/50
C2665	NM	NM	NM	NM	NM	NM	NM	330p/50	330p/50	330p/50	330p/50	330p/50	330p/50	330p/50	330p/50
C2666	NM	NM	NM	NM	NM	NM	NM	330p/50	330p/50	330p/50	330p/50	330p/50	330p/50	330p/50	330p/50
C2667	NM	NM	NM	NM	NM	NM	NM	560p/50	560p/50	NM	560p/50	560p/50	560p/50	NM	560p/50
C2668	NM	NM	NM	NM	NM	NM	NM	560p/50	560p/50	NM	560p/50	560p/50	560p/50	NM	560p/50
C2669	NM	NM	NM	NM	NM	NM	NM	47u/25	47u/25	47u/25	47u/25	47u/25	47u/25	47u/25	47u/25
C2670	NM	NM	NM	NM	NM	NM	NM	47u/25	47u/25	47u/25	47u/25	47u/25	47u/25	47u/25	47u/25
C2671	NM	NM	NM	NM	NM	NM	NM	8200p/50	8200p/50	8200p/50	8200p/50	8200p/50	8200p/50	8200p/50	8200p/50
C2672	NM	NM	NM	NM	NM	NM	NM	8200p/50	8200p/50	8200p/50	8200p/50	8200p/50	8200p/50	8200p/50	8200p/50
C2673	NM	NM	NM	NM	NM	NM	NM	1200p/50	1200p/50	1200p/50	1200p/50	1200p/50	1200p/50	1200p/50	1200p/50
C2674	NM	NM	NM	NM	NM	NM	NM	1200p/50	1200p/50	1200p/50	1200p/50	1200p/50	1200p/50	1200p/50	1200p/50
C2675	NM	NM	NM	NM	NM	NM	NM	1200p/50	1200p/50	1200p/50	1200p/50	1200p/50	1200p/50	1200p/50	1200p/50
C2676	NM	NM	NM	NM	NM	NM	NM	1200p/50	1200p/50	1200p/50	1200p/50	1200p/50	1200p/50	1200p/50	1200p/50
C2677	NM	NM	NM	NM	NM	NM	NM	10u/50	10u/50	10u/50	10u/50	10u/50	10u/50	10u/50	10u/50
C2678	NM	NM	NM	NM	NM	NM	NM	10u/50	10u/50	10u/50	10u/50	10u/50	10u/50	10u/50	10u/50
C2679	NM	NM	NM	NM	NM	NM	NM	100u/16	100u/16	100u/16	100u/16	100u/16	100u/16	100u/16	100u/16
C2680	NM	NM	NM	NM	NM	NM	NM	100u/16	100u/16	100u/16	100u/16	100u/16	100u/16	100u/16	100u/16
C2685	NM	NM	NM	NM	NM	NM	NM	220p/50	220p/50	NM	220p/50	220p/50	220p/50	NM	220p/50
C2686	NM	NM	NM	NM	NM	NM	NM	220p/50	220p/50	NM	220p/50	220p/50	220p/50	NM	220p/50
R2661	NM	NM	NM	NM	NM	NM	NM	100k	100k	100k	100k	100k	100k	100k	100k
R2662	NM	NM	NM	NM	NM	NM	NM	100k	100k	100k	100k	100k	100k	100k	100k
R2663	NM	NM	NM	NM	NM	NM	NM	620	620	620	620	620	620	620	620
R2664	NM	NM	NM	NM	NM	NM	NM	620	620	620	620	620	620	620	620
R2665	NM	NM	NM	NM	NM	NM	NM	100k	100k	100k	100k	100k	100k	100k	100k
R2666	NM	NM	NM	NM	NM	NM	NM	100k	100k	100k	100k	100k	100k	100k	100k
R2667	NM	NM	NM	NM	NM	NM	NM	560	560	560	560	560	560	560	560
R2668	NM	NM	NM	NM	NM	NM	NM	560	560	560	560	560	560	560	560
R2669	NM	NM	NM	NM	NM	NM	NM	390k	390k	390k	390k	390k	390k	390k	390k
R2670	NM	NM	NM	NM	NM	NM	NM	390k	390k	390k	390k	390k	390k	390k	390k
R2671	NM	NM	NM	NM	NM	NM	NM	30k	30k	30k	30k	30k	30k	30k	30k
R2672	NM	NM	NM	NM	NM	NM	NM	30k	30k	30k	30k	30k	30k	30k	30k
R2673	NM	NM	NM	NM	NM	NM	NM	620	620	620	620	620	620	620	620
R2674	NM	NM	NM	NM	NM	NM	NM	620	620	620	620	620	620	620	620
R3053	NM	NM	NM	NM	NM	NM	NM	0	0	0	0	0	0	0	0
R3054	NM	NM	NM	NM	NM	NM	NM	0	0	0	0	0	0	0	0
IC2661	NM	NM	NM	NM	NM	NM	NM	NJM4565MD	UPC4570G2-A	UPC4570G2-A	UPC4570G2-A	NJM4565MD	UPC4570G2-A	UPC4570G2-A	UPC4570G2-A

EMC(pl K-3)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
C2607	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50
C2608	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50

SOUND(pl A-5)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
R3030	4.7k	4.7k	NM	4.7k	4.7k	4.7k	NM	4.7k	4.7k	NM	4.7k	4.7k	4.7k	NM	4.7k
R3031	4.7M	4.7M	4.7k	4.7M	4.7M	4.7M	4.7k	4.7M	4.7M	3.9k	4.7M	4.7M	4.7M	3.9k	4.7M
R3032	1.8k	1.8k	1M	1.8k	1.8k	1.8k	1M	1.8k	1.8k	470k	1.8k	1.8k	1.8k	470k	1.8k
R3034	4.7k	NM	4.7k	4.7k	4.7k	NM	4.7k	4.7k	4.7k	NM	4.7k	4.7k	4.7k	NM	4.7k
R3041	NM	NM	NM	NM	NM	NM	NM	NM	NM	3.9k	NM	NM	NM	3.9k	NM
R3043	NM	NM	120k	NM	NM	NM	100k	NM	NM	3.9k	NM	NM	NM	3.9k	NM

CONNECTOR(pl A-8)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
JP3001	PP05PG-B20	PP05PG-B20	PP05PG-B20	PP05PG-B20	PP05PG-B20	PP05PG-B20	PP05PG-B20	ADX7745-A	ADX7745-A	ADX7745-A	ADX7745-A	ADX7745-A	ADX7745-A	ADX7745-A	ADX7745-A

SELMID(pl I-8)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
R2621	NM	NM	NM	NM	NM	NM	NM	NM	10	10	10	NM	NM	NM	NM
R2622	NM	NM	NM	NM	NM	NM	NM	NM	10	10	10	NM	NM	NM	NM
R2623	NM	NM	NM	NM	NM	NM	NM	NM	10	10	10	NM	NM	NM	NM
R2624	NM	NM	NM	NM	NM	NM	NM	NM	10	10	10	NM	NM	NM	NM
R2625	NM	NM	NM	NM	NM	NM	NM	NM	10	10	10	NM	NM	NM	NM
R2626	NM	NM	NM	NM	NM	NM	NM	NM	10	10	10	NM	NM	NM	NM
R2627	NM	NM	NM	NM	NM	NM	NM	NM	10	10	10	NM	NM	NM	NM
R2628	NM	NM	NM	NM	NM	NM	NM	NM	10	10	10	NM	NM	NM	NM
R3951	47k	47k	47k	47k	47k	47k	47k	47k	NM	NM	NM	47k	47k	47k	47k
R3952	47k	47k	47k	47k	47k	47k	47k	47k	NM	NM	NM	47k	47k	47k	47k
R3953	47k	47k	47k	47k	47k	47k	47k	47k	NM	NM	NM	47k	47k	47k	47k
R3954	47k	47k	47k	47k	47k	47k	47k	47k	NM	NM	NM	47k	47k	47k	47k
R3955	47k	47k	47k	47k	47k	47k	47k	47k	NM	NM	NM	47k	47k	47k	47k
R3956	47k	47k	47k	47k	47k	47k	47k	47k	NM	NM	NM	47k	47k	47k	47k
R3957	47k	47k	47k	47k	47k	47k	47k	47k	NM	NM	NM	47k	47k	47k	47k
R3958	47k	47k	47k	47k	47k	47k	47k	47k	NM	NM	NM	47k	47k	47k	47k
CN2510	NM	NM	NM	NM	NM	NM	NM	NM	AKF7123-A	AKF7123-A	AKF7123-A	NM	NM	NM	NM

A3/4 AUDIO ASSY (3/4) (AWX1525)

Temp(pl C-6)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
C3001	2.2u/50	2.2u/50	2.2u/50	ACH7379-A	2.2u/50	2.2u/50	2.2u/50	2.2u/50	2.2u/50	2.2u/50	ACH7379-A	2.2u/50	2.2u/50	2.2u/50	ACH7379-A
C3002	2.2u/50	2.2u/50	2.2u/50	ACH7379-A	2.2u/50	2.2u/50	2.2u/50	2.2u/50	2.2u/50	2.2u/50	ACH7379-A	2.2u/50	2.2u/50	2.2u/50	ACH7379-A
C3025	10u/50	10u/50	10u/50	ACH7380-A	10u/50	10u/50	10u/50	10u/50	10u/50	10u/50	ACH7380-A	10u/50	10u/50	10u/50	ACH7380-A
C3026	10u/50	10u/50	10u/50	ACH7380-A	10u/50	10u/50	10u/50	10u/50	10u/50	10u/50	ACH7380-A	10u/50	10u/50	10u/50	ACH7380-A

SOUND(pl D-6)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
R2575	0	0	0	0	0	0	0	0	22	22	22	0	0	0	0
R2576	0	0	0	0	0	0	0	0	22	22	22	0	0	0	0

SOUND(pl B-7)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
R2718	0	0	0	0	0	0	0	0	10	10	10	0	0	0	0
R2719	0	0	0	0	0	0	0	0	10	10	10	0	0	0	0
R3017	220k	200k	200k	200k	220k	200k	200k	200k	200k	200k	200k	200k	200k	200k	200k

SOUND(pl B-9)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
C2703	100p/50	NM	NM	NM	100p/50	100p/50	NM	100p/50	100p/50	100p/50	100p/50	100p/50	100p/50	100p/50	100p/50
C2704	100p/50	NM	NM	NM	100p/50	100p/50	NM	100p/50	100p/50	100p/50	100p/50	100p/50	100p/50	100p/50	100p/50
C2709	0.01u/50	0.01u/16	0.01u/16	0.01u/16	0.01u/50	0.01u/50	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16
C2710	0.01u/50	0.01u/16	0.01u/16	0.01u/16	0.01u/50	0.01u/50	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16
IC2702	NJM4565MD	UPC4570G2-A	UPC4570G2-A	UPC4570G2-A	NJM4565MD	NJM4565MD	UPC4570G2-A	NJM4565MD	UPC4570G2-A	UPC4570G2-A	NJM4565MD	NJM4565MD	UPC4570G2-A	UPC4570G2-A	NJM4565MD

PRE_BUF(pl C-11)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
C3953	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM
C3954	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM
R6735	10	10	10	10	NM	NM	NM	10	10	10	10	10	10	10	10
R6736	10	10	10	10	NM	NM	NM	10	10	10	10	10	10	10	10
R6747	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM
R6748	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM

6V DET(pl D-15)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
R2977	100	100	100	100	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM

SOUND(pl C-16)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
R2841	0	0	0	0	0	0	0	0	10	10	10	0	0	0	0

SOUND(pl E-12)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
C2807	220p/50	220p/50	220p/50	220p/50	220p/50	220p/50	220p/50	220p/50	NM	NM	NM	220p/50	220p/50	220p/50	220p/50
C2808	220p/50	220p/50	220p/50	220p/50	220p/50	220p/50	220p/50	220p/50	NM	NM	NM	220p/50	220p/50	220p/50	220p/50
C2815	NM	NM	NM	NM	NM	NM	NM	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16
C2816	NM	NM	NM	NM	NM	NM	NM	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16
R2827	0	0	0	0	0	0	0	0	10	10	10	0	0	0	0
R2828	0	0	0	0	0	0	0	0	10	10	10	0	0	0	0

SOUND(pl B-16)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
R2717	0	0	0	0	0	0	0	0	12	12	12	0	0	0	0

SOUND(pl C-12)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
R2577	10	10	10	10	10	10	10	10	100	100	100	10	10	10	10
R2578	10	10	10	10	10	10	10	10	100	100	100	10	10	10	10

SOUND(pl E-10)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
IC2751	NJM4565MD	NJM4565MD	NJM4565MD	NJM4565MD	NJM4565MD	NJM4565MD	NJM4565MD	NJM4565MD	UPC4570G2-A	UPC4570G2-A	NJM4565MD	NJM4565MD	UPC4570G2-A	UPC4570G2-A	NJM4565MD

SOUND(pl C-13)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
C2828	ACH1479-A	ACH1479-A	ACH1479-A	ACH1479-A	ACH1479-A	ACH1479-A	100u/16	ACH1479-A	ACH1479-A	ACH1479-A	ACH1479-A	ACH1479-A	ACH1479-A	ACH1479-A	ACH1479-A
C2836	ACH1479-A	ACH1479-A	ACH1479-A	ACH1479-A	ACH1479-A	ACH1479-A	100u/16	ACH1479-A	ACH1479-A	ACH1479-A	ACH1479-A	ACH1479-A	ACH1479-A	ACH1479-A	ACH1479-A

SOUND(pl F-8)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
C2693	ACH1479-A	ACH1479-A	ACH1479-A	ACH1479-A	ACH1479-A	ACH1479-A	100u/16	ACH1479-A	ACH1479-A	ACH1479-A	ACH1479-A	ACH1479-A	ACH1479-A	ACH1479-A	ACH1479-A
C2694	ACH1479-A	ACH1479-A	ACH1479-A	ACH1479-A	ACH1479-A	ACH1479-A	100u/16	ACH1479-A	ACH1479-A	ACH1479-A	ACH1479-A	ACH1479-A	ACH1479-A	ACH1479-A	ACH1479-A

SOUND(pl C-11)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
R2579	10	10	10	10	10	10	10	10	100	100	100	10	10	10	10
R2580	10	10	10	10	10	10	10	10	100	100	100	10	10	10	10

SOUND(pl I-14)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
C6722	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16
C6723	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16
IC6702	NJM4565MD	NJM4565MD	NJM4565MD	NJM4565MD	NJM4565MD	NJM4565MD	NJM4565MD	NJM4565MD	NJM4565MD	UPC4570G2-A	UPC4570G2-A	NJM4565MD	UPC4570G2-A	UPC4570G2-A	UPC4570G2-A

TUNER(pl J-13)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
C3903	100u/16	100u/16	NM	100u/16	100u/16	100u/16	NM	100u/16	100u/16	NM	100u/16	100u/16	100u/16	NM	100u/16
C3906	100u/16	100u/16	NM	100u/16	100u/16	100u/16	NM	100u/16	100u/16	NM	100u/16	100u/16	100u/16	NM	100u/16
C3907	0.01u/50	0.01u/50	NM	0.01u/50	0.01u/50	0.01u/50	NM	0.01u/50	0.01u/50	NM	0.01u/50	0.01u/50	0.01u/50	NM	0.01u/50
C3913	10p/50	10p/50	NM	10p/50	10p/50	10p/50	NM	10p/50	10p/50	NM	10p/50	10p/50	10p/50	NM	10p/50
C3914	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50
C3915	10p/50	10p/50	NM	10p/50	10p/50	10p/50	NM	10p/50	10p/50	NM	10p/50	10p/50	10p/50	NM	10p/50
C3917	10p/50	10p/50	NM	10p/50	10p/50	10p/50	NM	10p/50	10p/50	NM	10p/50	10p/50	10p/50	NM	10p/50
R3901	2.2	2.2	NM	2.2	2.2	2.2	NM	2.2	2.2	NM	2.2	2.2	2.2	NM	2.2
R3902	2.2	2.2	NM	2.2	2.2	2.2	NM	2.2	2.2	NM	2.2	2.2	2.2	NM	2.2
R3903	0	0	NM	0	0	0	NM	0	0	NM	0	0	0	NM	0
R3904	2.2k	2.2k	NM	2.2k	2.2k	2.2k	NM	2.2k	2.2k	NM	2.2k	2.2k	2.2k	NM	2.2k
R3905	1M	1M	0	1M	1M	1M	0	1M	1M	0	1M	1M	1M	0	1M
R3906	1M	1M	0	1M	1M	1M	0	1M	1M	0	1M	1M	1M	0	1M
R3907	10	10	NM	10	10	10	NM	10	10	NM	10	10	10	NM	10
R3917	10	10	NM	10	10	10	NM	10	10	NM	10	10	10	NM	10
R3918	10	10	NM	10	10	10	NM	10	10	NM	10	10	10	NM	10
R3919	10	10	NM	10	10	10	NM	10	10	NM	10	10	10	NM	10
R3976	10	10	NM	10	10	10	NM	10	10	NM	10	10	10	NM	10
CN3902	96048-09C	96048-09C	NM	96048-09C	96048-09C	96048-09C	NM	96048-09C	96048-09C	NM	96048-09C	96048-09C	96048-09C	NM	96048-09C
D3902	DZ2J056M0	DZ2J056M0	NM	DZ2J056M0	DZ2J056M0	DZ2J056M0	NM	DZ2J056M0	DZ2J056M0	NM	DZ2J056M0	DZ2J056M0	DZ2J056M0	NM	DZ2J056M0
Q3901	2SC5712	2SC5712	NM	2SC5712	2SC5712	2SC5712	NM	2SC5712	2SC5712	NM	2SC5712	2SC5712	2SC5712	NM	2SC5712

SOUND(pl K-15)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
C3909	330p/50	330p/50	NM	330p/50	330p/50	330p/50	NM	330p/50	NM	NM	NM	330p/50	330p/50	NM	330p/50

SOUND(pl E-3)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
C6720	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16
C6721	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16
R3055	0	10	10	10	0	0	0	0	10	0	0	0	0	0	0
R3056	0	10	10	10	0	0	0	0	10	0	0	0	0	0	0
IC6701	NJM4565MD	NJM4565MD	NJM4565MD	NJM4565MD	NJM4565MD	NJM4565MD	NJM4565MD	NJM4565MD	UPC4570G2-A	UPC4570G2-A	UPC4570G2-A	NJM4565MD	UPC4570G2-A	UPC4570G2-A	UPC4570G2-A

NOTE
1. RESISTORS
Unit: k-k Ω , M-M Ω or Ω unless otherwise noted.
Rated Power: 1/10w unless otherwise noted.
Toleranee: (J)5% unless otherwise noted.
2125 : RS1/8SQ
NO MARKED : RS1/10SR
2. CAPACITORS
No marked Ceramic Capacitors are CKSRYB.
No marked Electrolytic Capaciters are CEAT(VSX and VSA series)
No marked Electrolytic Capaciters are CEAK(SC series)
CH:CCSRCH CFHX:CFHXSQ unless otherwise noted.
Unit: p-pF or u-uF unless otherwise noted.
Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
1000p or less : CCSRCH, Over 1000p : CKSRYB
3. NM: No Mount

The ⚠ mark found on some component parts should be replaced with same parts (safety regulation authorized) of identical designation.

10.5 AUDIO ASSY (4/4)

CONNECTOR(p2 G-1)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
CN3051	AKP7251-A	AKP7251-A	AKP7251-A	AKP7251-A	NM	NM	NM	AKP7251-A	AKP7251-A	AKP7251-A	AKP7251-A	AKP7251-A	AKP7251-A	AKP7251-A	AKP7251-A
CN3052	NM	NM	NM	NM	AKP7249-A	AKP7249-A	AKP7249-A	NM	NM	NM	NM	NM	NM	NM	NM

SOUND(p2 I-1)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
C3053	NM	100u/16	100u/16	100u/16	NM	NM	100u/16	ACH1480-A	ACH1480-A	ACH1480-A	ACH1480-A	ACH1480-A	ACH1480-A	ACH1480-A	ACH1480-A
C3054	NM	100u/16	100u/16	100u/16	NM	NM	100u/16	ACH1480-A	ACH1480-A	ACH1480-A	ACH1480-A	ACH1480-A	ACH1480-A	ACH1480-A	ACH1480-A
C3055	NM	NM	NM	NM	NM	NM	NM	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16
C3056	NM	NM	NM	NM	NM	NM	NM	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16

PRE_BUF(p2 I-3)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
R6740	NM	NM	NM	NM	0	0	0	NM	NM	NM	NM	NM	NM	NM	NM
R6741	0	0	0	0	NM	NM	NM	0	0	0	0	0	0	0	0

PRE_BUF(p2 K-2)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
R6797	NM	NM	NM	NM	47k	47k	47k	NM	NM	NM	NM	NM	NM	NM	NM
R6798	0	0	0	0	NM	NM	NM	0	0	0	0	0	0	0	0
R6799	NM	NM	NM	NM	0	0	0	NM	NM	NM	NM	NM	NM	NM	NM
R6800	NM	NM	NM	NM	0	0	0	NM	NM	NM	NM	NM	NM	NM	NM
Q6706	NM	NM	NM	NM	DTC124EUA	DTC124EUA	DTC124EUA	NM	NM	NM	NM	NM	NM	NM	NM

SOUND(p2 J-5)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
C3221	NM	NM	NM	NM	NM	NM	NM	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16
C3222	NM	NM	NM	NM	NM	NM	NM	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16
C3223	0.01u/50	NM	NM	NM	0.01u/50	0.01u/50	NM	NM	NM	NM	NM	NM	NM	NM	NM
C3224	0.01u/50	NM	NM	NM	0.01u/50	0.01u/50	NM	NM	NM	NM	NM	NM	NM	NM	NM

PRE_BUF(p2 K-5)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
R6701	47k	47k	47k	47k	NM	NM	NM	47k	47k	47k	47k	47k	47k	47k	47k
R6702	NM	NM	NM	NM	47k	47k	47k	NM	NM	NM	NM	NM	NM	NM	NM

PRE_BUF(p2 B-6)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
C3103	NM	NM	NM	NM	NM	NM	NM	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16
C3104	NM	NM	NM	NM	NM	NM	NM	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16
C3153	NM	NM	NM	NM	NM	NM	NM	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16
C3154	NM	NM	NM	NM	NM	NM	NM	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16
C3203	NM	NM	NM	NM	NM	NM	NM	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16
C3204	NM	NM	NM	NM	NM	NM	NM	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16
R3103	0	0	0	0	0	0	0	NM	NM	NM	NM	NM	NM	NM	NM
R3104	0	0	0	0	0	0	0	NM	NM	NM	NM	NM	NM	NM	NM
R3153	0	0	0	0	0	0	0	NM	NM	NM	NM	NM	NM	NM	NM
R3154	NM	NM	NM	NM	NM	NM	NM	10k	10k	10k	10k	10k	10k	10k	10k
R3203	0	0	0	0	0	0	0	NM	NM	NM	NM	NM	NM	NM	NM
R3204	0	0	0	0	0	0	0	NM	NM	NM	NM	NM	NM	NM	NM
IC3101	NM	NM	NM	NM	NM	NM	NM	NJM4580V	NJM4580V	NJM4580V	NJM4580V	NJM4580V	NJM4580V	NJM4580V	NJM4580V
IC3151	NM	NM	NM	NM	NM	NM	NM	NJM4580V	NJM4580V	NJM4580V	NJM4580V	NJM4580V	NJM4580V	NJM4580V	NJM4580V
IC3201	NM	NM	NM	NM	NM	NM	NM	NJM4580V	NJM4580V	NJM4580V	NJM4580V	NJM4580V	NJM4580V	NJM4580V	NJM4580V

SOUND(p2 B-6)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
R3101	0	0	0	0	0	0	0	220	270	270	270	220	220	220	220
R3102	0	0	0	0	0	0	0	220	270	270	270	220	220	220	220
R3151	0	0	0	0	0	0	0	220	270	270	270	220	220	220	220
R3201	0	0	0	0	0	0	0	220	270	270	270	220	220	220	220
R3202	0	0	0	0	0	0	0	220	270	270	270	220	220	220	220

PRE_BUF(p2 H-7)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
C3253	NM	NM	NM	NM	NM	NM	NM	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16
C3254	NM	NM	NM	NM	NM	NM	NM	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16
C3273	NM	NM	NM	NM	NM	NM	NM	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16
C3274	NM	NM	NM	NM	NM	NM	NM	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16
C3928	NM	NM	NM	NM	NM	NM	NM	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16
C3929	NM	NM	NM	NM	NM	NM	NM	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16
R3223	NM	NM	NM	NM	100k	100k	100k	100k	100k	100k	100k	100k	100k	100k	100k
R3224	NM	NM	NM	NM	100k	100k	100k	100k	100k	100k	100k	100k	100k	100k	100k
R3253	0	0	0	0	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM
R3254	0	0	0	0	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM
R3273	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM
R3274	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM
R6707	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM
R6708	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM
IC3251	NM	NM	NM	NM	NM	NJM4565V	NJM4565V	NJM4565V	NJM4580V	NJM4580V	NJM4580V	NJM4580V	NJM4580V	NJM4580V	NJM4580V
IC3271	NJM4565V	NJM4565V	NJM4565V	NJM4565V	NJM4565V	NJM4565V	NJM4565V	NJM4565V	NJM4580V	NJM4580V	NJM4580V	NJM4580V	NJM4580V	NJM4580V	NJM4580V
IC3272	NJM4565V	NJM4565V	NJM4565V	NJM4565V	NM	NM	NM	NJM4580V	NJM4580V	NJM4580V	NJM4580V	NJM4580V	NJM4580V	NJM4580V	NJM4580V

SOUND(p2 H-8)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
C3265	NM	NM	NM	NM	0.01u/50	0.01u/50	NM	NM	NM	NM	NM	NM	NM	NM	NM
C3266	NM	NM	NM	NM	0.01u/50	0.01u/50	NM	NM	NM	NM	NM	NM	NM	NM	NM
C3285	0.01u/50	NM	NM	NM	0.01u/50	0.01u/50	NM	NM	NM	NM	NM	NM	NM	NM	NM
C3286	0.01u/50	NM	NM	NM	0.01u/50	0.01u/50	NM	NM	NM	NM	NM	NM	NM	NM	NM
C3931	0.01u/50	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM
C3933	0.01u/50	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM

FH/SW(p2 K-7)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
C3926	22u/50	22u/50	22u/50	22u/50	NM	NM	NM	22u/50	22u/50	22u/50	22u/50	22u/50	22u/50	22u/50	22u/50
C3927	22u/50	22u/50	22u/50	22u/50	NM	NM	NM	22u/50	22u/50	22u/50	22u/50	22u/50	22u/50	22u/50	22u/50
R6703	100k	100k	100k	100k	NM	NM	NM	100k	100k	100k	100k	100k	100k	100k	100k
R6704	100k	100k	100k	100k	NM	NM	NM	100k	100k	100k	100k	100k	100k	100k	100k
R6711	47k	47k	47k	47k	NM	NM	NM	47k	47k	47k	47k	47k	47k	47k	47k
R6712	47k	47k	47k	47k	NM	NM	NM	47k	47k	47k	47k	47k	47k	47k	47k
R6715	270	270	270	270	NM	NM	NM	270	270	270	270	270	270	270	270
R6716	270	270	270	270	NM	NM	NM	270	270	270	270	270	270	270	270
R6717	10k	10k	10k	10k	NM	NM	NM	10k	10k	10k	10k	10k	10k	10k	10k
R6718	10k	10k	10k	10k	NM	NM	NM	10k	10k	10k	10k	10k	10k	10k	10k
R6721	120	120	120	120	NM	NM	NM	120	120	120	120	120	120	120	120
R6722	120	120	120	120	NM	NM	NM	120	120	120	120	120	120	120	120
R6724	10k	10k	10k	10k	NM	NM	NM	10k	10k	10k	10k	10k	10k	10k	10k
R6725	10k	10k	10k	10k	NM	NM	NM	10k	10k	10k	10k	10k	10k	10k	10k
Q3275	IMX25	IMX25	IMX25	IMX25	NM	NM	NM	IMX25	IMX25	IMX25	IMX25	IMX25	IMX25	IMX25	IMX25
Q3276	IMX25	IMX25	IMX25	IMX25	NM	NM	NM	IMX25	IMX25	IMX25	IMX25	IMX25	IMX25	IMX25	IMX25

SOUND(p2 H-7)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
R3251	0	0	0	0	220	220	220	220	270	270	270	220	220	220	220
R3252	0	0	0	0	220	220	220	220	270	270	270	220	220	220	220
R3271	220	220	220	220	220	220	220	220	270	270	270	220	220	220	220
R3272	220	220	220	220	220	220	220	220	270	270	270	220	220	220	220
R6705	220	220	220	220	NM	NM	NM	220	270	270	270	220	220	220	220
R6706	220	220	220	220	NM	NM	NM	220	270	270	270	220	220	220	220

PRE_BUF(p2 B-9)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
R3109	150	150	150	150	150	150	150	270	270	270	270	270	270	270	270
R3110	150	150	150	150	150	150	150	270	270	270	270	270	270	270	270
R3160	150	150	150	150	150	150	150	270	270	270	270	270	270	270	270
R3209	150	150	150	150	150	150	150	270	270	270	270	270	270	270	270
R3210	150	150	150	150	150	150	150	270	270	270	270	270	270	270	270
R3259	150	150	150	150	270	270	270	270	270	270	270	270	270	270	270
R3260	150	150	150	150	270	270	270	270	270	270	270	270	270	270	270

EMC(p2 B-11)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
C3113	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50
C3114	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50
C3117	330p/50	330p/50	NM	330p/50	330p/50	330p/50	NM	330p/50	330p/50	NM	330p/50	330p/50	330p/50	NM	330p/50
C3118	330p/50	330p/50	NM	330p/50	330p/50	330p/50	NM	330p/50	330p/50	NM	330p/50	330p/50	330p/50	NM	330p/50
C3163	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50
C3164	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50
C3169	330p/50	330p/50	NM	330p/50	330p/50	330p/50	NM	330p/50	330p/50	NM	330p/50	330p/50	330p/50	NM	330p/50
C3170	330p/50	330p/50	NM	330p/50	330p/50	330p/50	NM	330p/50	330p/50	NM	330p/50	330p/50	330p/50	NM	330p/50
C3213	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50
C3214	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50
C3229	330p/50	330p/50	NM	330p/50	330p/50	330p/50	NM	330p/50	330p/50	NM	330p/50	330p/50	330p/50	NM	330p/50
C3230	330p/50	330p/50	NM	330p/50	330p/50	330p/50	NM	330p/50	330p/50	NM	330p/50	330p/50	330p/50	NM	330p/50
C3261	330p/50	330p/50	NM	330p/50	330p/50	330p/50	NM	330p/50	330p/50	NM	330p/50	330p/50	330p/50	NM	330p/50
C3262	330p/50	330p/50	NM	330p/50	330p/50	330p/50	NM	330p/50	330p/50	NM	330p/50	330p/50	330p/50	NM	330p/50
C3263	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50
C3264	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50
C3281	330p/50	330p/50	NM	330p/50	330p/50	330p/50	NM	330p/50	330p/50	NM	330p/50	330p/50	330p/50	NM	330p/50
C3282	330p/50	330p/50	NM	330p/50	330p/50	330p/50	NM	330p/50	330p/50	NM	330p/50	330p/50	330p/50	NM	330p/50
C3283	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50
C3284	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50
C3922	100p/50	100p/50	NM	100p/50	NM	NM	NM	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50
C3923	100p/50	100p/50	NM	100p/50	NM	NM	NM	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50
C3924	330p/50	330p/50	NM	330p/50	NM	NM	NM	330p/50	330p/50	NM	330p/50	330p/50	330p/50	NM	330p/50
C3925	330p/50	330p/50	NM	330p/50	NM	NM	NM	330p/50	330p/50	NM	330p/50	330p/50	330p/50	NM	330p/50
C3945	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50	100p/50	NM	100p/50	100p/50	100p/50	NM	100p/50
C3950	330p/50	330p/50	NM	330p/50	330p/50	330p/50	NM	330p/50	330p/50	NM	330p/50	330p/50	330p/50	NM	330p/50
R6727	100	100	100	100	NM	NM	NM	100	100	100	100	100	100	100	100
R6728	100	100	100	100	NM	NM	NM	100	100	100	100	100	100	100	100

JACK(p2 B-13)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
JA3101	AKB7246-A	AKB7246-A	AKB7246-A	AKB7246-A	AKB7246-A	AKB7246-A	AKB7246-A	AKB7242-A	AKB7242-A	AKB7242-A	AKB7242-A	AKB7246-A	AKB7246-A	AKB7246-A	AKB7246-A
JA3102	AKB7248-A	AKB7248-A	AKB7248-A	AKB7248-A	AKB7248-A	AKB7248-A	AKB7248-A	AKB7250-A	AKB7250-A	AKB7250-A	AKB7250-A	AKB7248-A	AKB7248-A	AKB7248-A	AKB7248-A
JA3201	AKB7245-A	AKB7245-A	AKB7245-A	AKB7245-A	AKB7245-A	AKB7245-A	AKB7245-A	AKB7241-A	AKB7241-A	AKB7241-A	AKB7241-A	AKB7245-A	AKB7245-A	AKB7245-A	AKB7245-A
JA3202	AKB7247-A	AKB7247-A	AKB7247-A	AKB7247-A	NM	NM	NM	AKB7243-A	AKB7243-A	AKB7243-A	AKB7243-A	AKB7247-A	AKB7247-A	AKB7247-A	AKB7247-A

SOUND(p1 H-10)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
R2715	100	100	100	100	0	100	100	100	100	100	100	100	100	100	100
R2716	100	100	100	100	0	100	100	100	100	100	100	100	100	100	100

SOUND(p2 H-5)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
R3205	22	22	22	22	0	22	22	22	22	22	22	22	22	22	22
R3206	22	22	22	22	0	22	22	22	22	22	22	22	22	22	22

SOUND(p1 H-11)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
C2763	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16
C2764	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16
R2764	22k	NM	NM	NM	22k	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM
R6746	22k	NM	NM	NM	22k	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM

SOUND(p2 E-9)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
R3158	100k	22k	22k	22k	100k	22k	22k	22k	22k	22k	22k	22k	22k	22k	22k
R6713	100k	22k	22k	22k	100k	22k	22k	22k	22k	22k	22k	22k	22k	22k	22k

SOUND(p2 E-11)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
C3167	10p/50	NM	10p/50	NM	10p/50	10p/50	NM	10p/50	NM	10p/50	NM	10p/50	NM	10p/50	NM
C3946	10p/50	NM	10p/50	NM	10p/50	10p/50	NM	10p/50	NM	10p/50	NM	10p/50	NM	10p/50	NM
R3167	82	75	75	75	82	75	75	75	75	75	75	75	75	75	75
R6726	82	75	75	75	82	75	75	75	75	75	75	75	75	75	75

SOUND(p2 F-3)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
R3227	0	10	10	10	0	10	10	10	10	10	10	10	10	10	10

SOUND(p1 C-8)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
C2701	0.01u/50	NM	NM	NM	0.01u/50	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM
C2702	0.01u/50	NM	NM	NM	0.01u/50	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM
C2711	NM	NM	NM	NM	NM	NM	NM	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16
C2712	NM	NM	NM	NM	NM	NM	NM	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16

SOUND(p1 H-12)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
C6718	0.01u/50	NM	NM	NM	0.01u/50	0.01u/50	NM	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16
R6729	0	10	10	10	0	0	10	0	0	0	0	0	0	0	0

SOUND(p1 I-13)

	AWX1525	AWX1356	AWX1526	AWX1632	AWX1527	AWX1445	AWX1528	AWX1486	AWX1446	AWX1533	AWX1611	AWX1482	AWX1534	AWX1535	AWX1612
C6719	0.01u/50	NM	NM	NM	0.01u/50	0.01u/50	NM	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16	0.01u/16
R6730	0	10	10	10	0	0	10	0	0	0	0	0	0	0	0

10.6 DAC HIGH ASSY (1/3)

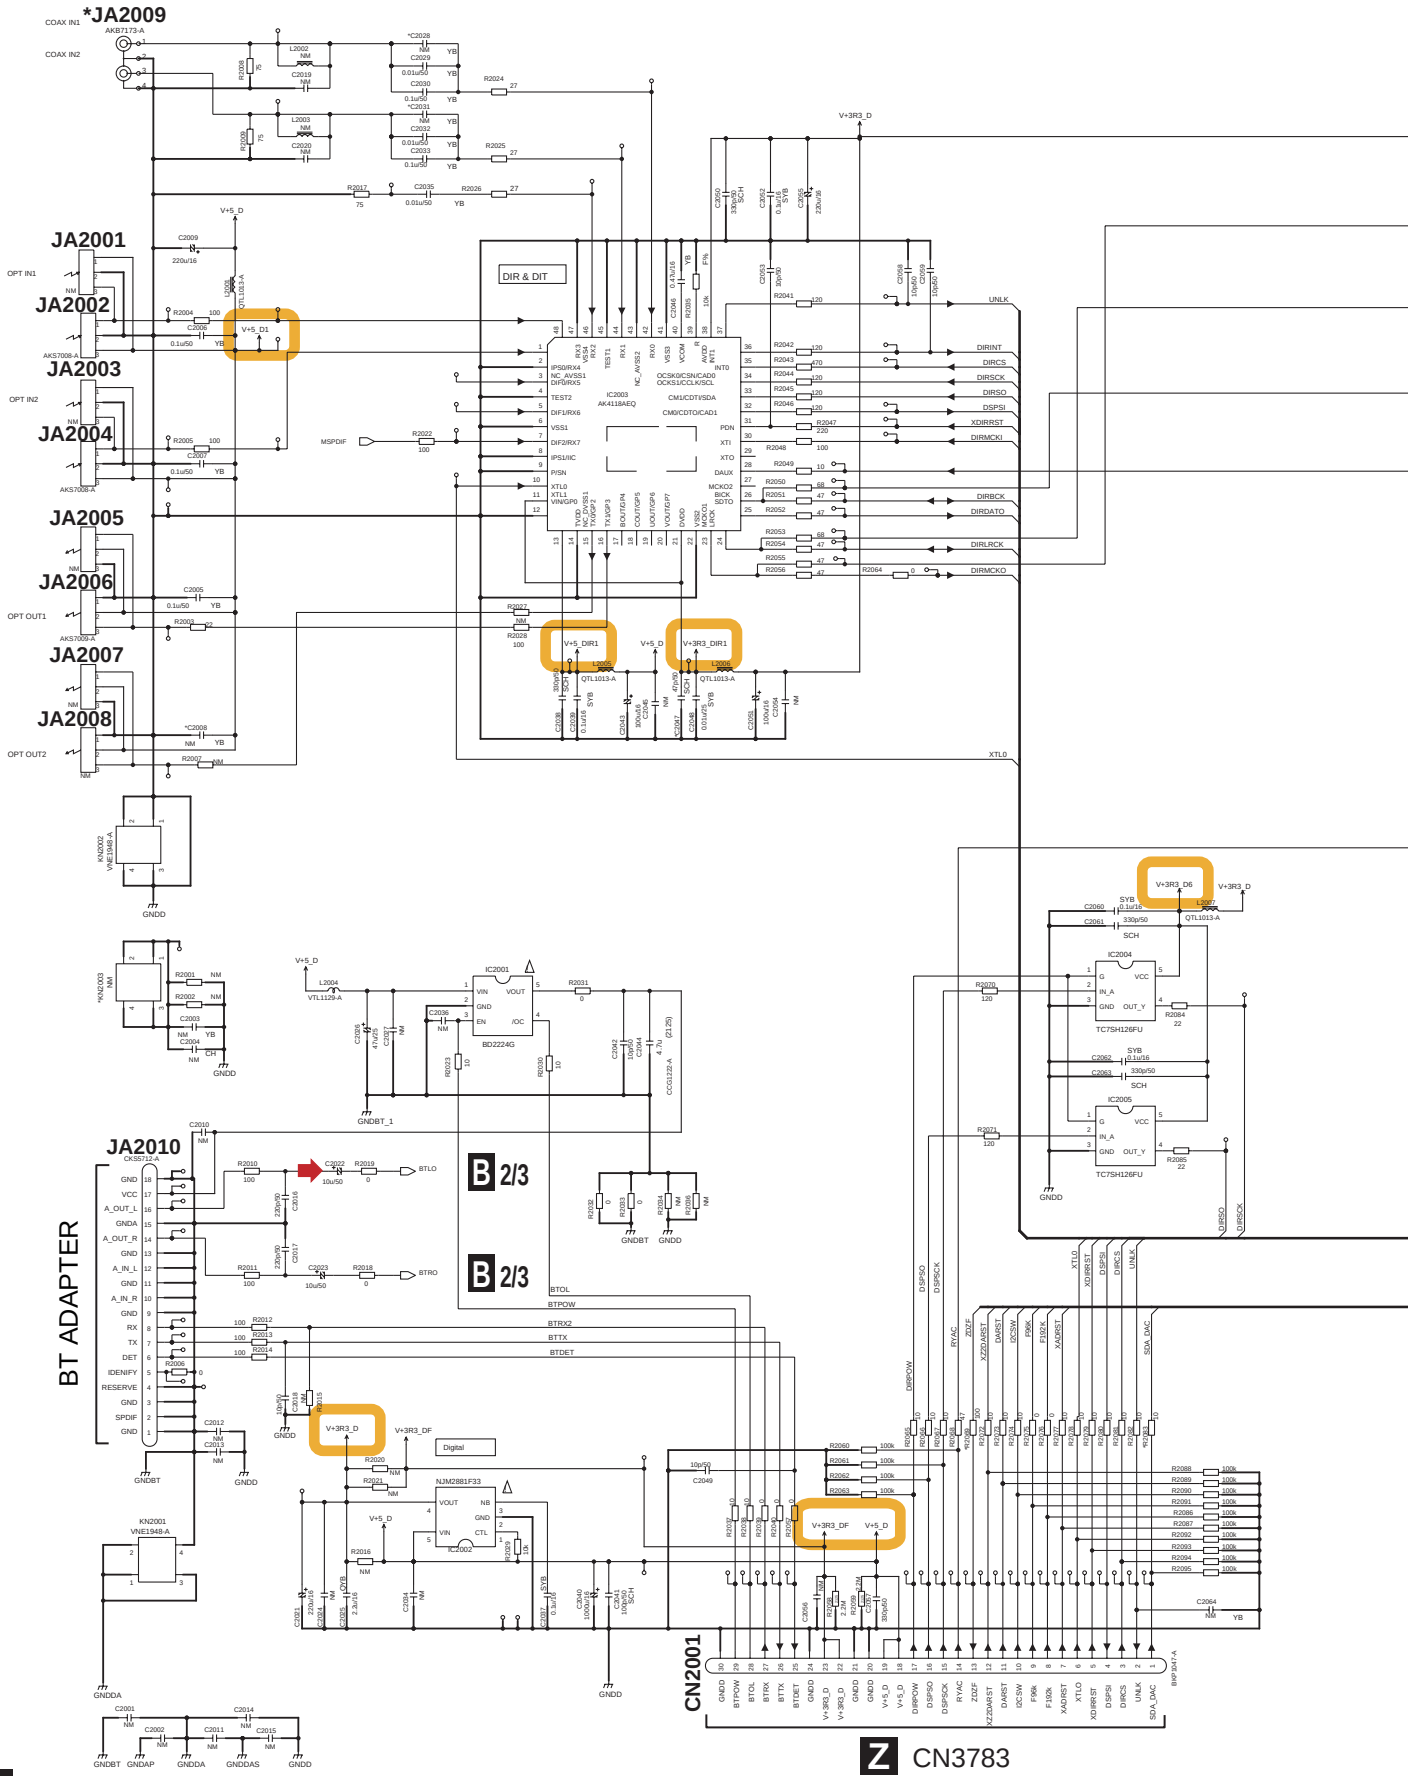

B1/3 DAC HIGH ASSY (1/3) (AWX1515)

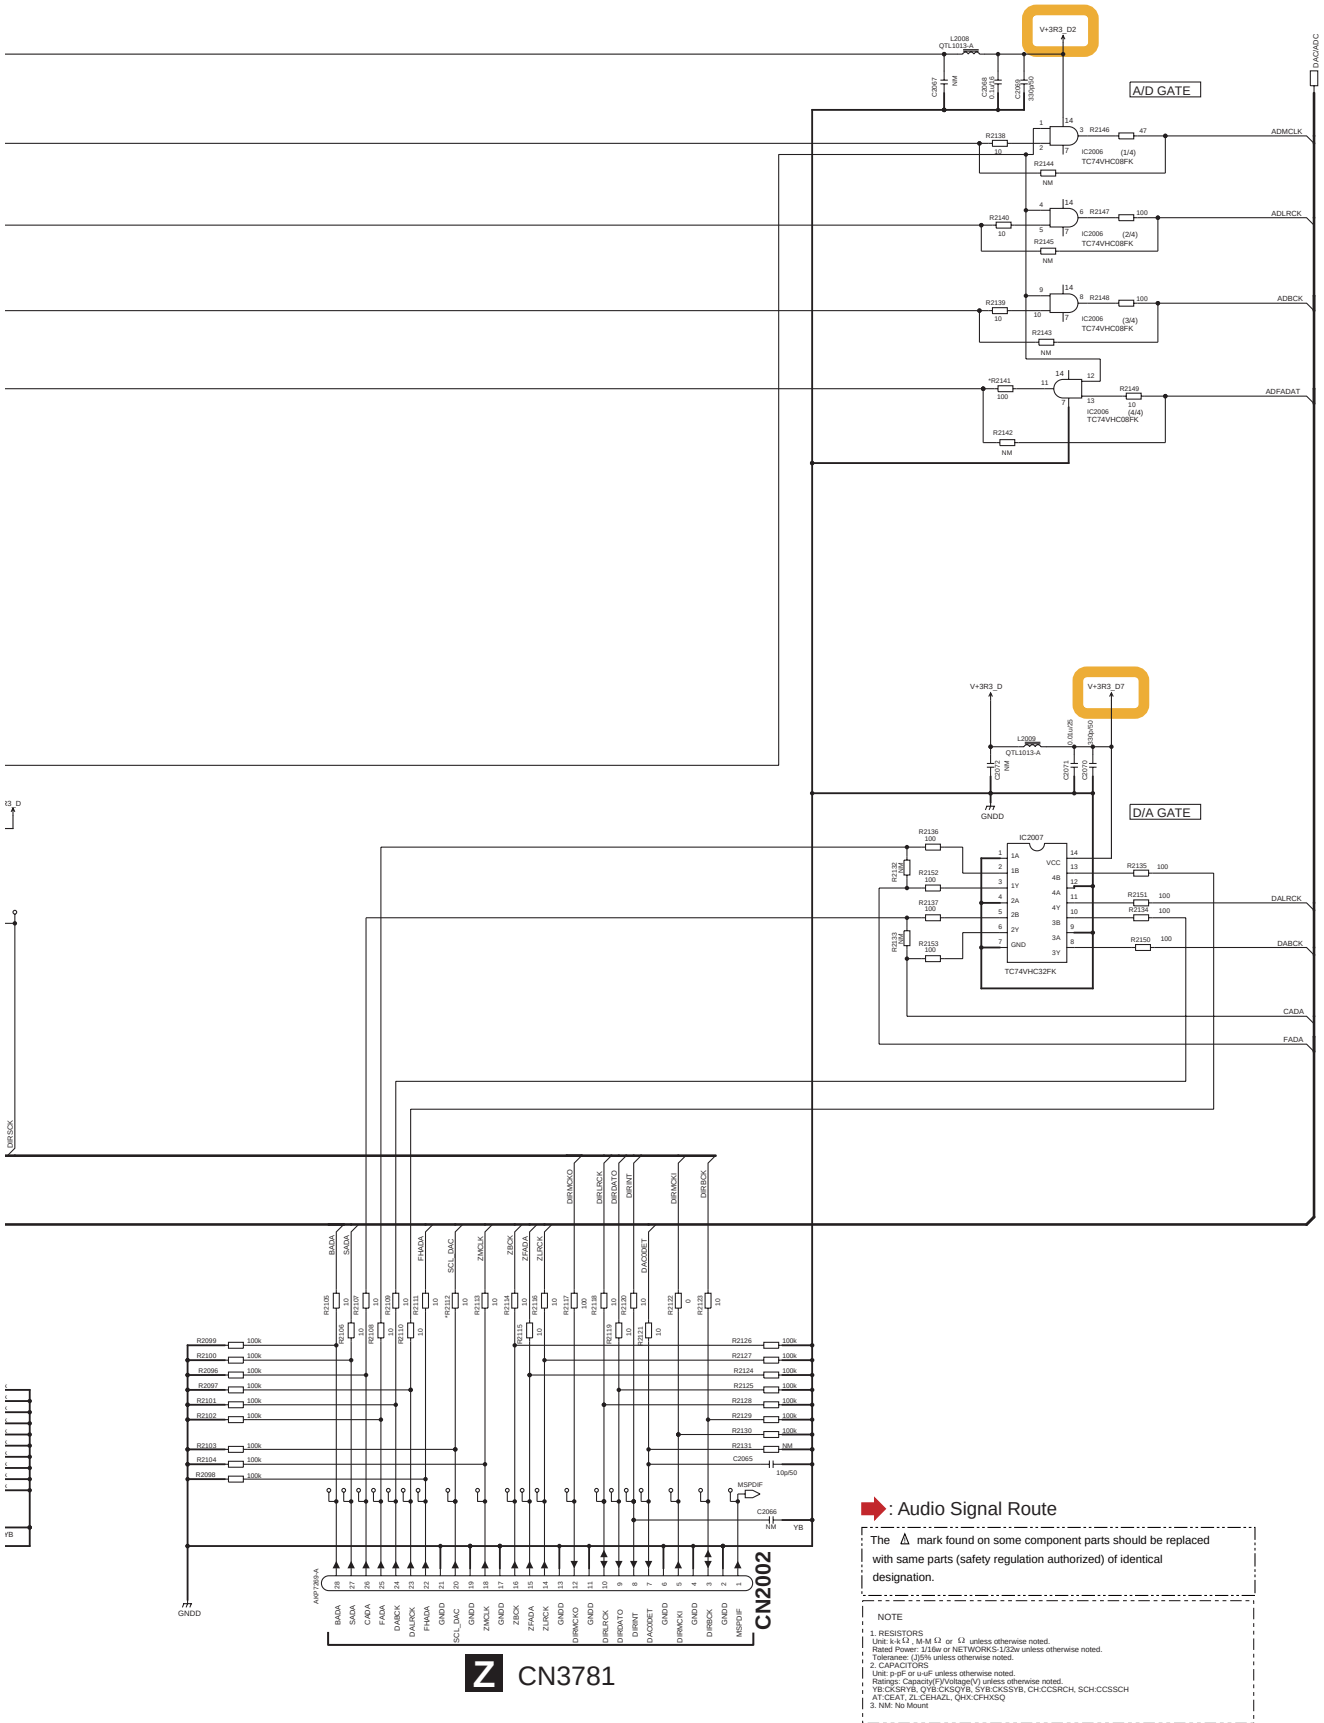

: Audio Signal Route

The ⚠ mark found on some component parts should be replaced with same parts (safety regulation authorized) of identical designation.

NOTE

1. RESISTORS
Unit: k-kΩ , M-MΩ or Ω unless otherwise noted.
Rated Power: 1/16w or NETWORKS-1/32w unless otherwise noted.
Tolerance: (J)5% unless otherwise noted.
2. CAPACITORS
Unit: p-pF or u-uF unless otherwise noted.
Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
YB:CKSRYB, QYB:CKSQYB, SYB:CKSSYB, CH:CCSRCH, SCH:CCSSCH
AT:CEAT, ZL:CEHAZL, QHX:CFHXSQ
3. NM: No Mount

10.7 DAC HIGH ASSY (2/3)

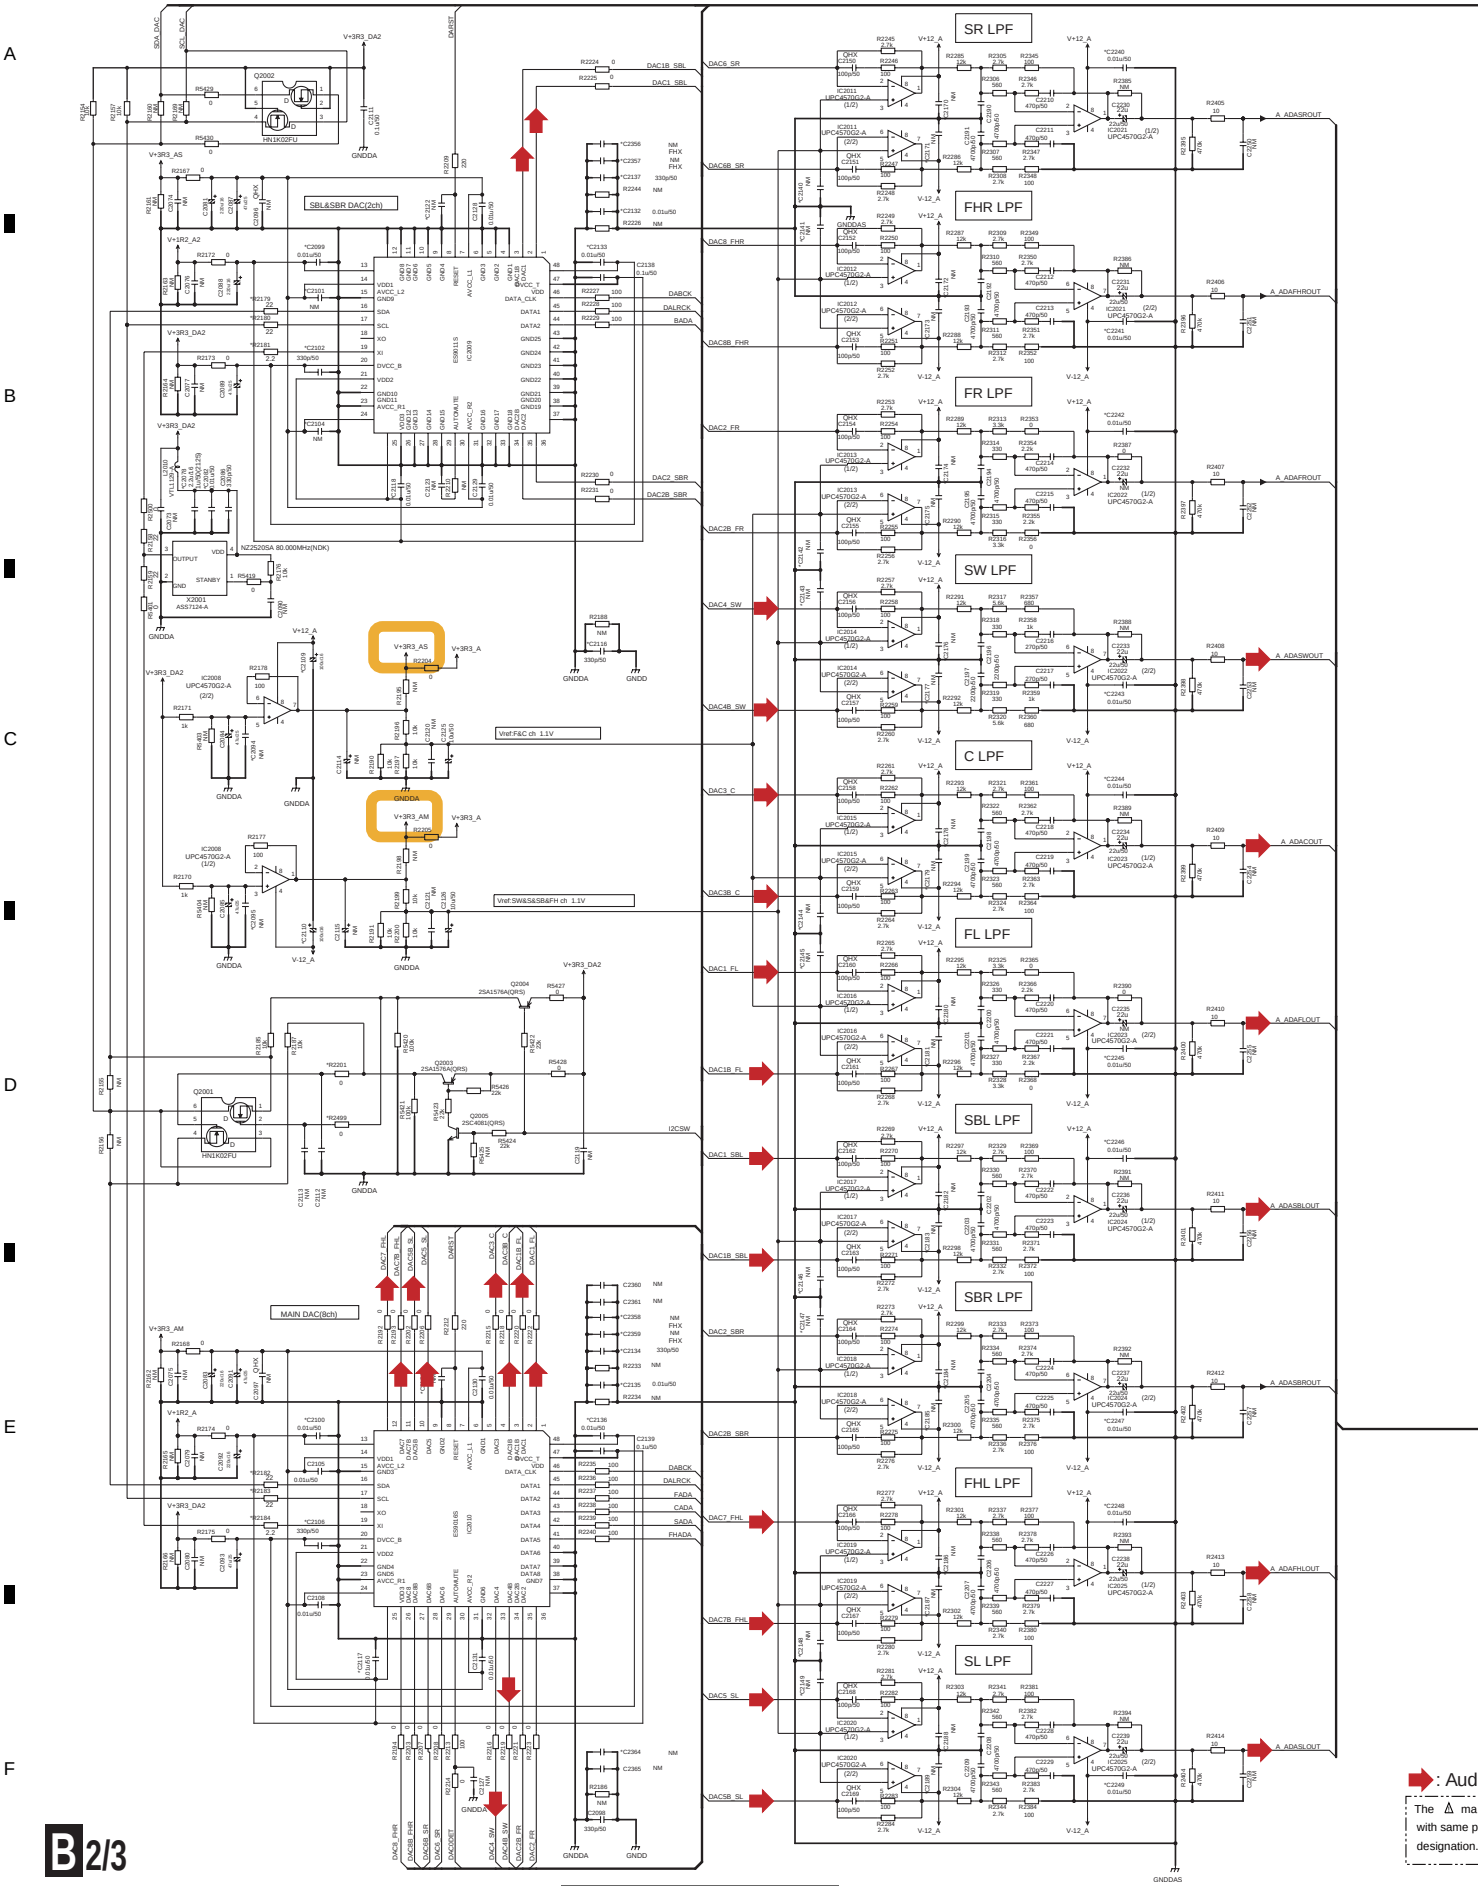

: Aud

The Δ ma
with same p
designation.

B2/3 DAC HIGH ASSY (2/3) (AWX1515)

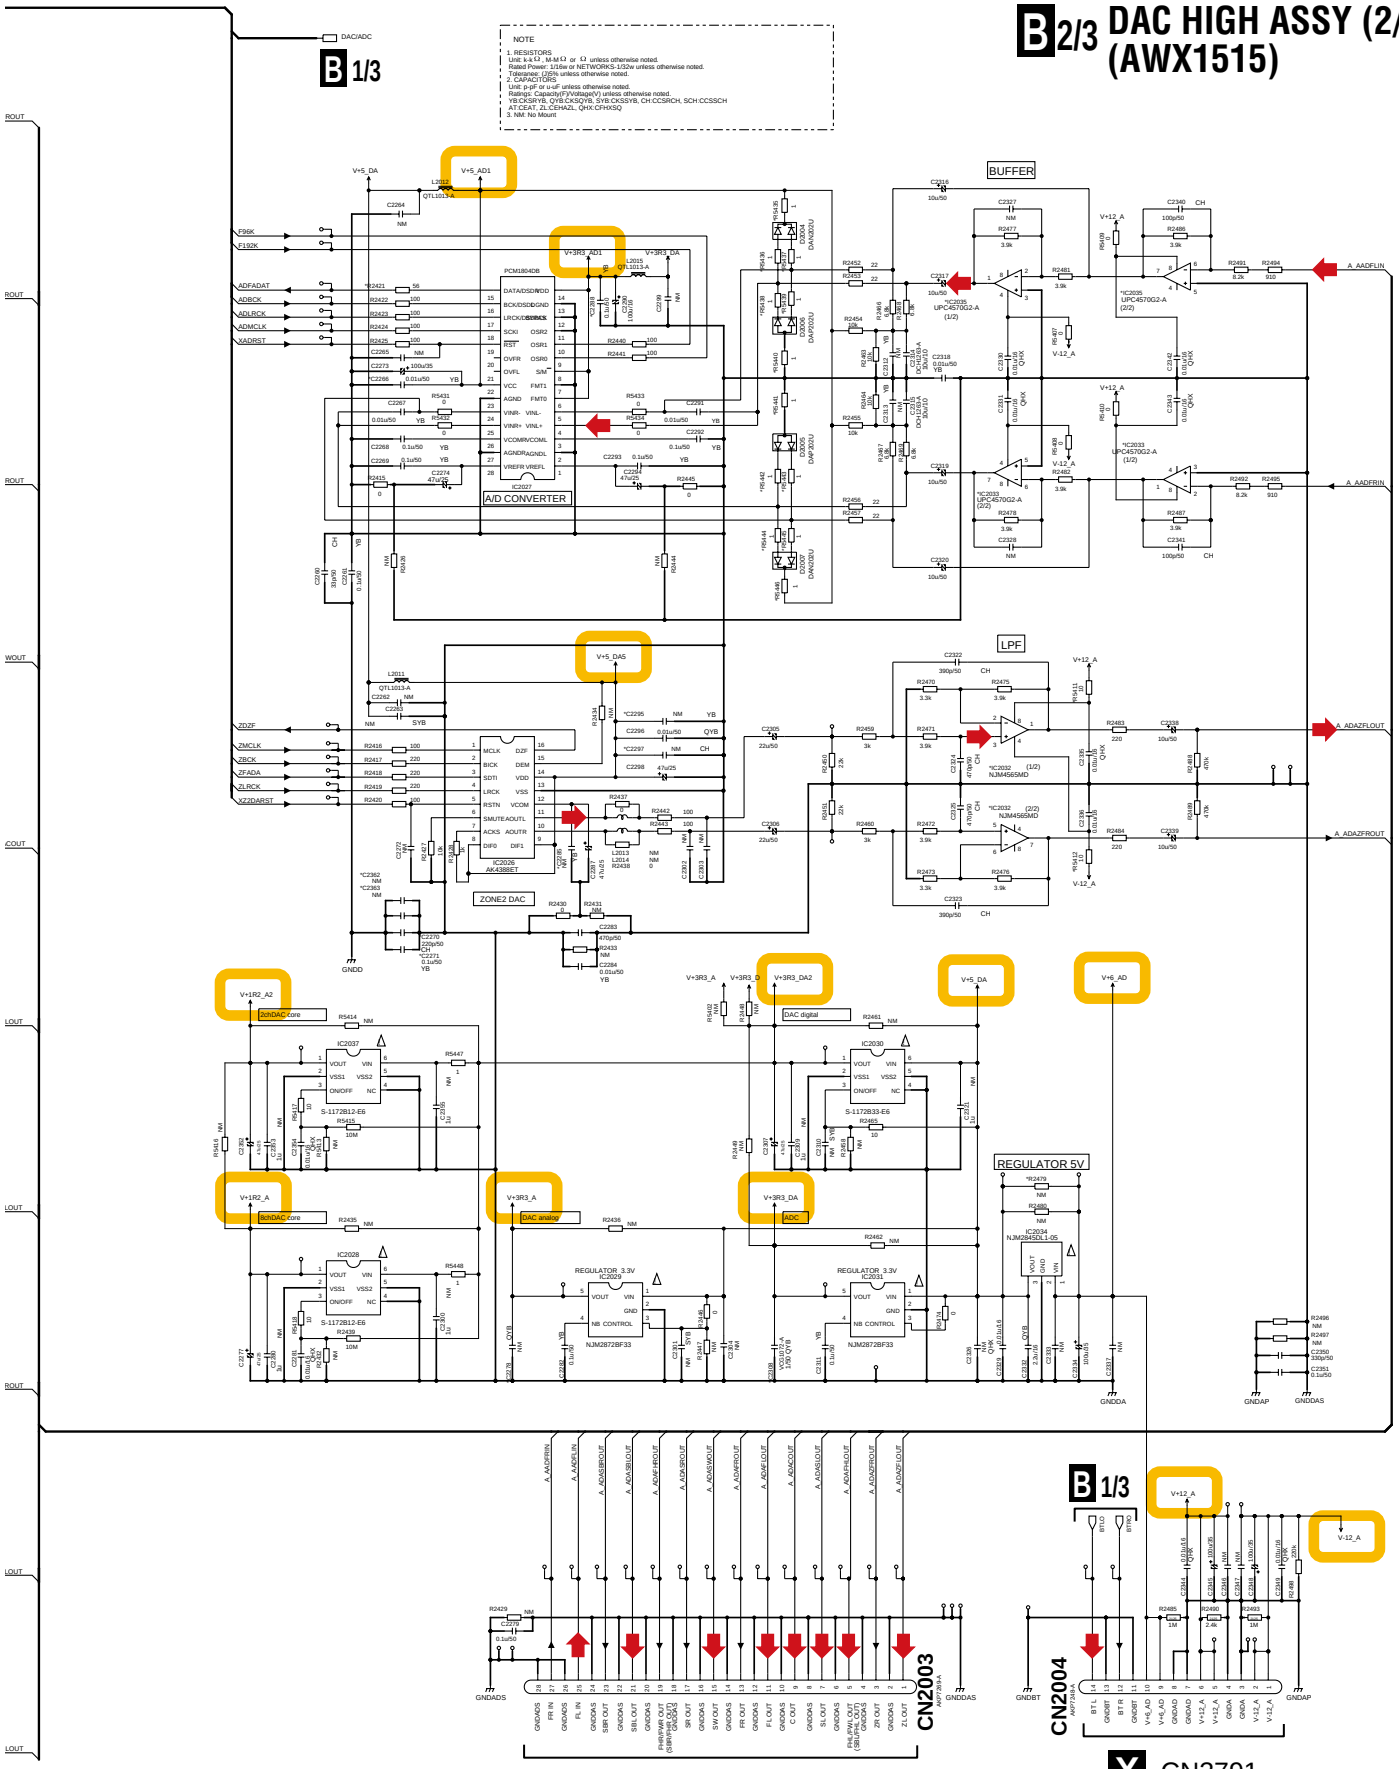

10.8 DAC HIGH ASSY (3/3)

	awx1515	awx1516	awx1517	awx1480	awx1519	awx1520	awx1479	awx1355	awx1518
C2008	0.1u/50	NM	NM	0.1u/50	NM	NM	0.1u/50	NM	NM
C2028	0.47u/16	NM	NM	NM	NM	NM	NM	NM	NM
C2031	0.47u/16	NM	NM	NM	NM	NM	NM	NM	NM
C2047	100p/50	47p/50	47p/50	100p/50	47p/50	47p/50	100p/50	47p/50	47p/50
R2069	0	100	100	100	100	100	100	100	100
R2083	0	10	10	10	10	10	10	10	10
R2112	0	10	10	10	10	10	10	10	10
R2141	47	100	100	47	100	100	47	100	100
JA2009	AKB7173-A	AKB7173-A	AKB7173-A	AKB7173-A	AKB7173-A	AKB7173-A	AKB7235-A	AKB7235-A	AKB7235-A
KN2003	NM	NM	NM	VNE1948-A	VNE1948-A	VNE1948-A	VNE1948-A	VNE1948-A	VNE1948-A

	awx1515	awx1516	awx1517	awx1480	awx1519	awx1520	awx1479	awx1355	awx1518
C2078	2.2u/16	2.2u/16	VCG1072-A	2.2u/16	VCG1072-A	VCG1072-A	2.2u/16	VCG1072-A	VCG1072-A
C2082	0.1u/50	0.01u/50	0.01u/50	0.1u/50	0.01u/50	0.01u/50	0.1u/50	0.01u/50	0.01u/50
C2094	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2095	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2099	0.1u/50	0.01u/50	0.01u/50	0.1u/50	0.01u/50	0.01u/50	0.1u/50	0.01u/50	0.01u/50
C2100	0.1u/50	0.01u/50	0.01u/50	0.1u/50	0.01u/50	0.01u/50	0.1u/50	0.01u/50	0.01u/50
C2101	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2102	1000p/50	330p/50	330p/50	1000p/50	330p/50	330p/50	1000p/50	330p/50	330p/50
C2104	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2106	1000p/50	330p/50	330p/50	1000p/50	330p/50	330p/50	1000p/50	330p/50	330p/50
C2109	47u/25	100u/16	100u/16	47u/25	100u/16	100u/16	47u/25	100u/16	100u/16
C2110	47u/25	100u/16	100u/16	47u/25	100u/16	100u/16	47u/25	100u/16	100u/16
C2116	330p/50	330p/50	NM	330p/50	NM	NM	330p/50	NM	NM
C2117	0.1u/50	0.01u/50	0.01u/50	0.1u/50	0.01u/50	0.01u/50	0.1u/50	0.01u/50	0.01u/50
C2118	0.1u/50	0.01u/50	0.01u/50	0.1u/50	0.01u/50	0.01u/50	0.1u/50	0.01u/50	0.01u/50
C2122	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2124	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2132	0.01u/50	0.01u/50	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2133	1000p/50	0.01u/50	0.01u/50	1000p/50	0.01u/50	0.01u/50	1000p/50	0.01u/50	0.01u/50
C2134	330p/50	330p/50	NM	330p/50	NM	NM	330p/50	NM	NM
C2135	0.01u/50	0.01u/50	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2136	1000p/50	0.01u/50	0.01u/50	1000p/50	0.01u/50	0.01u/50	1000p/50	0.01u/50	0.01u/50
C2137	330p/50	330p/50	NM	330p/50	NM	NM	330p/50	NM	NM
C2140	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2141	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2142	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2143	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2144	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2145	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2146	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2147	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2148	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2149	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2170	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2171	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2172	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2173	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2174	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2175	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2176	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2177	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2178	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2179	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2180	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2181	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2182	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2183	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2184	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2185	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2186	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2187	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2188	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2189	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM
C2240	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/16	0.01u/16
C2241	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/16	0.01u/16
C2242	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/16	0.01u/16
C2243	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/16	0.01u/16
C2244	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/16	0.01u/16
C2245	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/16	0.01u/16
C2246	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/16	0.01u/16
C2247	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/16	0.01u/16
C2248	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/16	0.01u/16
C2249	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/16	0.01u/16
C2356	NM	NM	100p/50	NM	100p/50	100p/50	NM	100p/50	100p/50
C2357	NM	NM	470p/50	NM	470p/50	470p/50	NM	470p/50	470p/50
C2358	NM	NM	100p/50	NM	100p/50	100p/50	NM	100p/50	100p/50
C2359	NM	NM	470p/50	NM	470p/50	470p/50	NM	470p/50	470p/50
C2364	NM	NM	330p/50	NM	330p/50	330p/50	NM	330p/50	330p/50
R2179	22	22	22	22	22	22	22	27	27
R2180	22	22	22	22	22	22	22	27	27
R2181	0	2.2	2.2	0	2.2	2.2	0	2.2	2.2
R2182	22	22	22	22	22	22	22	27	27
R2183	22	22	22	22	22	22	22	27	27
R2184	0	2.2	2.2	0	2.2	2.2	0	2.2	2.2
R2201	0	0	0	0	0	0	0	100	100
R2499	0	0	0	0	0	0	0	100	100

	awx1515	awx1516	awx1517	awx1480	awx1519	awx1520	awx1479	awx1355	awx1518
C2266	0.1u/50	0.01u/50	0.01u/50	0.1u/50	0.01u/50	0.01u/50	0.1u/50	0.01u/50	0.01u/50
C2270	220p/50	220p/50	NM	220p/50	NM	NM	220p/50	NM	NM
C2271	0.1u/50	0.1u/50	NM	0.1u/50	NM	NM	0.1u/50	NM	NM
C2278	2.2u/16	NM	NM	2.2u/16	NM	NM	2.2u/16	NM	NM
C2285	0.1u/50	NM	NM	0.1u/50	NM	NM	0.1u/50	NM	NM
C2288	0.1u/50	0.1u/50	0.01u/50	0.1u/50	0.01u/50	0.01u/50	0.1u/50	0.01u/50	0.01u/50
C2295	0.47u/16	NM	NM	0.47u/16	NM	NM	0.47u/16	NM	NM
C2297	220p/50	NM	NM	220p/50	NM	NM	220p/50	NM	NM
C2308	2.2u/16	VCG107Z-A	VCG107Z-A	2.2u/16	VCG107Z-A	VCG107Z-A	2.2u/16	VCG107Z-A	VCG107Z-A
C2362	NM	NM	0.1u/50	NM	0.1u/50	0.1u/50	NM	0.1u/50	0.1u/50
C2363	NM	NM	220p/50	NM	220p/50	220p/50	NM	220p/50	220p/50
R2421	47	56	56	47	56	56	47	56	56
R2479	100k	NM	NM	100k	NM	NM	100k	NM	NM
R5411	0	10	10	0	10	10	0	10	10
R5412	0	10	10	0	10	10	0	10	10
R5435	0	1	1	0	1	1	0	1	1
R5436	0	1	1	0	1	1	0	1	1
R5437	0	1	1	0	1	1	0	1	1
R5438	0	1	1	0	1	1	0	1	1
R5439	0	1	1	0	1	1	0	1	1
R5440	0	1	1	0	1	1	0	1	1
R5441	0	1	1	0	1	1	0	1	1
R5442	0	1	1	0	1	1	0	1	1
R5443	0	1	1	0	1	1	0	1	1
R5444	0	1	1	0	1	1	0	1	1
R5445	0	1	1	0	1	1	0	1	1
R5446	0	1	1	0	1	1	0	1	1
IC2032	NJM4565MD	NJM4565MD	NJM4565MD	NJM4565MD	NJM4565MD	NJM4565MD	NJM4565MD	UPC4570G2-A	UPC4570G2-A
IC2033	UPC4570G2-A	UPC4570G2-A	UPC4570G2-A	UPC4570G2-A	UPC4570G2-A	UPC4570G2-A	UPC4570G2-A	UPC4570G2-A	UPC4570G2-A
IC2035	UPC4570G2-A	UPC4570G2-A	UPC4570G2-A	UPC4570G2-A	UPC4570G2-A	UPC4570G2-A	UPC4570G2-A	UPC4570G2-A	UPC4570G2-A

10.9 FRONT HDMI USB ASSY

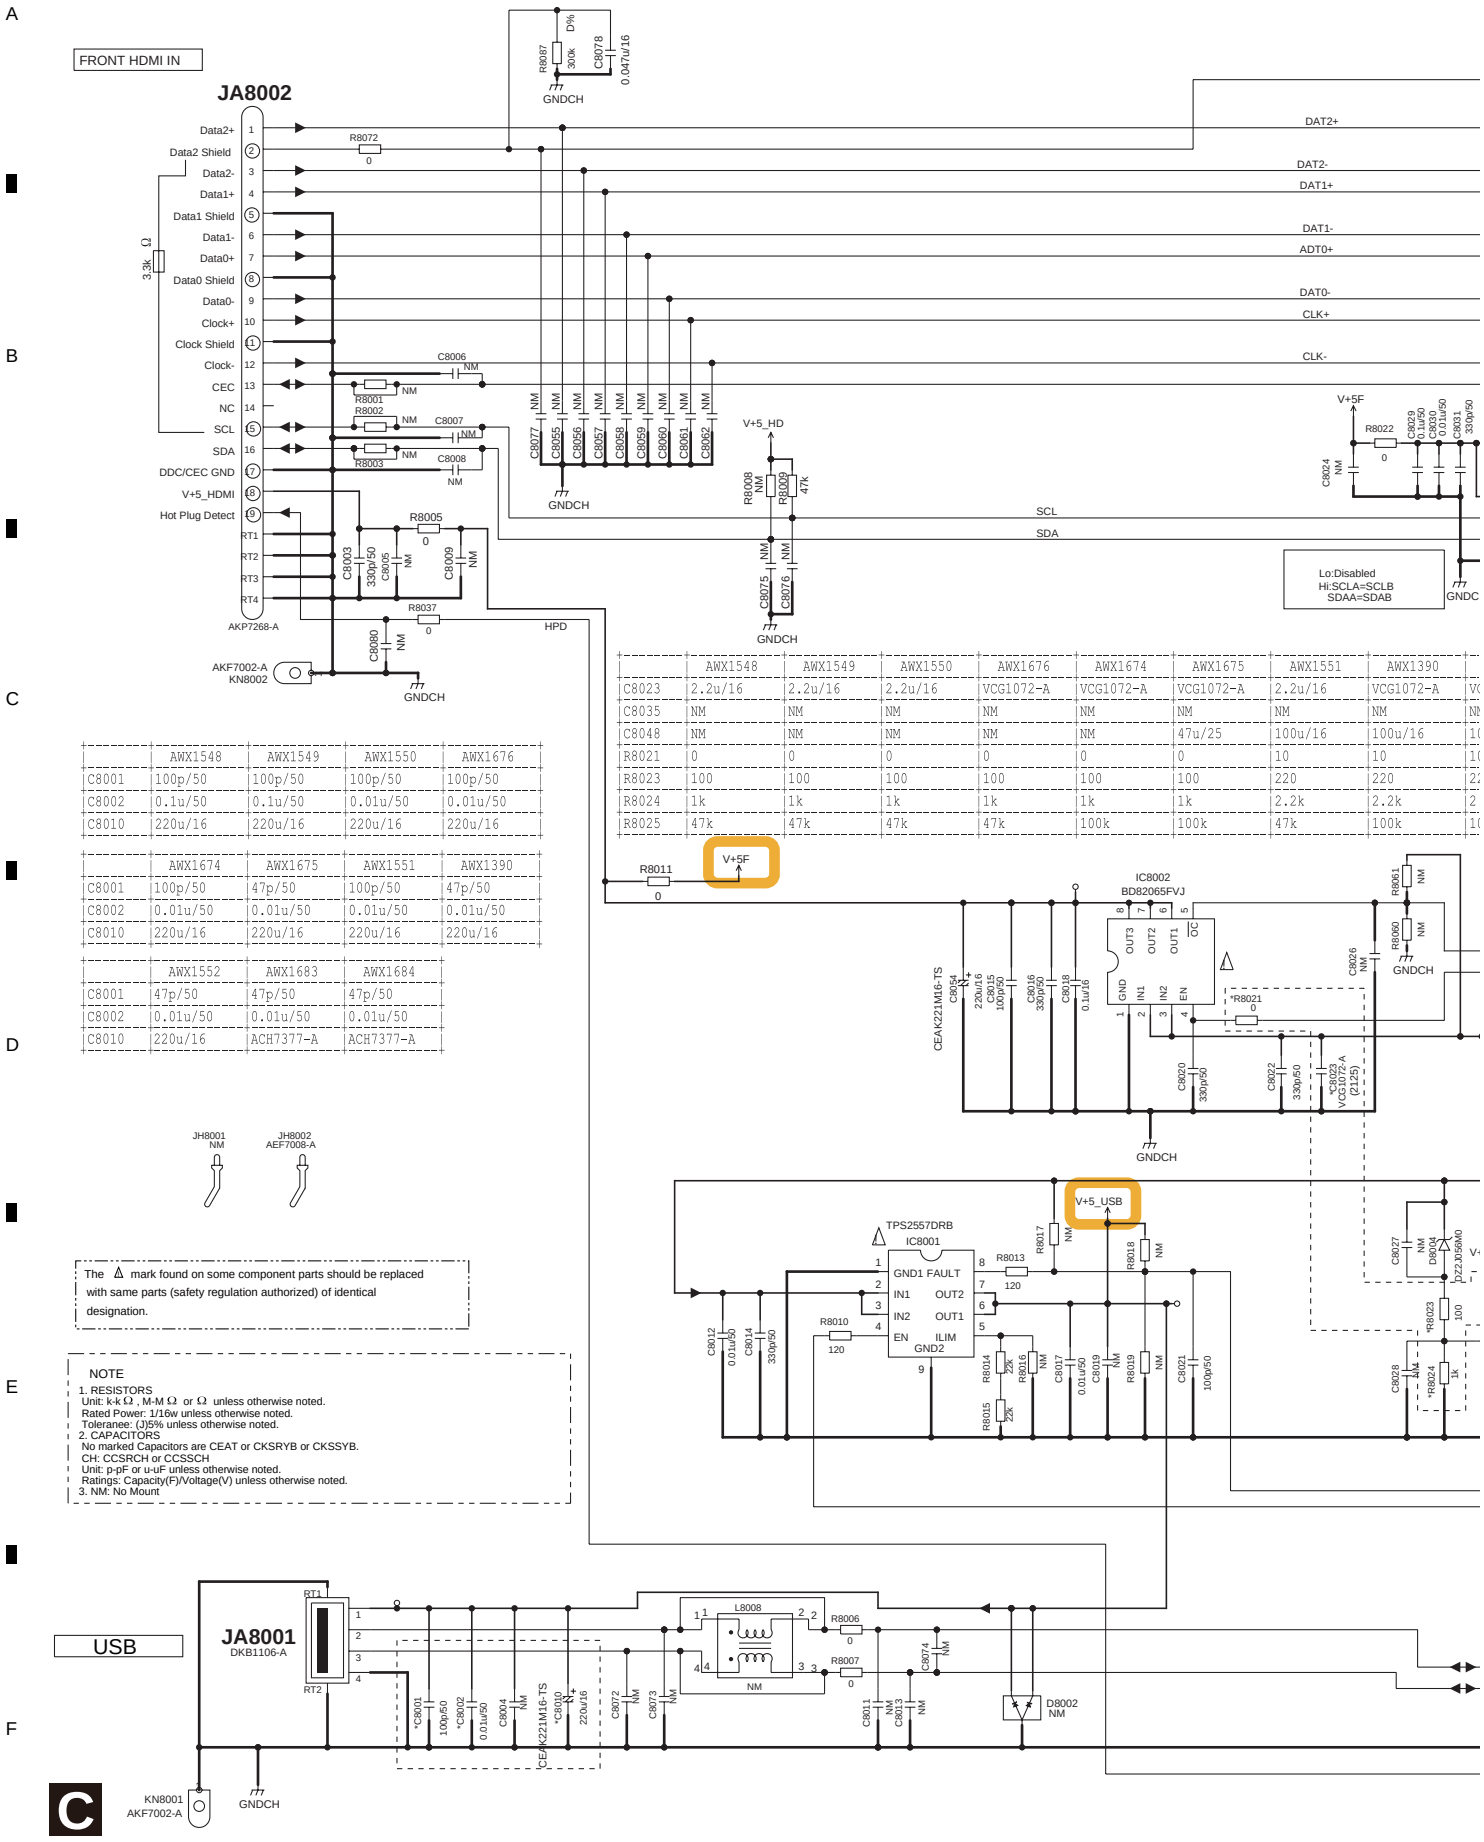

	AWX1548	AWX1549	AWX1550	AWX1676	AWX1674	AWX1675	AWX1551	AWX1390
C8023	2.2u/16	2.2u/16	2.2u/16	VCG1072-A	VCG1072-A	VCG1072-A	2.2u/16	VCG1072-A
C8035	NM	NM	NM	NM	NM	NM	NM	NM
C8048	NM	NM	NM	NM	NM	47u/25	100u/16	100u/16
R8021	0	0	0	0	0	0	10	10
R8023	100	100	100	100	100	100	220	220
R8024	1k	1k	1k	1k	1k	1k	2.2k	2.2k
R8025	47k	47k	47k	47k	100k	100k	47k	100k

	AWX1548	AWX1549	AWX1550	AWX1676
C8001	100p/50	100p/50	100p/50	100p/50
C8002	0.1u/50	0.1u/50	0.01u/50	0.01u/50
C8010	220u/16	220u/16	220u/16	220u/16

	AWX1674	AWX1675	AWX1551	AWX1390
C8001	100p/50	47p/50	100p/50	47p/50
C8002	0.01u/50	0.01u/50	0.01u/50	0.01u/50
C8010	220u/16	220u/16	220u/16	220u/16

	AWX1552	AWX1683	AWX1684
C8001	47p/50	47p/50	47p/50
C8002	0.01u/50	0.01u/50	0.01u/50
C8010	220u/16	ACH7377-A	ACH7377-A

The ⚠ mark found on some component parts should be replaced with same parts (safety regulation authorized) of identical designation.

NOTE
1. RESISTORS
Unit: k-kΩ , M-M Ω or Ω unless otherwise noted.
Rated Power: 1/16w unless otherwise noted.
Tolerance: (J)5% unless otherwise noted.
2. CAPACITORS
No marked Capacitors are CEAT or CKSRYB or CKSSYB.
CH: CCSRCH or CCSSCH
Unit: p-pF or u-uF unless otherwise noted.
Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
3. NM: No Mount

C FRONT HDMI USB ASSY (AWX1548)

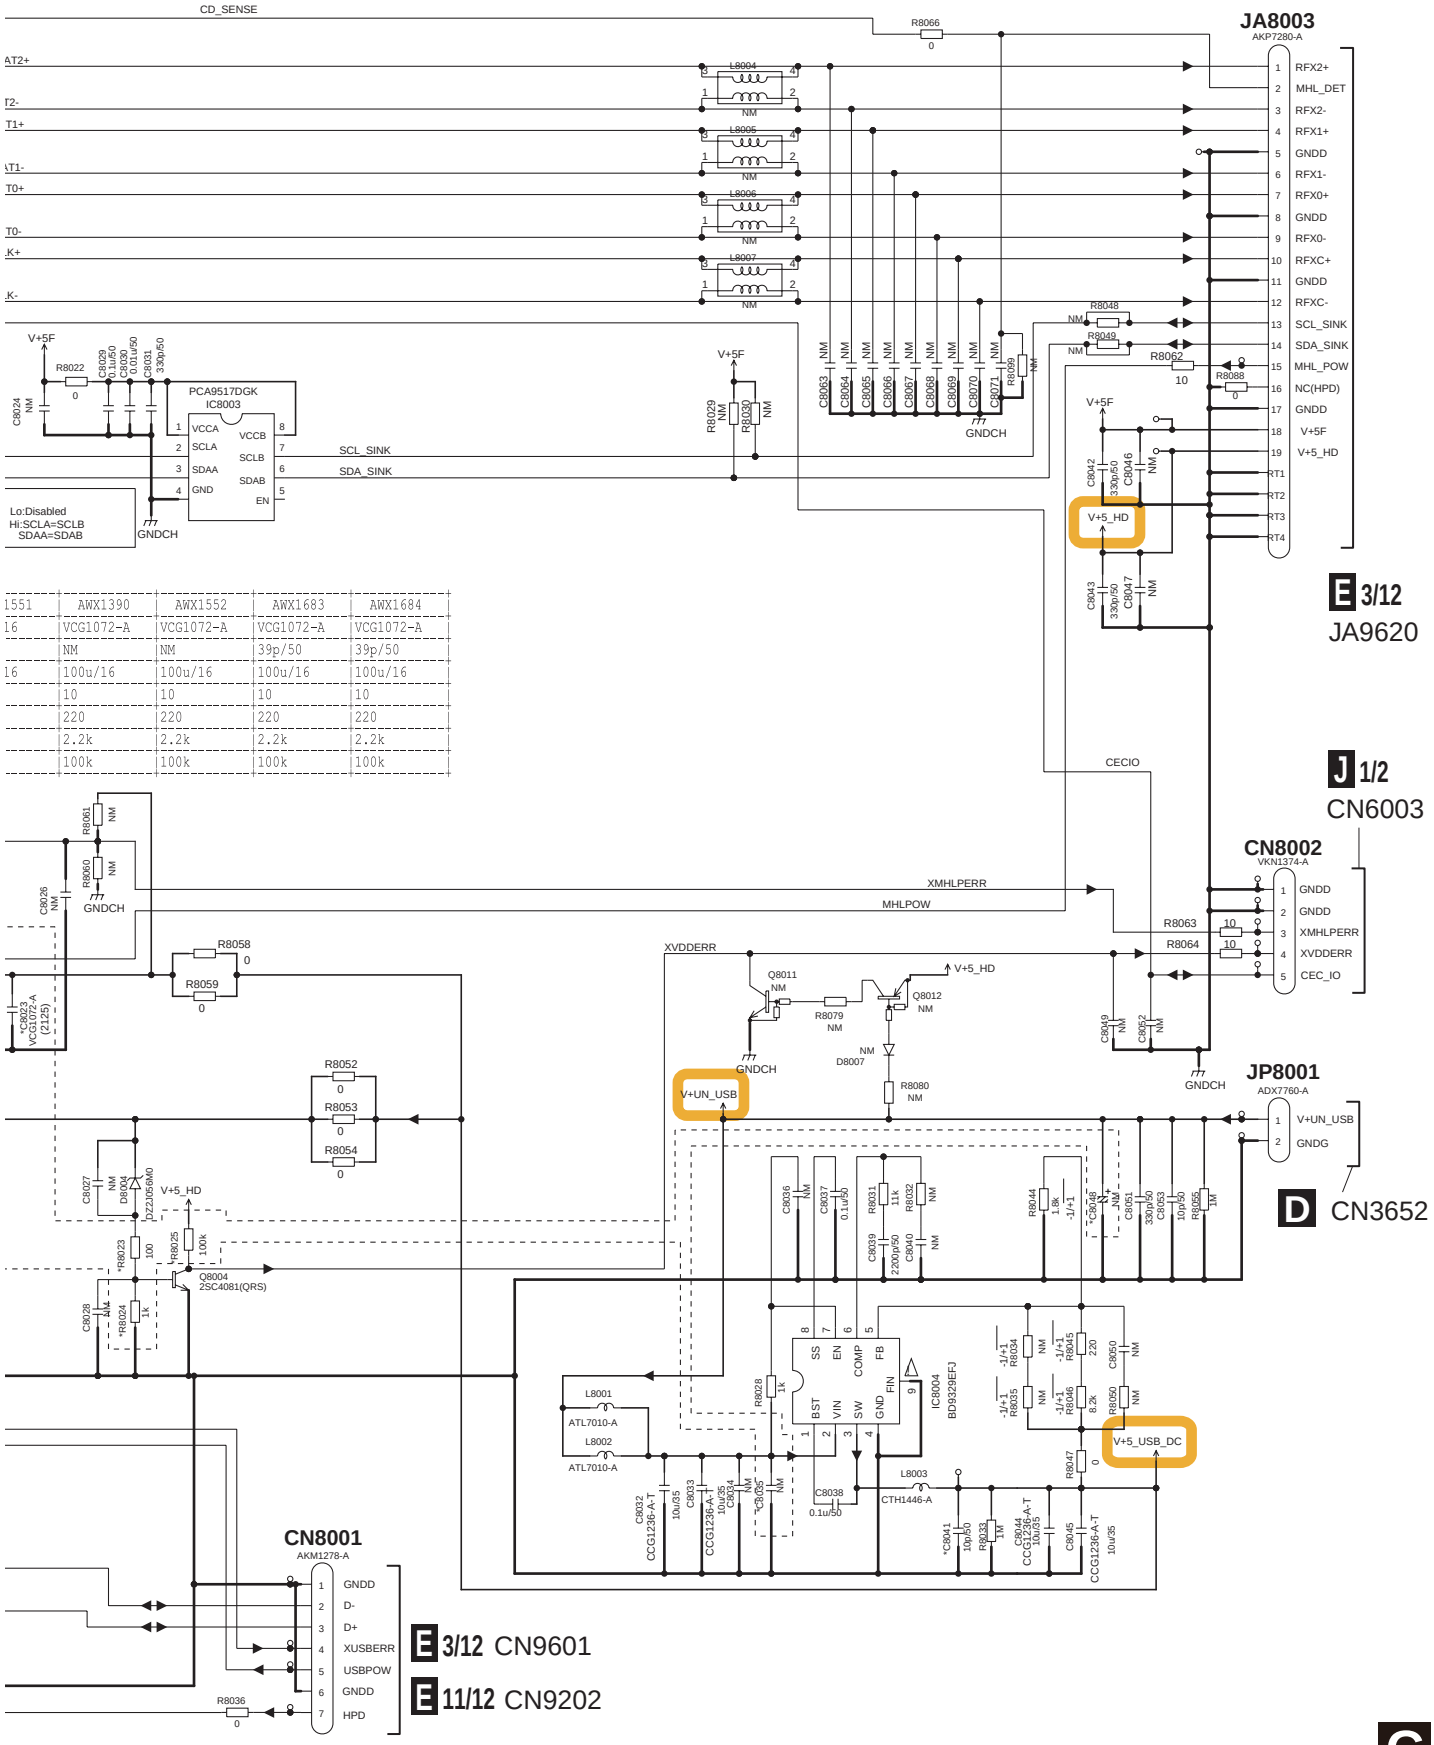

1551	AWX1390	AWX1552	AWX1683	AWX1684
16	VCG1072-A	VCG1072-A	VCG1072-A	VCG1072-A
	NM	NM	39p/50	39p/50
16	100u/16	100u/16	100u/16	100u/16
	10	10	10	10
	220	220	220	220
	2.2k	2.2k	2.2k	2.2k
	100k	100k	100k	100k

10.10 USB RECT_S ASSY

D USB RECT_S ASSY (AWX1405)

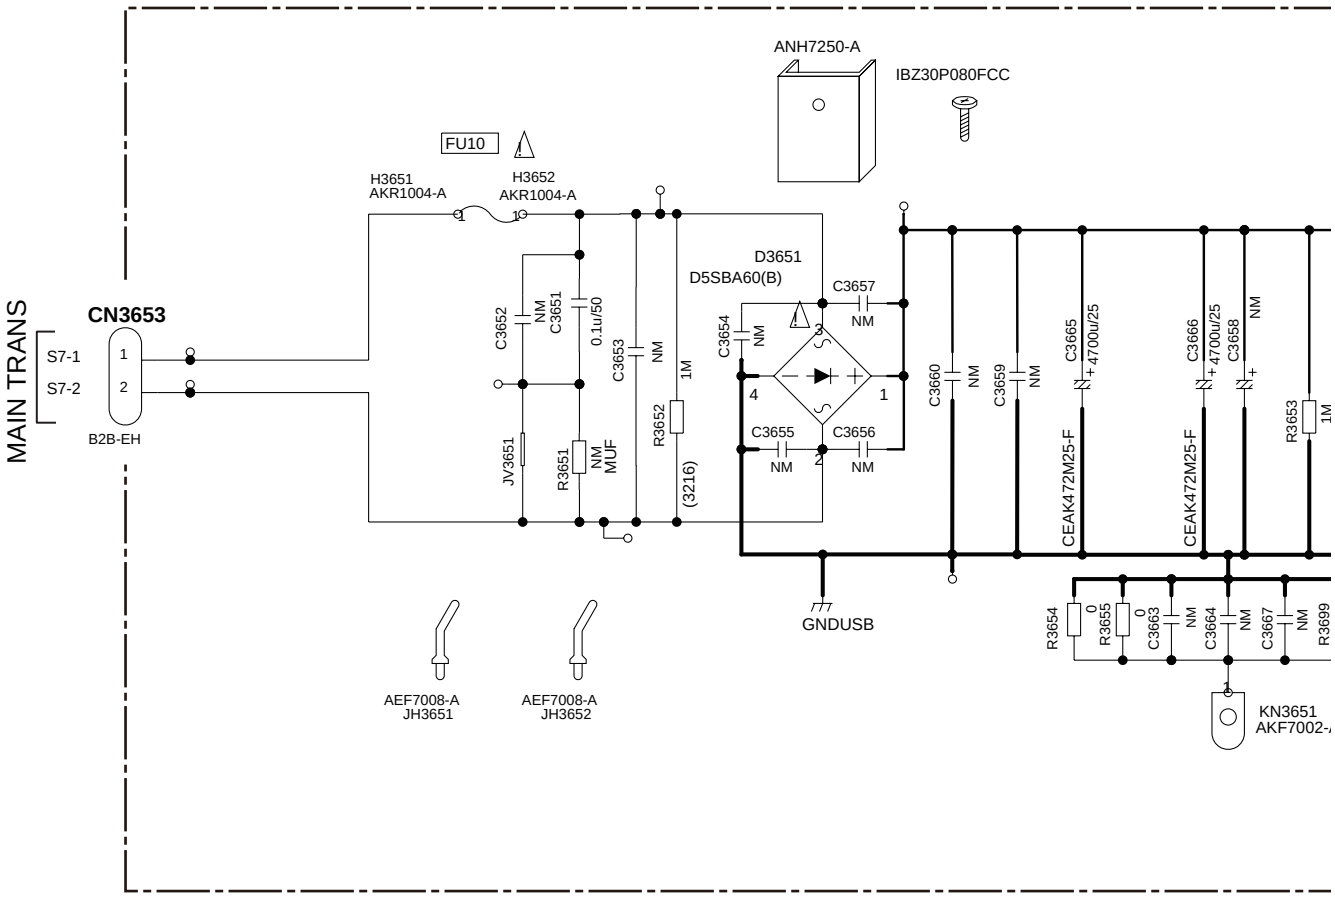

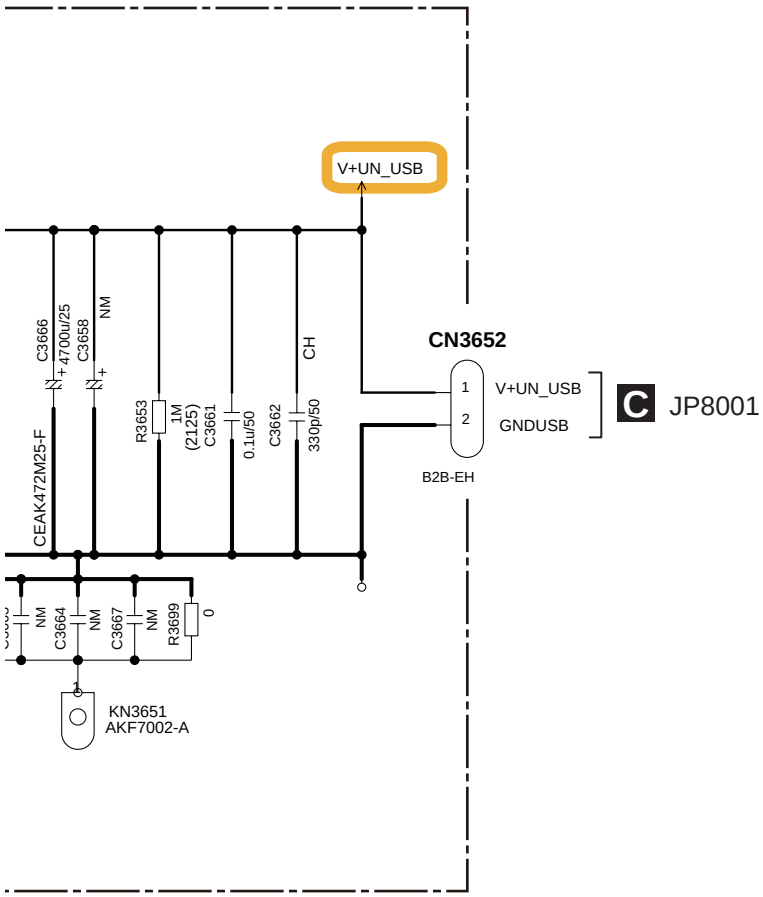

NOTE

1. RESISTORS
Unit: k-k Ω , M-M Ω or Ω unless otherwise noted.
Rated Power: 1/10W unless otherwise noted.
Toleranee: (J)5% unless otherwise noted.
MUF : RD1/4MUF
2125 : RS1/8SQ

2. CAPACITORS
Unit: p-pF or u-uF unless otherwise noted.
Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
CH : CCSRCH
NO MARKED : CEAT or CKSRYB

3. NM : NO MOUNT

The Δ mark found on some component parts should be replaced with same parts (safety regulation authorized) of identical designation.

10.11 DIGITAL MAIN ASSY (1/12)

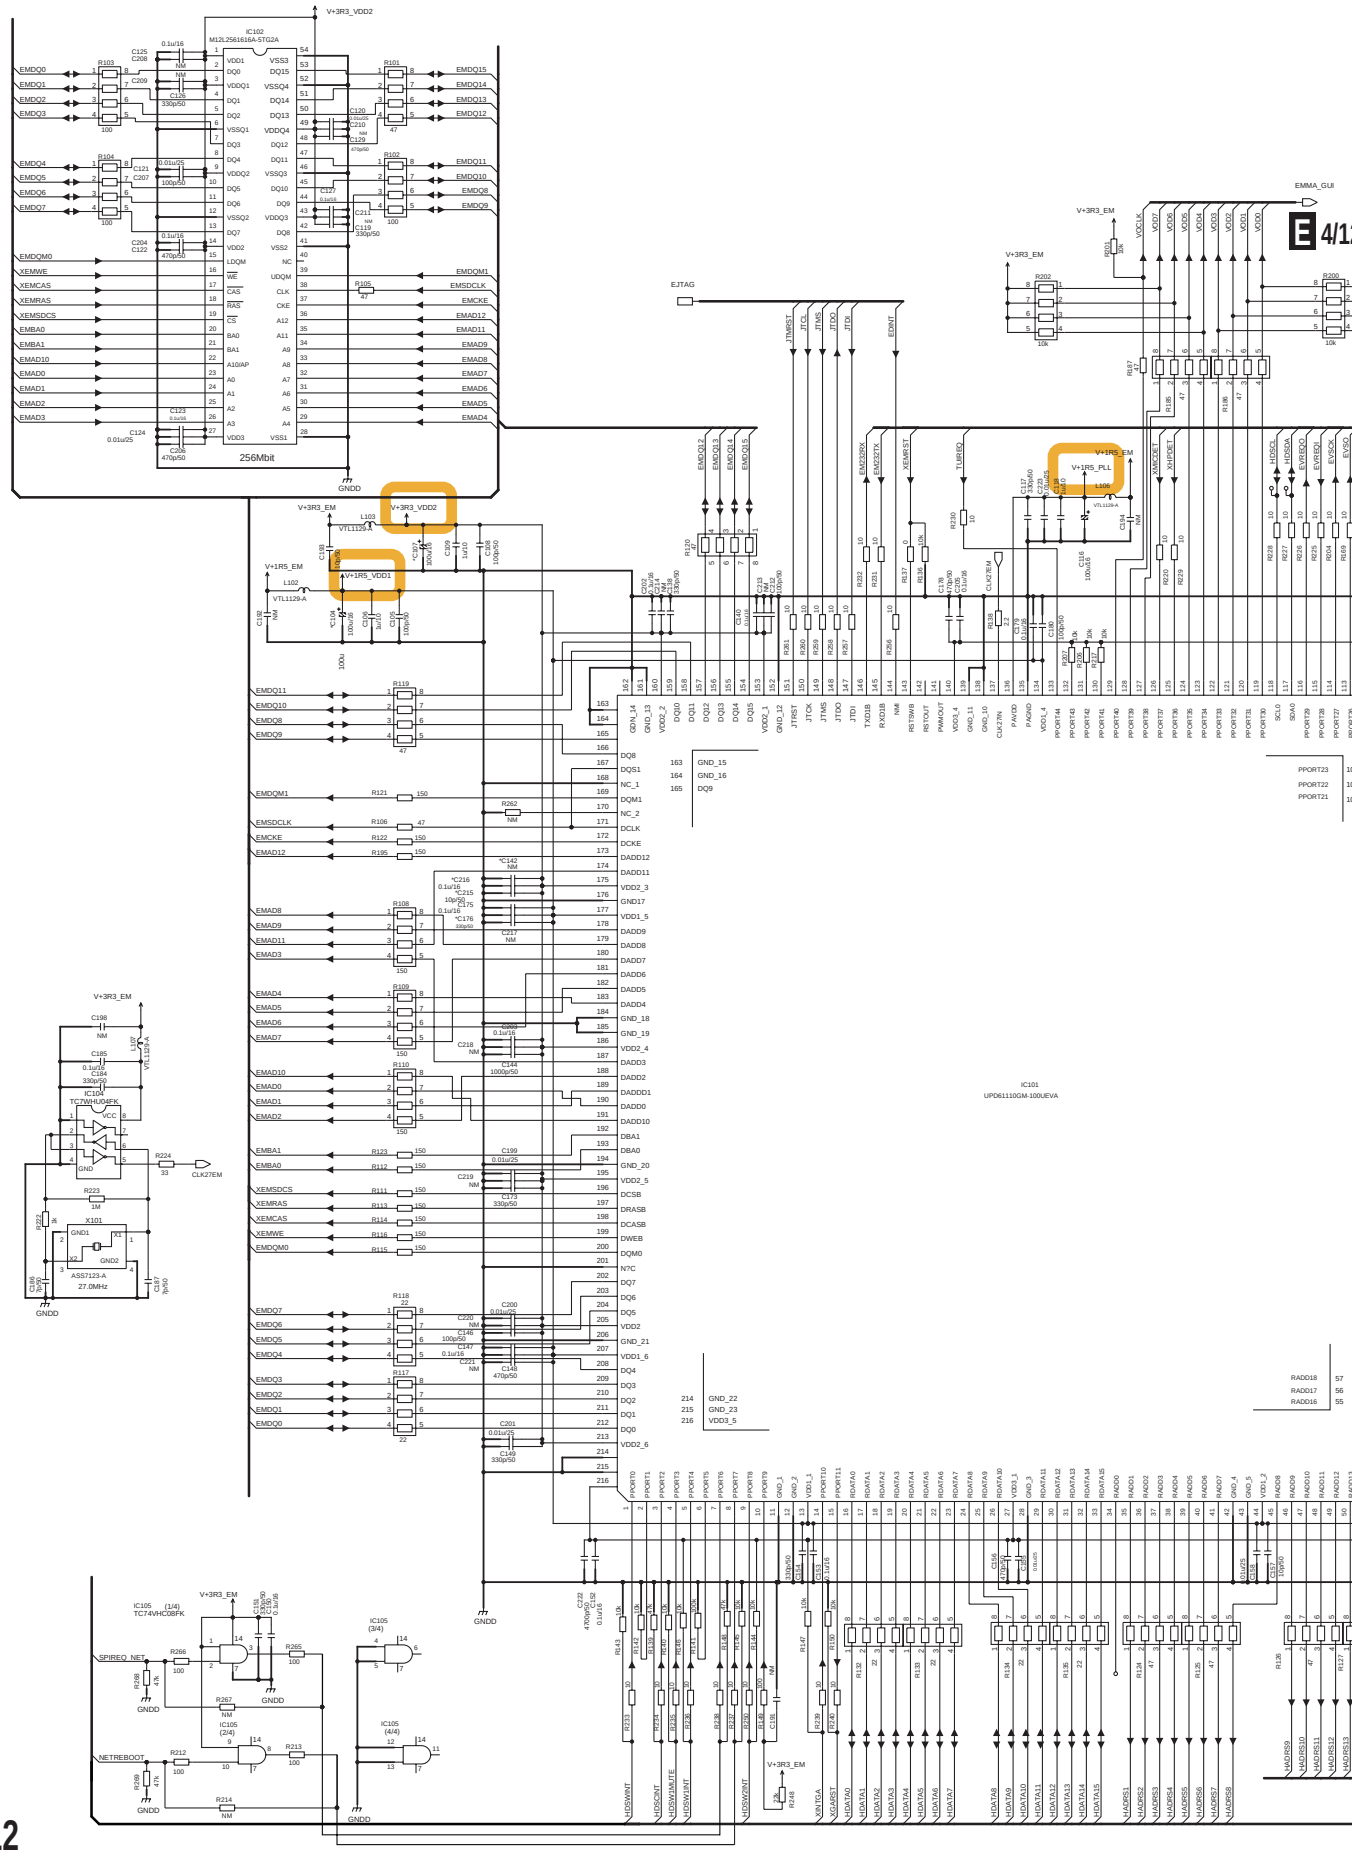

E1/12 DIGITAL MAIN ASSY (1/12) (AWX1422)

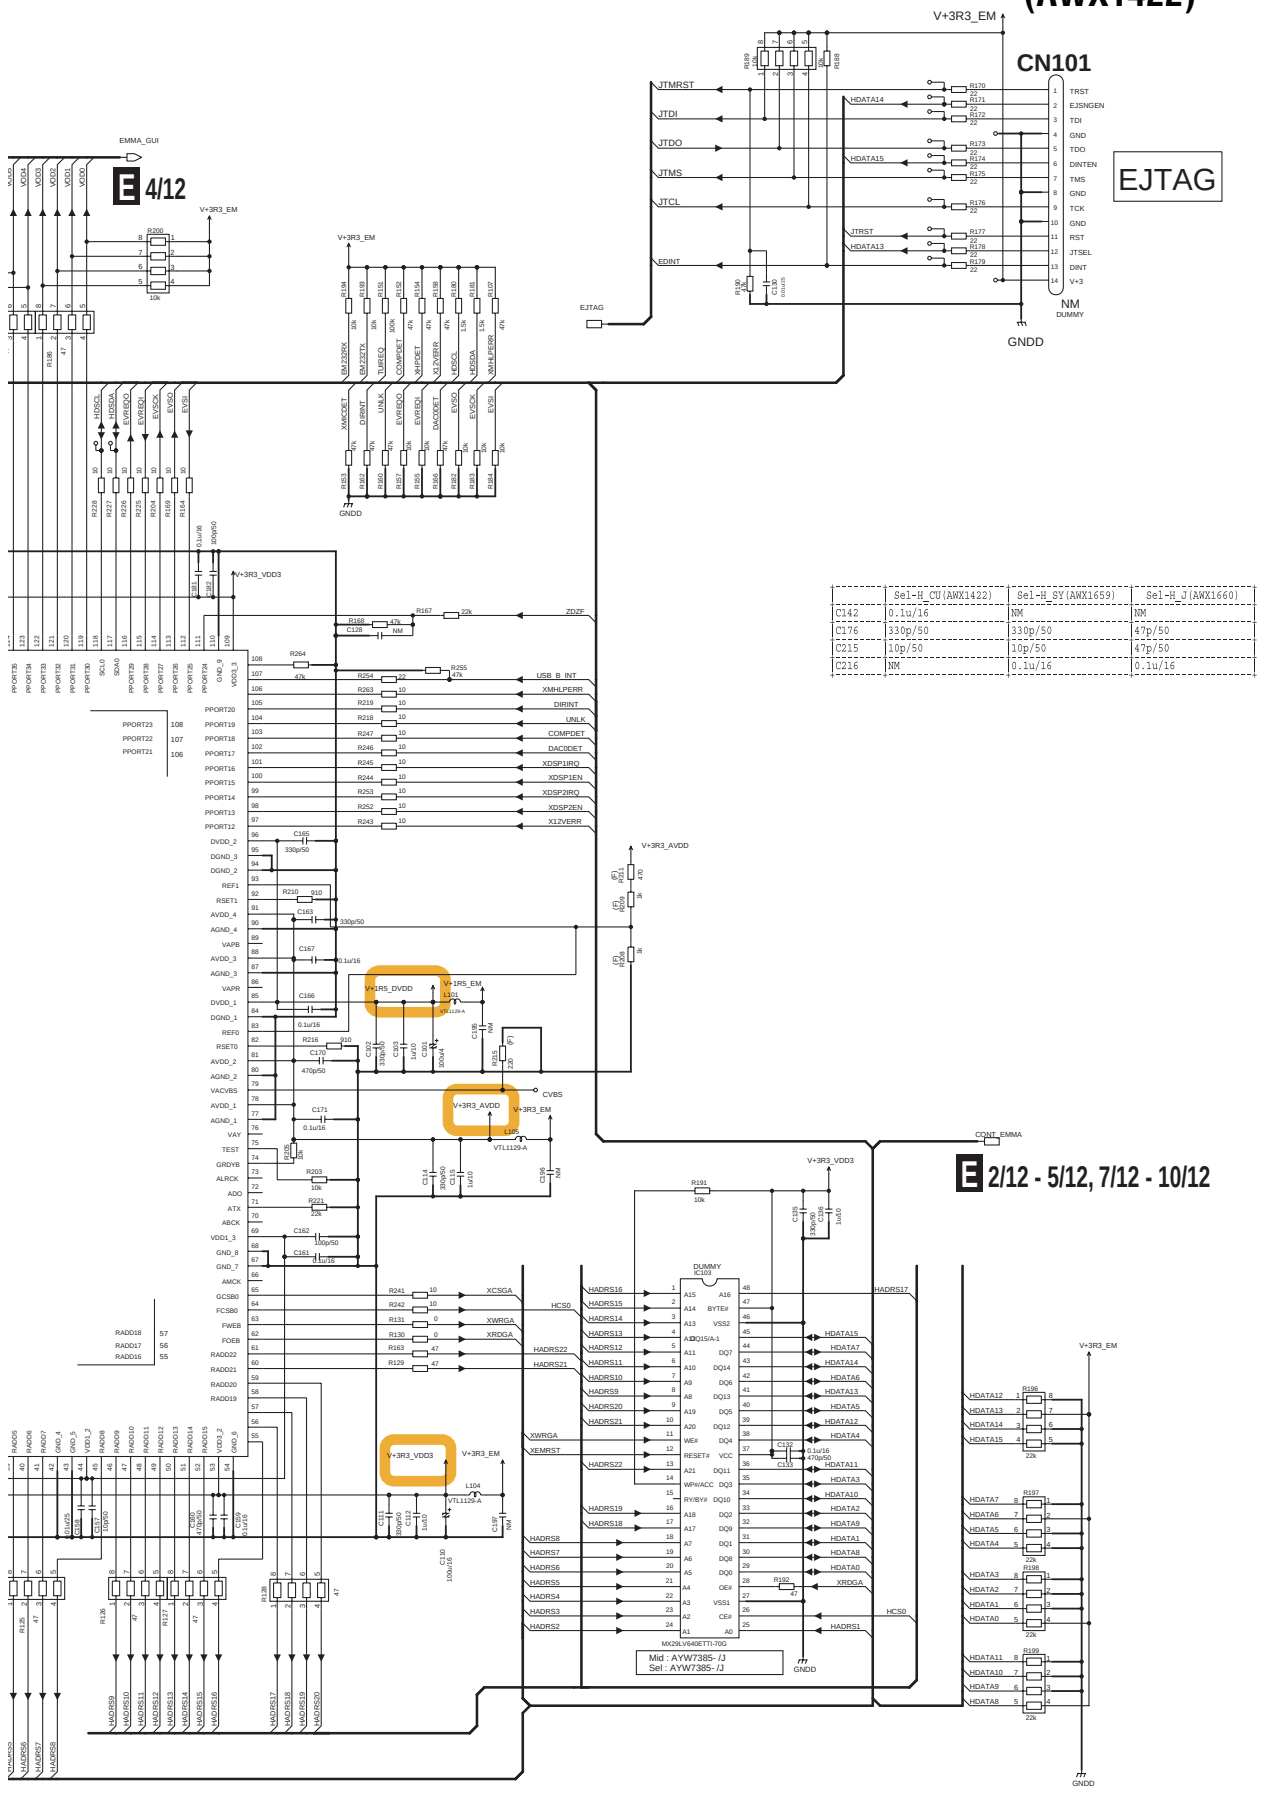

	Sel-H_CU(AWX1422)	Sel-H_SY(AWX1659)	Sel-H_J(AWX1660)
C142	0.1u/16	NM	NM
C176	330p/50	330p/50	47p/50
C215	10p/50	10p/50	47p/50
C216	NM	0.1u/16	0.1u/16

10.12 DIGITAL MAIN ASSY (2/12)

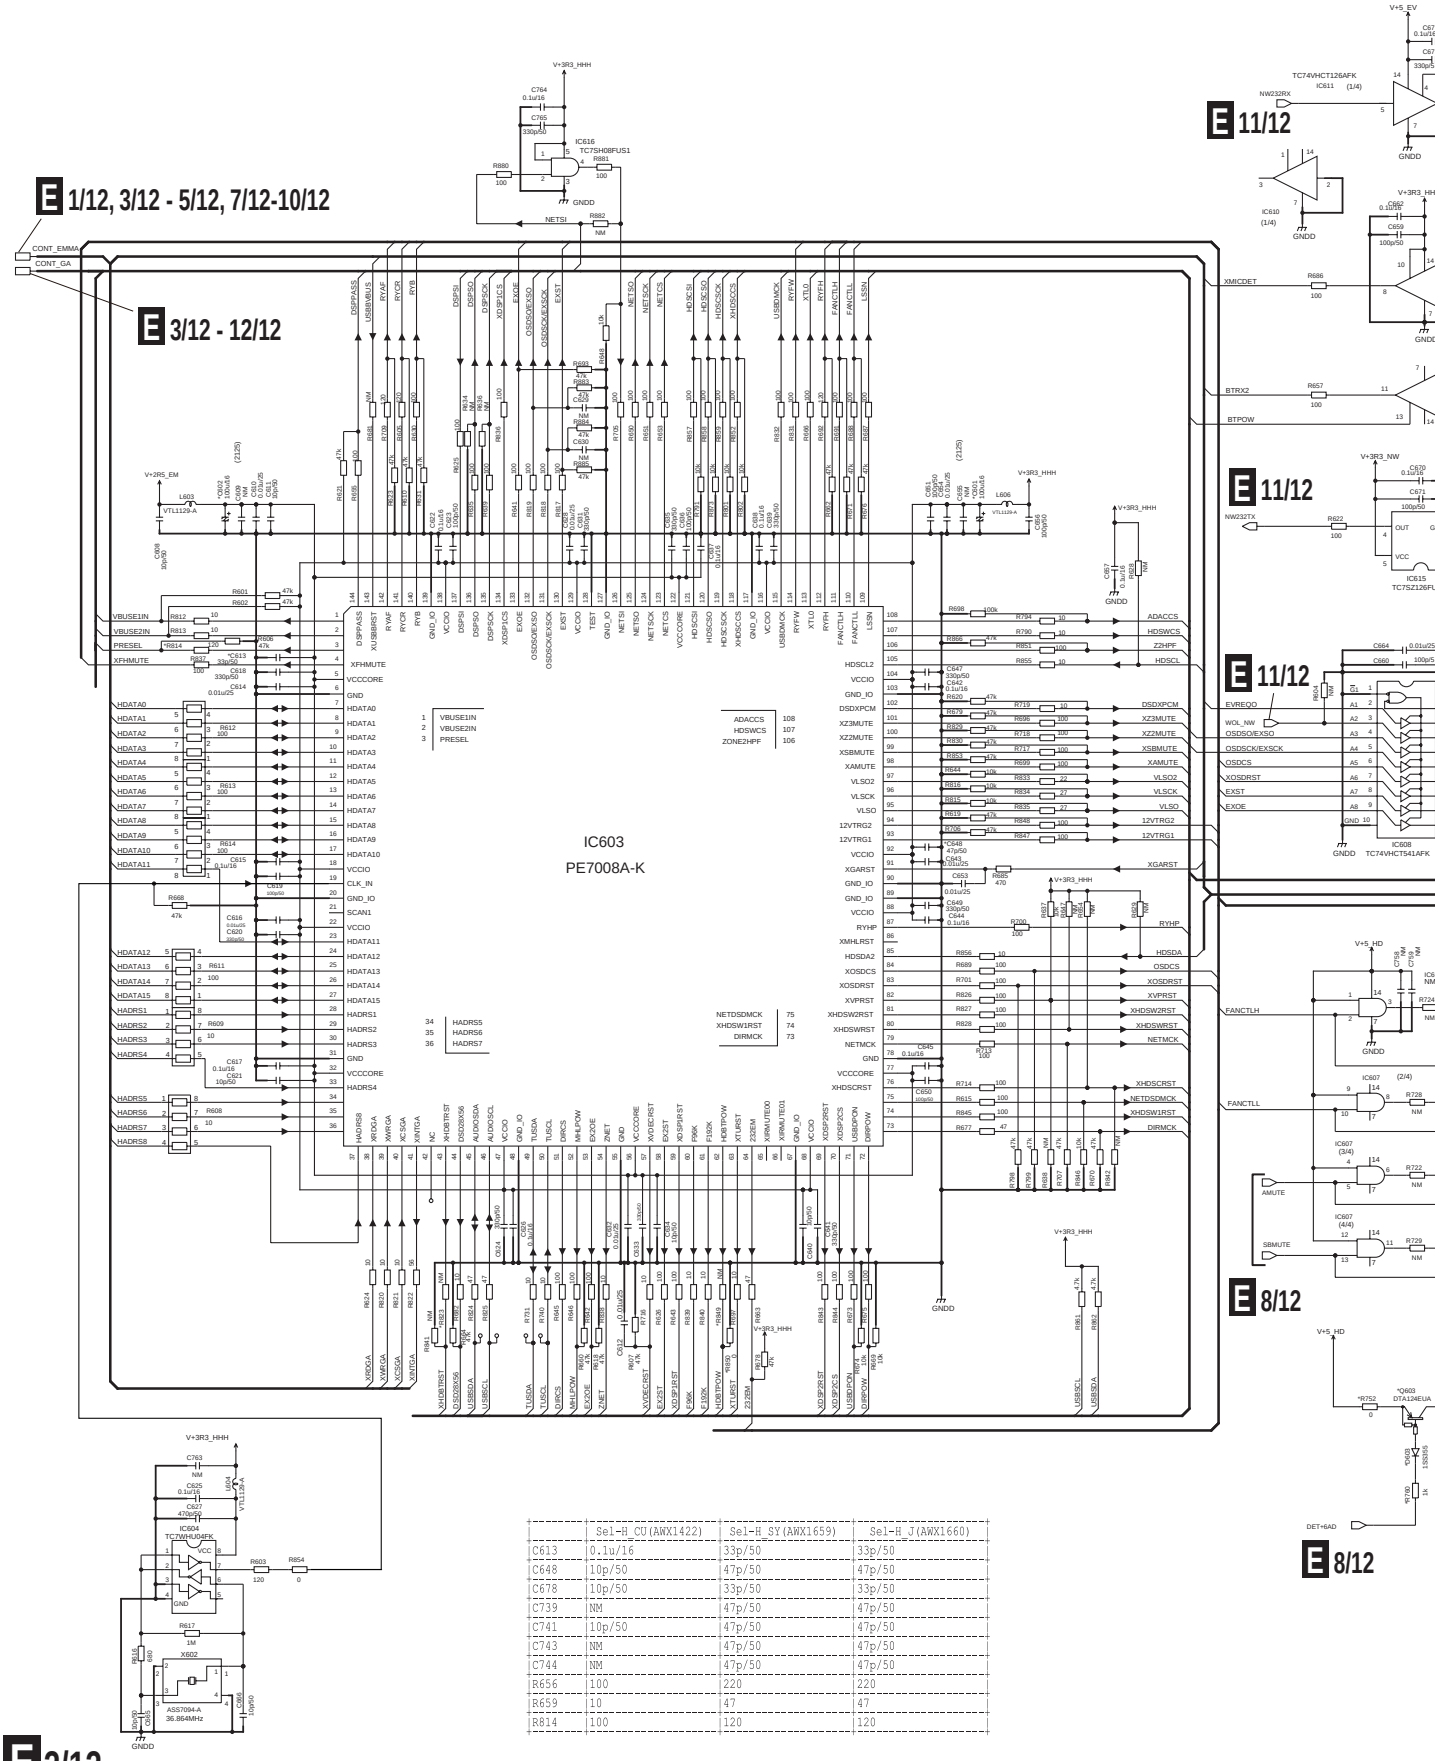

	Sel-H_CU(AWX1422)	Sel-H_SY(AWX1659)	Sel-H_J(AWX1660)
C613	0.1u/16	33p/50	33p/50
C648	10p/50	47p/50	47p/50
C678	10p/50	33p/50	33p/50
C739	NM	47p/50	47p/50
C741	10p/50	47p/50	47p/50
C743	NM	47p/50	47p/50
C744	NM	47p/50	47p/50
R656	100	220	220
R659	10	47	47
R814	100	120	120

E 2/12 DIGITAL MAIN ASSY (2/12) (AWX1422)

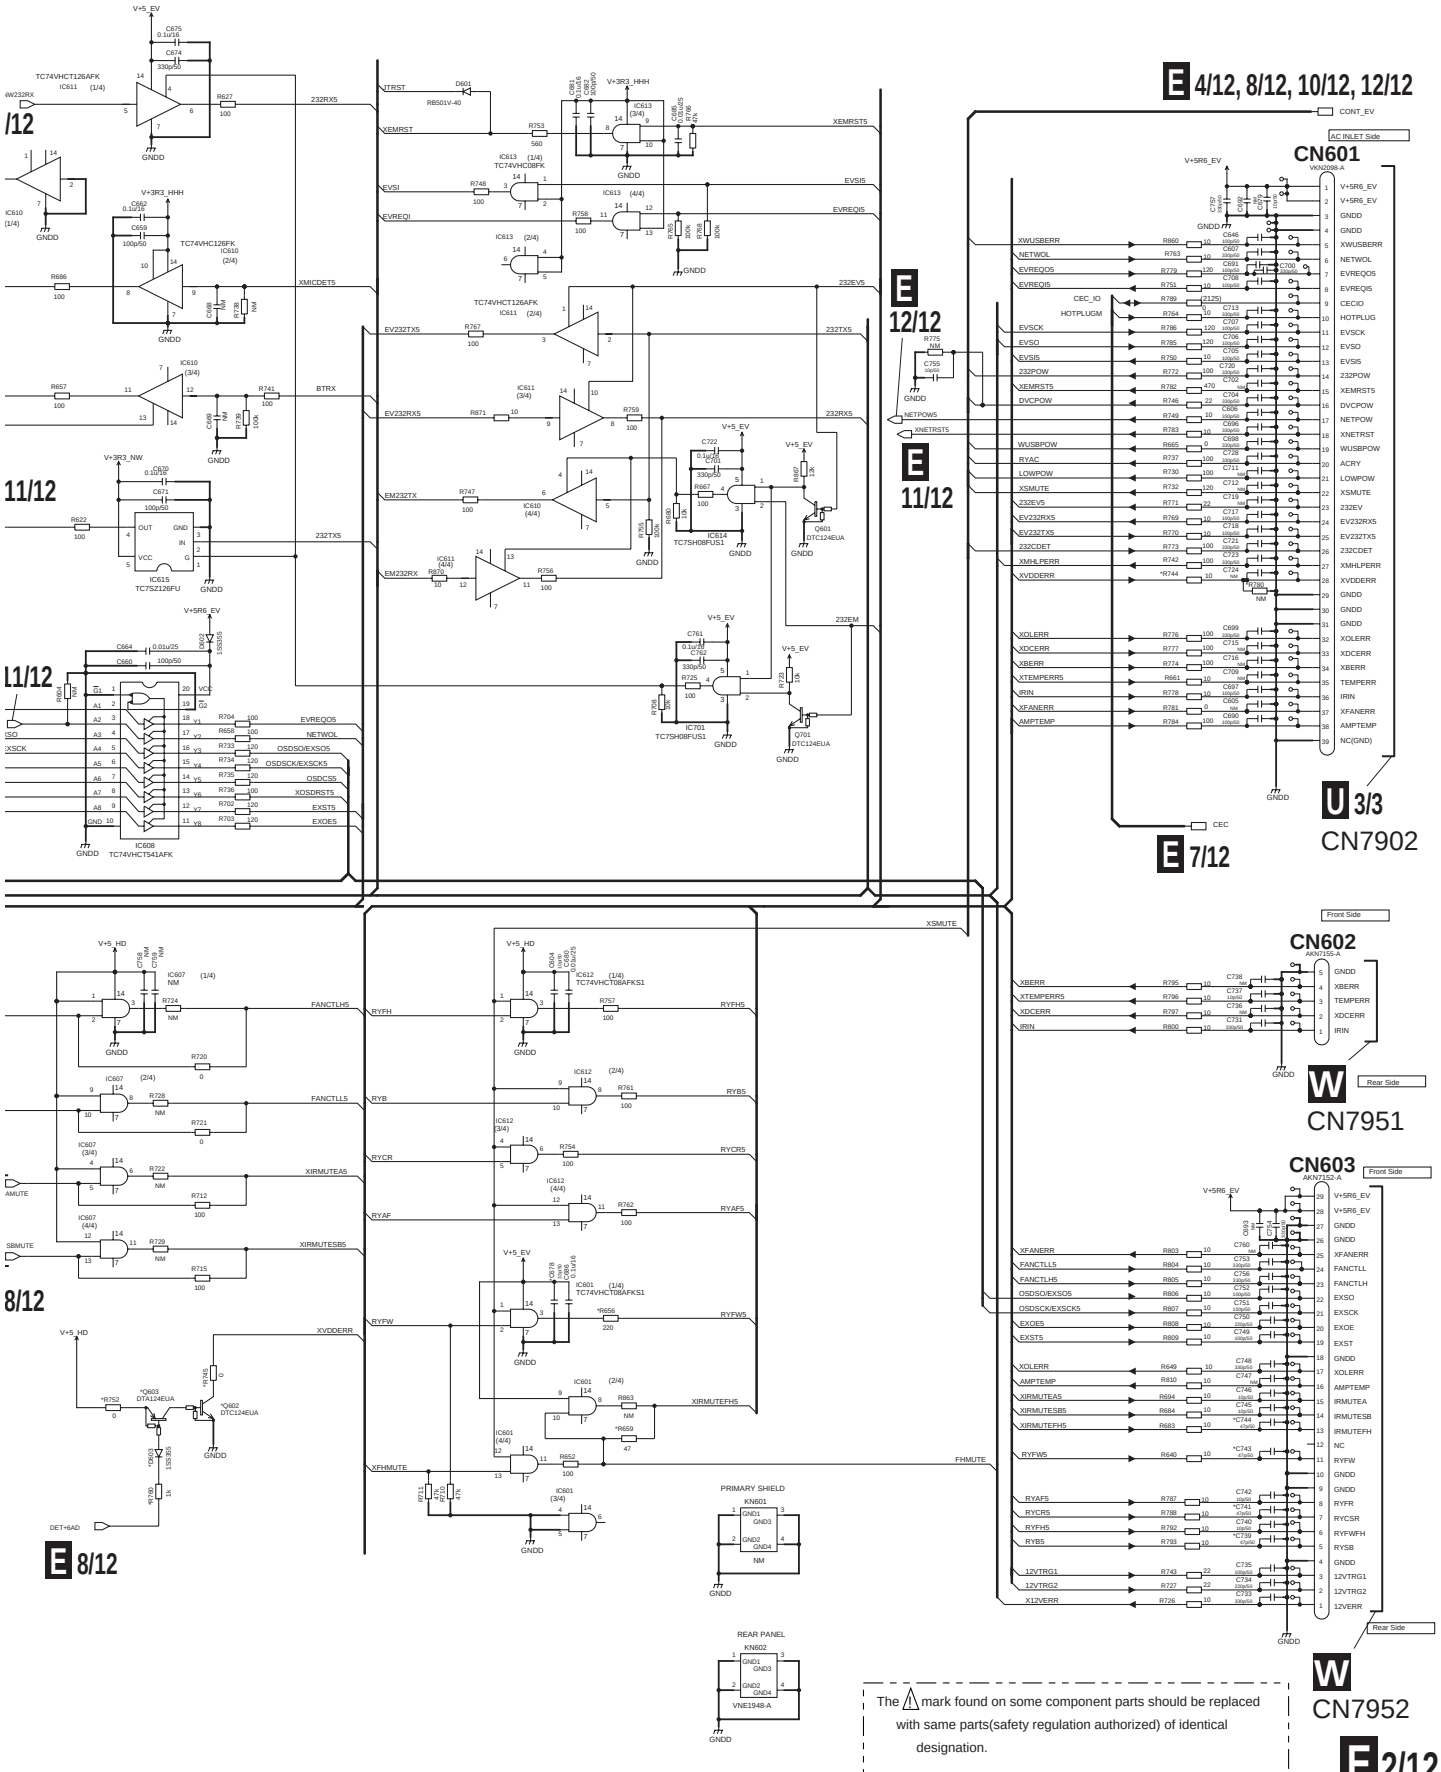

10.13 DIGITAL MAIN ASSY (3/12)

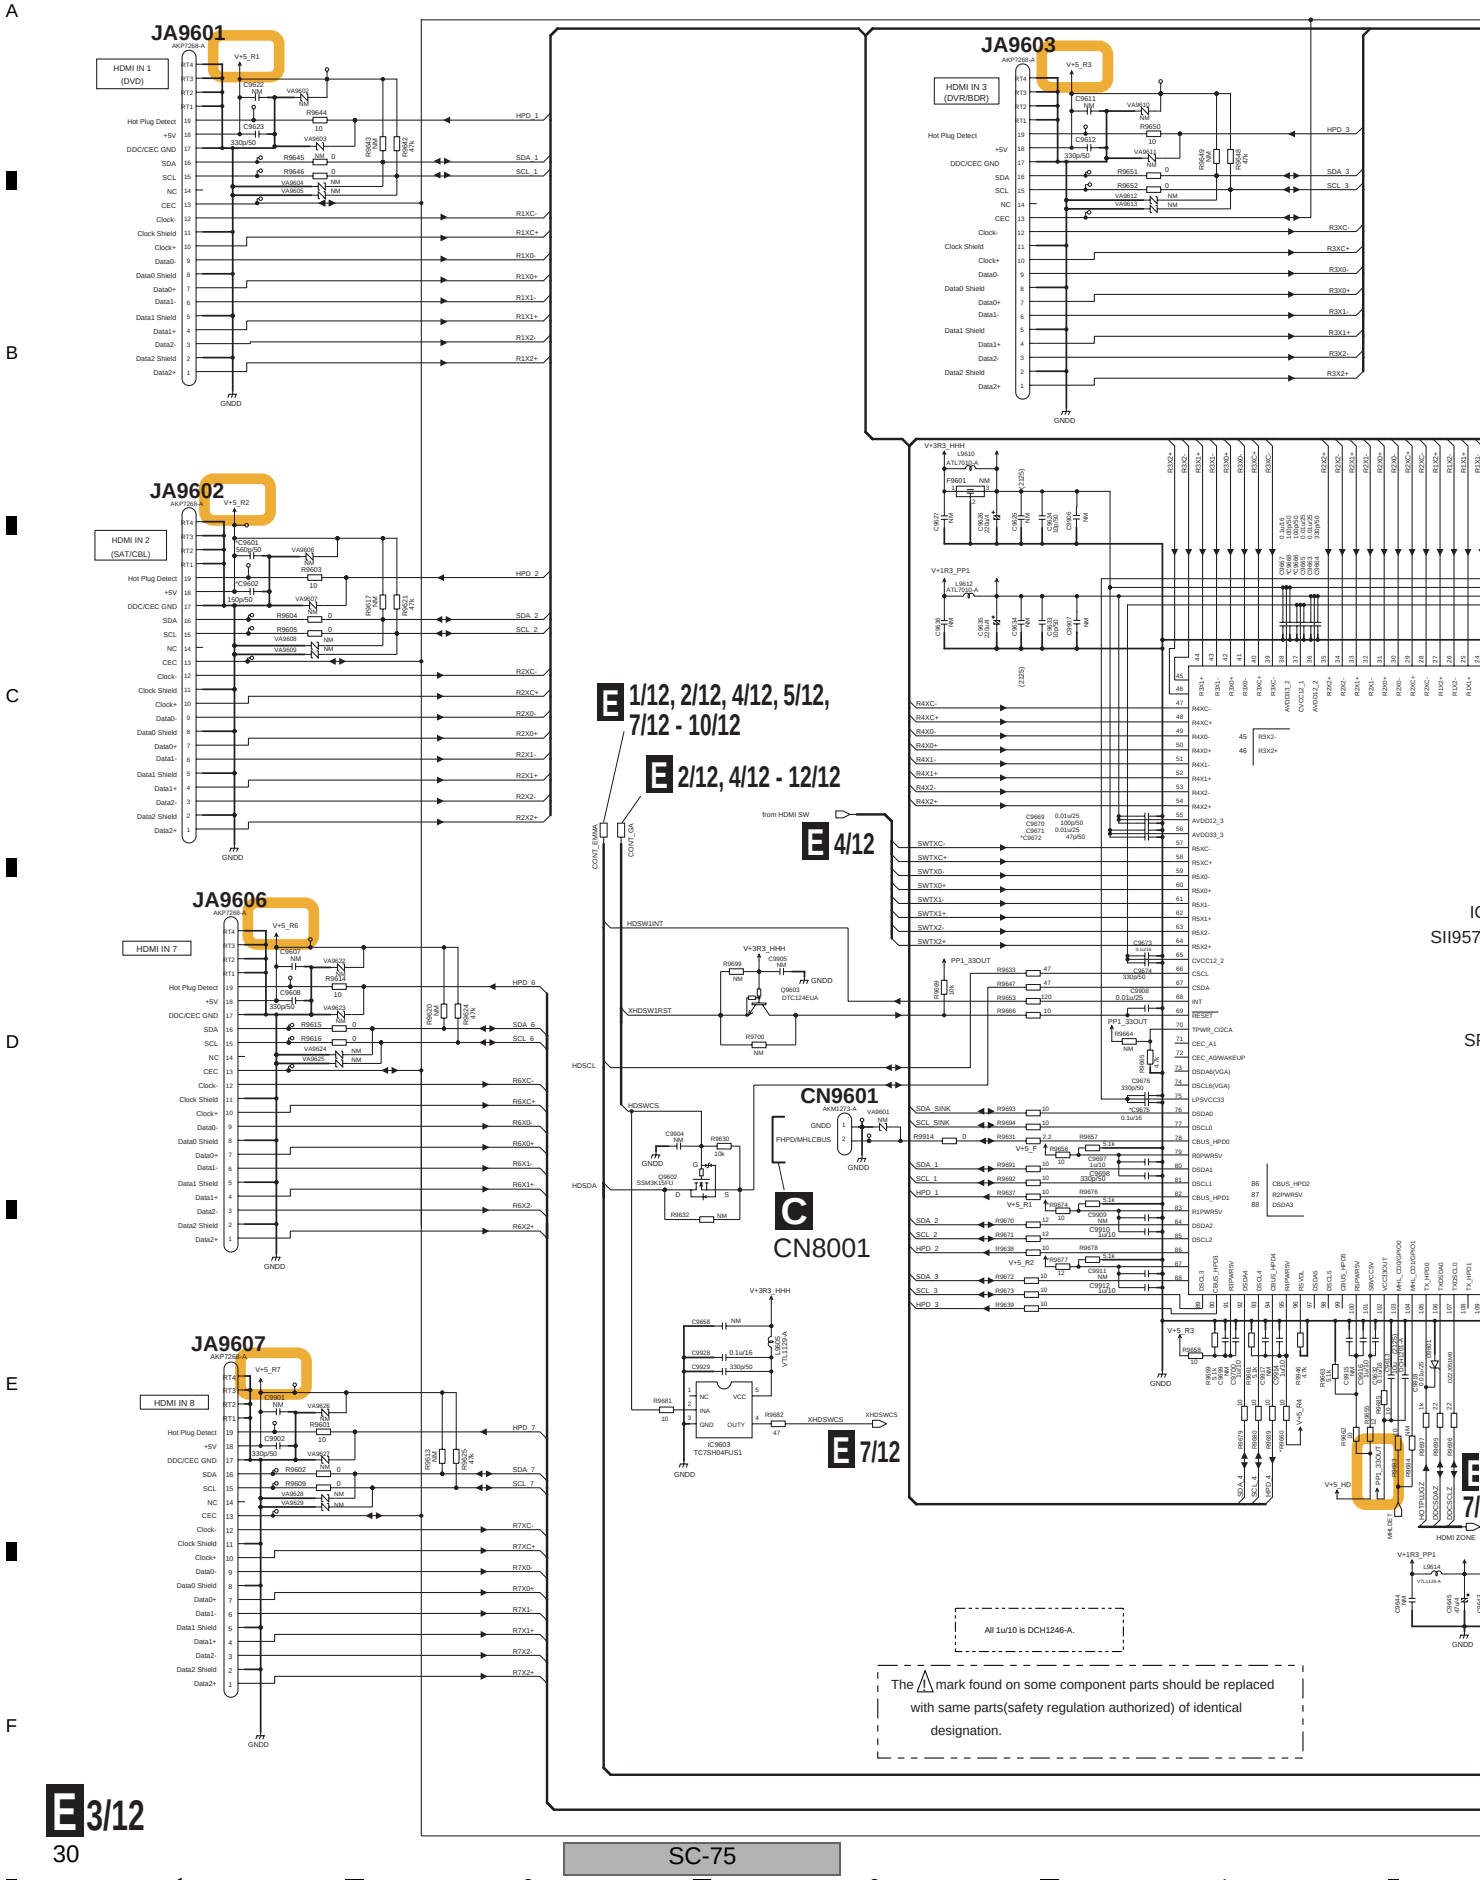

E 3/12 DIGITAL MAIN ASSY (3/12) (AWX1422)

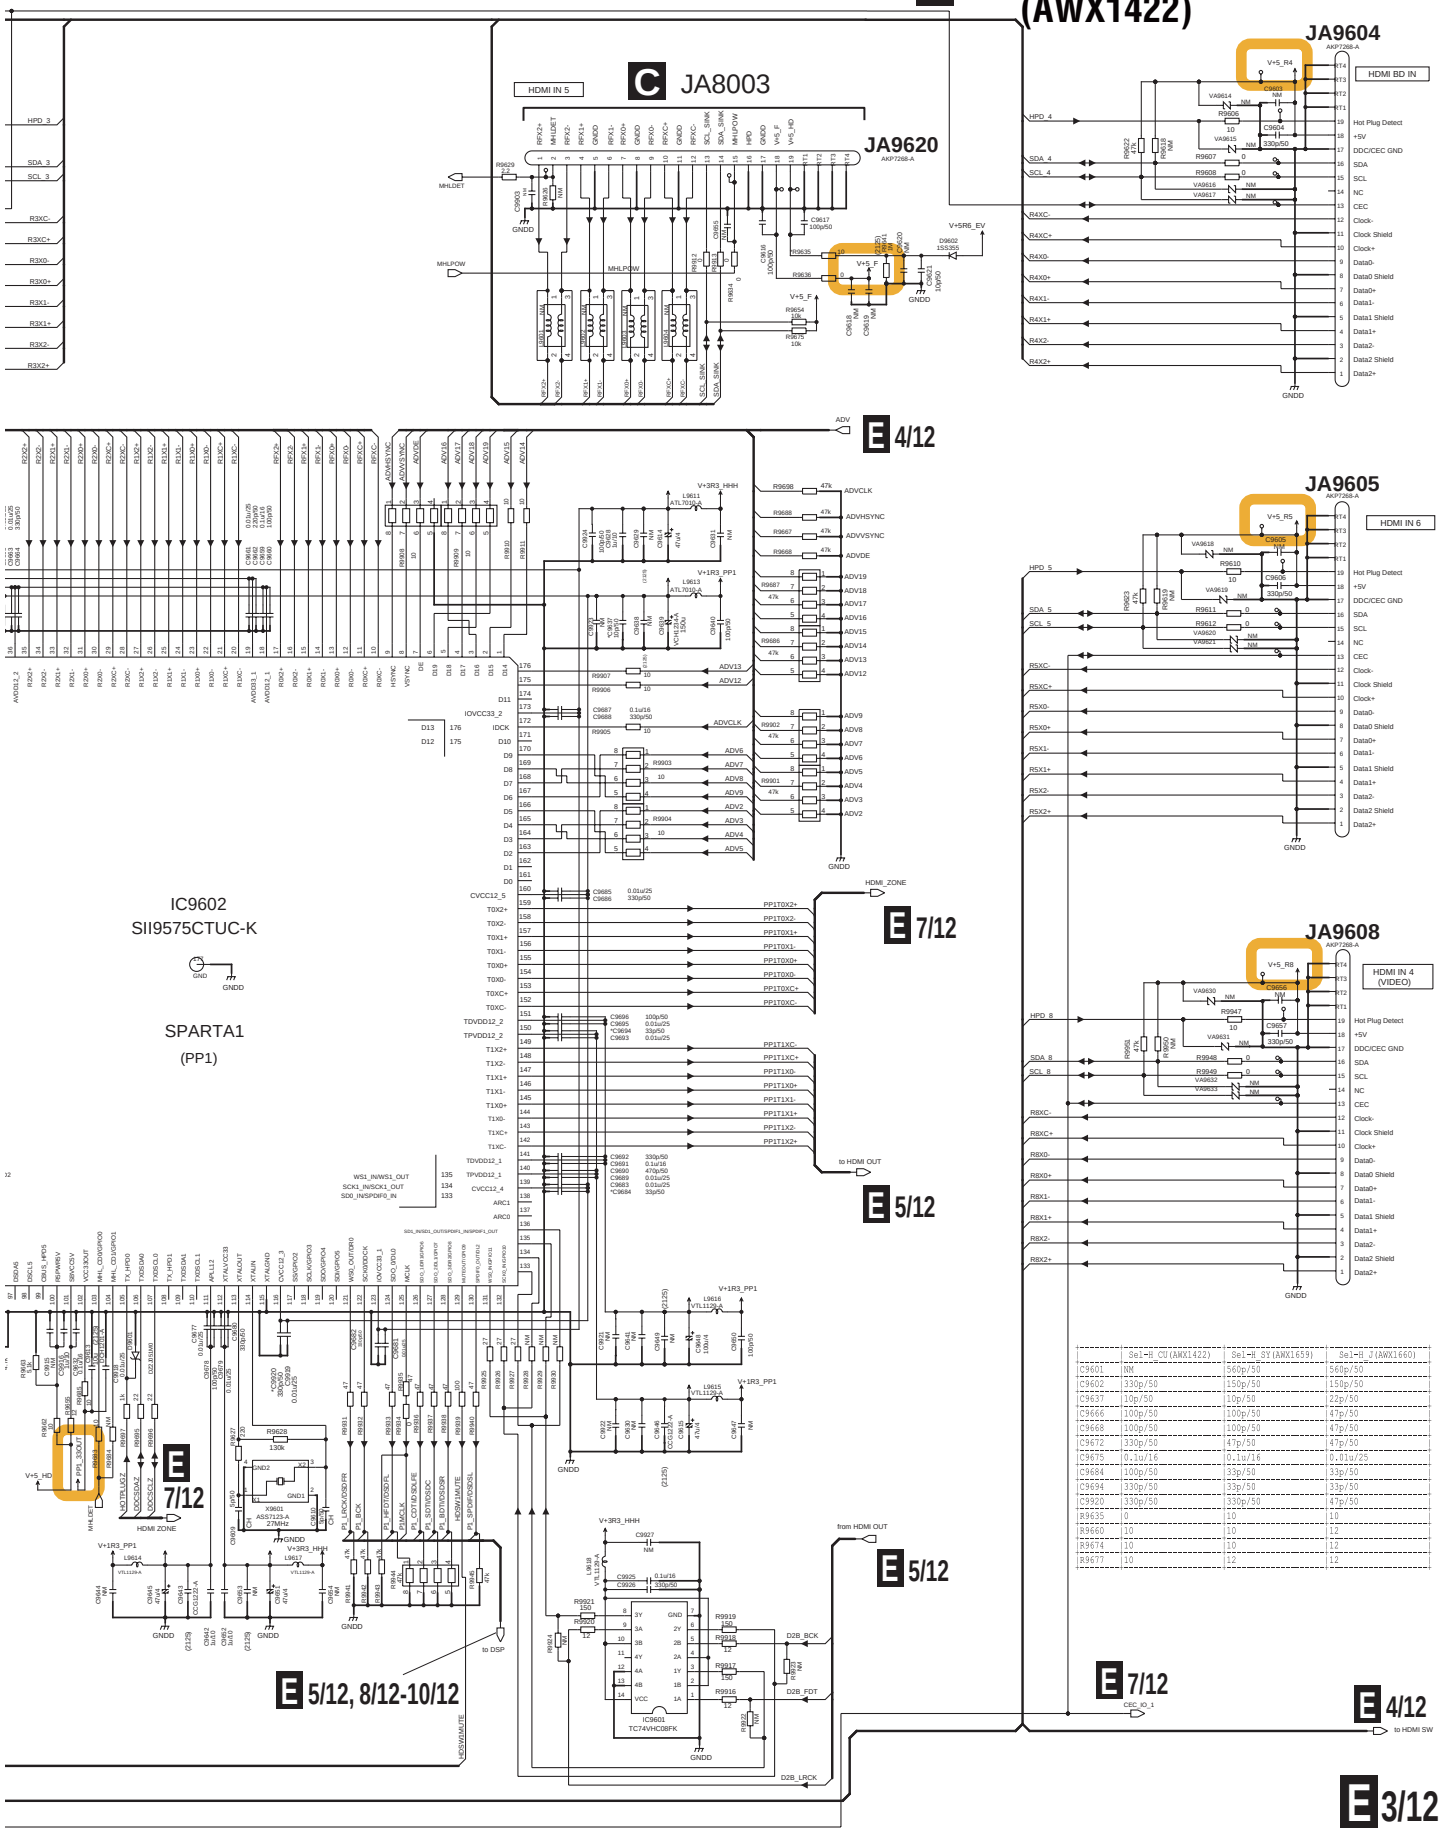

	Sel-H CU(AWX1422)	Sel-H SY(AWX1659)	Sel-H J(AWX1660)
C9601	NM	560p/50	560p/50
C9602	330p/50	150p/50	150p/50
C9637	10p/50	10p/50	22p/50
C9666	100p/50	100p/50	47p/50
C9668	100p/50	100p/50	47p/50
C9672	330p/50	47p/50	47p/50
C9675	0.1u/16	0.1u/16	0.01u/25
C9684	100p/50	33p/50	33p/50
C9694	330p/50	33p/50	33p/50
C9920	330p/50	330p/50	47p/50
R9635	0	10	10
R9660	10	10	12
R9674	10	10	12
R9677	10	22	12

10.14 DIGITAL MAIN ASSY (4/12)

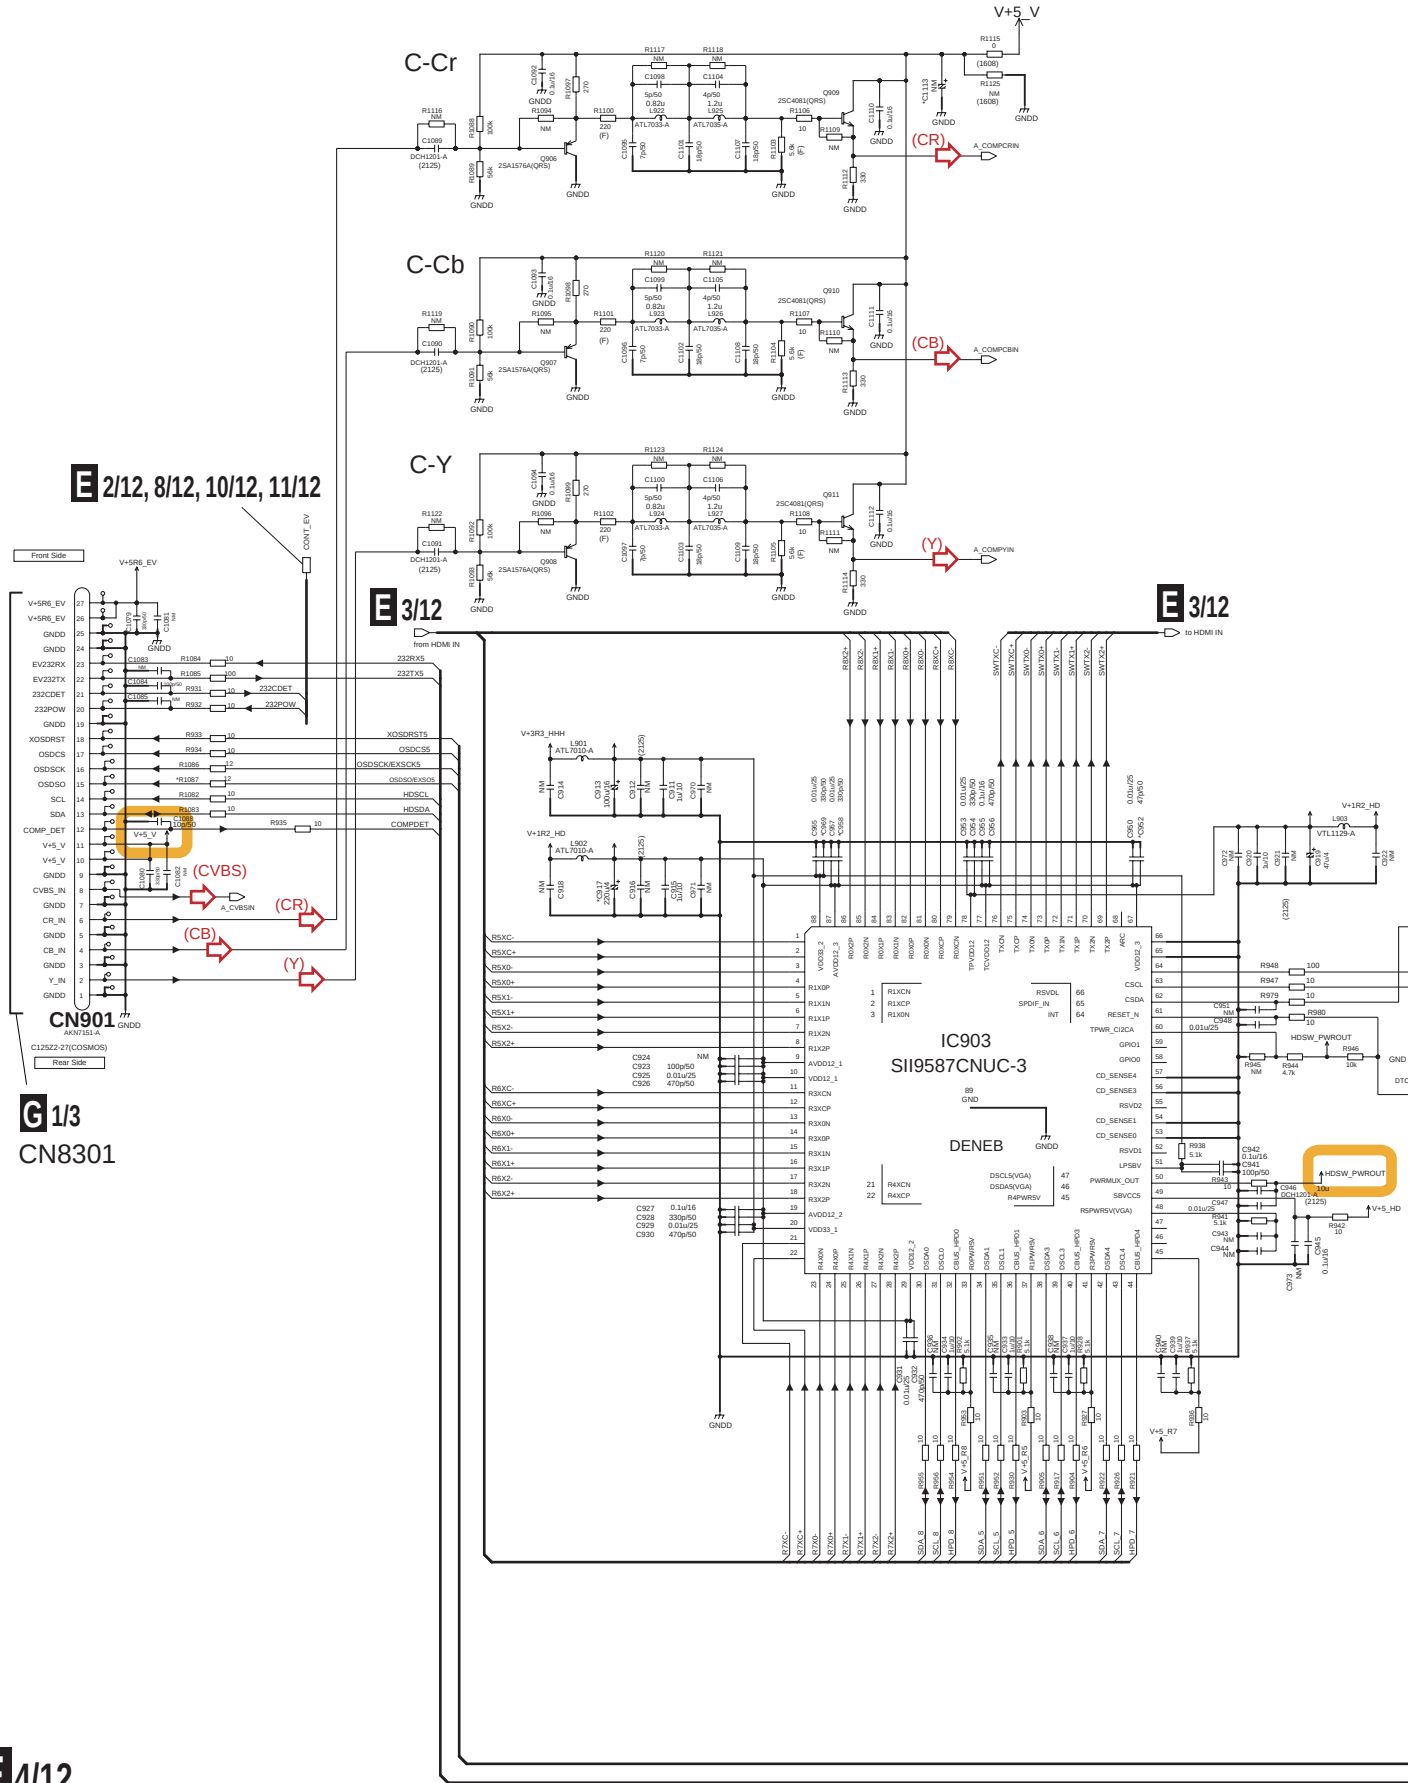

	Sel-H_CU(AWX1422)	Sel-H_SY(AWX1659)	Sel-H_J(AWX1660)
C952	100p/50	47p/50	47p/50
C958	330p/50	330p/50	33p/50
C969	330p/50	330p/50	33p/50
R1087	0	12	12

All 1u/10 is DCH1246-A.

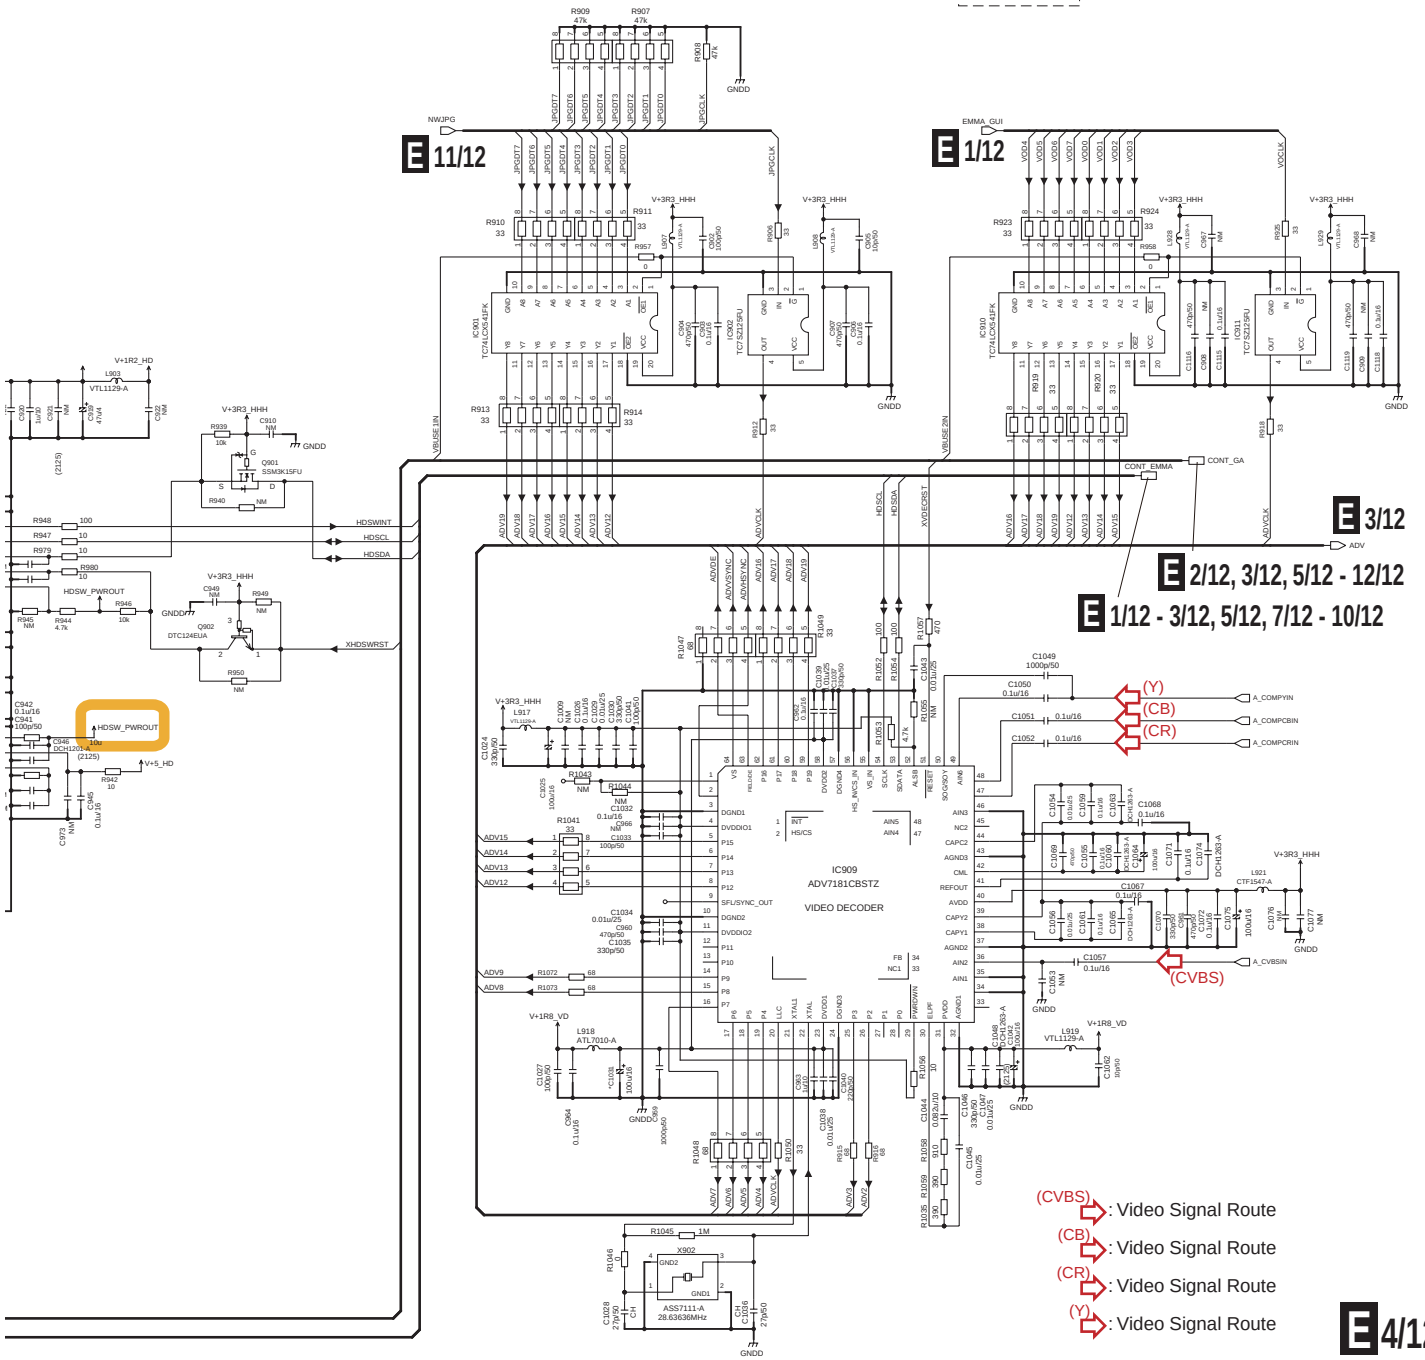

10.15 DIGITAL MAIN ASSY (5/12)

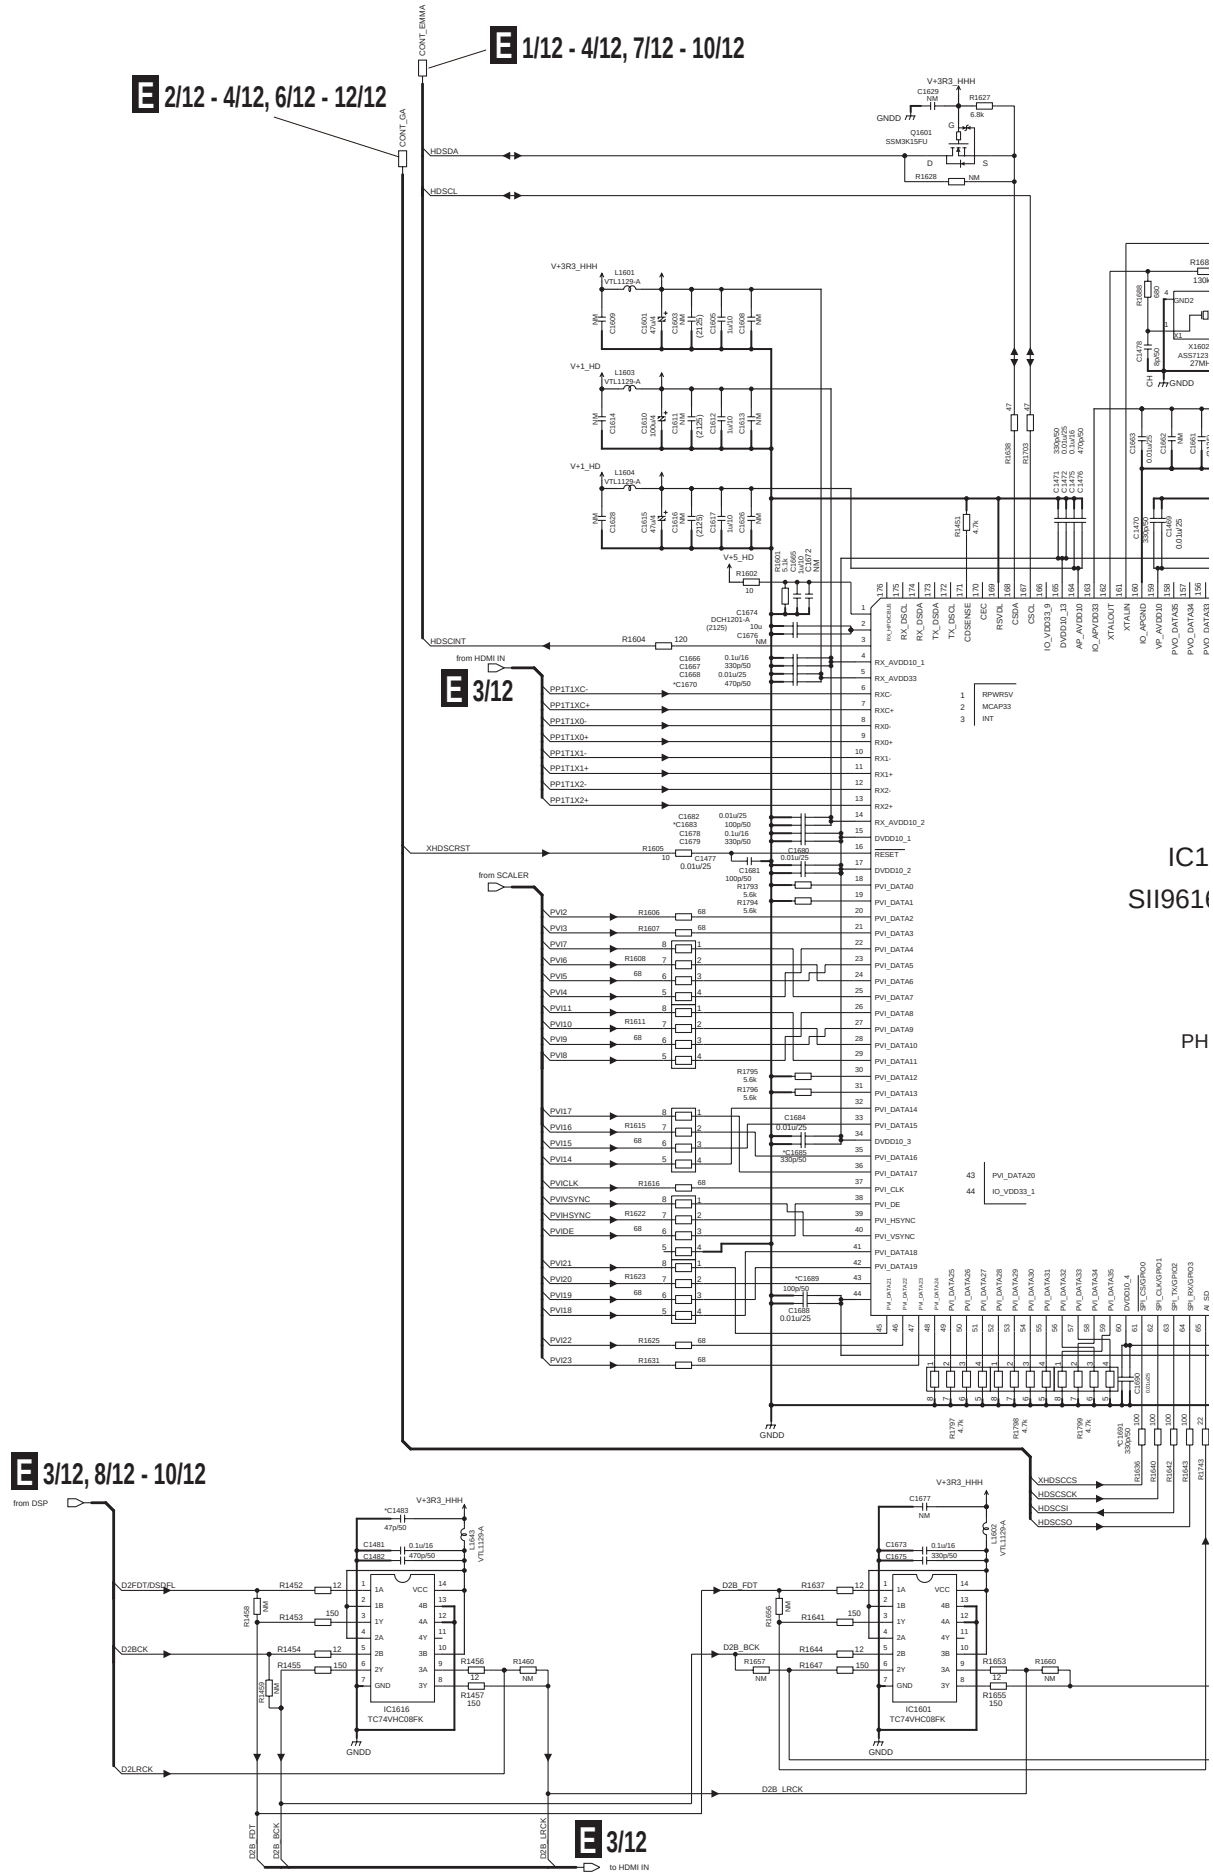

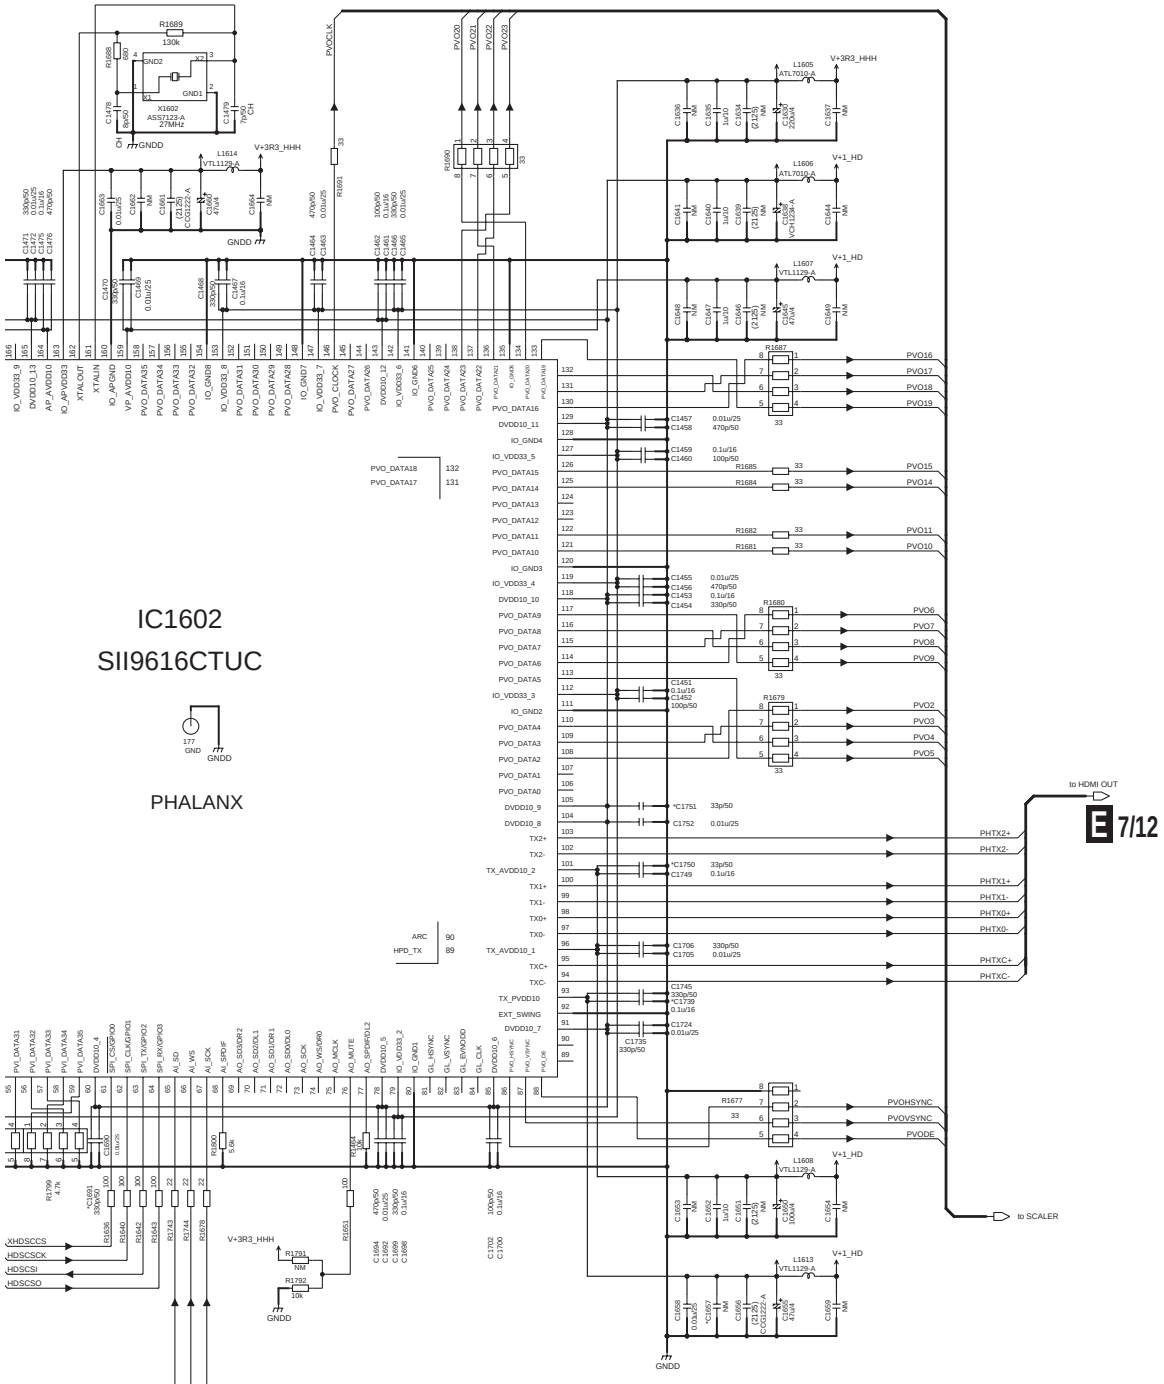

	Sel-H CU(AWX1422)	Sel-H SY(AWX1659)	Sel-H J(AWX1660)
C1483	NM	47p/50	47p/50
C1657	NM	NM	27p/50
C1670	470p/50	470p/50	33p/50
C1683	100p/50	100p/50	33p/50
C1685	330p/50	330p/50	47p/50
C1689	100p/50	100p/50	22p/50
C1691	330p/50	330p/50	22p/50
C1739	0.1u/16	0.1u/16	NM
C1750	100p/50	33p/50	33p/50
C1751	330p/50	33p/50	33p/50

10.16 DIGITAL MAIN ASSY (6/12)

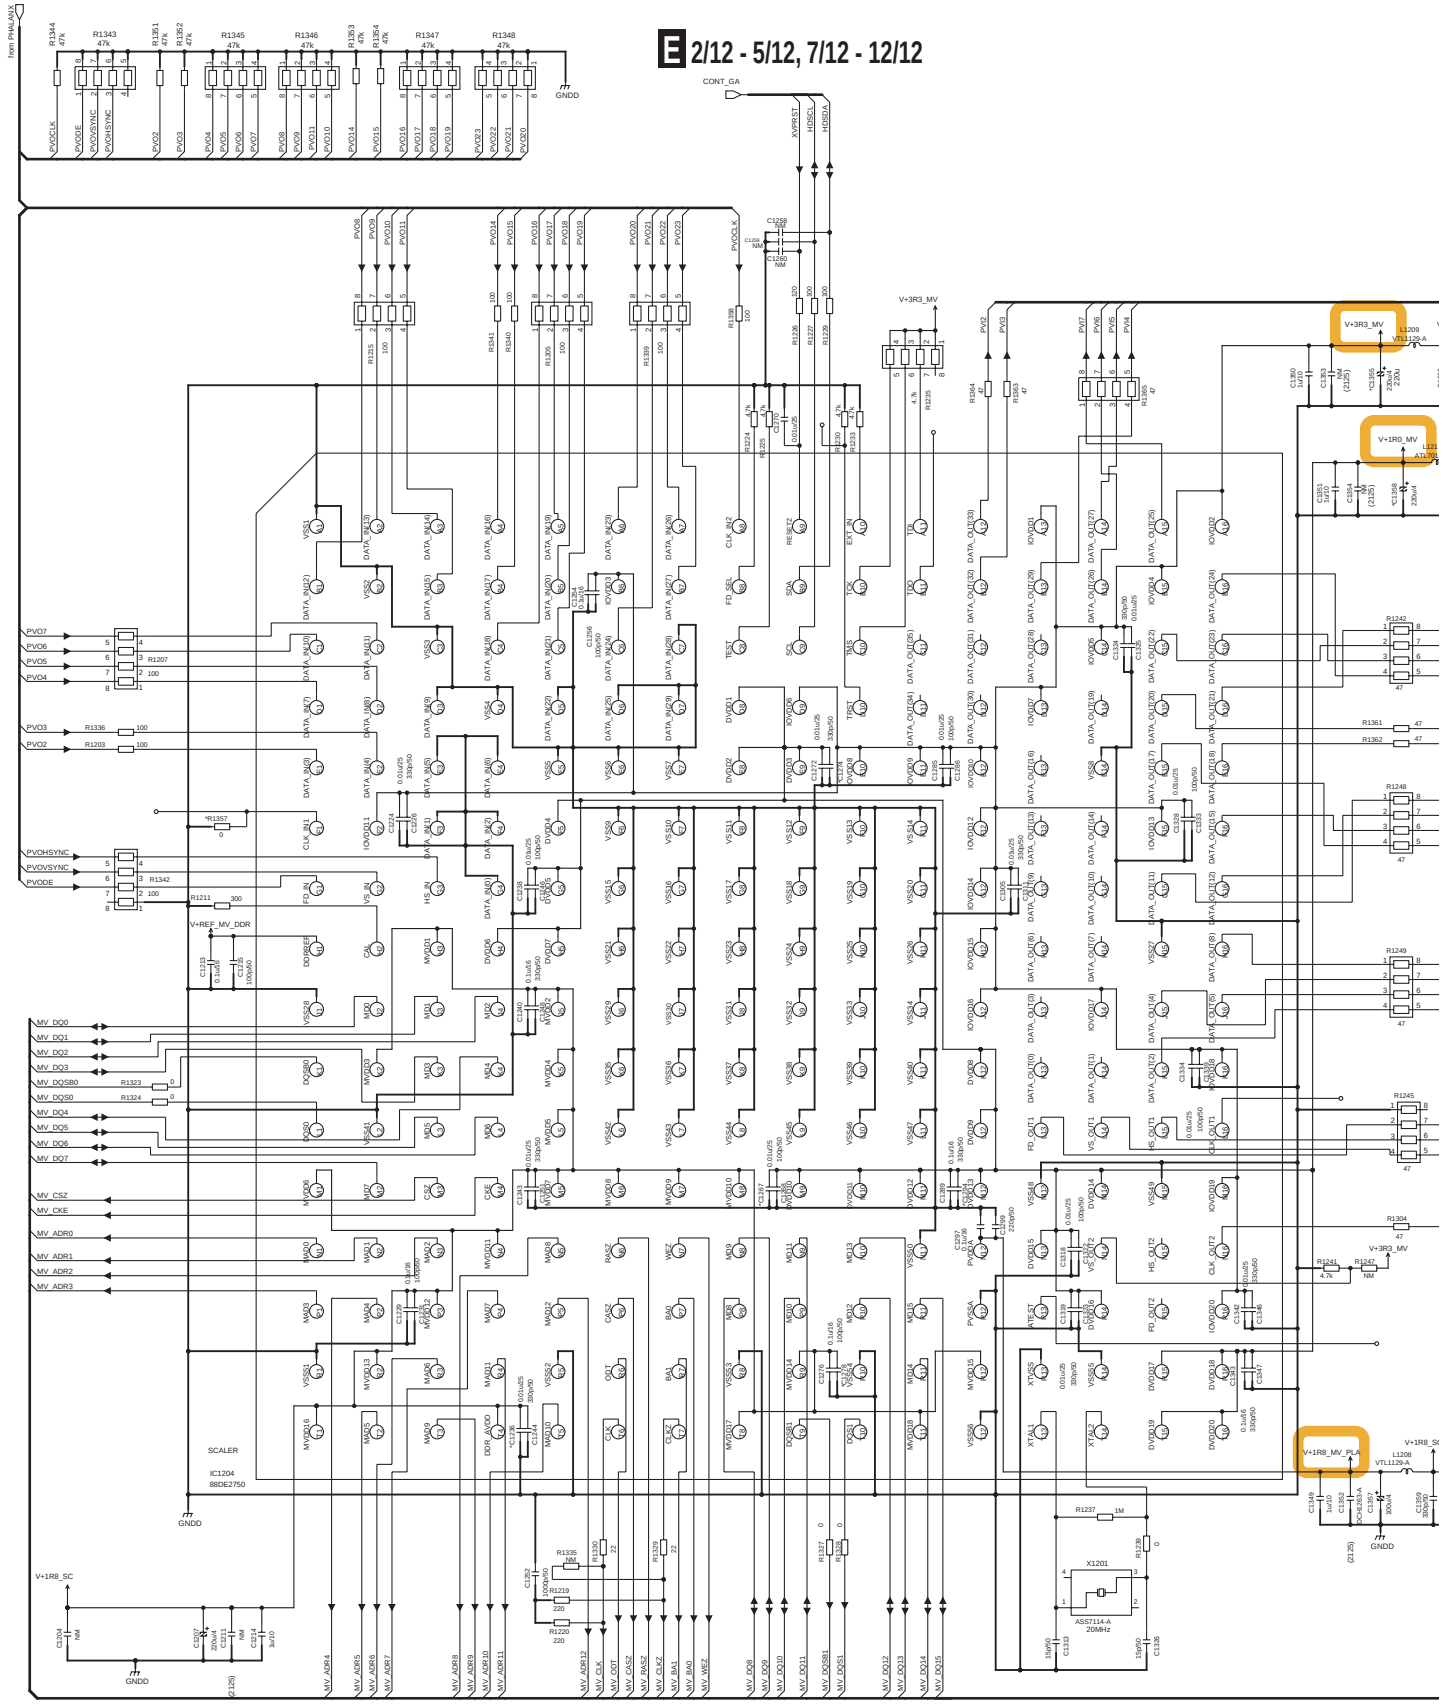

E 6/12 DIGITAL MAIN ASSY (6/12) (AWX1422)

	Sel-H_CU(AWX1422)	Sel-H_SY(AWX1659)	Sel-H_J(AWX1660)
C1220	100p/50	100p/50	22p/50
C1236	0.1u/16	0.01u/25	0.01u/25
C1267	0.1u/16	0.01u/25	0.01u/25
C1274	330p/50	330p/50	27p/50
C1278	100p/50	100p/50	22p/50
C1294	330p/50	330p/50	47p/50
C1390	100p/50	100p/50	27p/50
C1393	100p/50	100p/50	22p/50
R1357	0	0	12

All 1u/10 is DCH1246-A.

The ⚠ mark found on some component parts should be replaced with same parts (safety regulation authorized) of identical designation.

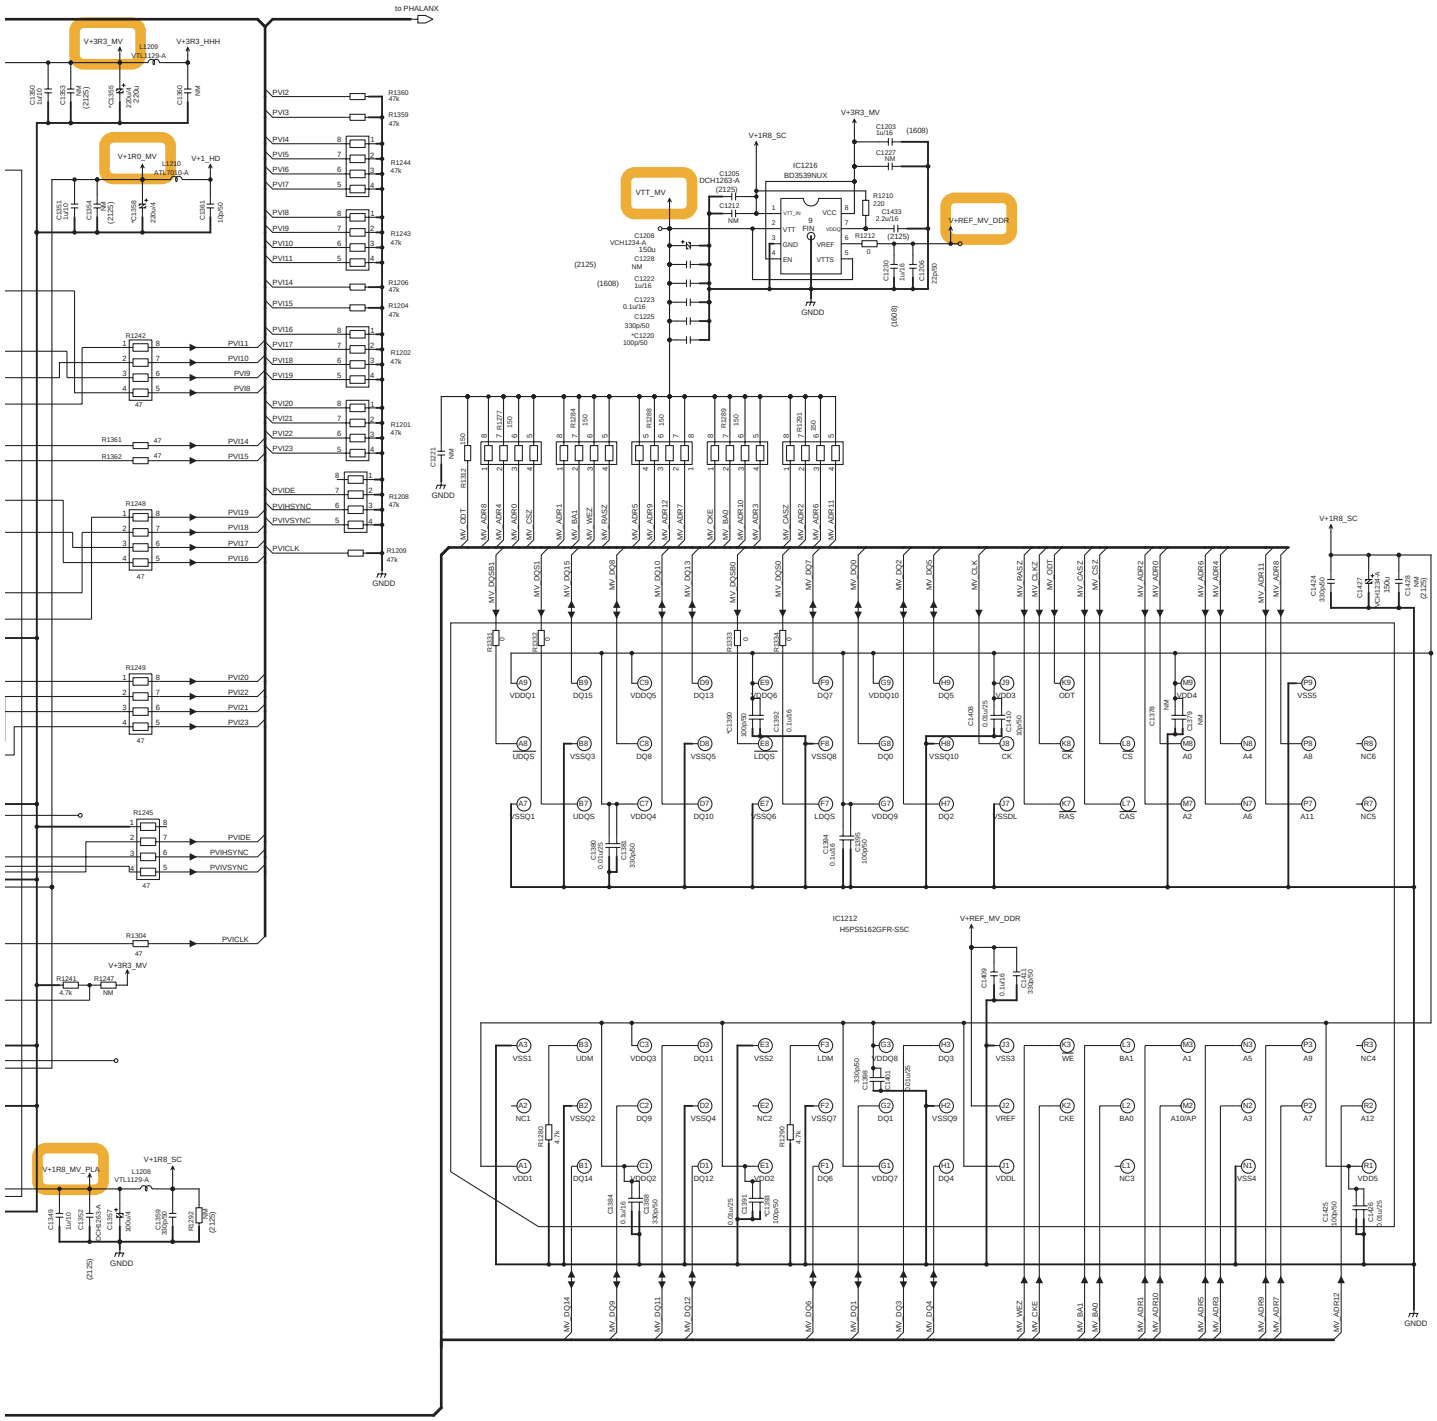

10.17 DIGITAL MAIN ASSY (7/12)

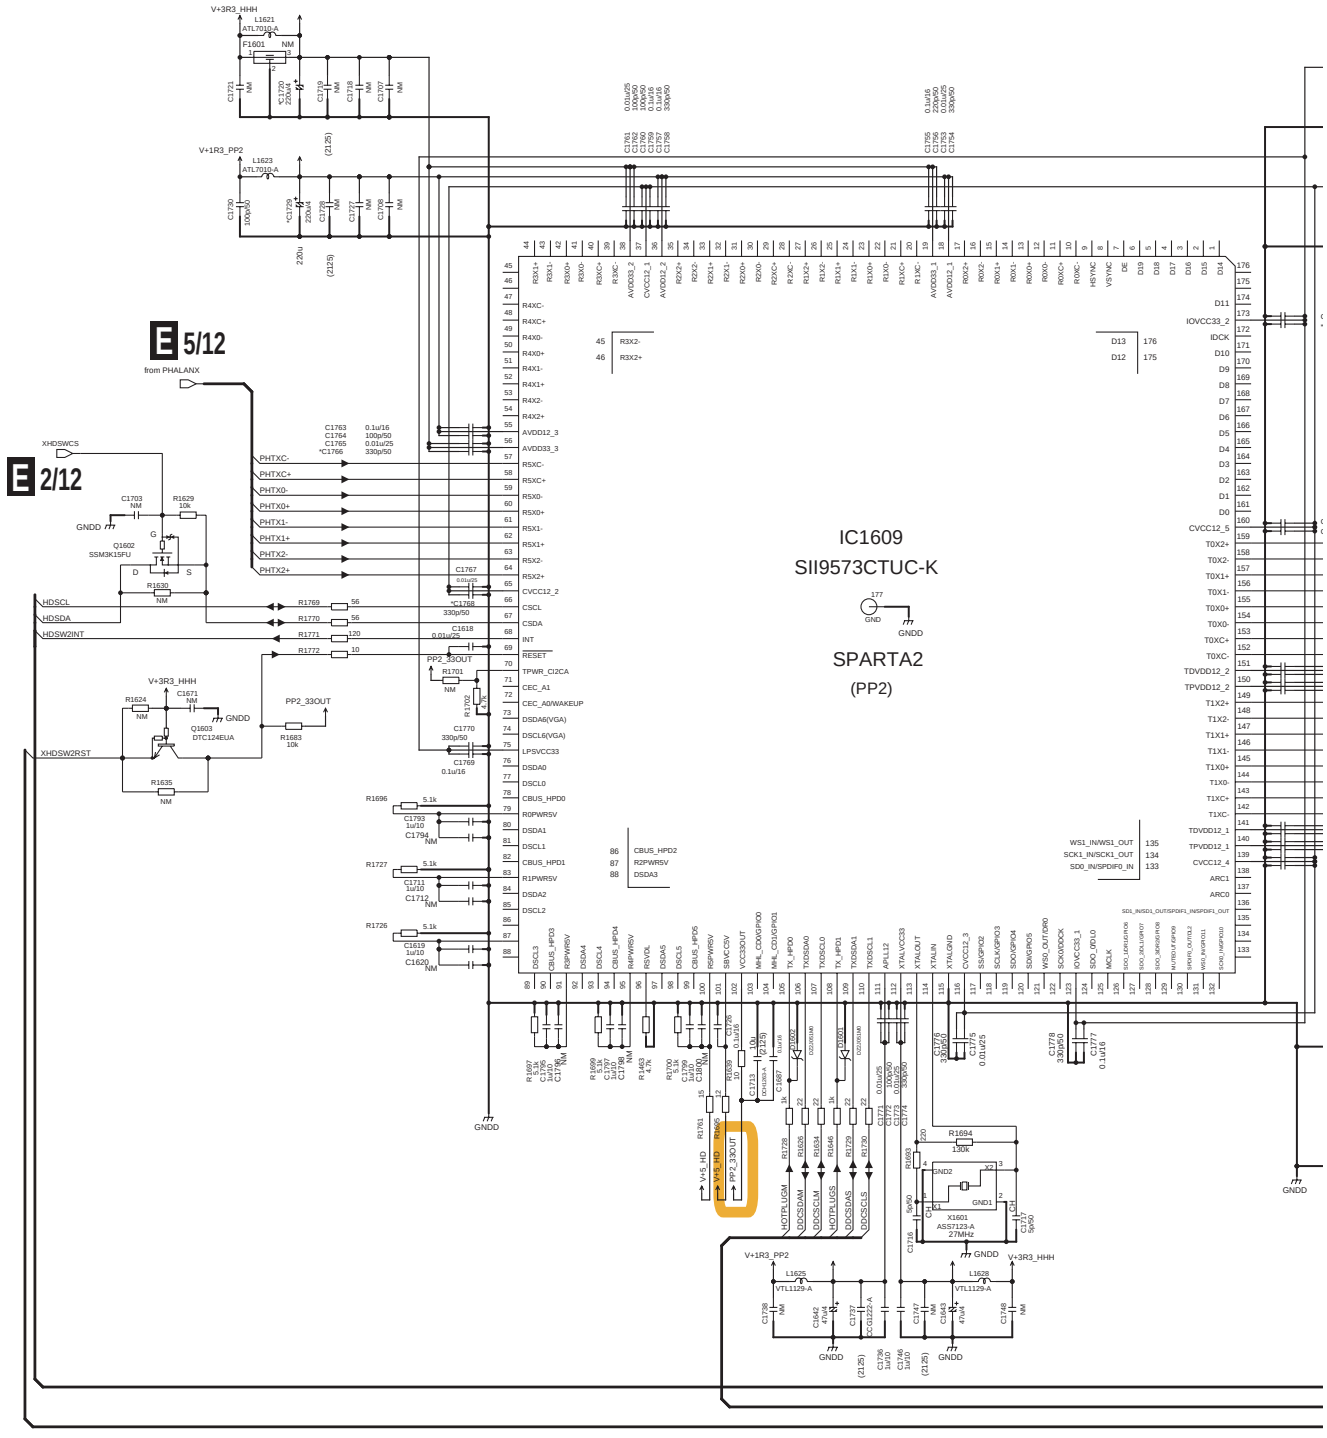

	Sel-H CU(AWX1422)	Sel-H SY(AWX1659)	Sel-H J(AWX1660)
C1766	330p/50	330p/50	47p/50
C1768	330p/50	330p/50	47p/50
C1784	330p/50	47p/50	47p/50
C1789	0.1u/16	0.01u/25	0.01u/25
C1790	330p/50	33p/50	47p/50
C1792	100p/50	100p/50	47p/50

The ⚠ mark found on some component parts should be replaced with same parts (safety regulation authorized) of identical designation.

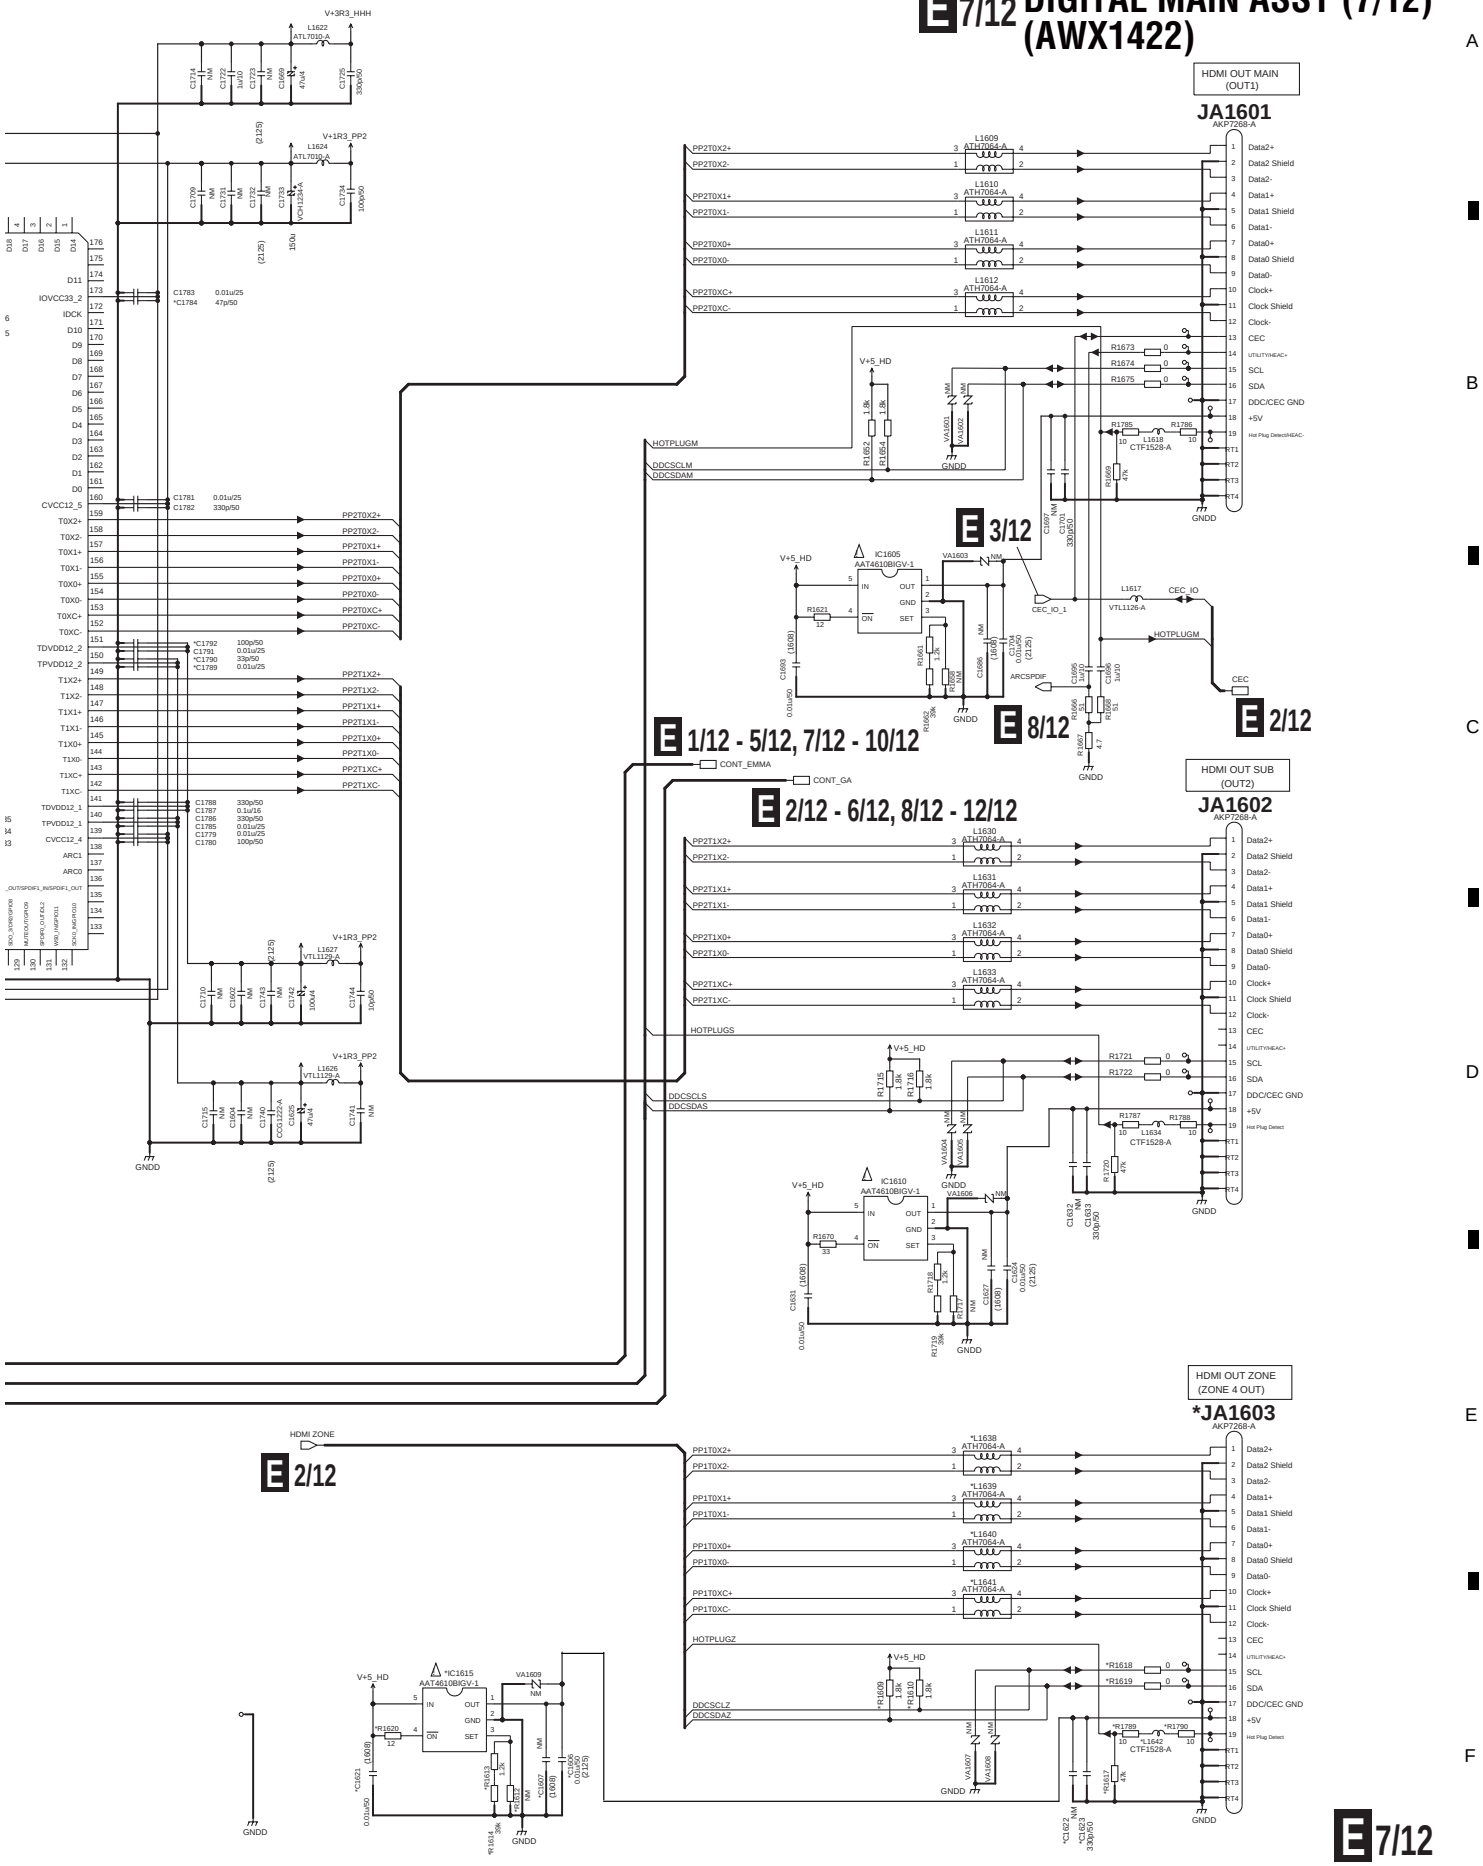
HDMI OUT MAIN (OUT1)
JA1601
AKP7268-A
HDMI OUT SUB (OUT2)
JA1602
AKP7268-A
HDMI OUT ZONE (ZONE 4 OUT)
*JA1603
AKP7268-A
HDMI ZONE
E 2/12
E 3/12
E 8/12
E 1/12 - 5/12, 7/12 - 10/12
E 2/12 - 6/12, 8/12 - 12/12
E 2/12
E 7/12
HOTPLUGM
DDCSCLM
DDCSDAM
HOTPLUGS
DDCSCLS
DDCSDAS
HOTPLUGZ
DDCSCLZ
DDCSDAZ
CONT_EMMA
CONT_GA
CEC_IO
ARCSPDIF
GNDD
V+5_HD
V+3R3_HHH
V+1R3_PP2
CTF1528-A
AAT4610BIGV-1

10.18 DIGITAL MAIN ASSY (8/12)

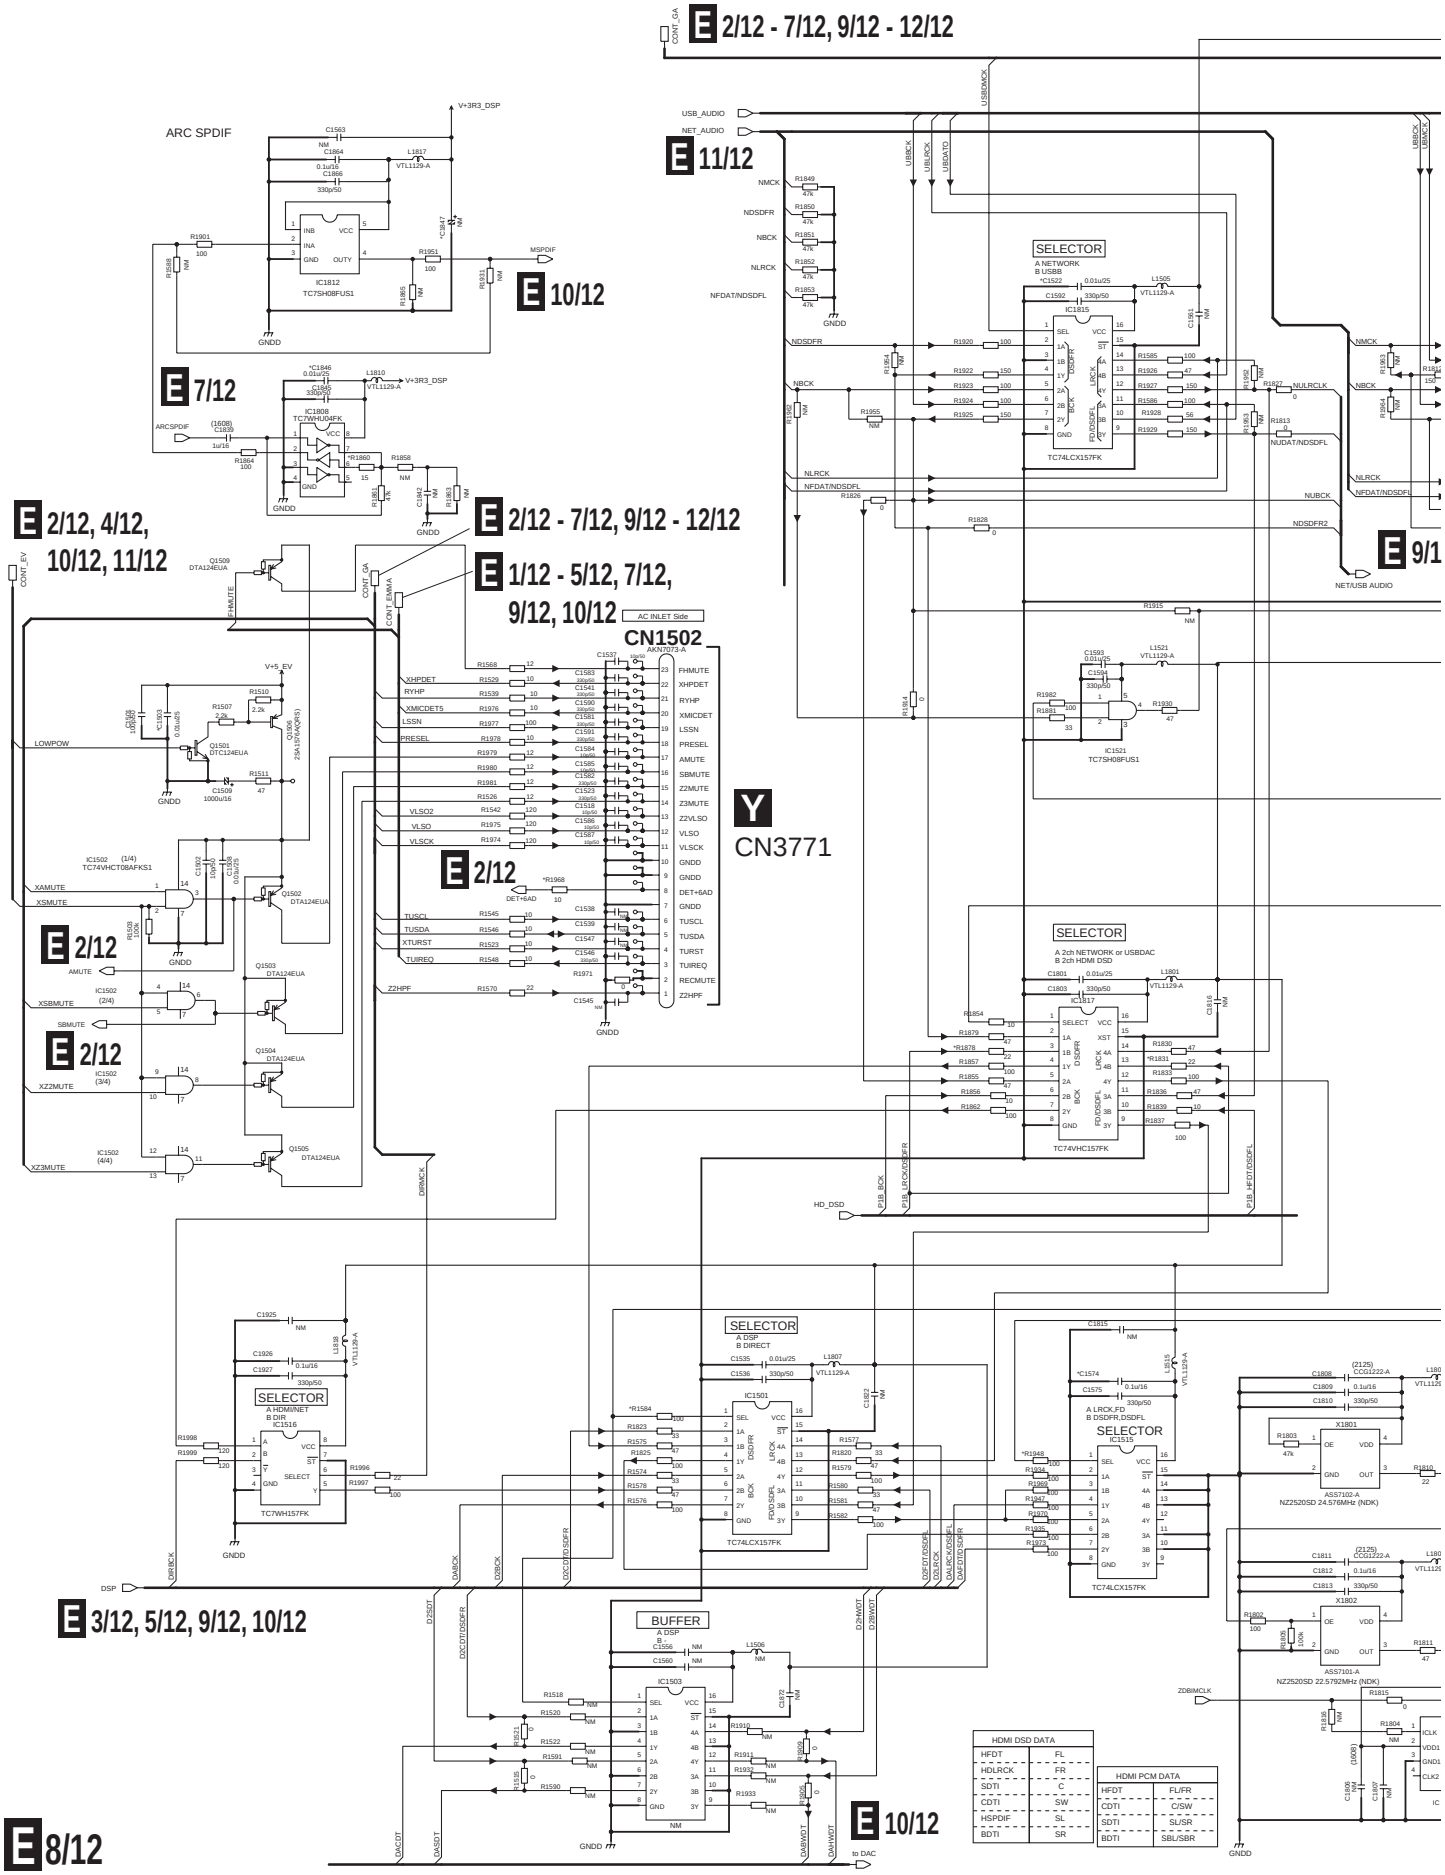

E 8/12 DIGITAL MAIN ASSY (8/12) (AWX1422)

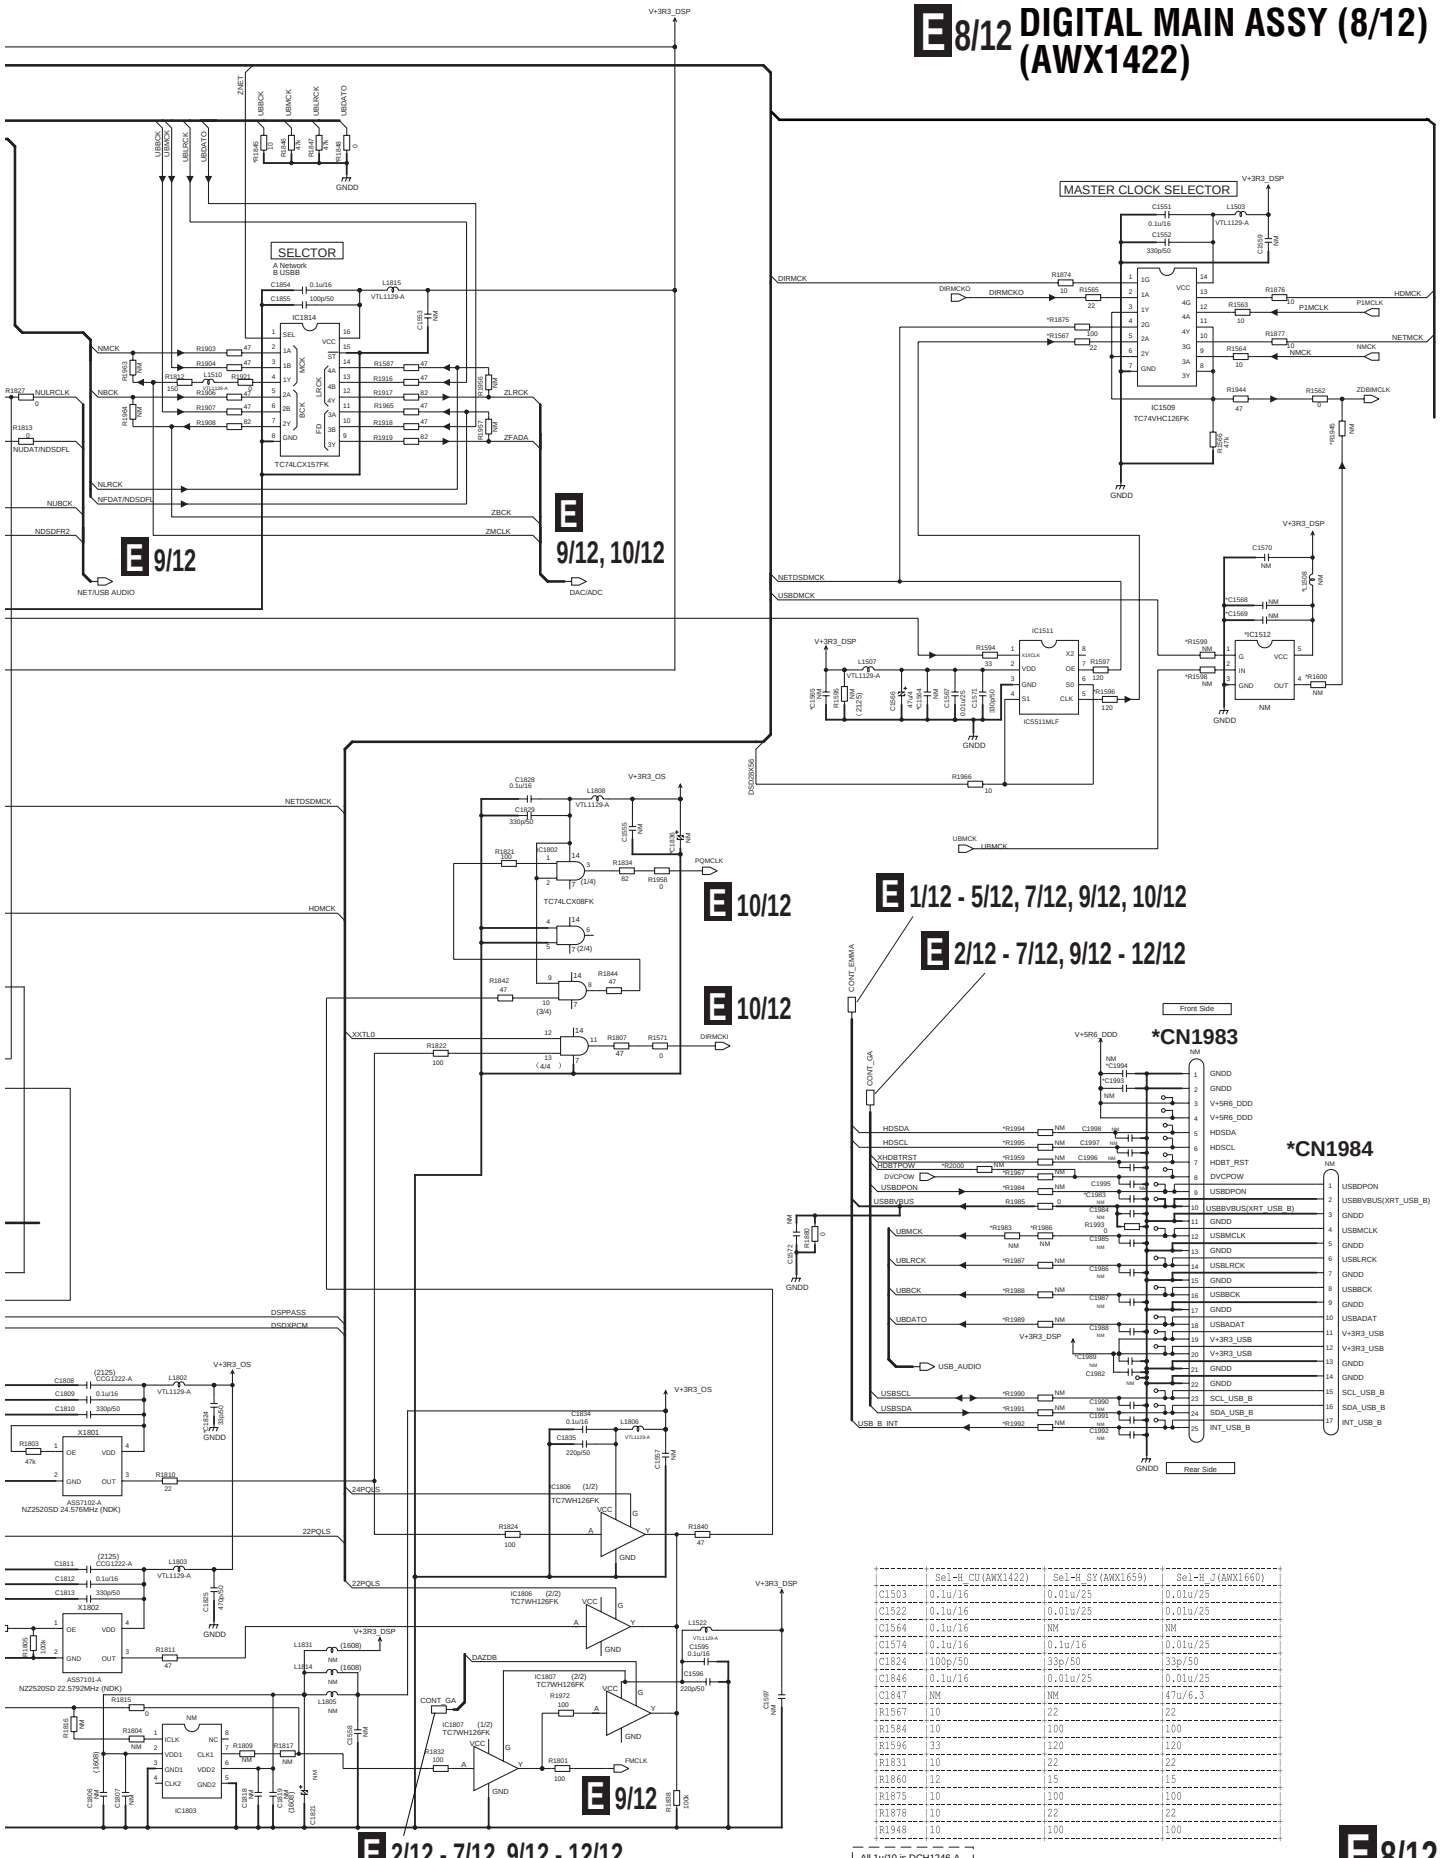

	Sel-H_CD(AWX1422)	Sel-H_SY(AWX1659)	Sel-H_J(AWX1660)
C1503	0.1u/16	0.01u/25	0.01u/25
C1522	0.1u/16	0.01u/25	0.01u/25
C1564	0.1u/16	NM	NM
C1574	0.1u/16	0.1u/16	0.01u/25
C1824	100p/50	33p/50	33p/50
C1846	0.1u/16	0.01u/25	0.01u/25
C1847	NM	NM	47u/6.3
R1567	10	22	22
R1584	10	100	100
R1596	33	120	120
R1831	10	22	22
R1860	12	15	15
R1875	10	100	100
R1878	10	22	22
R1948	10	100	100

All 1u/10 is DCH1246-A.

E 8/12

10.19 DIGITAL MAIN ASSY (9/12)

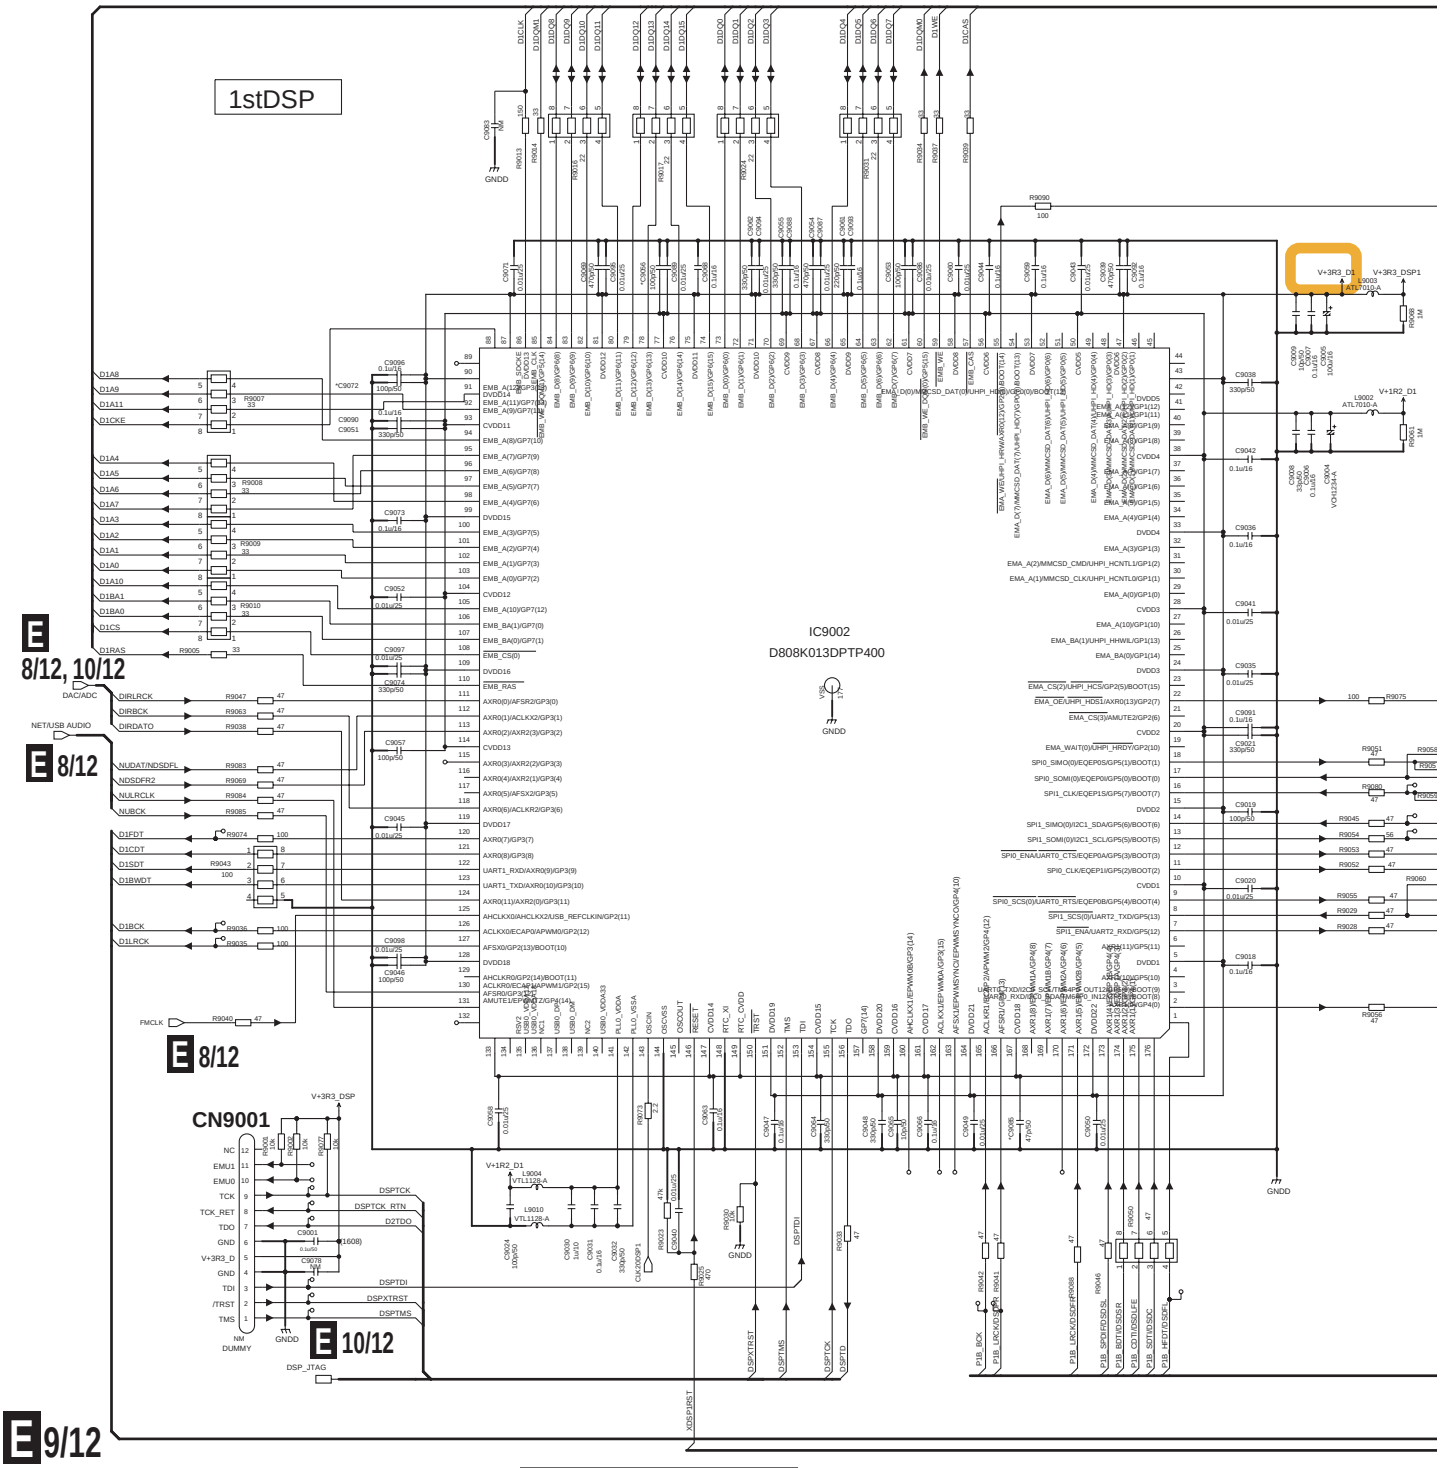

E 9/12 DIGITAL MAIN ASSY (9/12) (AWX1422)

	Sel-H_CO(AWX1422)	Sel-H_SY(AWX1659)	Sel-H_J(AWX1660)
C9015	330p/50	47p/50	47p/50
C9056	100p/50	100p/50	47p/50
C9072	100p/50	100p/50	22p/50
C9085	100p/50	47p/50	47p/50
R9101	27	33	33
R9102	27	33	33
R9103	27	33	33
R9104	27	33	33
R9105	27	33	33
R9106	27	33	33
R9107	27	33	33

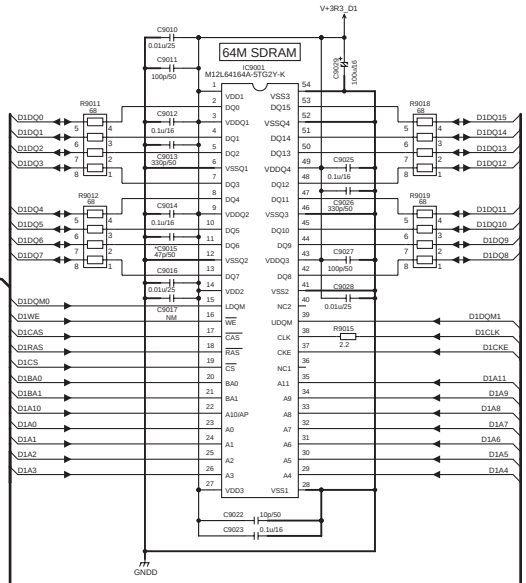

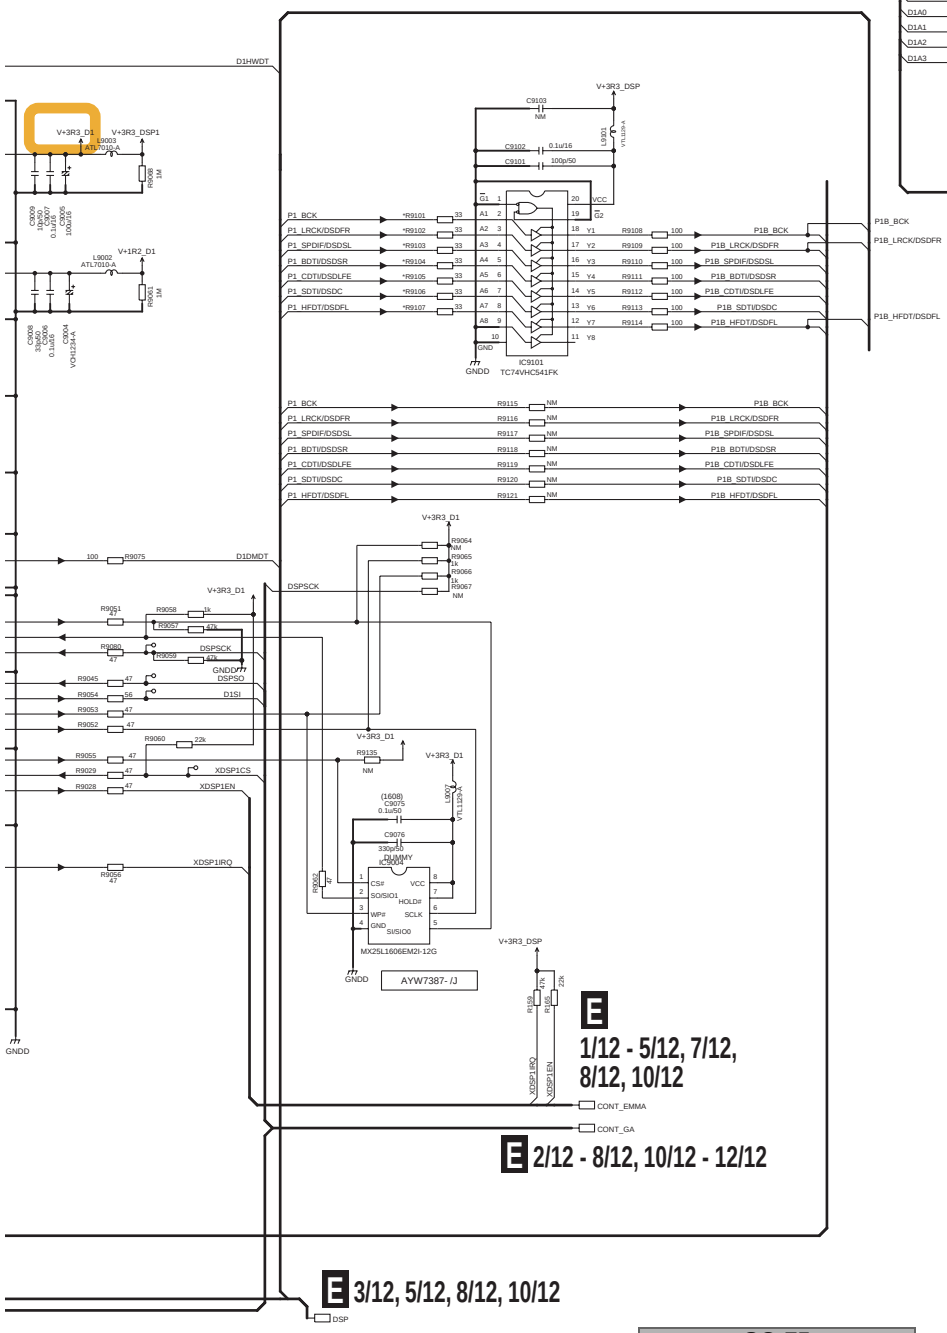

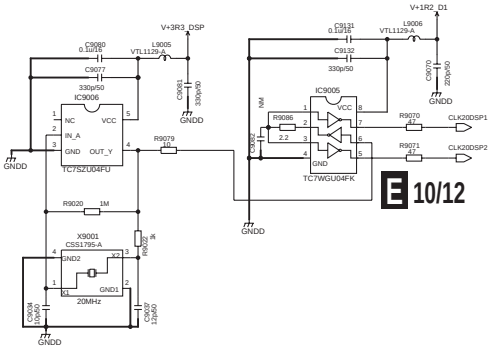

10.20 DIGITAL MAIN ASSY (10/12)

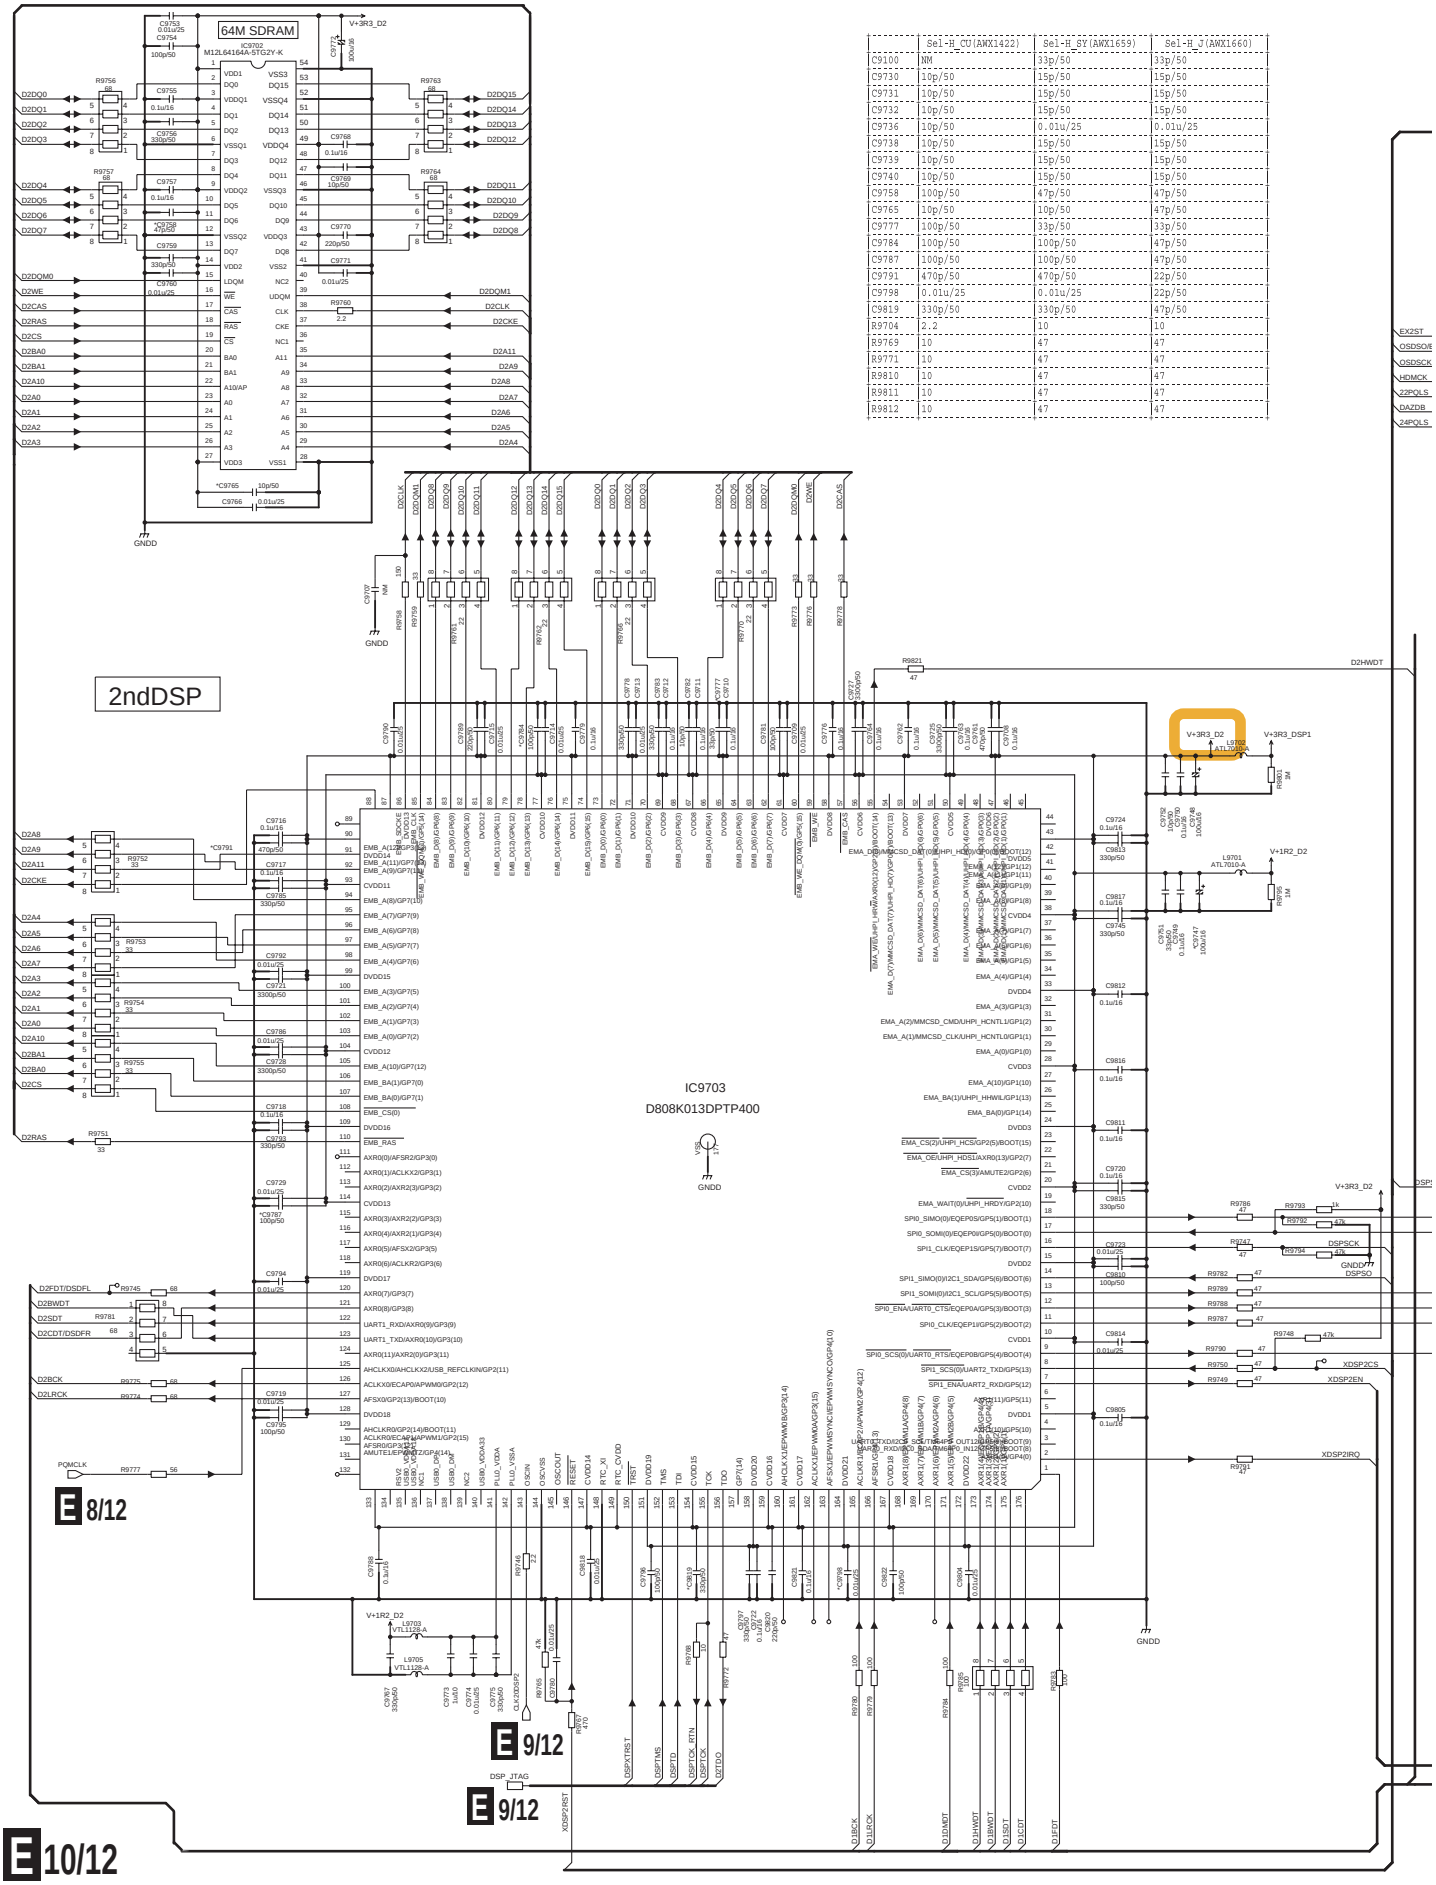

	Sel-H_CD(AWX1422)	Sel-H_SY(AWX1659)	Sel-H_J(AWX1660)
C9100	NM	33p/50	33p/50
C9730	10p/50	15p/50	15p/50
C9731	10p/50	15p/50	15p/50
C9732	10p/50	15p/50	15p/50
C9736	10p/50	0.01u/25	0.01u/25
C9738	10p/50	15p/50	15p/50
C9739	10p/50	15p/50	15p/50
C9740	10p/50	15p/50	15p/50
C9758	100p/50	47p/50	47p/50
C9765	10p/50	10p/50	47p/50
C9777	100p/50	33p/50	33p/50
C9784	100p/50	100p/50	47p/50
C9787	100p/50	100p/50	47p/50
C9791	470p/50	470p/50	22p/50
C9798	0.01u/25	0.01u/25	22p/50
C9819	330p/50	330p/50	47p/50
R9704	2.2	10	10
R9769	10	47	47
R9771	10	47	47
R9810	10	47	47
R9811	10	47	47
R9812	10	47	47

E 10/12 DIGITAL MAIN ASSY (10/12) (AWX1422)

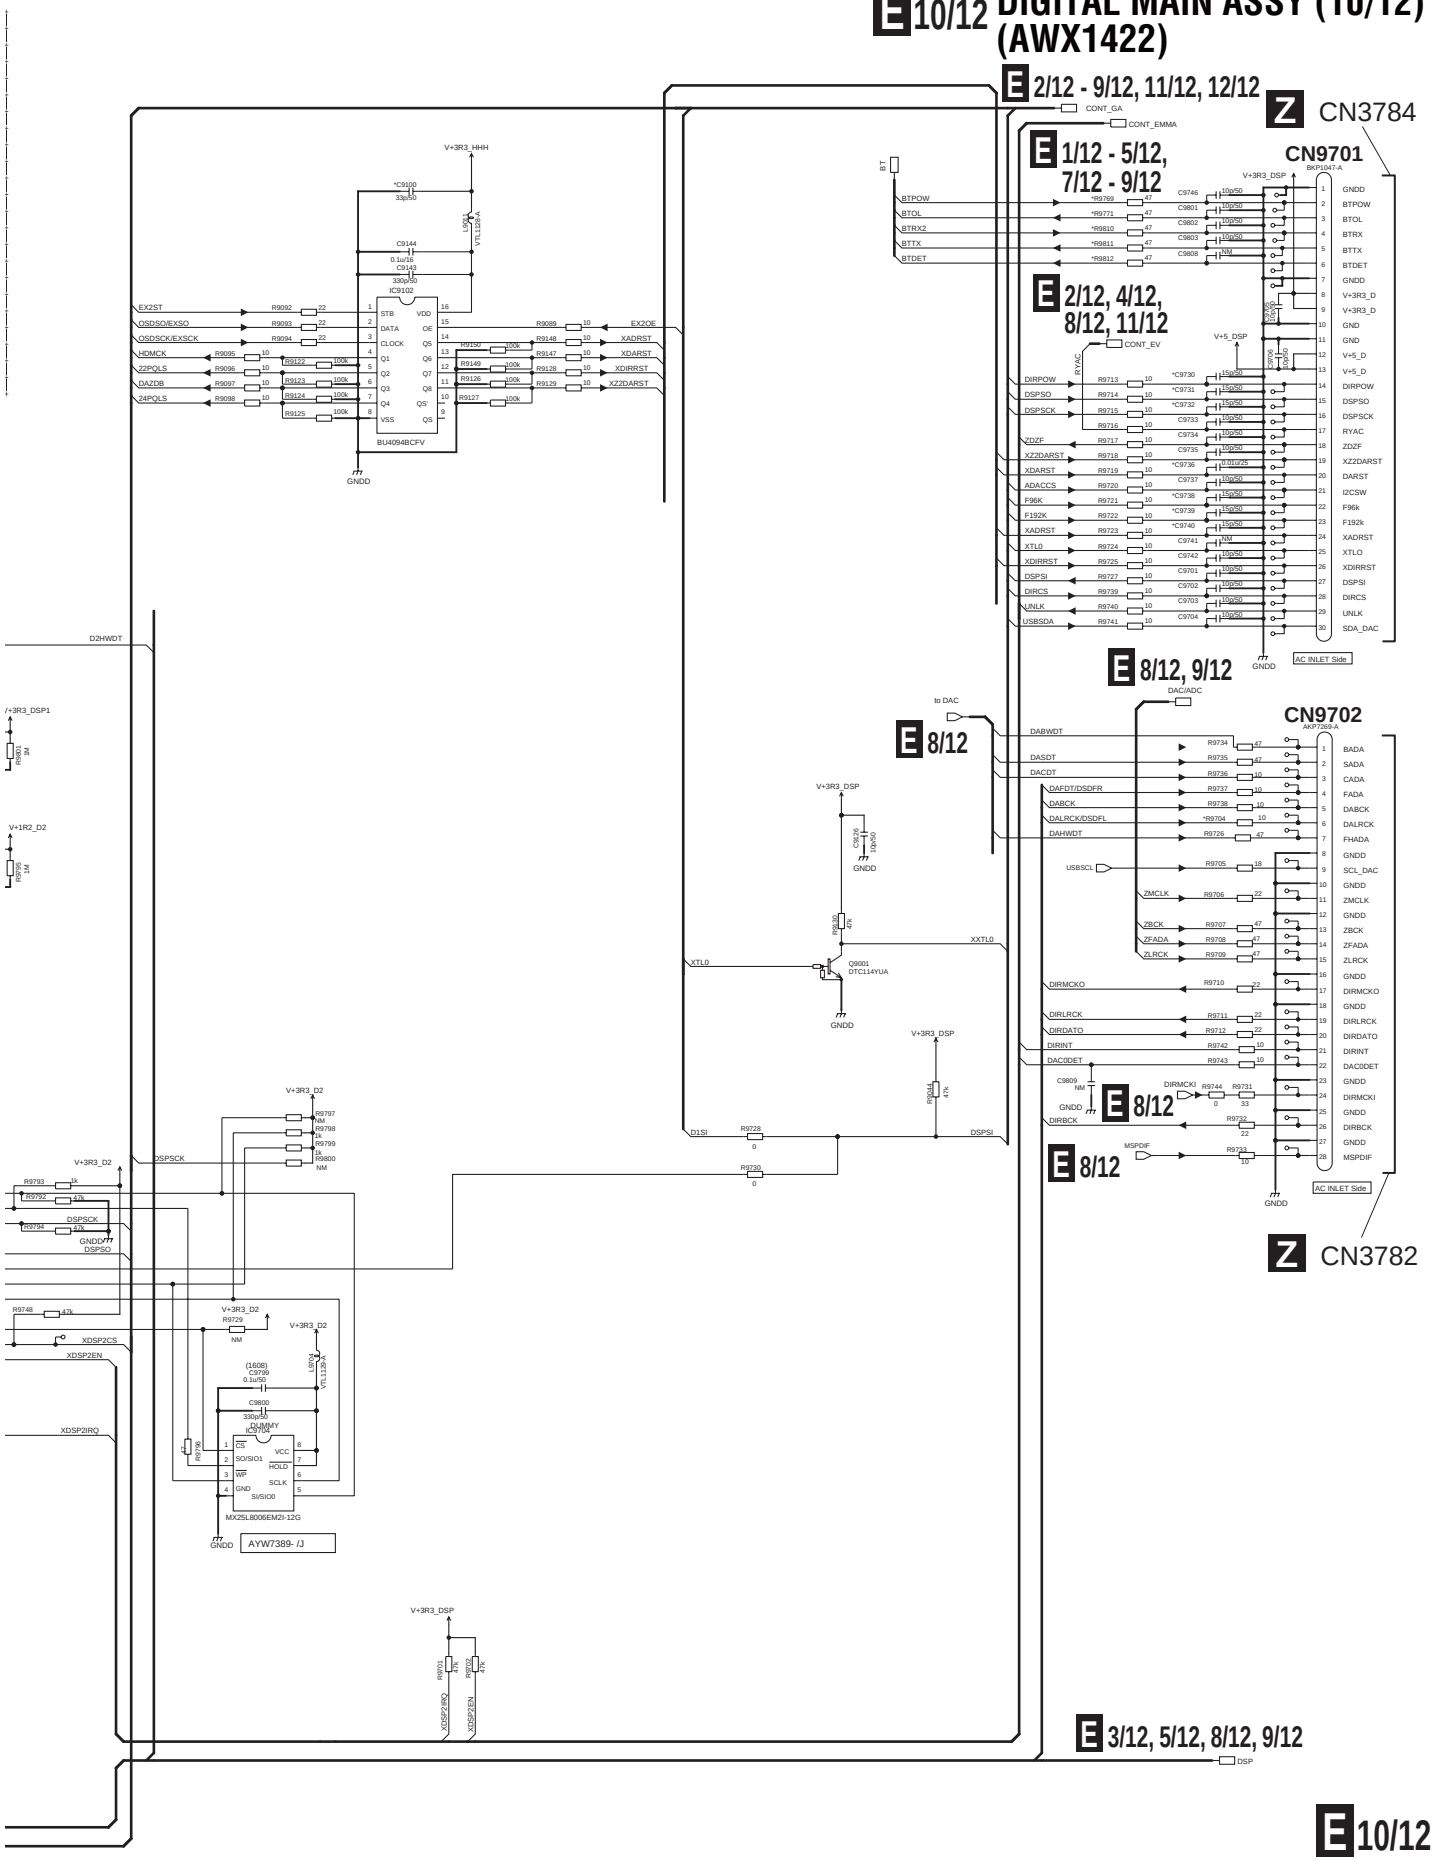

10.21 DIGITAL MAIN ASSY (11/12)

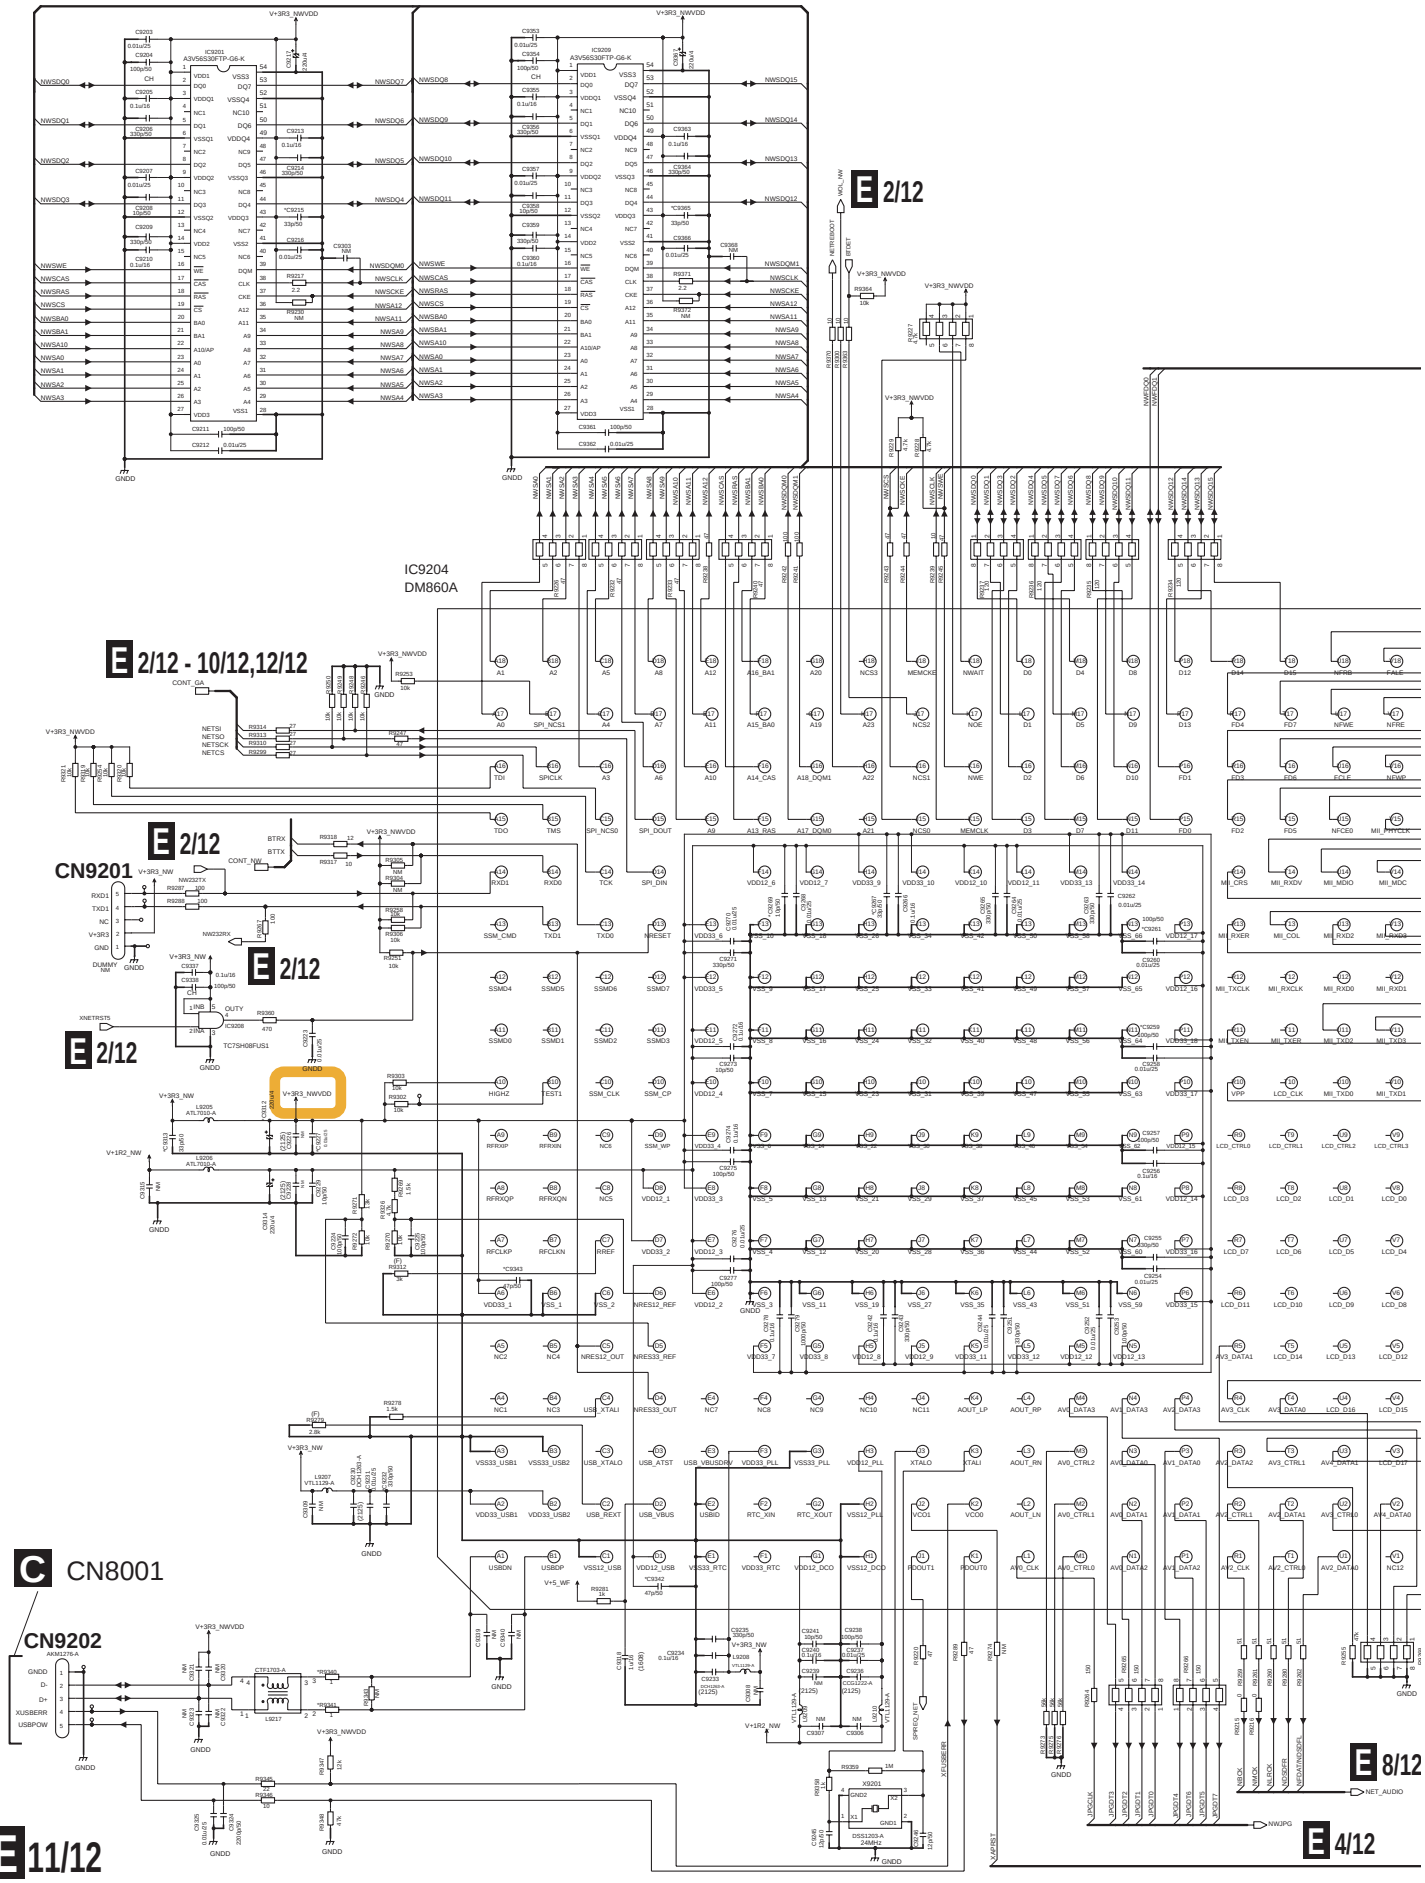

E 11/12 DIGITAL MAIN ASSY (11/12) (AWX1422)

	Sel-H_CU(AWX1422)	Sel-H_SY(AWX1659)	Sel-H_J(AWX1660)
C9201	CCG1222-A	CCG1222-A	VCG1072-A
C9215	100p/50	33p/50	33p/50
C9227	0.1u/16	0.01u/25	NM
C9232	330p/50	330p/50	180p/50
C9259	100p/50	100p/50	22p/50
C9261	100p/50	100p/50	22p/50
C9267	330p/50	33p/50	33p/50
C9269	10p/50	10p/50	47p/50
C9282	0.01u/25	0.01u/25	1500p/50
C9283	0.01u/25	0.01u/25	1500p/50
C9284	CCG1222-A	CCG1222-A	VCG1072-A
C9285	CCG1222-A	CCG1222-A	VCG1072-A
C9287	100p/50	33p/50	33p/50
C9289	470p/50	330p/50	330p/50
C9292	0.01u/25	0.01u/25	470p/50
C9293	100p/50	33p/50	33p/50
C9297	330p/50	100p/50	100p/50
C9301	100p/50	100p/50	27p/50
C9302	0.022u/16	0.022u/16	0.01u/25
C9312	220u/4	220u/4	VCH1234-A
C9313	NM	33p/50	33p/50
C9342	NM	47p/50	47p/50
C9343	NM	47p/50	47p/50
C9344	330p/50	47p/50	27p/50
C9365	100p/50	33p/50	33p/50
C9345	NM	1M	1M
R9316	47	47	100
R9340	0	1	1
R9341	0	1	1

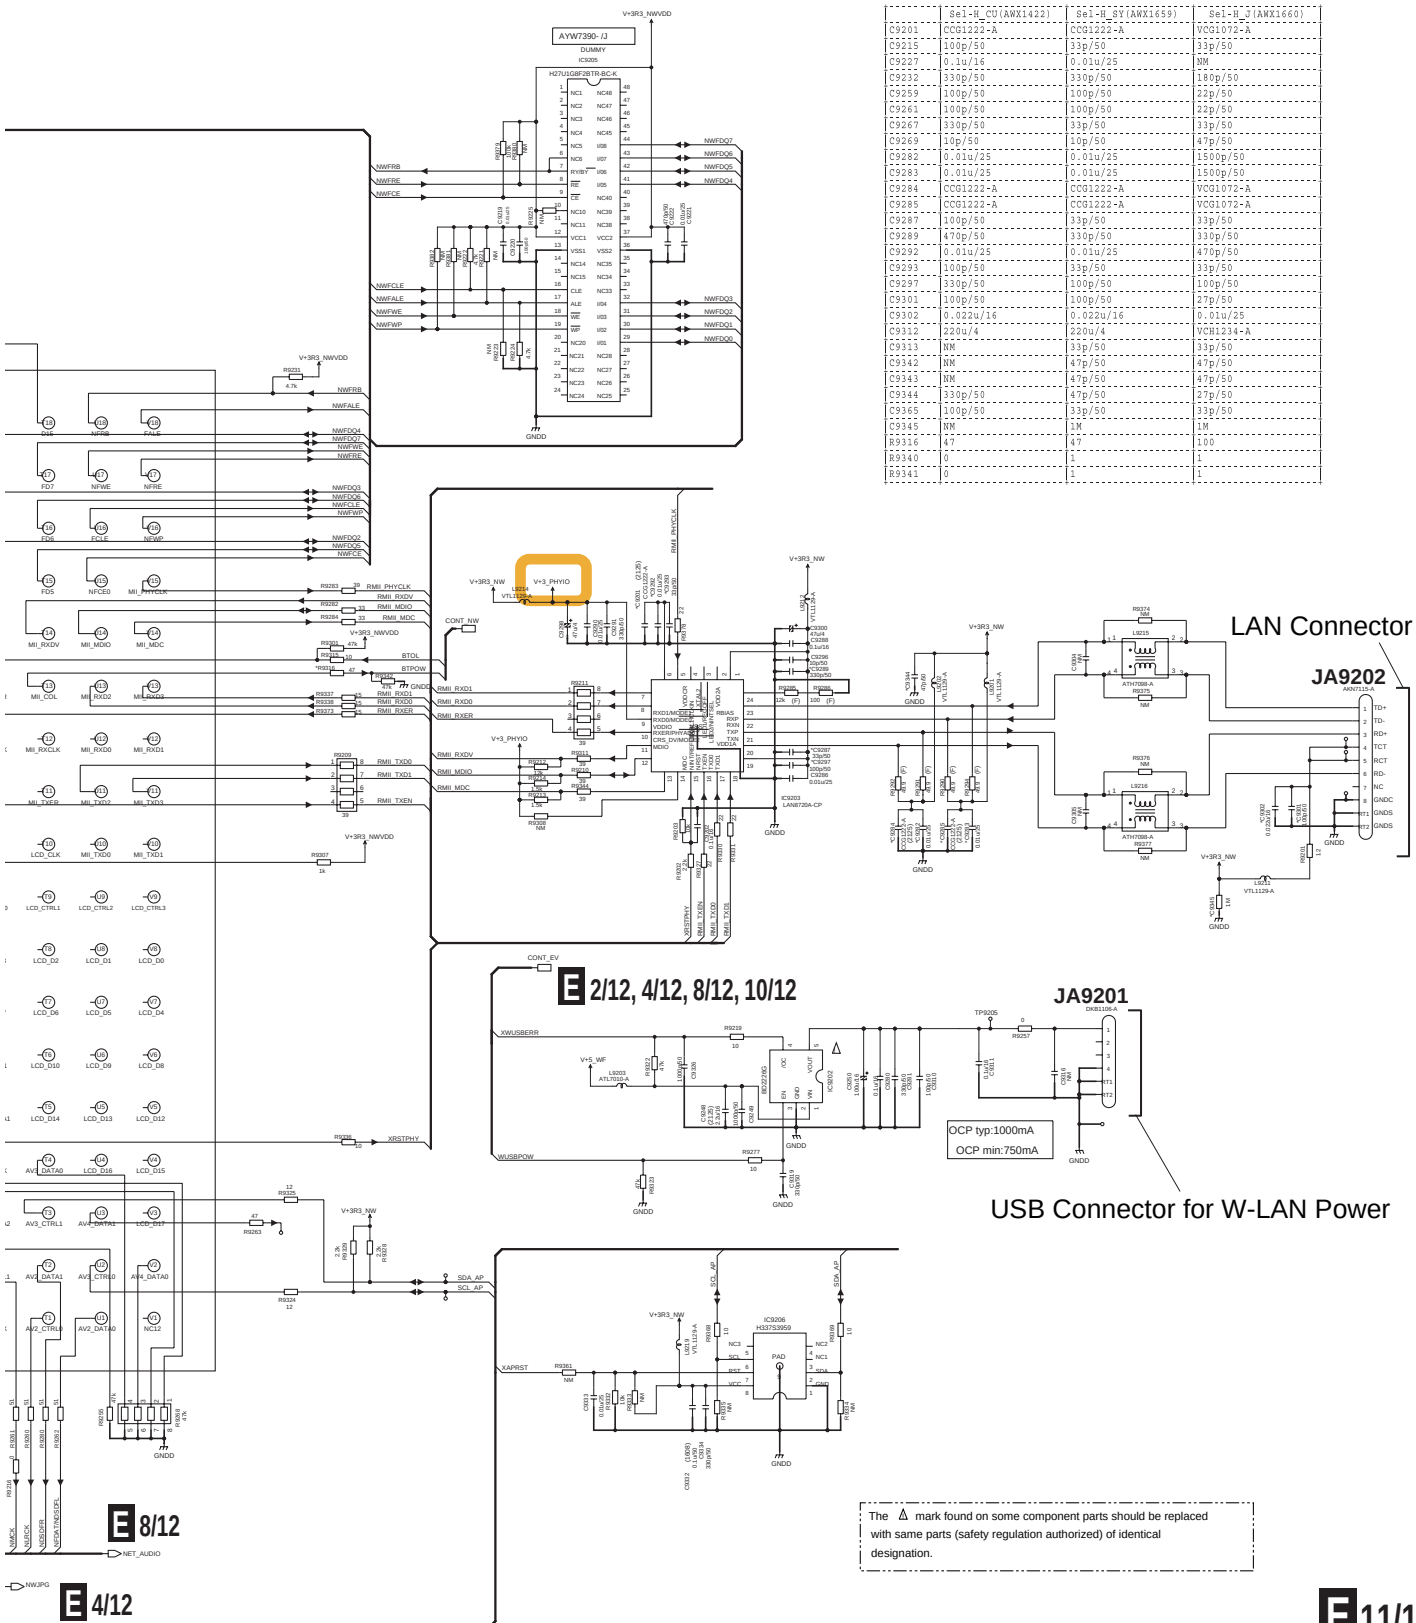

10.22 DIGITAL MAIN ASSY (12/12)

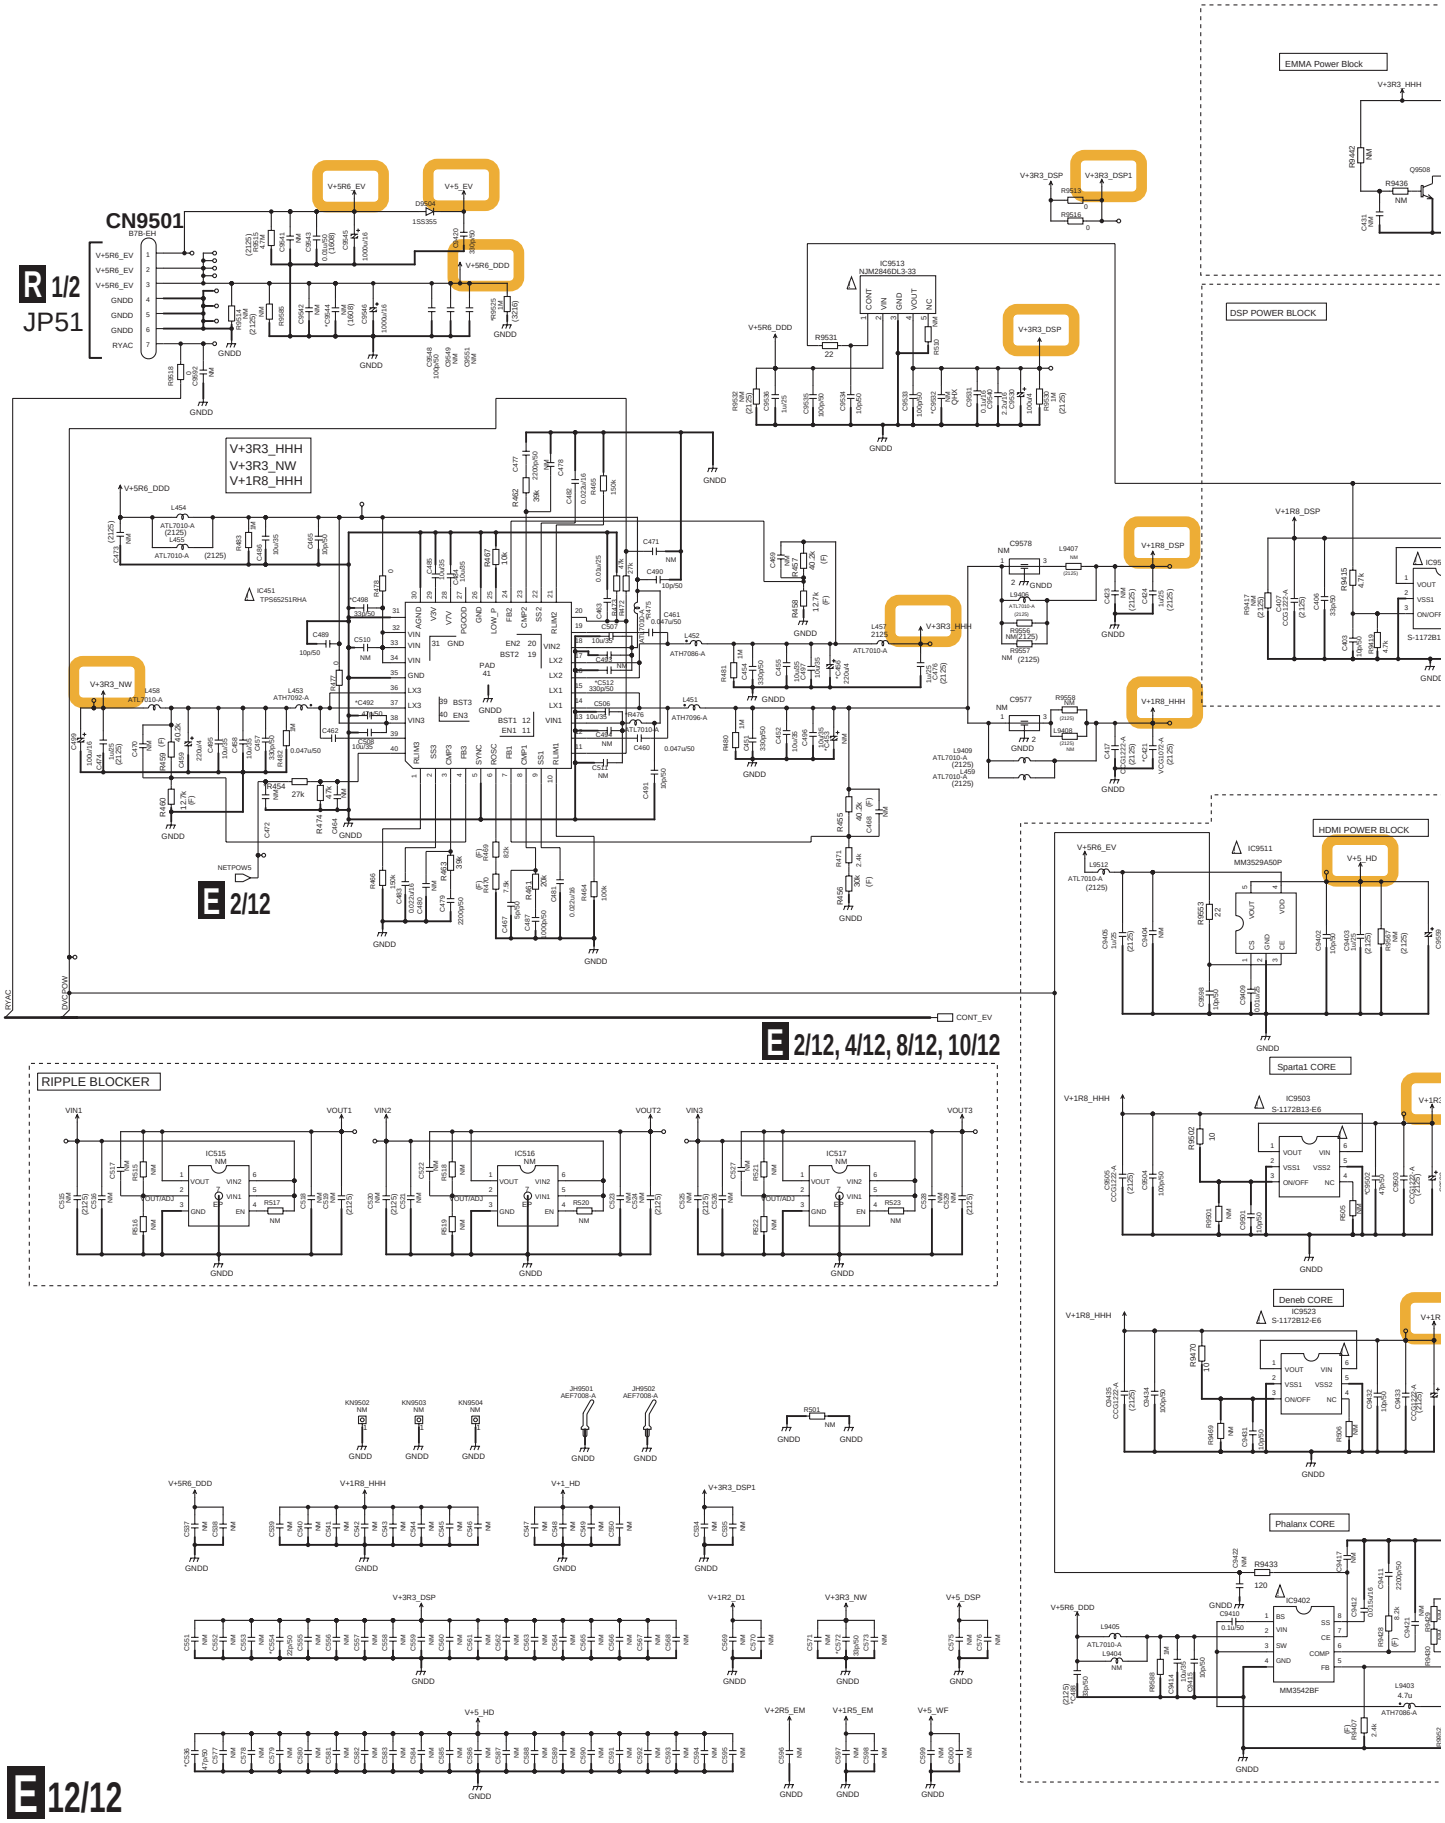

E 12/12 DIGITAL MAIN ASSY (12/12) (AWX1422)

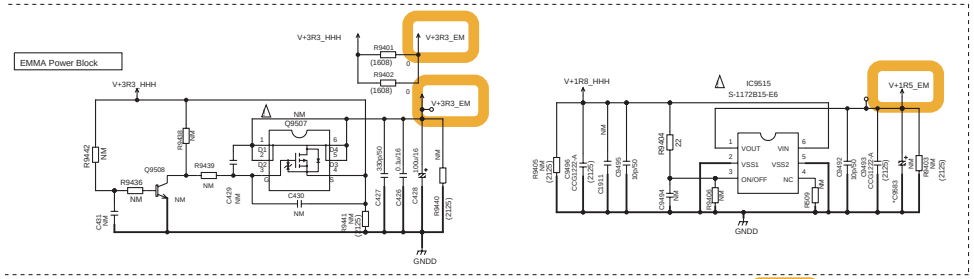

	Sel-H CU(AWX1422)	Sel-H SY(AWX1659)	Sel-H J(AWX1660)
C421	1u/25	VCG1072-A	VCG1072-A
C488	NM	33p/50	33p/50
C492	NM	47p/50	47p/50
C498	NM	33p/50	33p/50
C512	NM	330p/50	330p/50
C536	NM	47p/50	47p/50
C554	NM	22p/50	22p/50
C572	NM	33p/50	33p/50
C9407	NM	33p/50	33p/50
C9485	10p/50	33p/50	33p/50
C9490	0.01u/25	NM	NM
C9502	10p/50	47p/50	47p/50
C9544	0.1u/50	NM	NM
R454	22k	27k	27k
R9525	NM	1M	1M
R475	0	ATL7010-A	ATL7010-A
R476	0	ATL7010-A	ATL7010-A

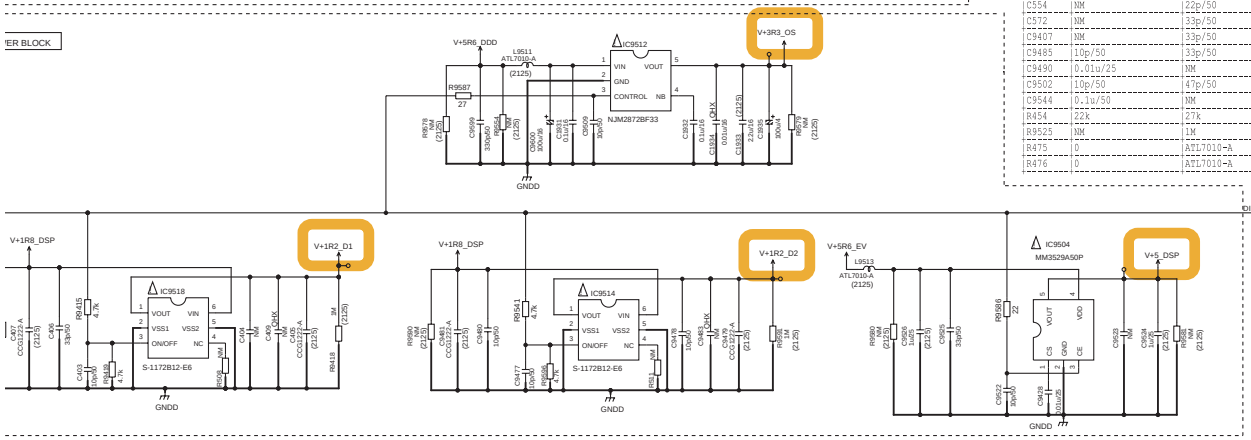

E 2/12 - 11/12

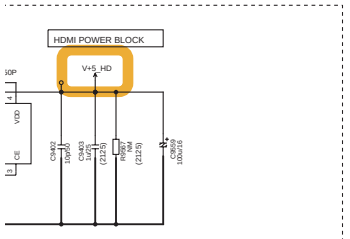

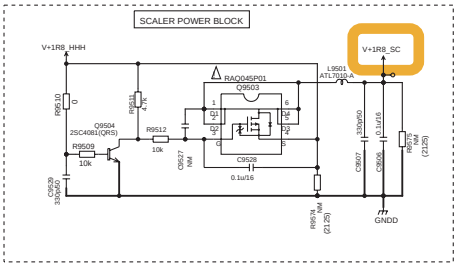

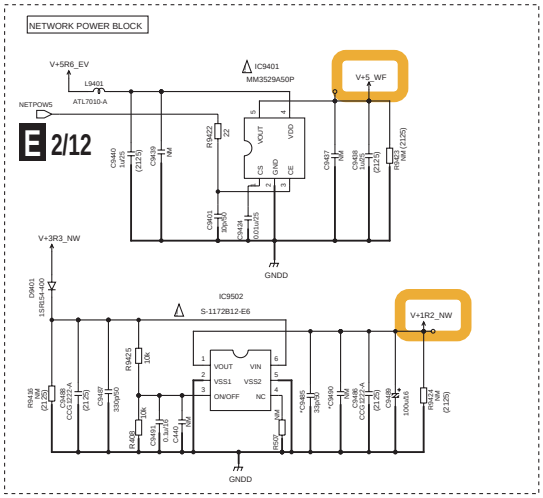



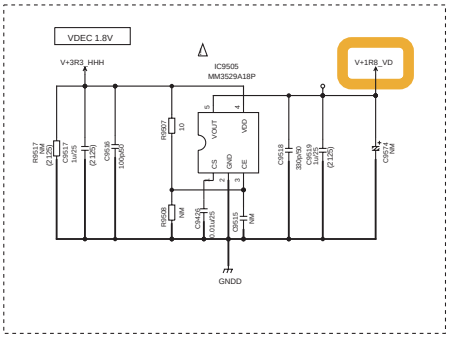



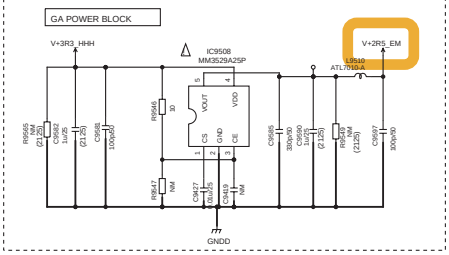

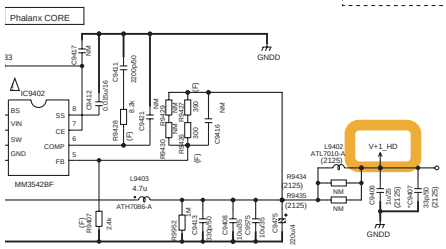

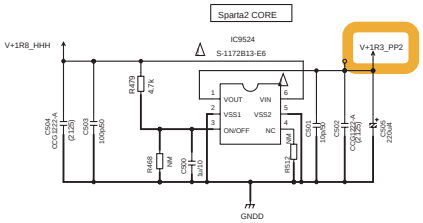

All 1u/10 is DCH1246-A.
CCG1222-A is 4.7u/25.

The △ mark found on some component parts should be replaced with same parts (safety regulation authorized) of identical designation.

E 12/12

10.23 INTERFACE_S ASSY

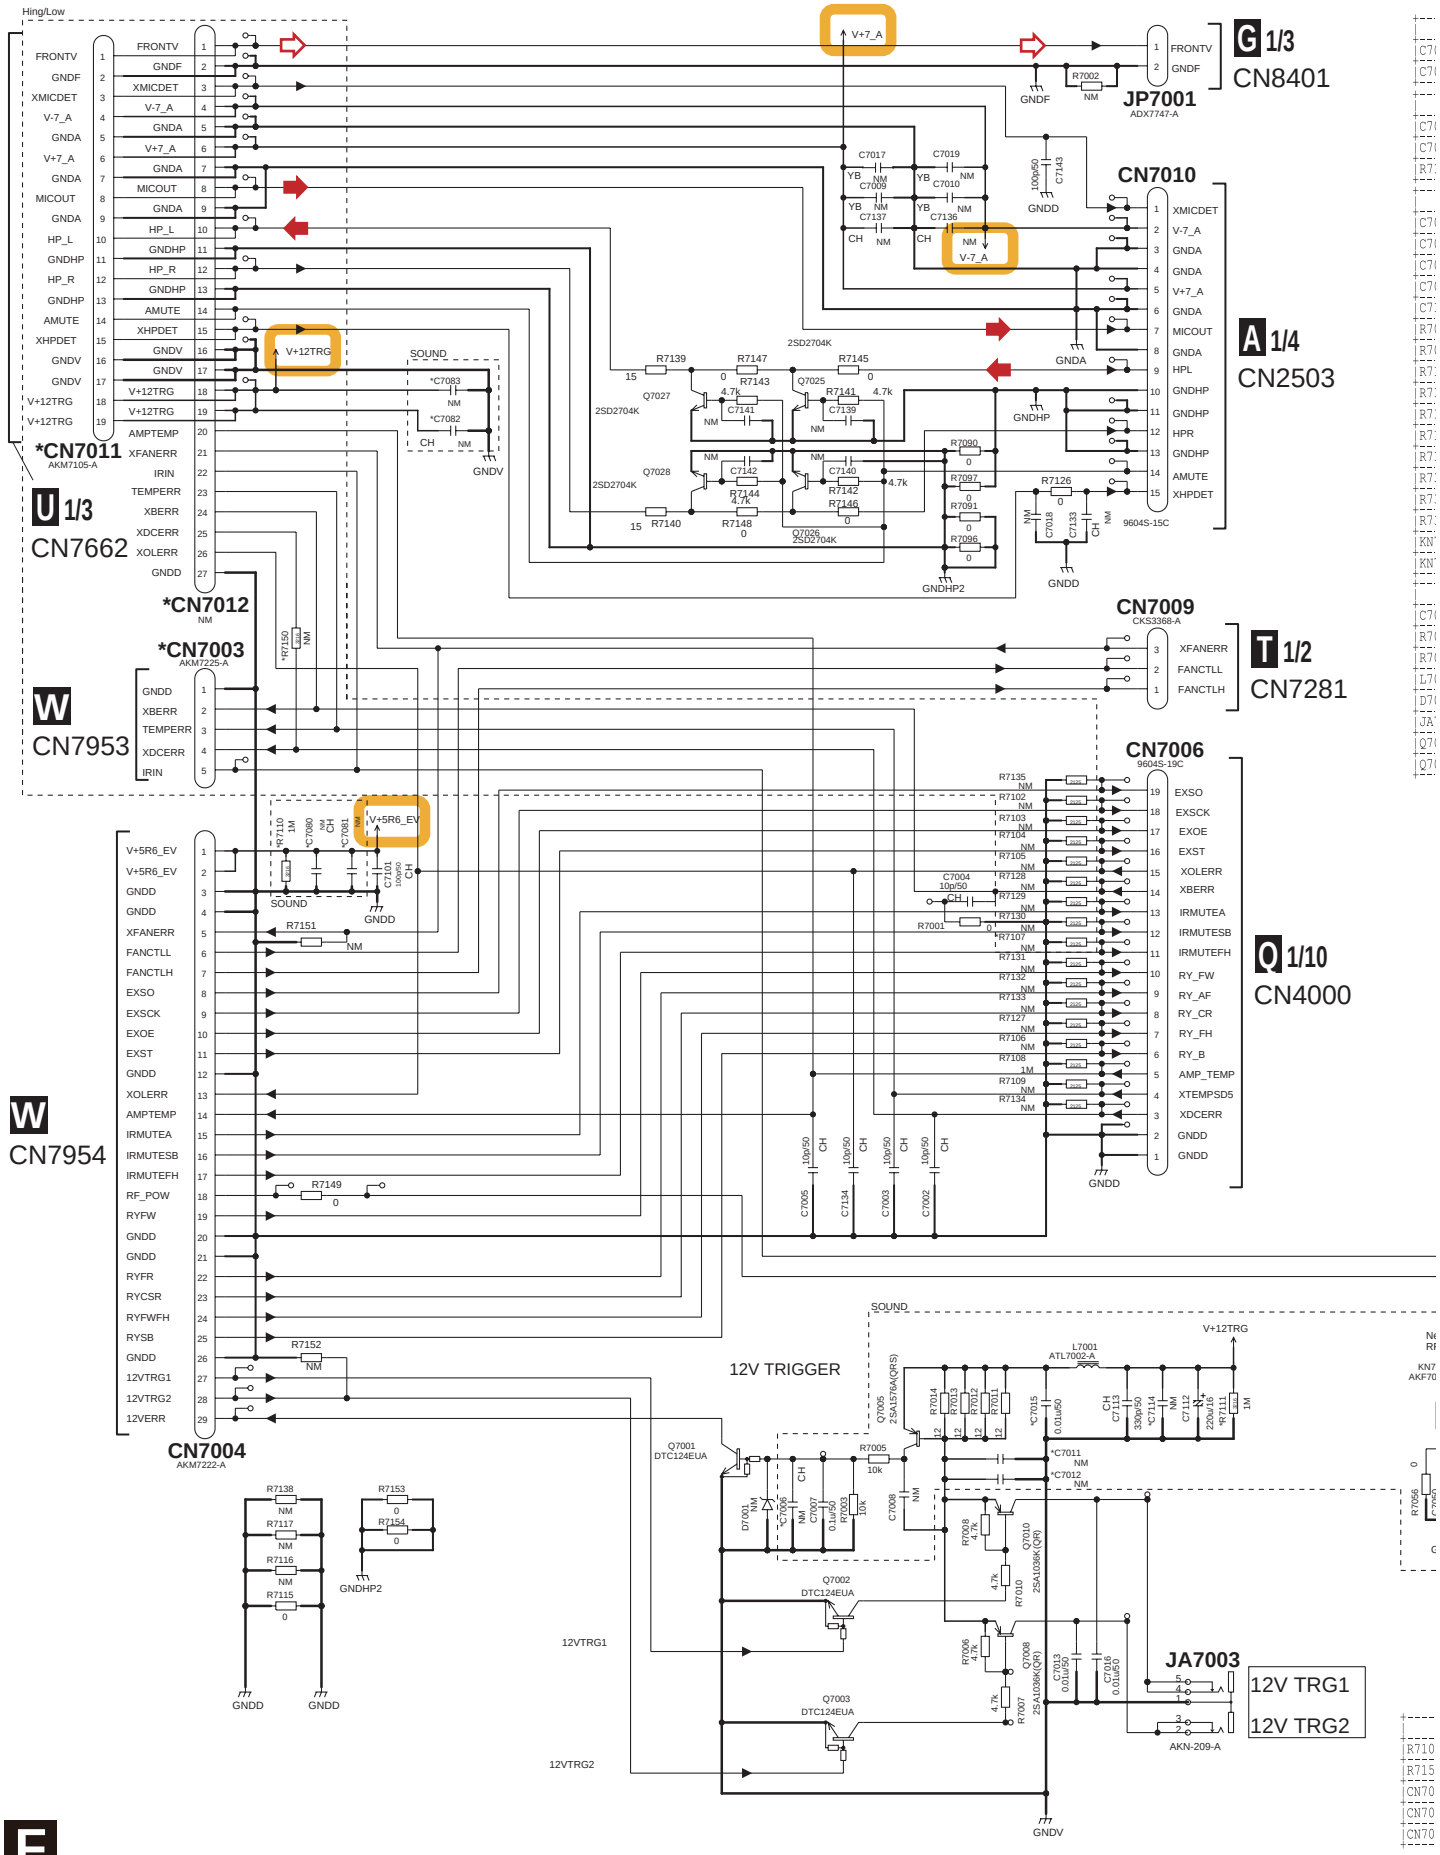

F INTERFACE_S ASSY (AWX1572)

1/3
I8401

	awx1363	awx1572	awx1573	awx1462	awx1574	awx1608	awx1677
C7082	NM	1000p/50	NM	NM	1000p/50	1000p/50	NM
C7083	NM	0.1u/50	NM	NM	0.1u/50	0.1u/50	NM

	awx1363	awx1572	awx1573	awx1462	awx1574	awx1608	awx1677
C7080	NM	1000p/50	NM	NM	1000p/50	1000p/50	NM
C7081	NM	0.1u/50	NM	NM	0.1u/50	0.1u/50	NM
R7110	1M	NM	1M	1M	NM	NM	1M

1/4
N2503

	awx1363	awx1572	awx1573	awx1462	awx1574	awx1608	awx1677
C7006	NM	1000p/50	NM	NM	1000p/50	1000p/50	NM
C7011	NM	0.1u/50	NM	NM	0.1u/50	0.1u/50	NM
C7012	NM	1000p/50	NM	NM	1000p/50	1000p/50	NM
C7015	0.01u/50	0.1u/50	0.01u/50	0.01u/50	0.1u/50	0.1u/50	0.01u/50
C7114	NM	0.1u/50	NM	NM	0.1u/50	0.1u/50	NM
R7043	0	NM	0	NM	NM	NM	0
R7098	0	NM	0	NM	NM	NM	0
R7111	1M	NM	1M	1M	NM	NM	1M
R7113	10	0	10	10	0	0	10
R7136	0	NM	0	NM	NM	NM	0
R7137	0	NM	0	NM	NM	NM	0
R7155	0	NM	0	NM	NM	NM	0
R7301	0	NM	0	NM	NM	NM	0
R7302	0	NM	0	NM	NM	NM	0
R7303	0	NM	0	NM	NM	NM	0
KN7002	AKF7002-A	NM	AKF7002-A	NM	NM	NM	AKF7002-A
KN7004	AKF7002-A	NM	AKF7002-A	NM	NM	NM	AKF7002-A

1/2
CN7281

	awx1363	awx1572	awx1573	awx1462	awx1574	awx1608	awx1677
C7026	0.015u/50	0.015u/50	0.015u/50	NM	0.015u/50	NM	NM
R7029	100k	100k	100k	NM	100k	NM	NM
R7033	0	0	0	NM	0	NM	NM
L7007	QTL1013-A	QTL1013-A	QTL1013-A	NM	QTL1013-A	NM	NM
D7007	RB501VM-40	RB501VM-40	RB501VM-40	NM	RB501VM-40	NM	NM
JA7004	VKB1243-A	VKB1243-A	VKB1243-A	NM	VKB1243-A	NM	NM
Q7015	DTC124EUA	DTC124EUA	DTC124EUA	NM	DTC124EUA	NM	NM
Q7016	DTA124EUA	DTA124EUA	DTA124EUA	NM	DTA124EUA	NM	NM

1/10
CN4000

Near AMP and 12V TRG
KN7006
AKF7002-A



The ⚠ mark found on some component parts should be replaced with same parts (safety regulation authorized) of identical designation.

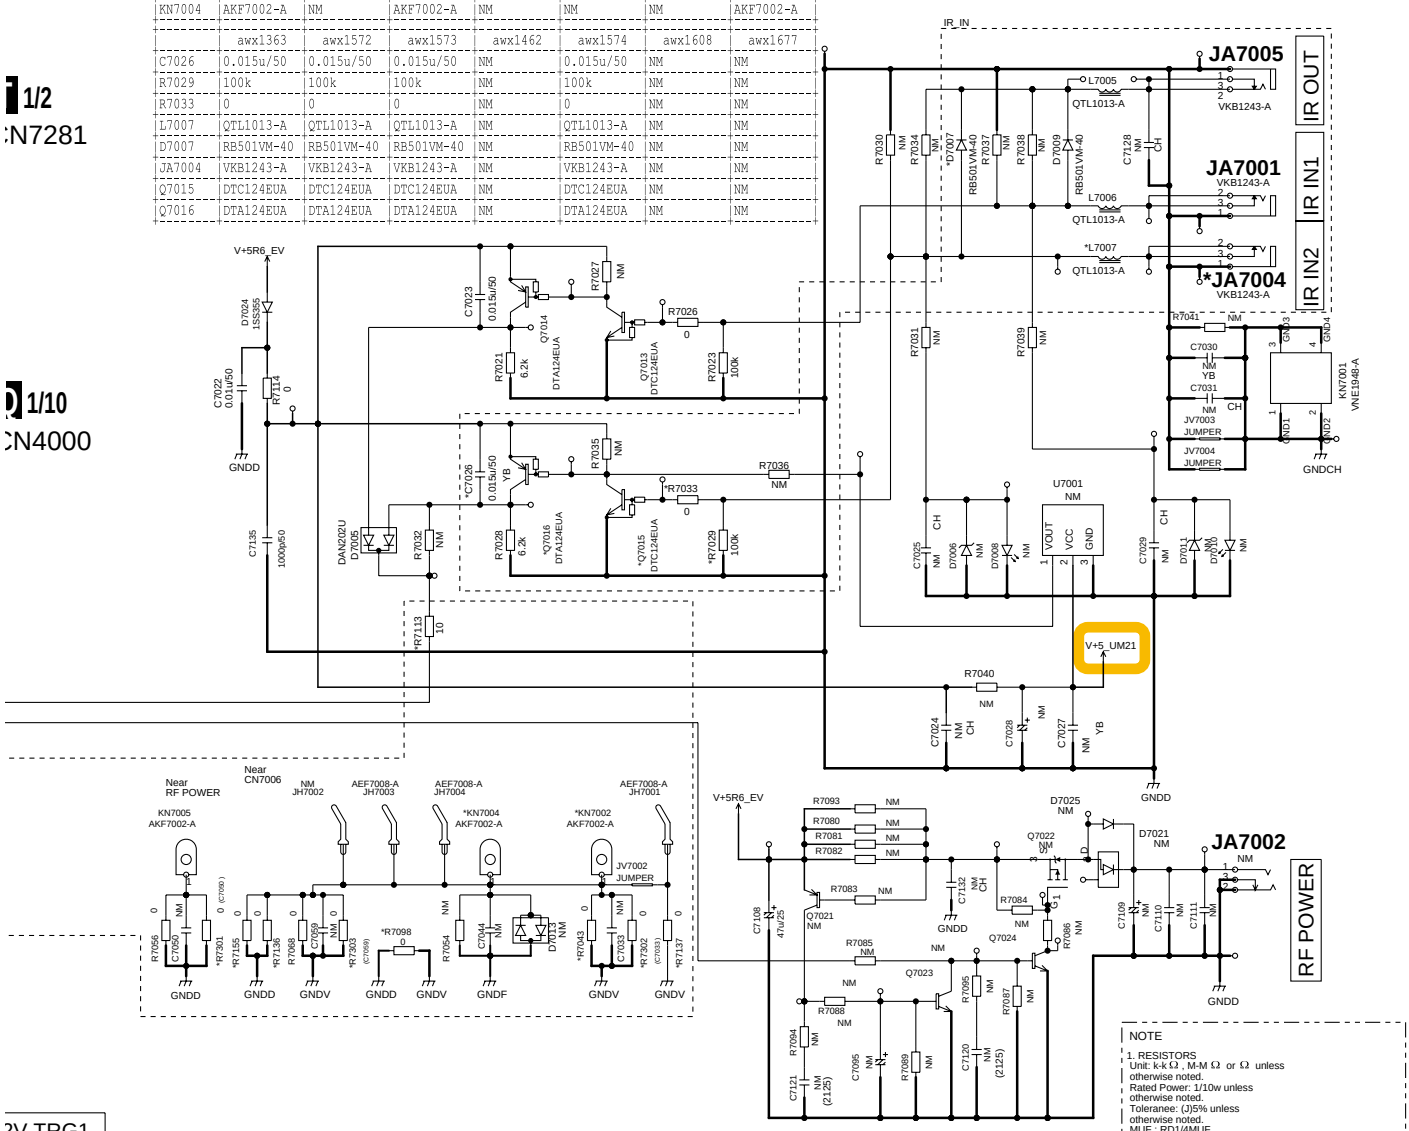

NOTE
1. RESISTORS
Unit: k-k Ω , M-M Ω or Ω unless otherwise noted.
Rated Power: 1/10w unless otherwise noted.
Tolerance: (J)5% unless otherwise noted.
MUF : RD1/4MUF
2125 : RS1/8SQ, 3216 : RS1/4SA
NO MARKED : RS1/10SR unless otherwise noted.
2. CAPACITORS
Unit: p-pF or u-uF unless otherwise noted.
Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
CH : CCSRCH , CFTLA : CFTLA
NO MARKED : CKSRYB or CEAK
3. NM: No Mount

: Video Signal Route
: Audio Signal Route

2V TRG1
2V TRG2

	awx1363	awx1572	awx1573	awx1462	awx1574	awx1608	awx1677
R7107	NM	NM	NM	0	0	0	0
R7150	NM	NM	NM	0	0	0	0
CN7003	AKM7225-A	AKM7225-A	AKM7225-A	NM	NM	NM	NM
CN7011	AKM7105-A	AKM7105-A	AKM7105-A	NM	NM	NM	NM
CN7012	NM	NM	NM	AKM7221-A	AKM7221-A	AKM7221-A	AKM7221-A

10.24 COMPONENT ASSY (1/3)

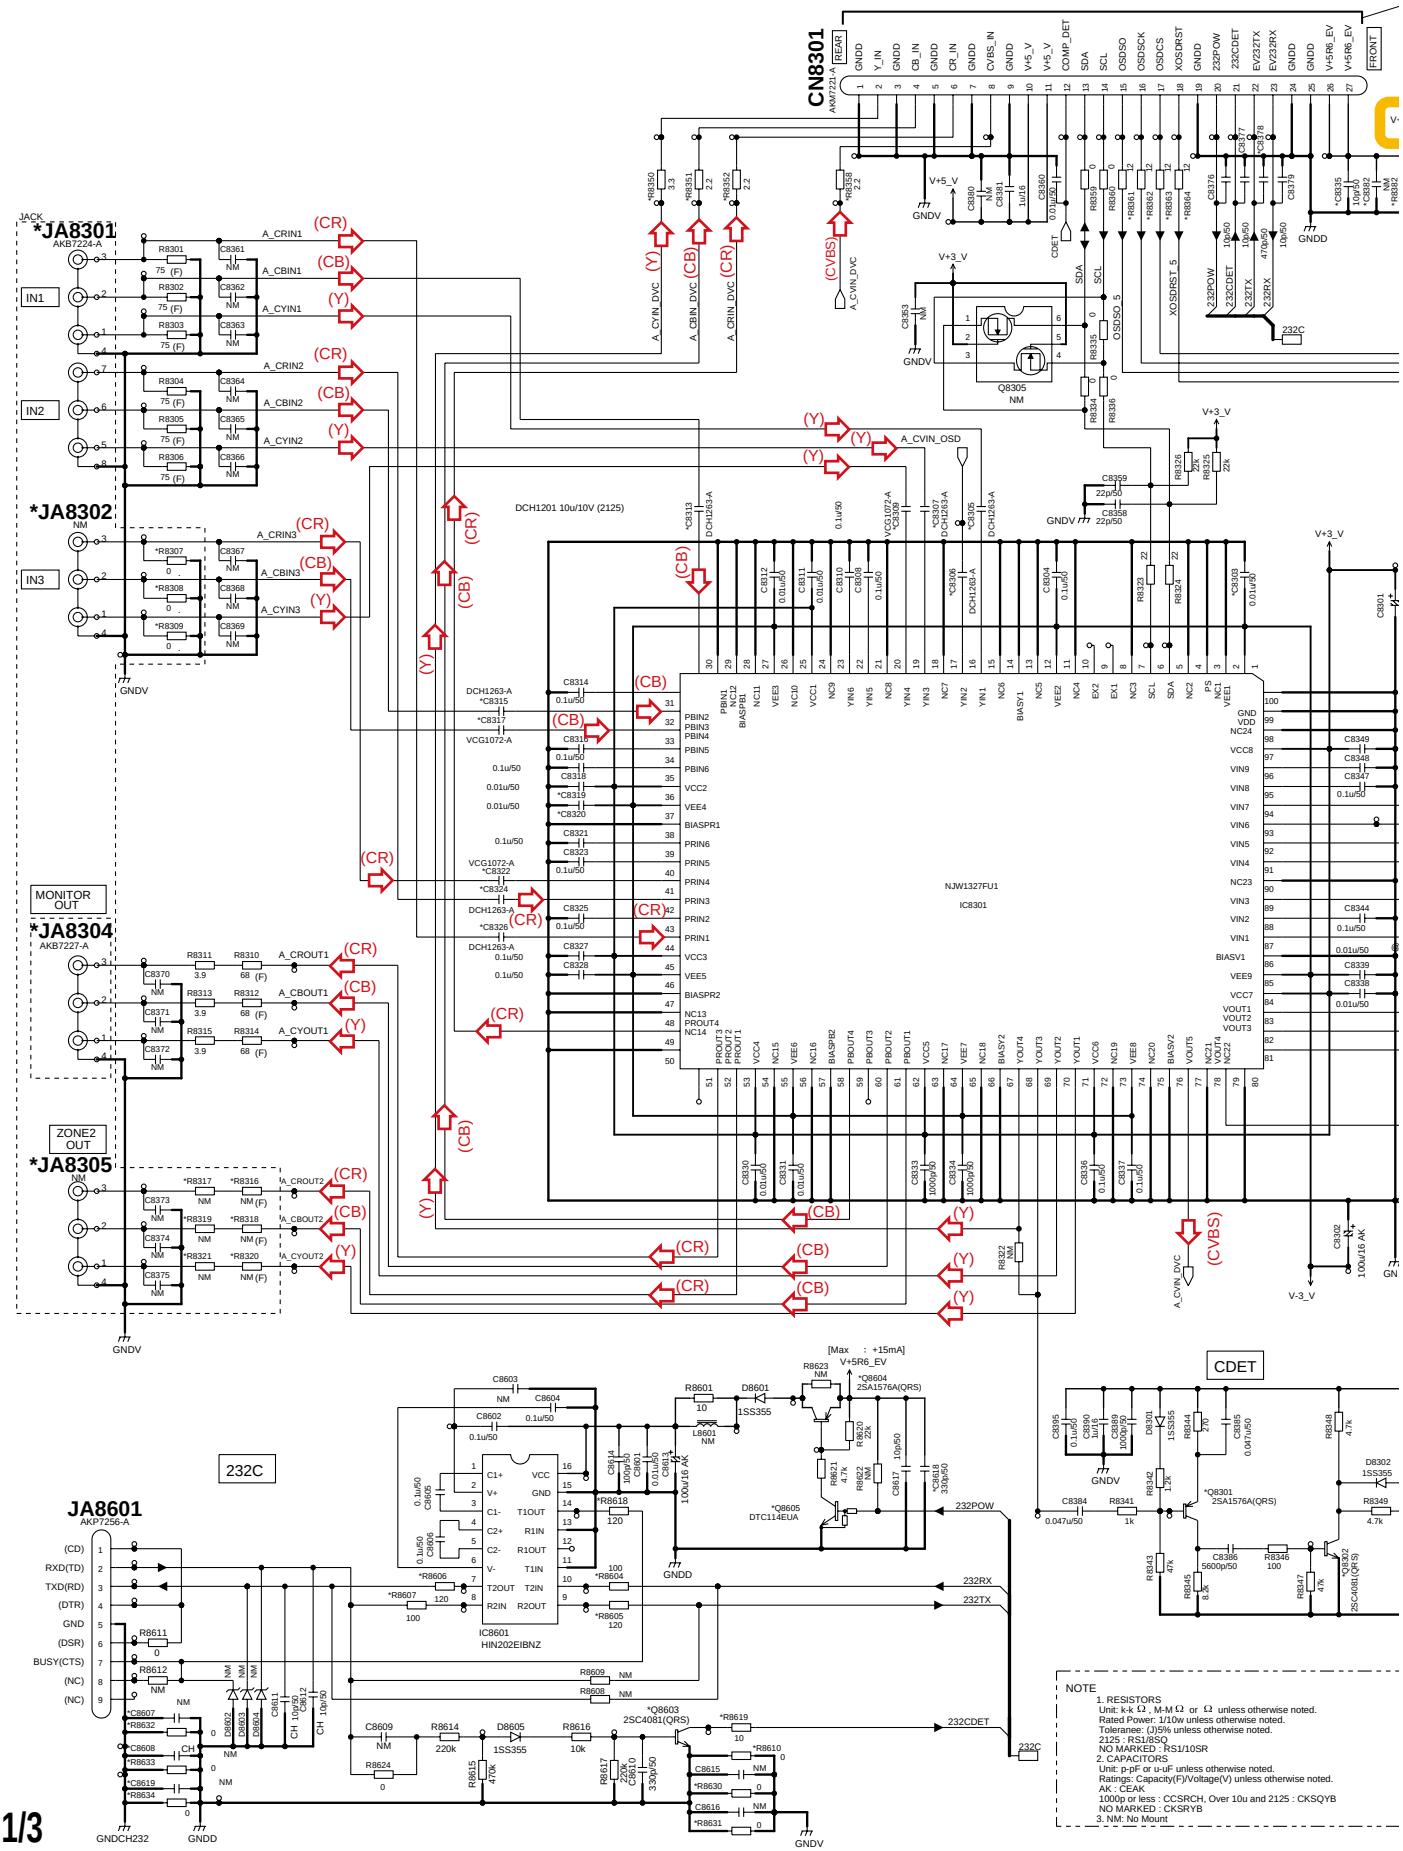

G 1/3 COMPONENT ASSY(1/3) (AWX1623)

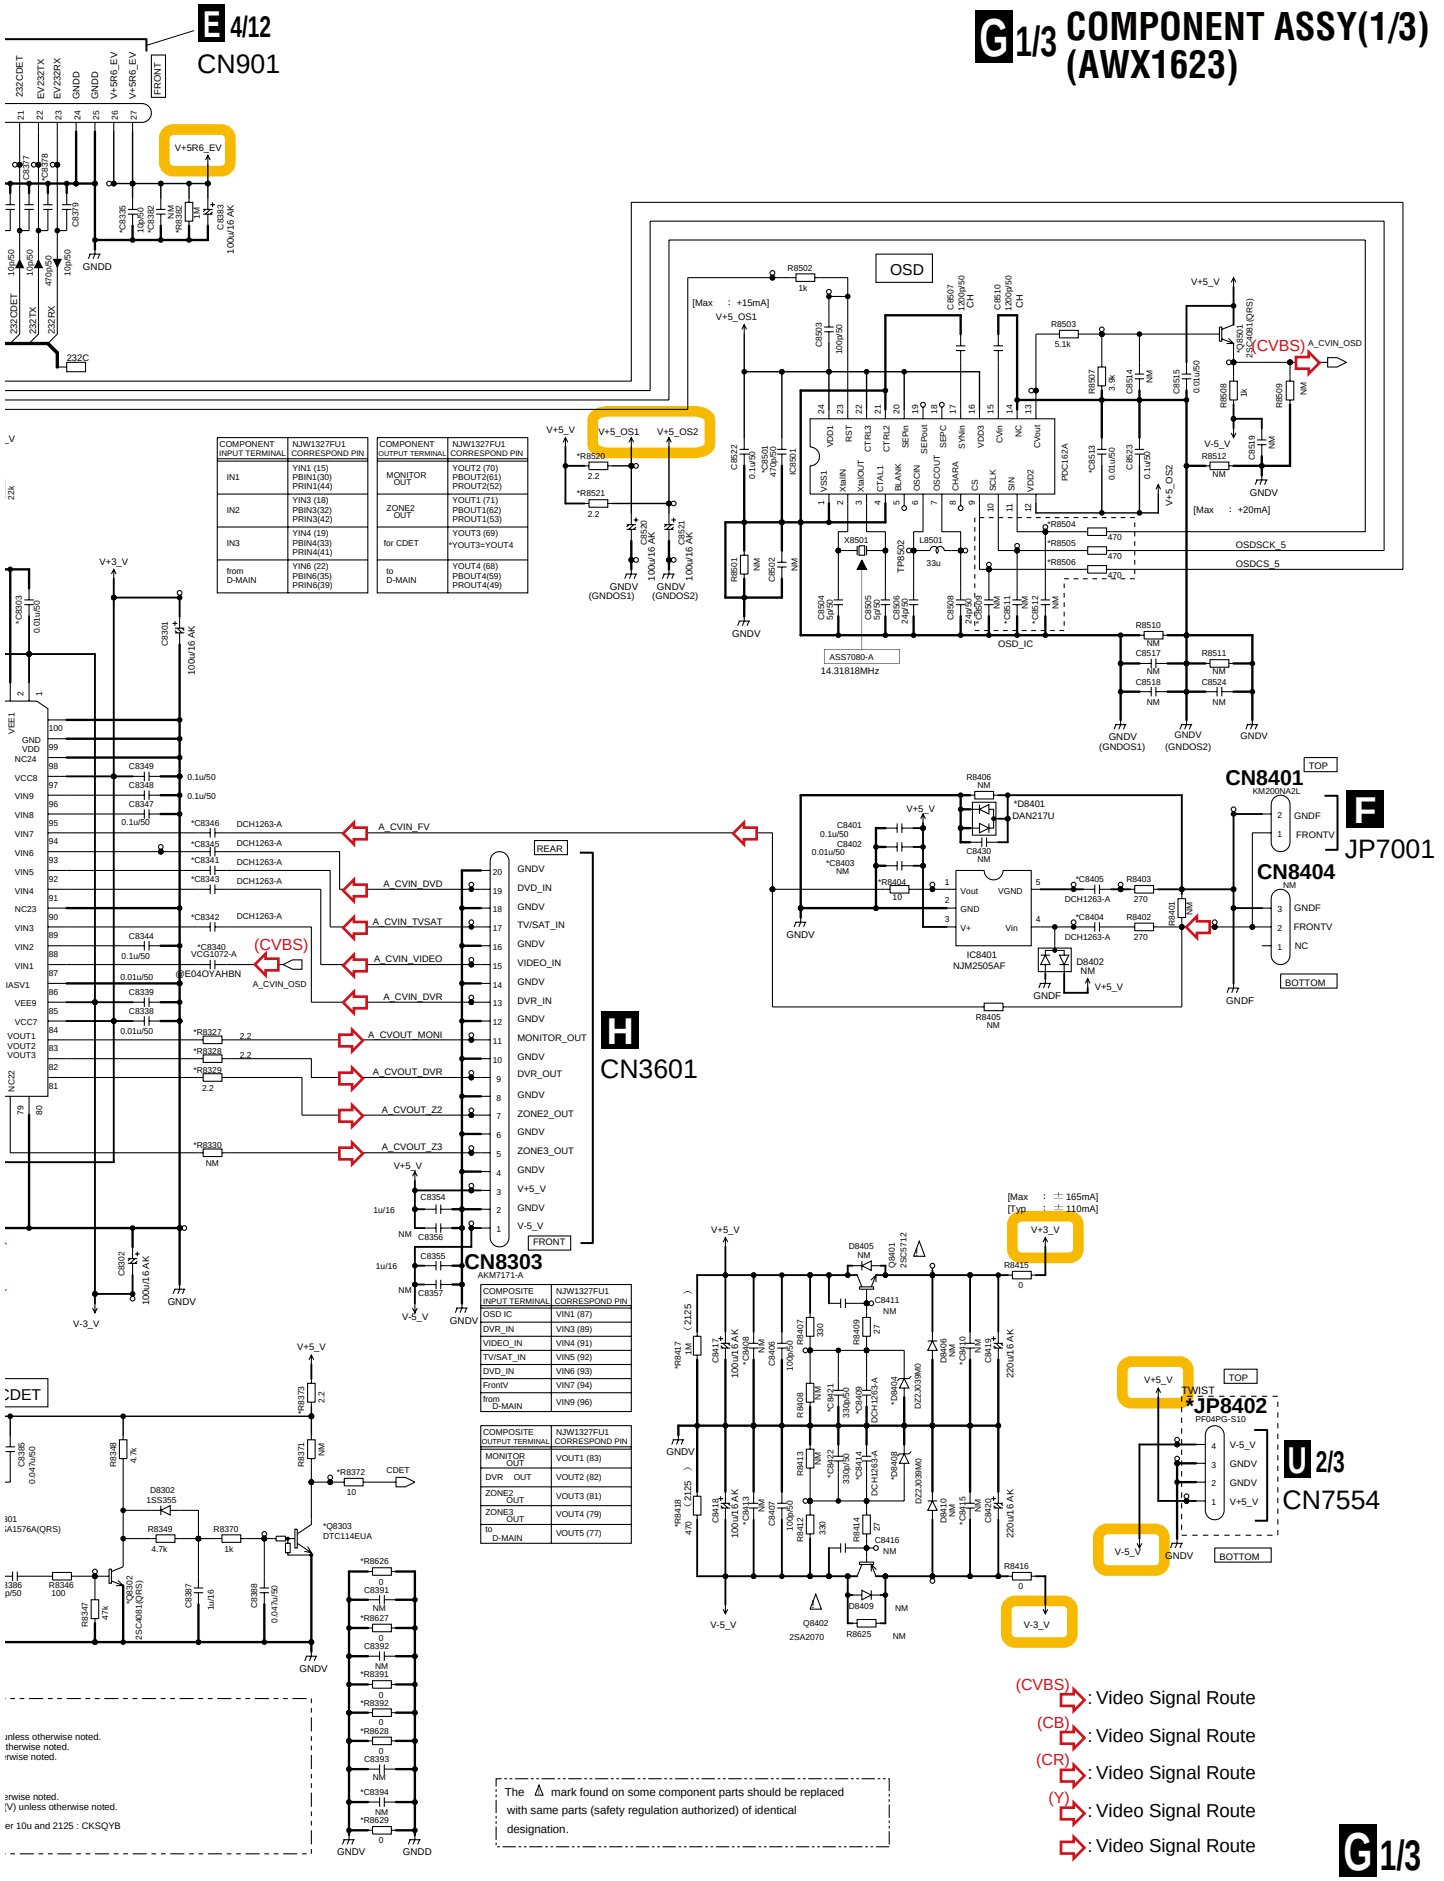

10.25 COMPONENT ASSY (2/3)

SOUND_1

	awx1105	awx1287	awx1316	awx1106	awx1288	awx1339	awx1107	awx1108	awx1340	awx1623	
C8303	1000p/50	1000p/50	0.01u/50	1000p/50	0.01u/50	0.01u/50	1000p/50	0.01u/50	0.01u/50	0.01u/50	0.(
C8305	DCH1201-A	DCH1201-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH
C8306	DCH1201-A	DCH1201-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH
C8307	DCH1201-A	DCH1201-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH
C8309	1u/25	1u/25	VCG1072-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	VCG1072-A	VCC
C8313	DCH1201-A	DCH1201-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH
C8315	DCH1201-A	DCH1201-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH
C8317	1u/25	1u/25	VCG1072-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	VCG1072-A	VCC
C8319	1000p/50	1000p/50	0.01u/50	1000p/50	0.01u/50	0.01u/50	1000p/50	0.01u/50	0.01u/50	0.01u/50	0.(
C8320	1000p/50	1000p/50	0.01u/50	1000p/50	0.01u/50	0.01u/50	1000p/50	0.01u/50	0.01u/50	0.01u/50	0.(
C8322	1u/25	1u/25	VCG1072-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	VCG1072-A	VCC
C8324	DCH1201-A	DCH1201-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH
C8326	DCH1201-A	DCH1201-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH
C8335	10p/50	10p/50	10p/50	10p/50	NM	NM	10p/50	NM	NM	10p/50	10p
C8378	NM	470p/50	470p/50	1000p/50	470p/50	470p/50	1000p/50	470p/50	470p/50	470p/50	470
C8382	1u/16	1u/16	1u/16	1u/16	1u/16	NM	1u/16	1u/16	NM	NM	NM
C8607	0.01u/50	NM	NM	0.01u/50	NM	NM	0.01u/50	NM	NM	NM	NM
C8608	470p/50	NM	NM	470p/50	NM	NM	470p/50	NM	NM	NM	NM
C8618	NM	NM	NM	NM	330p/50	330p/50	NM	330p/50	330p/50	330p/50	330
C8619	10p/50	NM	NM	10p/50	NM	NM	10p/50	NM	NM	NM	NM
R8350	0	0	3.3	0	3.3	3.3	0	3.3	3.3	3.3	3.3
R8351	0	0	2.2	0	2.2	2.2	0	2.2	2.2	2.2	2.2
R8352	0	0	2.2	0	2.2	2.2	0	2.2	2.2	2.2	2.2
R8358	0	0	2.2	0	2.2	2.2	0	2.2	2.2	2.2	2.2
R8361	10	10	12	10	12	12	10	12	12	12	12
R8362	10	10	12	10	12	12	10	12	12	12	12
R8363	10	10	12	10	12	12	10	12	12	12	12
R8364	10	10	12	10	12	12	10	12	12	12	12
R8382	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	1M
R8604	100	100	100	100	120	120	100	120	120	100	100
R8605	100	100	120	100	120	120	100	120	120	120	120
R8606	100	100	120	100	120	120	100	120	120	120	120
R8607	100	100	100	100	120	120	100	120	120	100	100
R8610	NM	0	0	NM	0	0	NM	0	0	0	0
R8618	100	100	120	100	120	120	100	120	120	120	120
R8619	0	0	10	0	10	10	0	10	10	10	10
R8630	NM	0	0	NM	0	0	NM	0	0	0	0
R8631	NM	0	0	NM	0	0	NM	0	0	0	0
R8632	NM	0	0	NM	0	0	NM	0	0	0	0
R8633	NM	0	0	NM	0	0	NM	0	0	0	0
R8634	NM	0	0	NM	0	0	NM	0	0	0	0

G2/3 COMPONENT ASSY(2/3) (AWX1623)

awx1623	awx1624	awx1625	awx1626	awx1627	awx1628	awx1629	awx1630	awx1631	awx1672	awx1673
0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50
DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A
DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A
DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A
VCG1072-A	VCG1072-A	VCG1072-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	VCG1072-A	VCG1072-A
DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A
DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A
VCG1072-A	VCG1072-A	VCG1072-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	VCG1072-A	VCG1072-A
0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50
0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50
VCG1072-A	VCG1072-A	VCG1072-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	VCG1072-A	VCG1072-A
DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A
DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A
10p/50	10p/50	10p/50	NM	NM	NM	NM	NM	NM	10p/50	10p/50
470p/50	470p/50	470p/50	470p/50	470p/50	470p/50	470p/50	470p/50	470p/50	470p/50	470p/50
NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM
NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM
NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM
330p/50	330p/50	330p/50	330p/50	330p/50	330p/50	330p/50	330p/50	330p/50	330p/50	330p/50
NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM
3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3
2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2
2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2
2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2
12	12	12	12	12	12	12	12	12	12	12
12	12	12	12	12	12	12	12	12	12	12
12	12	12	12	12	12	12	12	12	12	12
12	12	12	12	12	12	12	12	12	12	12
NM	1M	1M	NM	1M	1M	NM	1M	1M	1M	1M
100	100	100	120	120	120	120	120	120	100	100
120	120	120	120	120	120	120	120	120	120	120
120	120	120	120	120	120	120	120	120	120	120
100	100	100	120	120	120	120	120	120	100	100
0	0	0	0	0	0	0	0	0	0	0
120	120	120	120	120	120	120	120	120	120	120
10	10	10	10	10	10	10	10	10	10	10
0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0

10.26 COMPONENT ASSY (3/3)

SOUND_2

	awx1105	awx1287	awx1316	awx1106	awx1288	awx1339	awx1107	awx1108	awx1340	awx1623	awx16
C8340	1u/25	1u/25	VCG1072-A	1u/25	VCG1072-A	VCG1072-A	1u/25	VCG1072-A	VCG1072-A	VCG1072-A	VCG1072-A
C8341	DCH1201-A	DCH1201-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A
C8342	DCH1201-A	DCH1201-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A
C8343	DCH1201-A	DCH1201-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A
C8345	DCH1201-A	DCH1201-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A
C8346	DCH1201-A	DCH1201-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A
C8394	47p/50	NM	NM	47p/50	NM	NM	47p/50	NM	NM	NM	NM
C8403	1000p/50	1000p/50	NM	1000p/50	NM	NM	1000p/50	NM	NM	NM	NM
C8404	DCH1201-A	DCH1201-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A
C8405	DCH1201-A	DCH1201-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A
C8408	1000p/50	NM	NM	1000p/50	NM	NM	1000p/50	NM	NM	NM	NM
C8409	DCH1201-A	DCH1263-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A
C8410	1000p/50	NM	NM	1000p/50	NM	NM	1000p/50	NM	NM	NM	NM
C8413	1000p/50	NM	NM	1000p/50	NM	NM	1000p/50	NM	NM	NM	NM
C8414	DCH1201-A	DCH1263-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1201-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A
C8415	1000p/50	NM	NM	1000p/50	NM	NM	1000p/50	NM	NM	NM	NM
C8421	1000p/50	330p/50	330p/50	1000p/50	330p/50	330p/50	1000p/50	330p/50	330p/50	330p/50	330p/50
C8422	1000p/50	330p/50	330p/50	1000p/50	330p/50	330p/50	1000p/50	330p/50	330p/50	330p/50	330p/50
C8501	1000p/50	1000p/50	1000p/50	1000p/50	1000p/50	1000p/50	1000p/50	1000p/50	1000p/50	1000p/50	470p/50
C8513	1000p/50	1000p/50	0.01u/50	1000p/50	0.01u/50	0.01u/50	1000p/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50
R8327	0	0	2.2	0	2.2	2.2	0	2.2	2.2	2.2	2.2
R8328	0	0	2.2	0	2.2	2.2	0	2.2	2.2	2.2	2.2
R8329	0	0	2.2	0	2.2	2.2	0	2.2	2.2	2.2	2.2
R8330	0	0	NM	0	2.2	2.2	0	2.2	2.2	NM	NM
R8372	0	0	10	0	10	10	0	10	10	10	10
R8373	0	0	2.2	0	2.2	2.2	0	2.2	2.2	2.2	2.2
R8391	NM	0	0	NM	0	0	NM	0	0	0	0
R8392	NM	0	0	NM	0	0	NM	0	0	0	0
R8404	0	0	10	0	10	10	0	10	10	10	10
R8417	1M	1M	1M	1M	1M	1M	1M	1M	820k	1M	1M
R8418	560	470	470	560	470	470	560	470	470	470	470
R8520	0	0	2.2	0	2.2	2.2	0	2.2	2.2	2.2	2.2
R8521	0	0	2.2	0	2.2	2.2	0	2.2	2.2	2.2	2.2
R8626	NM	0	0	NM	0	0	NM	0	0	0	0
R8627	NM	0	0	NM	0	0	NM	0	0	0	0
R8628	NM	0	0	NM	0	0	NM	0	0	0	0
R8629	NM	0	0	NM	0	0	NM	0	0	0	0

JACK

	awx1105	awx1287	awx1316	awx1106	awx1288	awx1339	awx1107	awx1108	awx1340	awx1623	awx16
R8307	0	0	0	75	75	75	75	75	75	0	0
R8308	0	0	0	75	75	75	75	75	75	0	0
R8309	0	0	0	75	75	75	75	75	75	0	0
R8316	NM	NM	NM	68	68	68	68	NM	NM	NM	NM
R8317	NM	NM	NM	3.9	3.9	3.9	3.9	NM	NM	NM	NM
R8318	NM	NM	NM	68	68	68	68	NM	NM	NM	NM
R8319	NM	NM	NM	3.9	3.9	3.9	3.9	NM	NM	NM	NM
R8320	NM	NM	NM	68	68	68	68	NM	NM	NM	NM
R8321	NM	NM	NM	3.9	3.9	3.9	3.9	NM	NM	NM	NM
JA8301	AKB7224-A	AKB7224-A	AKB7224-A	AKB7225-A	AKB7225-A	AKB7225-A	AKB7224-A	AKB7224-A	AKB7224-A	AKB7224-A	AKB7224-A
JA8302	NM	NM	NM	AKB7228-A	AKB7228-A	AKB7228-A	AKB7227-A	AKB7227-A	AKB7227-A	NM	NM
JA8304	AKB7227-A	AKB7227-A	AKB7227-A	AKB7228-A	AKB7228-A	AKB7228-A	AKB7227-A	AKB7227-A	AKB7227-A	AKB7227-A	AKB7227-A
JA8305	NM	NM	NM	AKB7228-A	AKB7228-A	AKB7228-A	AKB7227-A	NM	NM	NM	NM

TWIST

	awx1105	awx1287	awx1316	awx1106	awx1288	awx1339	awx1107	awx1108	awx1340	awx1623	awx16
JP8402	PF04PG-S10	PF04PG-S10	PF04PG-S10	ADX7746-A	ADX7746-A	ADX7746-A	ADX7746-A	ADX7746-A	ADX7746-A	PF04PG-S10	PF04PG-S1

Tr_D

	awx1105	awx1287	awx1316	awx1106	awx1288	awx1339	awx1107	awx1108	awx1340	awx1623	awx16
D8401	1SS302	1SS302	1SS302	1SS302	1SS302	1SS302	1SS302	1SS302	1SS302	DAN217U	DAN217U
D8404	RKZ3.9KG(B2)	RKZ3.9KG(B2)	RKZ3.9KG(B2)	RKZ3.9KG(B2)	RKZ3.9KG(B2)	RKZ3.9KG(B2)	RKZ3.9KG(B2)	RKZ3.9KG(B2)	RKZ3.9KG(B2)	DZ2J039M0	DZ2J039M0
D8408	RKZ3.9KG(B2)	RKZ3.9KG(B2)	RKZ3.9KG(B2)	RKZ3.9KG(B2)	RKZ3.9KG(B2)	RKZ3.9KG(B2)	RKZ3.9KG(B2)	RKZ3.9KG(B2)	RKZ3.9KG(B2)	DZ2J039M0	DZ2J039M0
Q8301	ISA1602AM1(EF)	ISA1602AM1(EF)	ISA1602AM1(EF)	ISA1602AM1(EF)	ISA1602AM1(EF)	ISA1602AM1(EF)	ISA1602AM1(EF)	ISA1602AM1(EF)	ISA1602AM1(EF)	2SA1576A(QRS)	2SA1576A
Q8302	2SC4154-11(EF)	2SC4154-11(EF)	2SC4154-11(EF)	2SC4154-11(EF)	2SC4154-11(EF)	2SC4154-11(EF)	2SC4154-11(EF)	2SC4154-11(EF)	2SC4154-11(EF)	2SC4081(QRS)	2SC4081(Q
Q8303	RT1N141M-11	RT1N141M-11	RT1N141M-11	RT1N141M-11	RT1N141M-11	RT1N141M-11	RT1N141M-11	RT1N141M-11	RT1N141M-11	DTC114EUA	DTC114EUA
Q8501	2SC4154-11(EF)	2SC4154-11(EF)	2SC4154-11(EF)	2SC4154-11(EF)	2SC4154-11(EF)	2SC4154-11(EF)	2SC4154-11(EF)	2SC4154-11(EF)	2SC4154-11(EF)	2SC4081(QRS)	2SC4081(Q
Q8603	2SC4154-11(EF)	2SC4154-11(EF)	2SC4154-11(EF)	2SC4154-11(EF)	2SC4154-11(EF)	LSC4081UB(QRS)	2SC4154-11(EF)	2SC4154-11(EF)	LSC4081UB(QRS)	2SC4081(QRS)	2SC4081(Q
Q8604	ISA1602AM1(EF)	ISA1602AM1(EF)	ISA1602AM1(EF)	ISA1602AM1(EF)	ISA1602AM1(EF)	LSA1576UB(QRS)	ISA1602AM1(EF)	ISA1602AM1(EF)	LSA1576UB(QRS)	2SA1576A(QRS)	2SA1576A
Q8605	RT1N141M-11	RT1N141M-11	RT1N141M-11	RT1N141M-11	RT1N141M-11	LTC114EUB	RT1N141M-11	RT1N141M-11	LTC114EUB	DTC114EUA	DTC114EUA

OSD_IC

	awx1105	awx1287	awx1316	awx1106	awx1288	awx1339	awx1107	awx1108	awx1340	awx1623	awx16
C8509	100p/50	100p/50	100p/50	100p/50	100p/50	100p/50	100p/50	100p/50	100p/50	100p/50	100p/50
C8511	100p/50	100p/50	100p/50	100p/50	100p/50	100p/50	100p/50	100p/50	100p/50	47p/50	47p/50
C8512	100p/50	100p/50	100p/50	100p/50	100p/50	100p/50	100p/50	100p/50	100p/50	47p/50	47p/50
R8504	330	330	330	330	330	330	330	330	330	100	100
R8505	330	330	330	330	330	330	330	330	330	100	100
R8506	330	330	330	330	330	330	330	330	330	330	330

G3/3 COMPONENT ASSY(3/3) (AWX1623)

awx1623	awx1624	awx1625	awx1626	awx1627	awx1628	awx1629	awx1630	awx1631	awx1672	awx1673
CG1072-A	VCG1072-A	VCG1072-A	VCG1072-A	VCG1072-A	VCG1072-A	VCG1072-A	VCG1072-A	VCG1072-A	VCG1072-A	VCG1072-A
CH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A
CH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A
CH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A
CH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A
CH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A
M	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM
M	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM
CH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A
CH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A
M	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM
CH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A
M	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM
M	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM
CH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A	DCH1263-A
M	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM
30p/50	330p/50	330p/50	330p/50	330p/50	330p/50	330p/50	330p/50	330p/50	330p/50	330p/50
30p/50	330p/50	330p/50	330p/50	330p/50	330p/50	330p/50	330p/50	330p/50	330p/50	330p/50
000p/50	470p/50	470p/50	1000p/50	470p/50	470p/50	1000p/50	470p/50	470p/50	470p/50	470p/50
.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.01u/50
.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2
.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2
.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2
M	NM	NM	2.2	2.2	2.2	2.2	2.2	2.2	NM	NM
0	10	10	10	10	10	10	10	10	10	10
.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2
	0	0	0	0	0	0	0	0	0	0
	0	0	0	0	0	0	0	0	0	0
0	10	10	10	10	10	10	10	10	10	10
M	1M	1M	1M	1M	1M	1M	1M	1M	1M	1M
70	470	470	470	470	470	470	470	470	470	470
.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2
.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2
	0	0	0	0	0	0	0	0	0	0
	0	0	0	0	0	0	0	0	0	0
	0	0	0	0	0	0	0	0	0	0
	0	0	0	0	0	0	0	0	0	0

awx1623	awx1624	awx1625	awx1626	awx1627	awx1628	awx1629	awx1630	awx1631	awx1672	awx1673
	0	0	75	75	75	75	75	75	0	0
	0	0	75	75	75	75	75	75	0	0
	0	0	75	75	75	75	75	75	0	0
M	NM	NM	68	68	68	68	NM	NM	NM	NM
M	NM	NM	3.9	3.9	3.9	3.9	NM	NM	NM	NM
M	NM	NM	68	68	68	68	NM	NM	NM	NM
M	NM	NM	3.9	3.9	3.9	3.9	NM	NM	NM	NM
M	NM	NM	68	68	68	68	NM	NM	NM	NM
M	NM	NM	3.9	3.9	3.9	3.9	NM	NM	NM	NM
KB7224-A	AKB7224-A	AKB7224-A	AKB7225-A	AKB7225-A	AKB7225-A	AKB7224-A	AKB7224-A	AKB7224-A	AKB7224-A	AKB7224-A
M	NM	NM	AKB7228-A	AKB7228-A	AKB7228-A	AKB7227-A	AKB7227-A	AKB7227-A	NM	NM
KB7227-A	AKB7227-A	AKB7227-A	AKB7228-A	AKB7228-A	AKB7228-A	AKB7227-A	AKB7227-A	AKB7227-A	AKB7227-A	AKB7227-A
M	NM	NM	AKB7228-A	AKB7228-A	AKB7228-A	AKB7227-A	NM	NM	NM	NM

awx1623	awx1624	awx1625	awx1626	awx1627	awx1628	awx1629	awx1630	awx1631	awx1672	awx1673
F04PG-S10	PF04PG-S10	PF04PG-S10	ADX7746-A	ADX7746-A	ADX7746-A	ADX7746-A	ADX7746-A	ADX7746-A	PF04PG-S10	PF04PG-S10

awx1623	awx1624	awx1625	awx1626	awx1627	awx1628	awx1629	awx1630	awx1631	awx1672	awx1673
AN217U	DAN217U	DAN217U	DAN217U	DAN217U	DAN217U	DAN217U	DAN217U	DAN217U	DAN217U	DAN217U
Z2J039M0	DZ2J039M0	DZ2J039M0	DZ2J039M0	DZ2J039M0	DZ2J039M0	DZ2J039M0	DZ2J039M0	DZ2J039M0	DZ2J039M0	DZ2J039M0
Z2J039M0	DZ2J039M0	DZ2J039M0	DZ2J039M0	DZ2J039M0	DZ2J039M0	DZ2J039M0	DZ2J039M0	DZ2J039M0	DZ2J039M0	DZ2J039M0
SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)
SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)
TC114EUA	DTC114EUA	DTC114EUA	DTC114EUA	DTC114EUA	DTC114EUA	DTC114EUA	DTC114EUA	DTC114EUA	DTC114EUA	DTC114EUA
SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)
SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)
SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)
TC114EUA	DTC114EUA	DTC114EUA	DTC114EUA	DTC114EUA	DTC114EUA	DTC114EUA	DTC114EUA	DTC114EUA	DTC114EUA	DTC114EUA

awx1623	awx1624	awx1625	awx1626	awx1627	awx1628	awx1629	awx1630	awx1631	awx1672	awx1673
00p/50	100p/50	NM	100p/50	NM	NM	100p/50	NM	NM	NM	NM
7p/50	47p/50	NM	47p/50	NM	NM	47p/50	NM	NM	NM	NM
7p/50	47p/50	NM	47p/50	NM	NM	47p/50	NM	NM	NM	NM
00	100	470	100	470	470	100	470	470	470	470
00	100	470	100	470	470	100	470	470	470	470
30	330	470	330	470	470	330	470	470	470	470

10.27 COMPOSITE ASSY

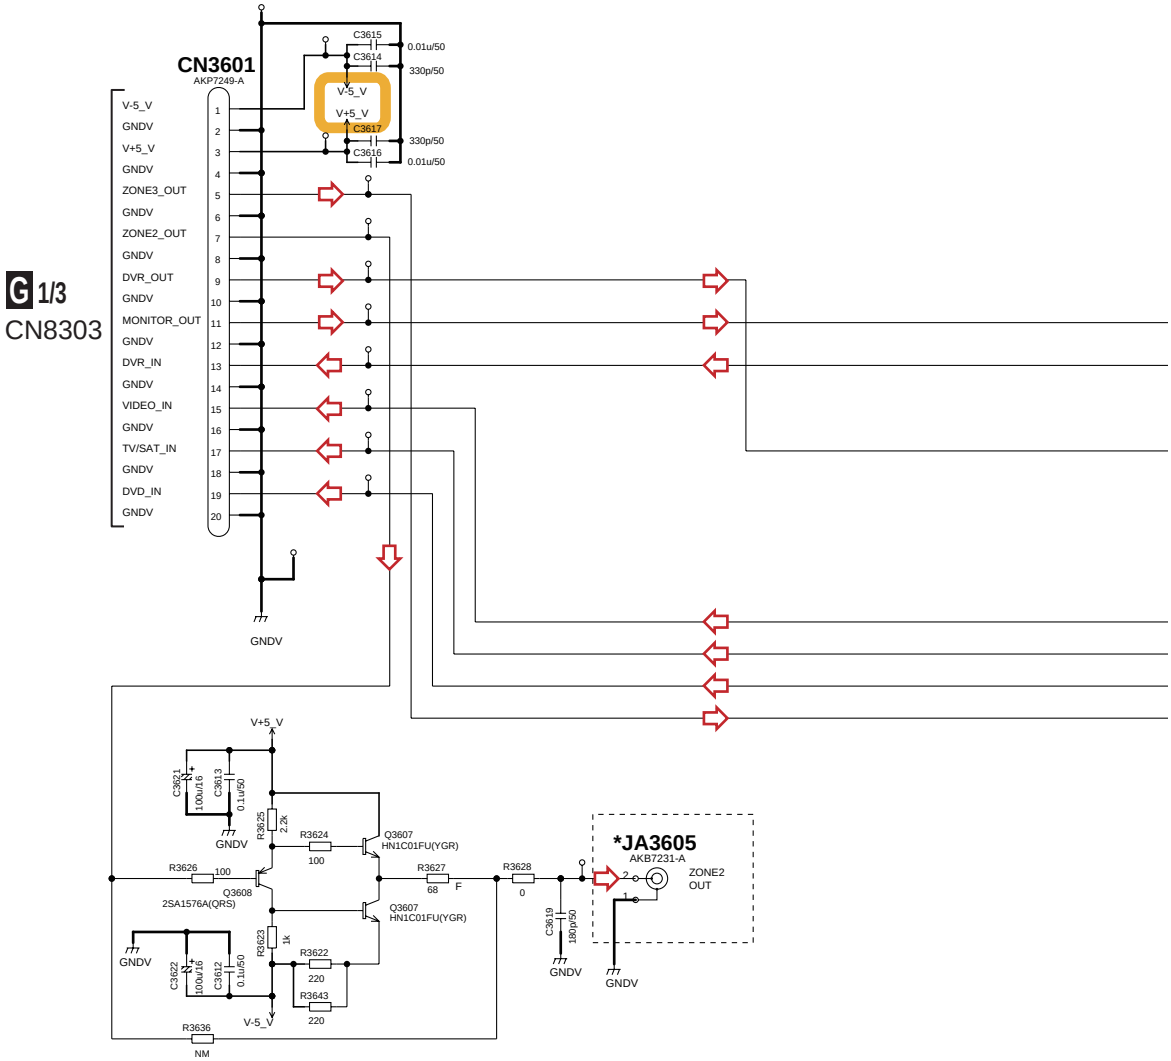

	AWX1357
JA3605	AKB7231-A

	AWX1357
JA3604	NM

	AWX1357
JA3601	AKB7229-A
JA3602	AKB7229-A
JA3603	AKB7229-A

	AWX1357
C3608	NM
C3610	NM
C3618	NM
R3615	NM
R3616	NM
R3617	NM
R3618	NM
R3619	NM
R3620	NM
R3621	NM
R3644	NM
Q3605	NM
Q3606	NM

: Video Signal Route

NOTE
1. RESISTORS
Unit: k-k Ω , M-M Ω or Ω unless otherwise noted.
Rated Power: 1/10w unless otherwise noted.
Toleranee: (J)5% unless otherwise noted.

2. CAPACITORS
Unit: p-pF or u-uF unless otherwise noted.
Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
CH : CCSRCH
NO MARKED : CKSRYB
3. NM: No Mount

COMPOSITE ASSY (AWX1357)

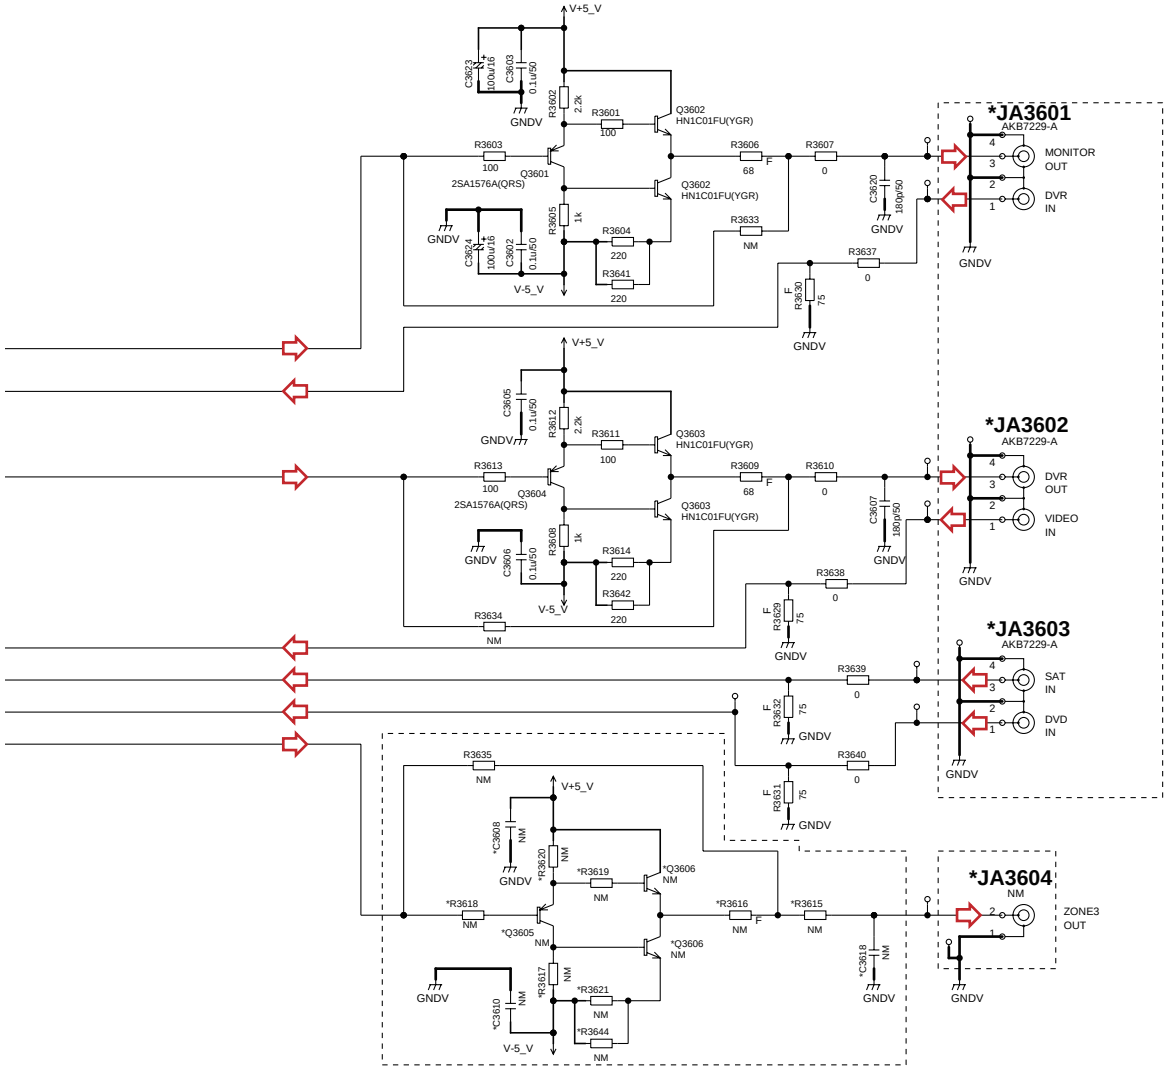

AWX1357
NM

AWX1357
NM
NM
NM
NM
NM
NM
NM
NM
NM
NM
NM
NM
NM

10.28 MIC HP ASSY

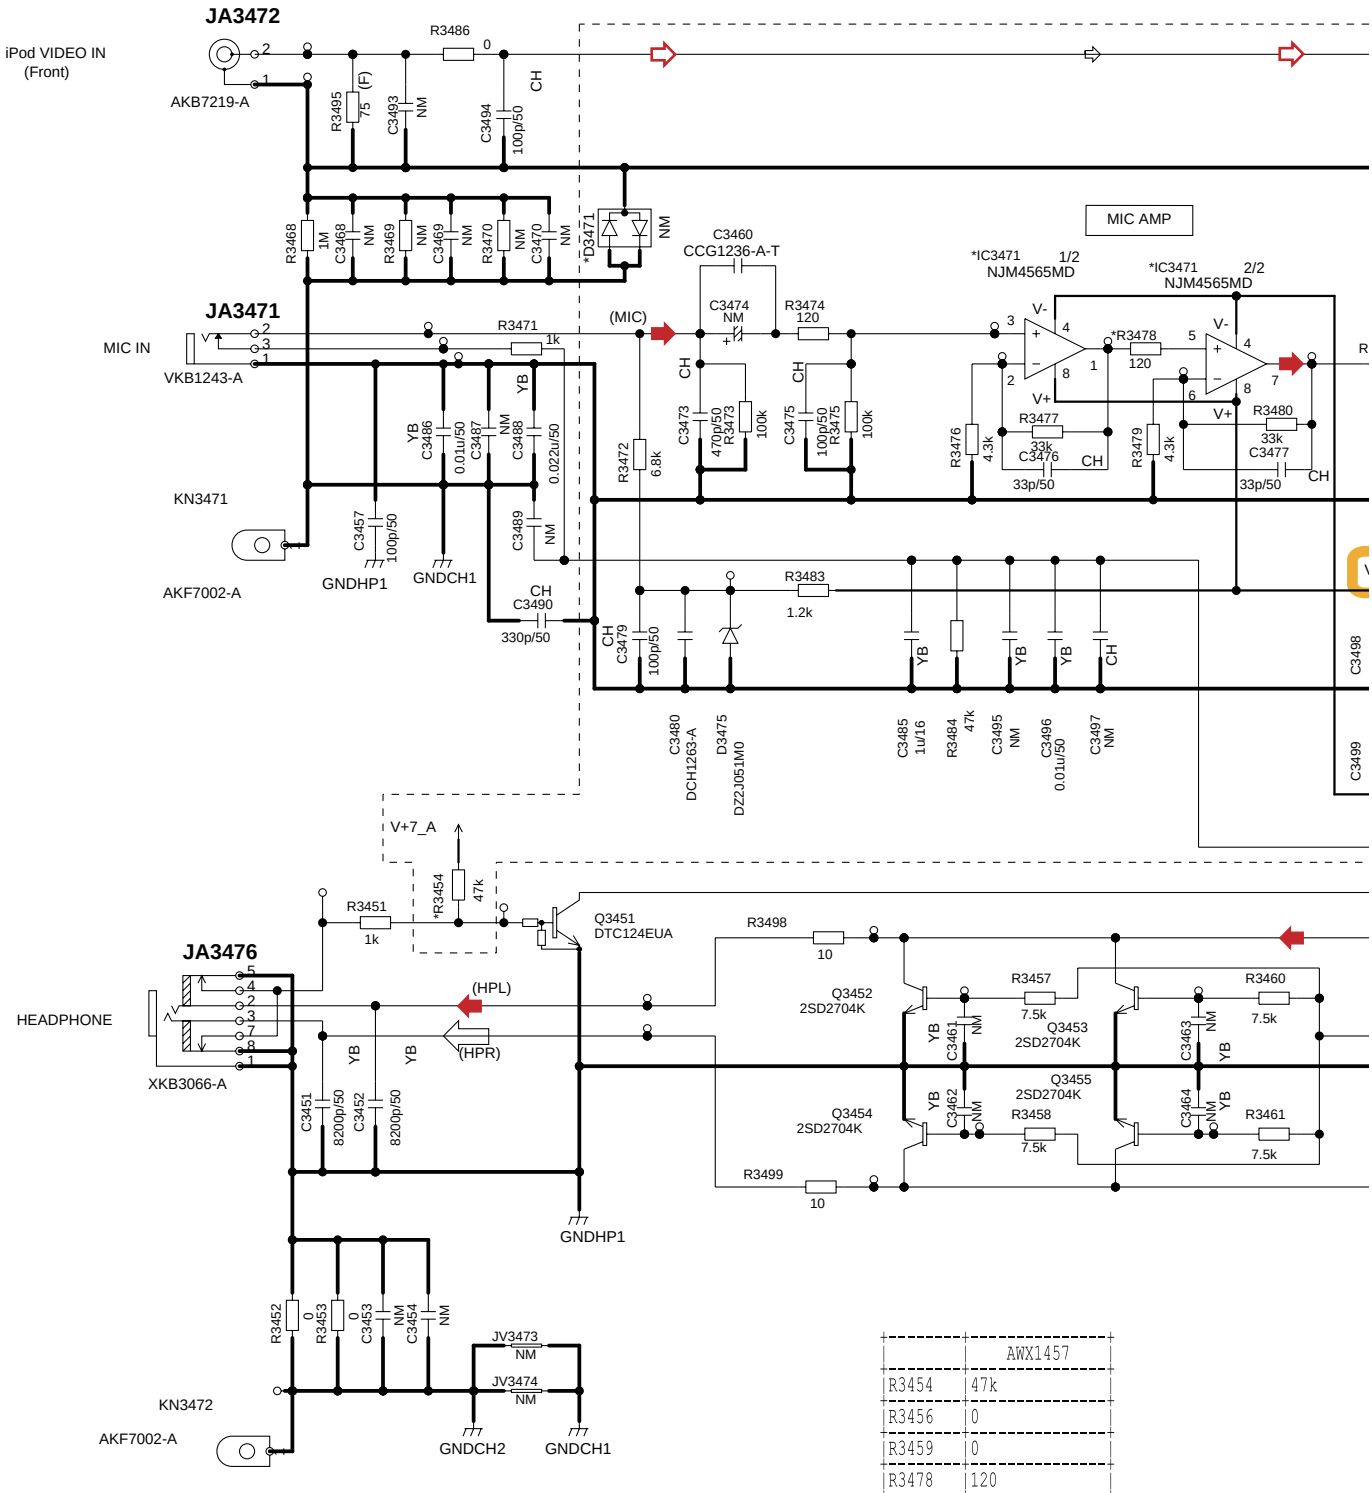

	AWX1457
R3454	47k
R3456	0
R3459	0
R3478	120
IC3471	NJM4565MD
D3471	NM
JH3471	NM

MIC HP ASSY (AWX1457)

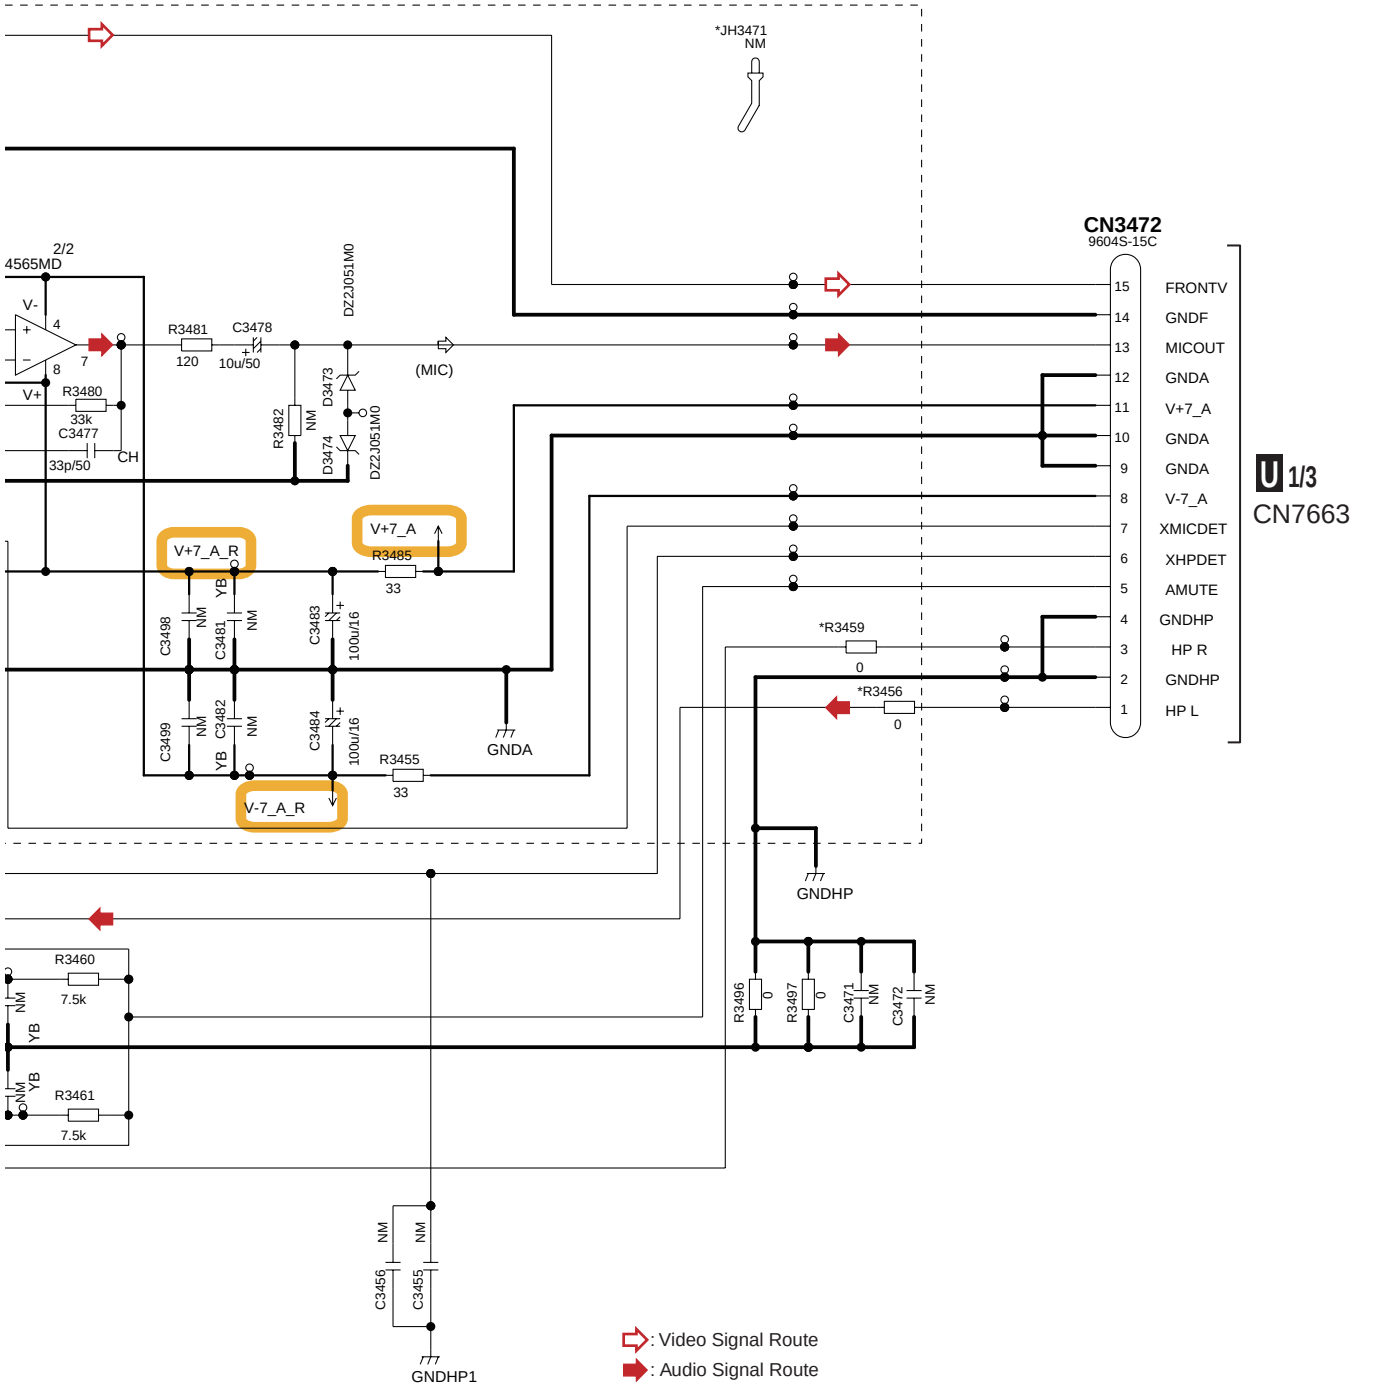

: Video Signal Route

: Audio Signal Route

NOTE

1.RESISTORS
Unit: k-kΩ , M-M Ω or Ω unless otherwise noted.
Rated power: 1/10W unless otherwise noted.
Tolerance: (J) ±5% unless otherwise noted.

2.CAPACITORS
Unit: p-pF, or μ F unless otherwise noted.
Ratings: Capacity(μ F)/Voltage(V) unless otherwise noted.

10.29 DISPLAY ASSY (1/2)

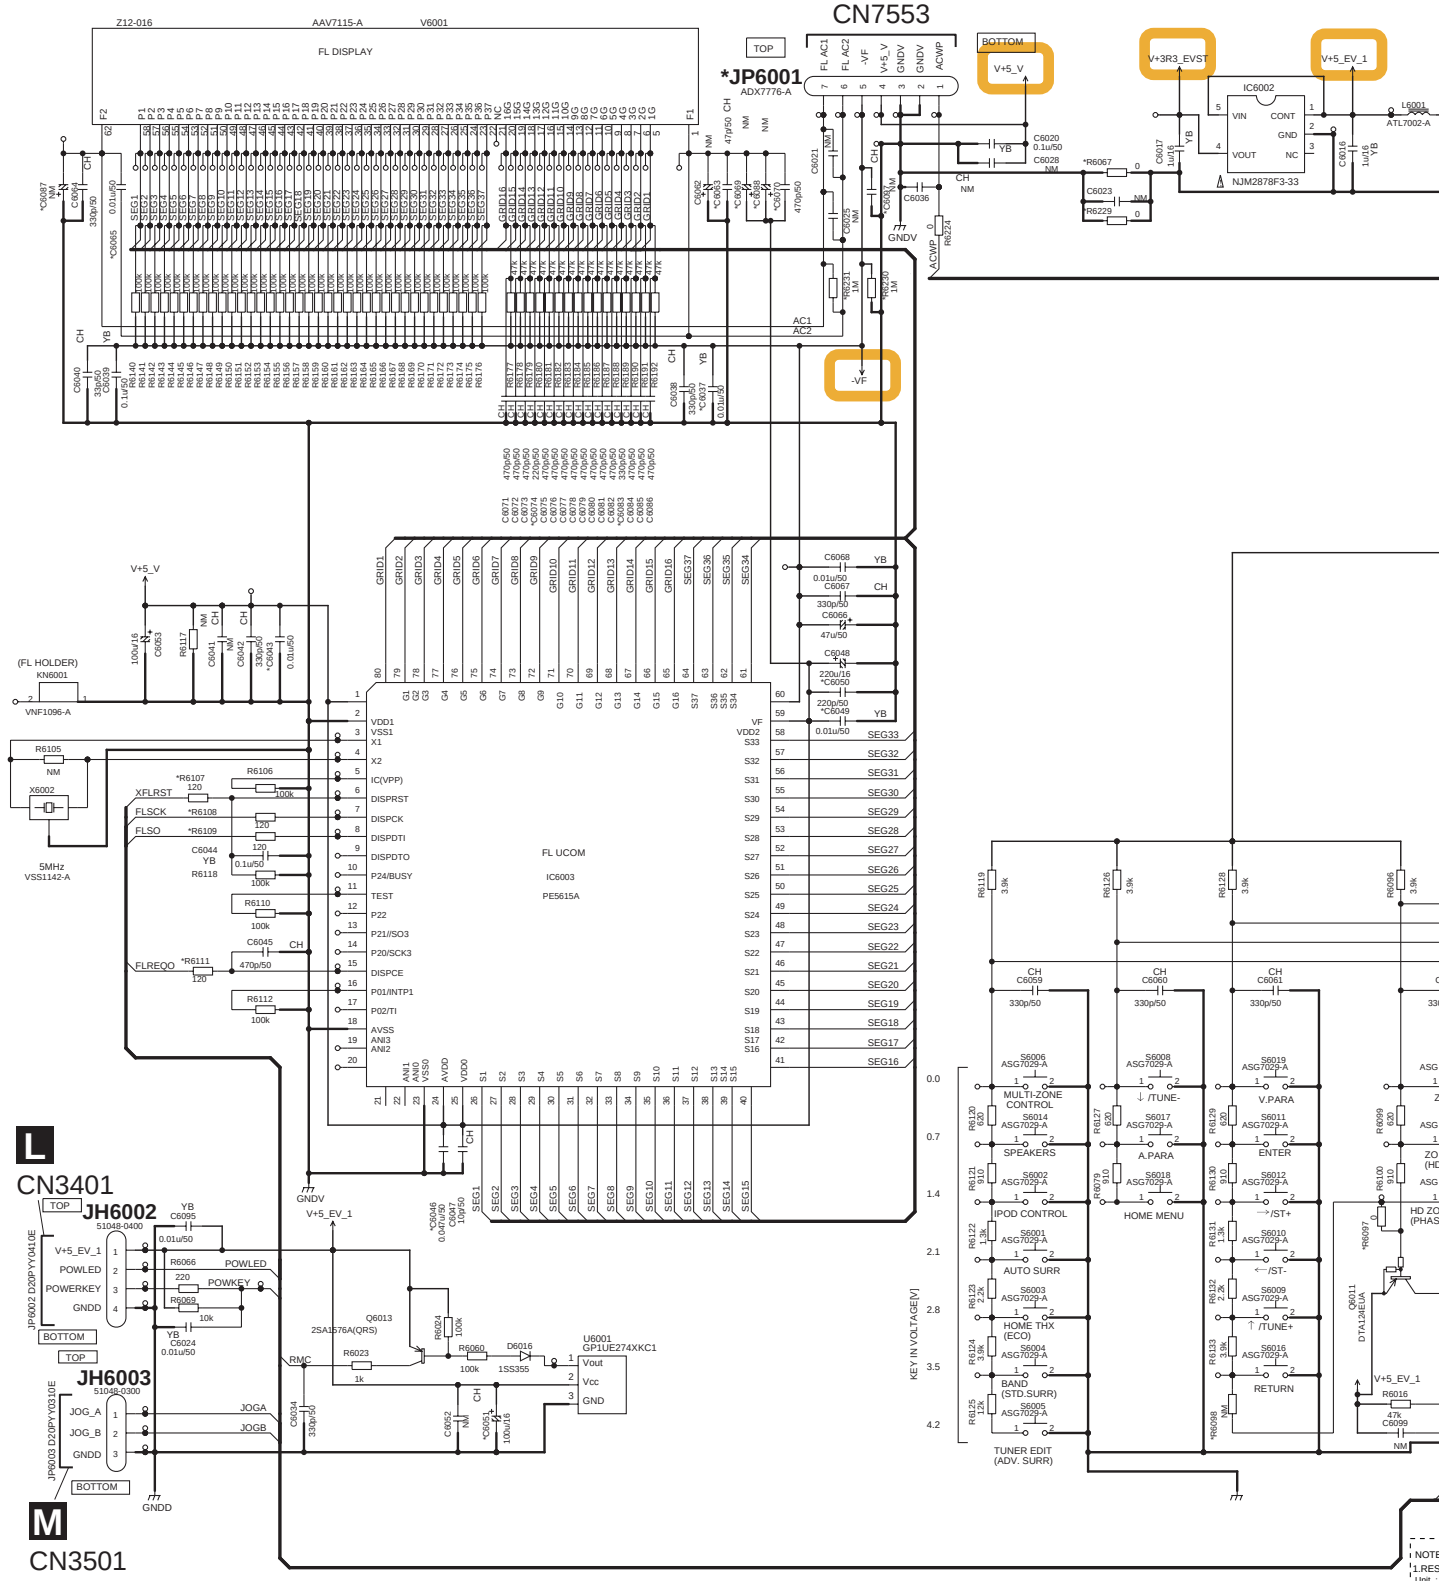

J 1/2 DISPLAY ASSY(1/2)
(SC-75 : AWX1465)
(SC-1528-K, SC-1523-K : AWX1505)

U 3/3 CN7903

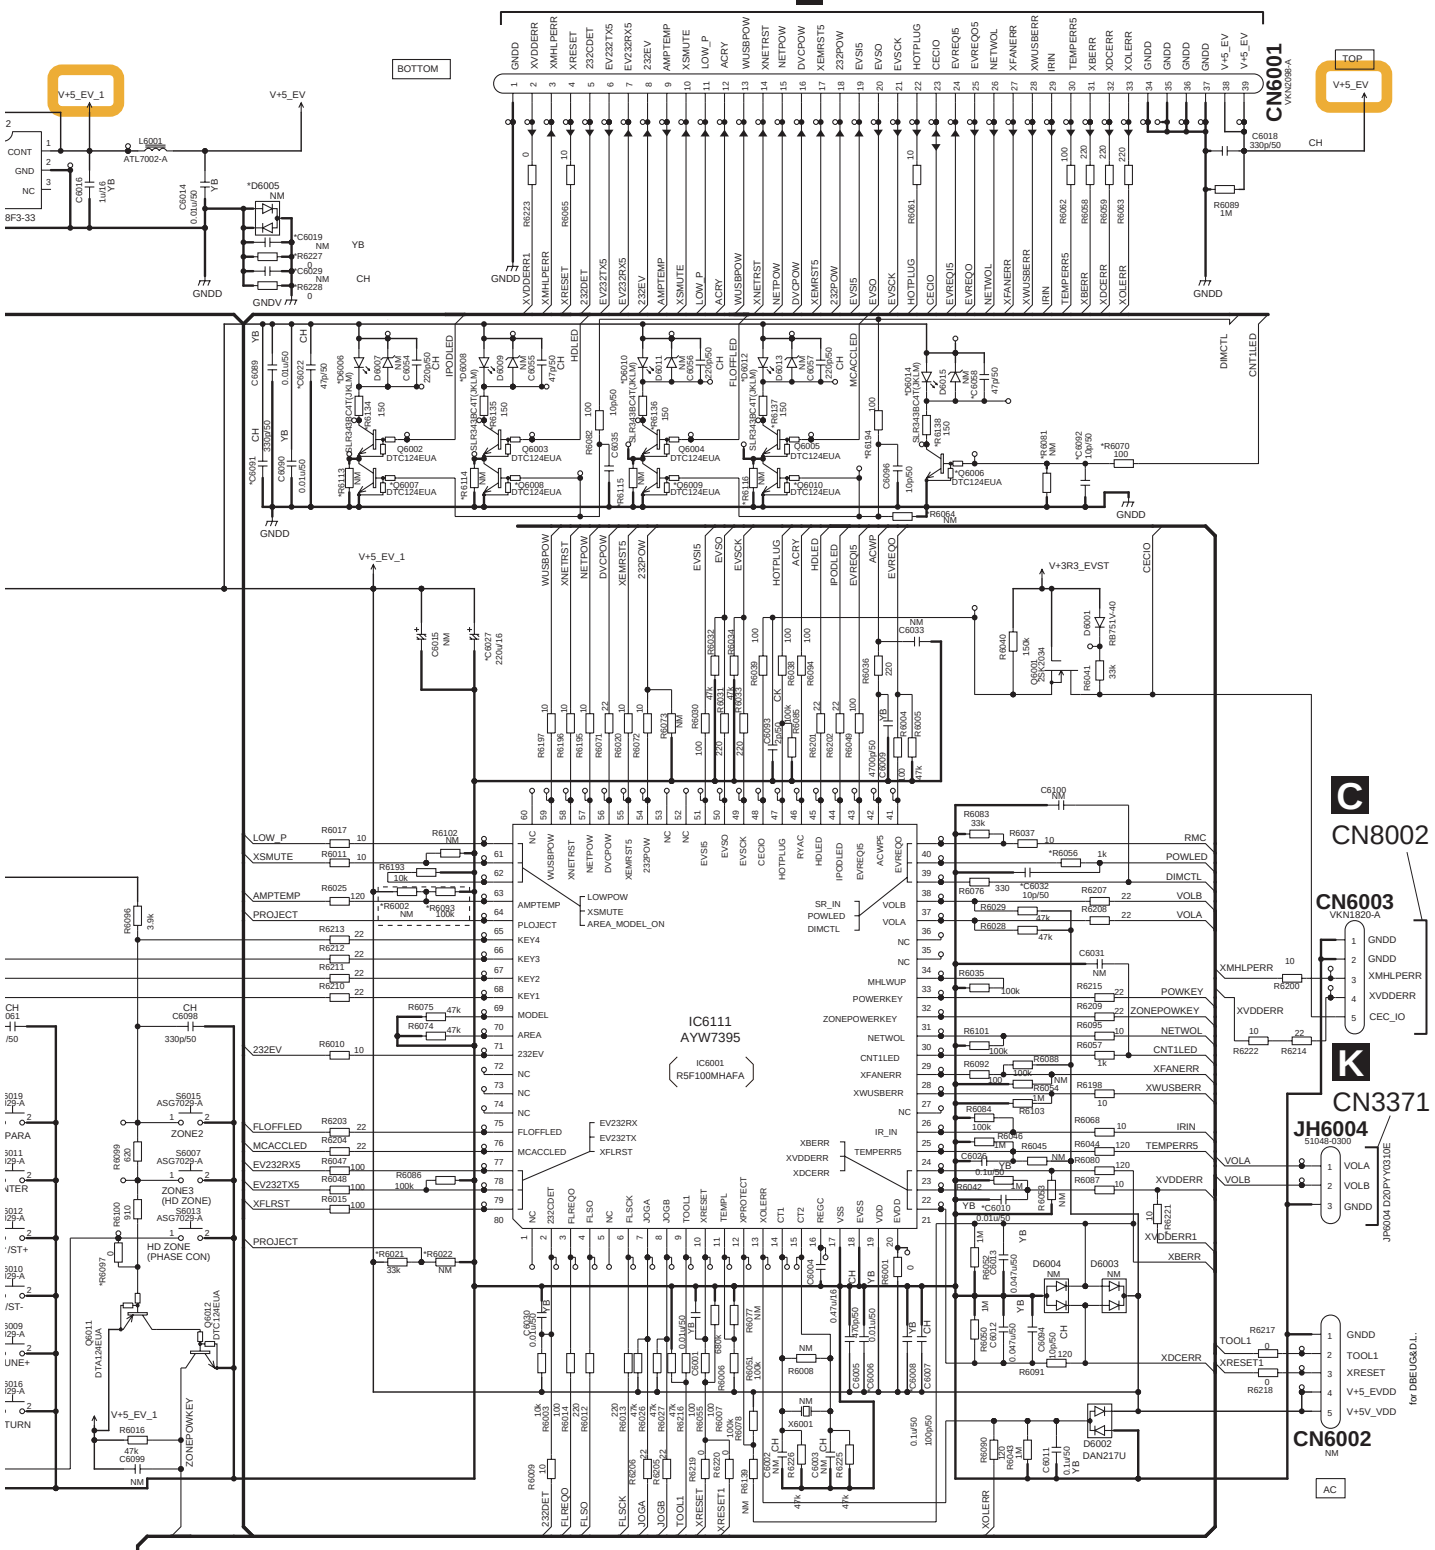

10.30 DISPLAY ASSY (2/2)

	AWX1391	AWX1619	AWX1465	AWX1505	AWX1613	AWX1454
C6006	0.1u/50	0.01u/50	0.1u/50	0.1u/50	0.01u/50	0.1u/50
C6008	0.01u/50	0.1u/50	0.01u/50	0.01u/50	0.1u/50	0.01u/50
C6010	0.1u/50	0.01u/50	0.1u/50	0.1u/50	0.01u/50	0.1u/50
C6022	0.1u/50	47p/50	0.1u/50	0.1u/50	47p/50	0.1u/50
C6027	ACH7268-A	220u/16	220u/16	220u/16	220u/16	220u/16
C6032	10p/50	10p/50	10p/50	NM	10p/50	10p/50
C6058	47p/50	47p/50	47p/50	NM	47p/50	47p/50
C6091	0.01u/50	330p/50	0.01u/50	0.01u/50	330p/50	0.01u/50
C6092	10p/50	10p/50	10p/50	NM	10p/50	10p/50
R6002	NM	NM	NM	NM	NM	NM
R6021	33k	33k	33k	33k	33k	33k
R6022	NM	NM	NM	NM	NM	22k
R6056	1k	1k	1k	NM	1k	1k
R6064	NM	NM	NM	0	NM	NM
R6070	100	100	100	NM	100	100
R6081	NM	NM	NM	0	NM	NM
R6093	100k	100k	100k	100k	100k	100k
R6097	0	0	0	0	0	0
R6098	NM	NM	NM	NM	NM	NM
R6113	NM	NM	NM	0	NM	NM
R6114	NM	NM	NM	0	NM	NM
R6115	NM	NM	NM	0	NM	NM
R6116	NM	NM	NM	0	NM	NM
R6134	150	150	150	680	150	150
R6135	150	150	150	680	150	150
R6136	150	150	150	680	150	150
R6137	150	150	150	680	150	150
R6138	150	150	150	NM	150	150
R6194	100	100	100	NM	100	100
R6221	NM	NM	10	10	10	NM
D6006	SLR343BC4T(JKLM)	SLR343BC4T(JKLM)	SLR343BC4T(JKLM)	SLR-343VC(NPQ)	SLR343BC4T(JKLM)	SLR343BC4T(JKLM)
D6008	SLR343BC4T(JKLM)	SLR343BC4T(JKLM)	SLR343BC4T(JKLM)	SLR-343VC(NPQ)	SLR343BC4T(JKLM)	SLR343BC4T(JKLM)
D6010	SLR343BC4T(JKLM)	SLR343BC4T(JKLM)	SLR343BC4T(JKLM)	SLR-343VC(NPQ)	SLR343BC4T(JKLM)	SLR343BC4T(JKLM)
D6012	SLR343BC4T(JKLM)	SLR343BC4T(JKLM)	SLR343BC4T(JKLM)	SLR-343VC(NPQ)	SLR343BC4T(JKLM)	SLR343BC4T(JKLM)
D6014	SLR343BC4T(JKLM)	SLR343BC4T(JKLM)	SLR343BC4T(JKLM)	NM	SLR343BC4T(JKLM)	SLR343BC4T(JKLM)
Q6006	DTC124EUA	DTC124EUA	DTC124EUA	NM	DTC124EUA	DTC124EUA
Q6007	DTC124EUA	DTC124EUA	DTC124EUA	NM	DTC124EUA	DTC124EUA
Q6008	DTC124EUA	DTC124EUA	DTC124EUA	NM	DTC124EUA	DTC124EUA
Q6009	DTC124EUA	DTC124EUA	DTC124EUA	NM	DTC124EUA	DTC124EUA
Q6010	DTC124EUA	DTC124EUA	DTC124EUA	NM	DTC124EUA	DTC124EUA

	AWX1391	AWX1619	AWX1465	AWX1505	AWX1613	AWX1454
C6019	0.1u/50	NM	0.1u/50	0.1u/50	NM	0.1u/50
C6029	100p/50	NM	100p/50	100p/50	NM	100p/50
C6037	0.01u/50	0.01u/50	0.1u/50	0.1u/50	0.01u/50	0.1u/50
C6043	0.1u/50	0.01u/50	0.1u/50	0.1u/50	0.1u/50	0.1u/50
C6046	0.047u/50	0.047u/50	NM	NM	0.047u/50	NM
C6049	0.01u/50	0.01u/50	1u/16	1u/16	0.01u/50	1u/16
C6050	NM	220p/50	NM	NM	NM	NM
C6051	ACH7272-A	100u/16	100u/16	100u/16	100u/16	100u/16
C6063	470p/50	47p/50	470p/50	470p/50	47p/50	470p/50
C6065	0.1u/50	0.01u/50	0.1u/50	0.1u/50	0.01u/50	0.1u/50
C6069	47u/50	NM	47u/50	47u/50	47u/50	47u/50
C6070	NM	470p/50	NM	NM	NM	NM
C6074	470p/50	220p/50	470p/50	470p/50	470p/50	470p/50
C6083	470p/50	330p/50	470p/50	470p/50	470p/50	470p/50
C6087	100u/35	NM	100u/35	100u/35	100u/35	100u/35
C6088	47u/50	NM	47u/50	47u/50	47u/50	47u/50
C6097	330p/50	NM	330p/50	330p/50	330p/50	330p/50
R6067	NM	0	NM	NM	0	NM
R6107	100	120	100	100	120	100
R6108	100	120	100	100	120	100
R6109	100	120	100	100	120	100
R6111	100	120	100	100	120	100
R6227	NM	0	NM	NM	0	NM
R6228	NM	0	NM	NM	0	NM
R6229	NM	0	NM	NM	0	NM
R6230	NM	1M	NM	NM	NM	NM
R6231	NM	1M	NM	NM	NM	NM
D6005	DAN217U	NM	DAN217U	DAN217U	NM	DAN217U
JP6001	ADX7753-A	ADX7753-A	ADX7776-A	ADX7776-A	ADX7776-A	ADX7776-A

J 2/2

J 2/2 DISPLAY ASSY(2/2)
(SC-75 : AWX1465)
(SC-1528-K, SC-1523-K : AWX1505)

	AWX1454	AWX1506	AWX1455	AWX1507	AWX1671	AWX1680	AWX1682
	0.1u/50	0.1u/50	0.1u/50	0.1u/50	0.01u/50	0.01u/50	0.01u/50
	0.01u/50	0.01u/50	0.01u/50	0.01u/50	0.1u/50	0.1u/50	0.1u/50
	0.1u/50	0.1u/50	0.1u/50	0.1u/50	0.01u/50	0.01u/50	0.01u/50
	0.1u/50	0.1u/50	0.1u/50	0.1u/50	47p/50	47p/50	47p/50
	220u/16	220u/16	220u/16	220u/16	220u/16	220u/16	220u/16
	10p/50	NM	10p/50	NM	NM	NM	10p/50
	47p/50	NM	47p/50	NM	NM	NM	47p/50
	0.01u/50	0.01u/50	0.01u/50	0.01u/50	330p/50	330p/50	330p/50
	10p/50	NM	10p/50	NM	NM	NM	10p/50
	NM	NM	100k	100k	NM	NM	NM
	33k	33k	33k	33k	33k	33k	33k
	22k	22k	22k	22k	22k	22k	NM
	1k	NM	1k	NM	NM	NM	1k
	NM	0	NM	0	0	0	NM
	100	NM	100	NM	NM	NM	100
	NM	0	NM	0	0	0	NM
	100k	100k	NM	NM	100k	100k	100k
	0	0	NM	NM	0	0	0
	NM	NM	12k	12k	NM	NM	NM
	NM	0	NM	0	0	0	NM
	NM	0	NM	0	0	0	NM
	NM	0	NM	0	0	0	NM
	NM	0	NM	0	0	0	NM
	150	680	150	680	680	680	150
	150	680	150	680	680	680	150
	150	680	150	680	680	680	150
	150	680	150	680	680	680	150
	150	NM	150	NM	NM	NM	150
	100	NM	100	NM	NM	NM	100
	NM	NM	NM	NM	NM	NM	10
)	SLR343BC4T(JKLM)	SLR-343VC(NPQ)	SLR343BC4T(JKLM)	SLR-343VC(NPQ)	SLR-343VC(NPQ)	SLR-343VC(NPQ)	SLR343BC4T(JKLM)
)	SLR343BC4T(JKLM)	SLR-343VC(NPQ)	SLR343BC4T(JKLM)	SLR-343VC(NPQ)	SLR-343VC(NPQ)	SLR-343VC(NPQ)	SLR343BC4T(JKLM)
)	SLR343BC4T(JKLM)	SLR-343VC(NPQ)	SLR343BC4T(JKLM)	SLR-343VC(NPQ)	SLR-343VC(NPQ)	SLR-343VC(NPQ)	SLR343BC4T(JKLM)
)	SLR343BC4T(JKLM)	SLR-343VC(NPQ)	SLR343BC4T(JKLM)	SLR-343VC(NPQ)	SLR-343VC(NPQ)	SLR-343VC(NPQ)	SLR343BC4T(JKLM)
)	SLR343BC4T(JKLM)	NM	SLR343BC4T(JKLM)	NM	NM	NM	SLR343BC4T(JKLM)
	DTC124EUA	NM	DTC124EUA	NM	NM	NM	DTC124EUA
	DTC124EUA	NM	DTC124EUA	NM	NM	NM	DTC124EUA
	DTC124EUA	NM	DTC124EUA	NM	NM	NM	DTC124EUA
	DTC124EUA	NM	DTC124EUA	NM	NM	NM	DTC124EUA
	DTC124EUA	NM	DTC124EUA	NM	NM	NM	DTC124EUA

	AWX1454	AWX1506	AWX1455	AWX1507	AWX1671	AWX1680	AWX1682
	0.1u/50	0.1u/50	0.1u/50	0.1u/50	0.1u/50	NM	NM
	100p/50	100p/50	100p/50	100p/50	100p/50	NM	NM
	0.1u/50	0.1u/50	0.1u/50	0.1u/50	0.01u/50	0.01u/50	0.01u/50
	0.1u/50	0.1u/50	0.1u/50	0.1u/50	0.1u/50	0.1u/50	0.01u/50
	NM	NM	NM	NM	0.047u/50	0.047u/50	0.047u/50
	1u/16	1u/16	1u/16	1u/16	0.01u/50	0.01u/50	0.01u/50
	NM	NM	NM	NM	NM	NM	220p/50
	100u/16	100u/16	100u/16	100u/16	100u/16	100u/16	100u/16
	470p/50	470p/50	470p/50	470p/50	47p/50	47p/50	47p/50
	0.1u/50	0.1u/50	0.1u/50	0.1u/50	0.01u/50	0.01u/50	0.01u/50
	47u/50	47u/50	47u/50	47u/50	47u/50	47u/50	NM
	NM	NM	NM	NM	NM	NM	470p/50
	470p/50	470p/50	470p/50	470p/50	470p/50	470p/50	220p/50
	470p/50	470p/50	470p/50	470p/50	470p/50	470p/50	330p/50
	100u/35	100u/35	100u/35	100u/35	100u/35	100u/35	NM
	47u/50	47u/50	47u/50	47u/50	47u/50	47u/50	NM
	330p/50	330p/50	330p/50	330p/50	330p/50	330p/50	NM
	NM	NM	NM	NM	NM	0	0
	100	100	100	100	120	120	120
	100	100	100	100	120	120	120
	100	100	100	100	120	120	120
	100	100	100	100	120	120	120
	NM	NM	NM	NM	NM	0	0
	NM	NM	NM	NM	NM	0	0
	NM	NM	NM	NM	NM	0	0
	NM	NM	NM	NM	NM	NM	1M
	NM	NM	NM	NM	NM	NM	1M
	DAN217U	DAN217U	DAN217U	DAN217U	DAN217U	NM	NM
	ADX7776-A	ADX7776-A	ADX7776-A	ADX7776-A	ADX7776-A	ADX7776-A	ADX7776-A

10.31 VOL ASSY

K VOL ASSY (AWX1392)

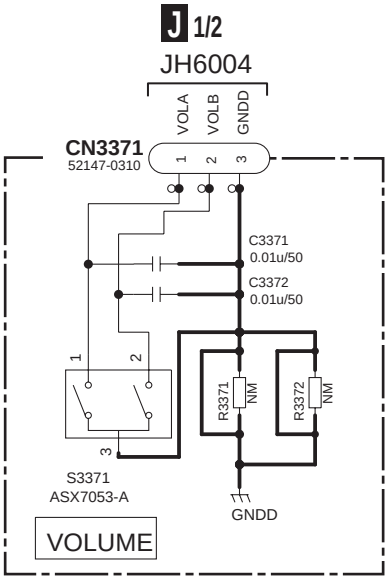

NOTE

1. RESISTORS
   Unit: k-kΩ , M-MΩ or Ω unless otherwise noted.
   Rated Power: 1/16w unless otherwise noted.
   Toleranee: (J)5% unless otherwise noted.
2. CAPACITORS
   Unit: p-pF or u-uF unless otherwise noted.
   Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
3. NM: No Mount

10.32 POWER SW ASSY and ENCODER ASSY

L POWER SW ASSY (SC-75 : AWX1653) (SC-1528-K, SC-1523-K : AWX1654)

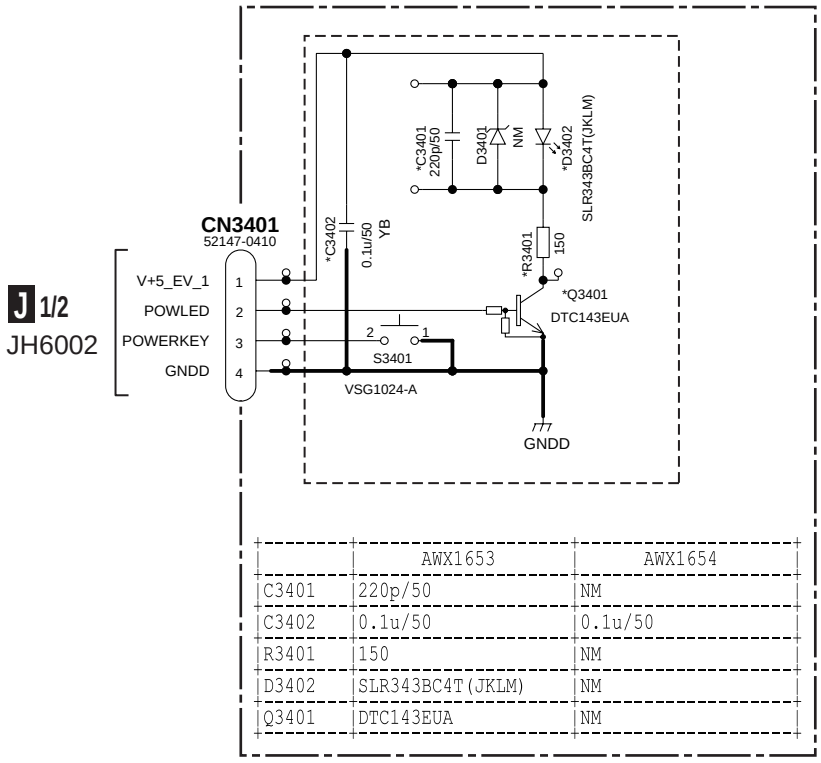

	AWX1653	AWX1654
C3401	220p/50	NM
C3402	0.1u/50	0.1u/50
R3401	150	NM
D3402	SLR343BC4T(JKLM)	NM
Q3401	DTC143EUA	NM

NOTE
1.RESISTORS
Unit :k-k Ω , M-M Ω or Ω unless otherwise noted.
Rated:power :1/10W unless otherwise noted.
Tolerance :(J) ± 5% unless otherwise noted.

2,CAPACITORS
Unit :p-pF or μ F or unless otherwise noted.
Ratings :Capacity(F)/Voltage(V) unless otherwise noted.
YB :CKSRYB CH :CCSRCH

3, NM :No mount

M ENCODER ASSY (AWX1396)

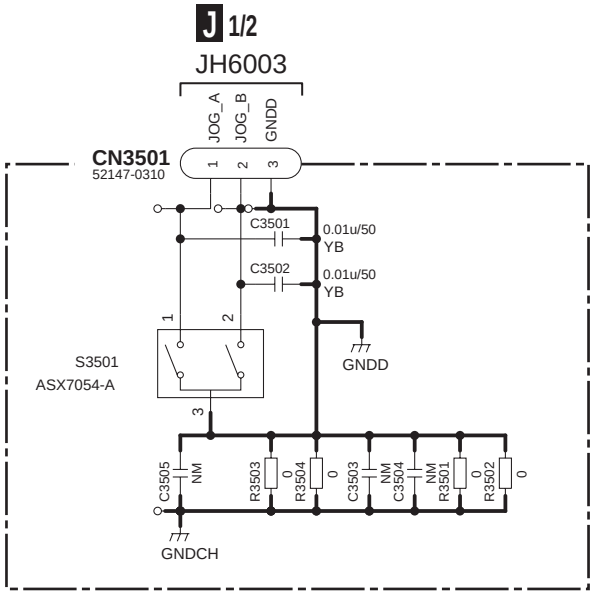

NOTE

1.RESISTORS

Unit :k-k Ω , M-M Ω or Ω unless otherwise noted.
Rated:power :1/10W unless otherwise noted.
Tolerance :(J) ± 5% unless otherwise noted.

2,CAPACITORS

Unit :p-pF or μ F or unless otherwise noted.
Ratings :Capacity(μ F)/Voltage(V) unless otherwise noted.
YB :CKSRYB

3,NM :No mount

10.33 IR BUFFER_S ASSY (1/2)

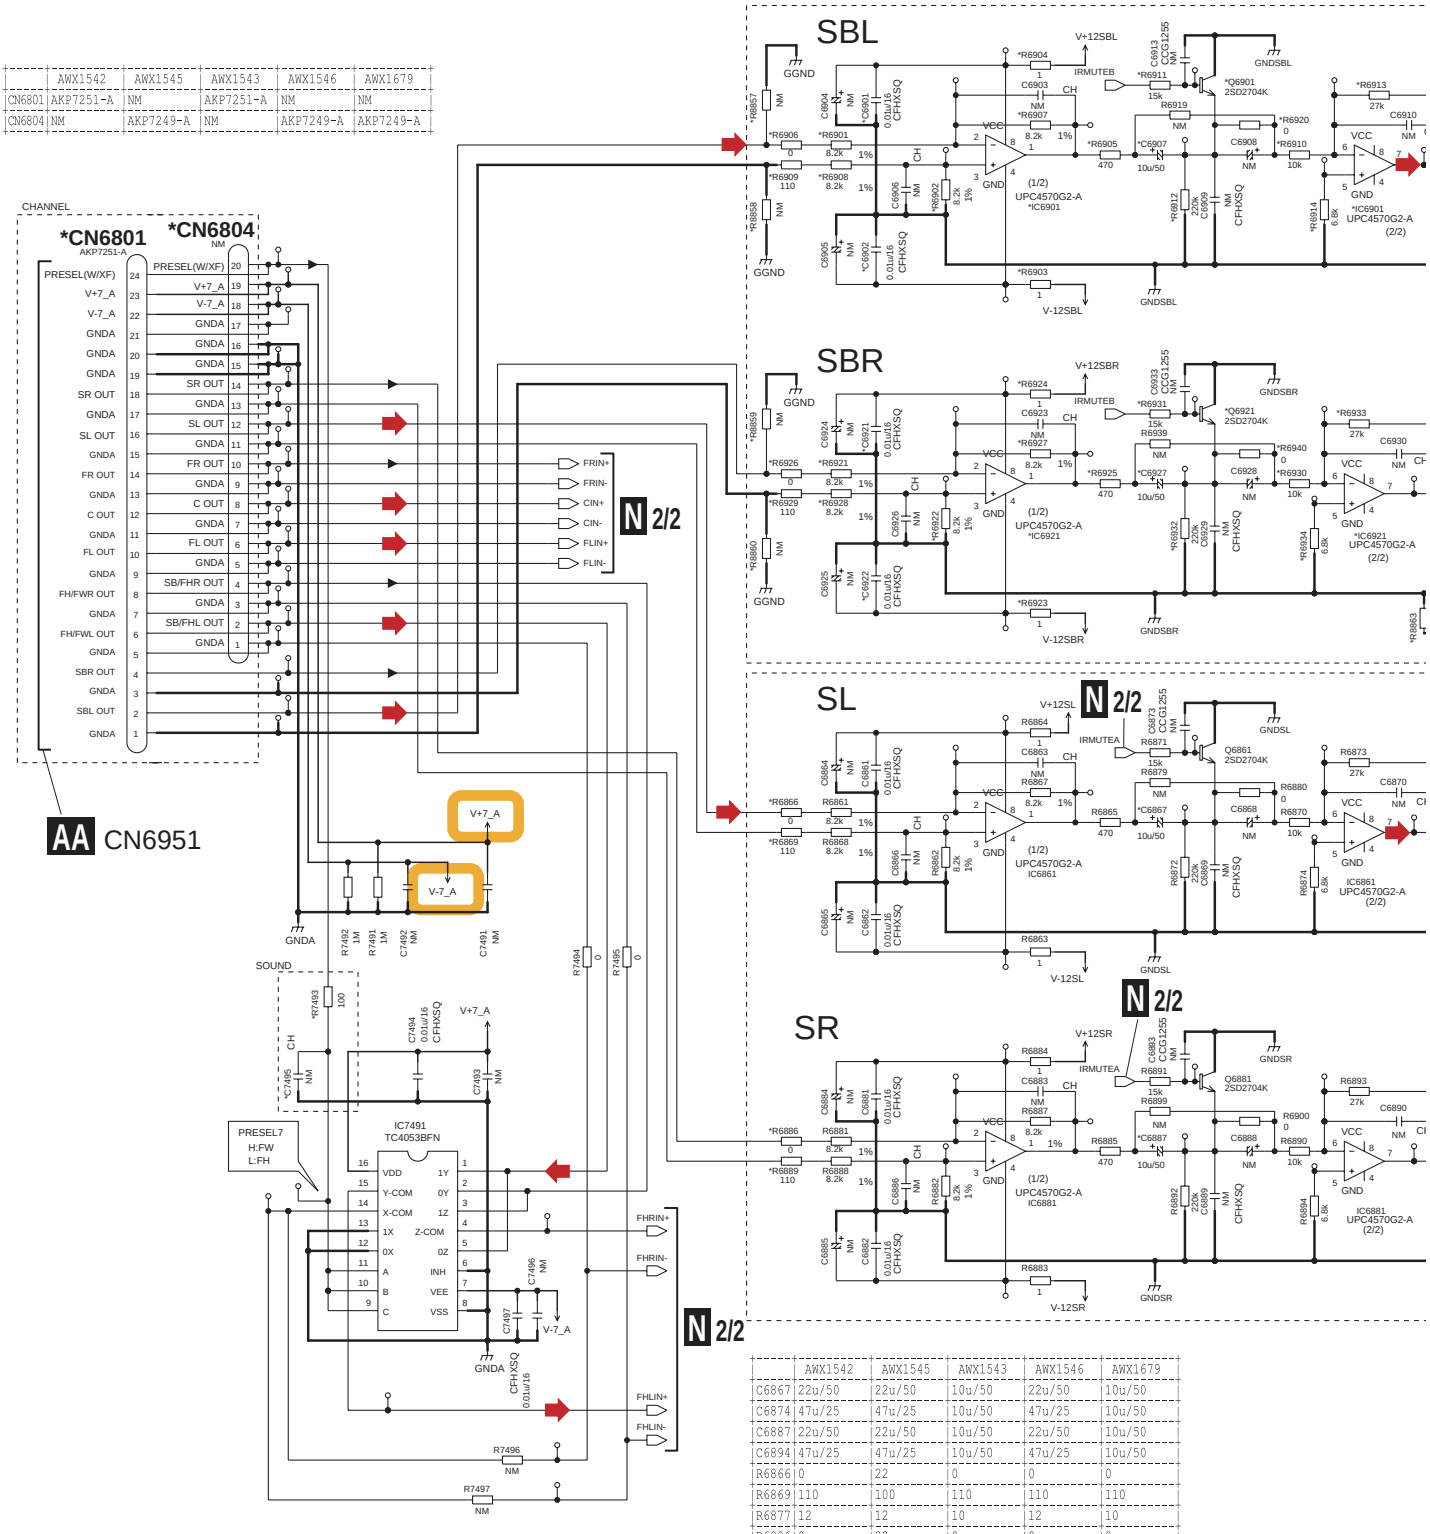

	AWX1542	AWX1545	AWX1543	AWX1546	AWX1679
CN6801	AKP7251-A	NM	AKP7251-A	NM	NM
CN6804	NM	AKP7249-A	NM	AKP7249-A	AKP7249-A

	AWX1542	AWX1545	AWX1543	AWX1546	AWX1679
C6867	22u/50	22u/50	10u/50	22u/50	10u/50
C6874	47u/25	47u/25	10u/50	47u/25	10u/50
C6887	22u/50	22u/50	10u/50	22u/50	10u/50
C6894	47u/25	47u/25	10u/50	47u/25	10u/50
R6866	0	22	0	0	0
R6869	110	100	110	110	110
R6877	12	12	10	12	10
R6886	0	22	0	0	0
R6889	110	100	110	110	110
R6897	12	12	10	12	10

	AWX1542	AWX1545	AWX1543	AWX1546	AWX1679
C7495	10p/50	10p/50	NM	10p/50	NM
R7493	10	10	100	10	100

N1/2 IR BUFFER_S ASSY(1/2) (AWX1542)

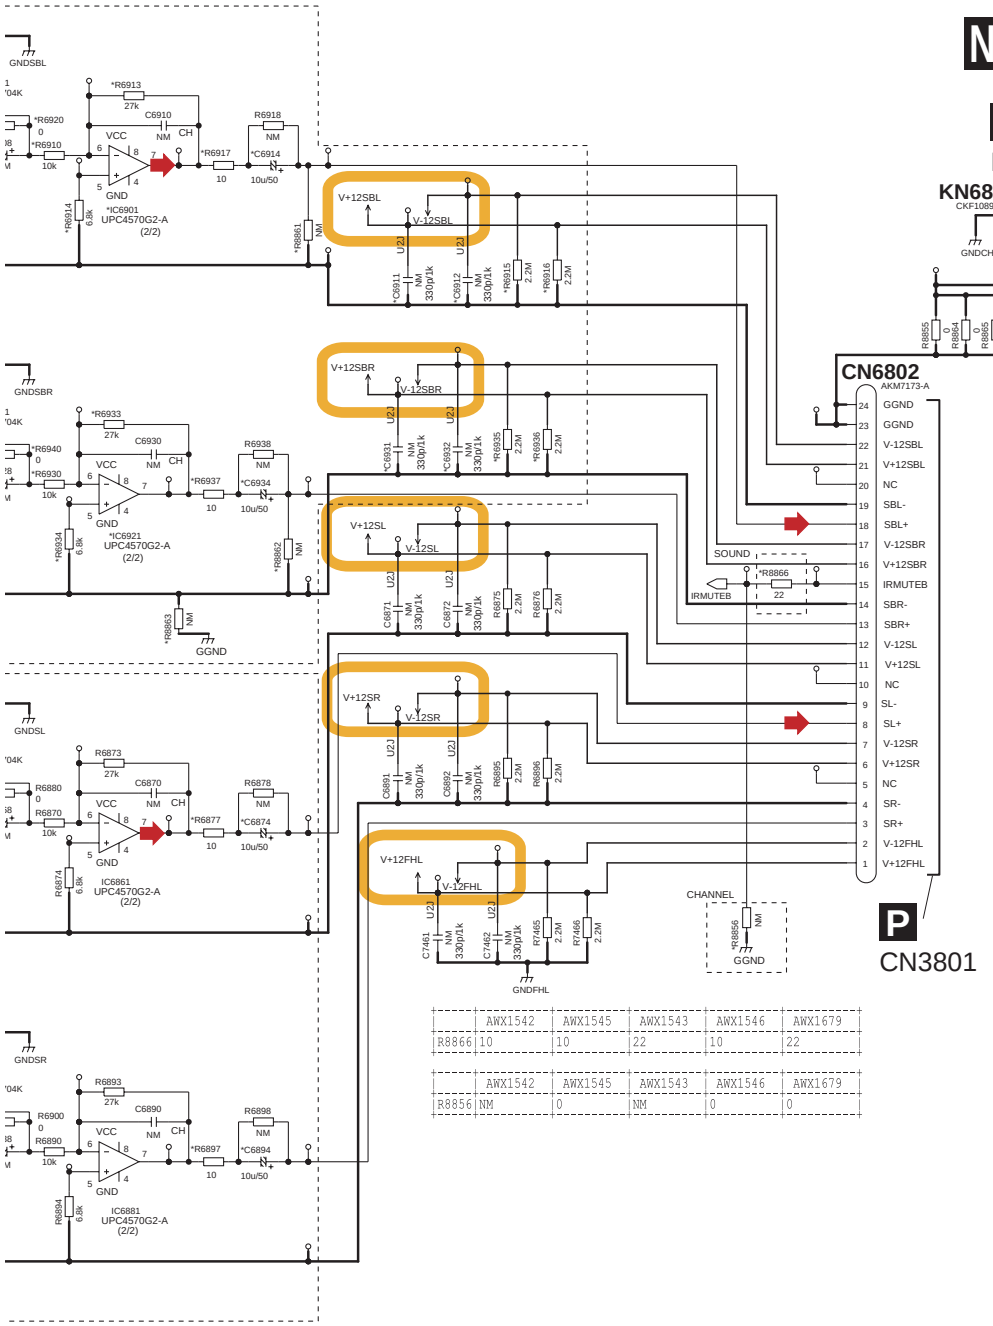

	AWX1542	AWX1545	AWX1543	AWX1546	AWX1679
R8866	10	10	22	10	22

	AWX1542	AWX1545	AWX1543	AWX1546	AWX1679
R8856	NM	0	NM	0	0

	AWX1542	AWX1545	AWX1543	AWX1546	AWX1679
C6901	0.01u/16	NM	0.01u/16	NM	NM
C6902	0.01u/16	NM	0.01u/16	NM	NM
C6907	22u/50	NM	10u/50	NM	NM
C6911	NM	NM	NM	NM	NM
C6912	NM	NM	NM	NM	NM
C6914	47u/25	NM	10u/50	NM	NM
C6921	0.01u/16	NM	0.01u/16	NM	NM
C6922	0.01u/16	NM	0.01u/16	NM	NM
C6927	22u/50	NM	10u/50	NM	NM
C6931	NM	NM	NM	NM	NM
C6932	NM	NM	NM	NM	NM
C6934	47u/25	NM	10u/50	NM	NM
R6901	8.2k	NM	8.2k	NM	NM
R6902	8.2k	NM	8.2k	NM	NM
R6903	1	NM	1	NM	NM
R6904	1	NM	1	NM	NM
R6905	470	NM	470	NM	NM
R6906	0	NM	0	NM	NM
R6907	8.2k	NM	8.2k	NM	NM
R6908	8.2k	NM	8.2k	NM	NM
R6909	110	NM	110	NM	NM
R6910	10k	NM	10k	NM	NM
R6911	15k	NM	15k	NM	NM
R6912	220k	NM	220k	NM	NM
R6913	27k	NM	27k	NM	NM
R6914	6.8k	NM	6.8k	NM	NM
R6915	2.2M	0	2.2M	0	0
R6916	2.2M	0	2.2M	0	0
R6917	12	NM	10	NM	NM
R6920	0	NM	0	NM	NM
R6921	8.2k	NM	8.2k	NM	NM
R6922	8.2k	NM	8.2k	NM	NM
R6923	1	NM	1	NM	NM
R6924	1	NM	1	NM	NM
R6925	470	NM	470	NM	NM
R6926	0	NM	0	NM	NM
R6927	8.2k	NM	8.2k	NM	NM
R6928	8.2k	NM	8.2k	NM	NM
R6929	110	NM	110	NM	NM
R6930	10k	NM	10k	NM	NM
R6931	15k	NM	15k	NM	NM
R6932	220k	NM	220k	NM	NM
R6933	27k	NM	27k	NM	NM
R6934	6.8k	NM	6.8k	NM	NM
R6935	2.2M	0	2.2M	0	0
R6936	2.2M	0	2.2M	0	0
R6937	12	NM	10	NM	NM
R6940	0	NM	0	NM	NM
R8857	NM	0	NM	0	0
R8858	NM	0	NM	0	0
R8859	NM	0	NM	0	0
R8860	NM	0	NM	0	0
R8861	NM	0	NM	0	0
R8862	NM	0	NM	0	0
R8863	NM	0	NM	0	0
IC6901	UPC4570G2-A	NM	UPC4570G2-A	NM	NM
IC6921	UPC4570G2-A	NM	UPC4570G2-A	NM	NM
Q6901	2SD2704K	NM	2SD2704K	NM	NM
Q6921	2SD2704K	NM	2SD2704K	NM	NM

: Audio Signal Route

1608 SIZE	2125 SIZE	3216 SIZE
RS1/16S*** RN1/16S***	RS1/10S*** RS1/8SQ*** 1/8W	RS1/8S*** RS1/4SA*** 1/4W
CCSR*** CKSR***	CCSQ*** CKSQ***	CCS*** CKS***

NOTE
1. RESISTORS
Unit: k-k Ω , M-M Ω or Ω unless otherwise noted.
Rated Power: 1/16w unless otherwise noted.
Toleranee: (J)5% unless otherwise noted.
2. CAPACITORS
Unit: p-pF or u-uF unless otherwise noted.
Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
YB:CKSRYB,CH:CCSRCH
3. NM: No Mount

10.34 IR BUFFER_S ASSY (2/2)

	AWX1542	AWX1545	AWX1543	AWX1546	AWX1679
C7457	22u/50	22u/50	10u/50	22u/50	10u/50
C7464	47u/25	47u/25	10u/50	47u/25	10u/50
C7477	22u/50	22u/50	10u/50	22u/50	10u/50
C7484	47u/25	47u/25	10u/50	47u/25	10u/50
R7456	0	22	0	0	0
R7459	110	100	110	110	110
R7467	12	12	10	12	10
R7476	0	22	0	0	0
R7479	110	100	110	110	110
R7487	12	12	10	12	10

	AWX1542	AWX1545	AWX1543	AWX1546	AWX1679
C6807	22u/50	22u/50	10u/50	22u/50	10u/50
C6814	47u/25	47u/25	10u/50	47u/25	10u/50
R6806	0	22	0	0	0
R6809	110	100	110	110	110
R6817	12	12	10	12	10

	AWX1542	AWX1545	AWX1543	AWX1546	AWX1679
C6827	22u/50	22u/50	10u/50	22u/50	10u/50
C6834	47u/25	47u/25	10u/50	47u/25	10u/50
C6847	22u/50	22u/50	10u/50	22u/50	10u/50
C6854	47u/25	47u/25	10u/50	47u/25	10u/50
R6826	0	22	0	0	0
R6829	110	100	110	110	110
R6837	12	12	10	12	10
R6846	0	22	0	0	0
R6849	110	100	110	110	110
R6857	12	12	10	12	10

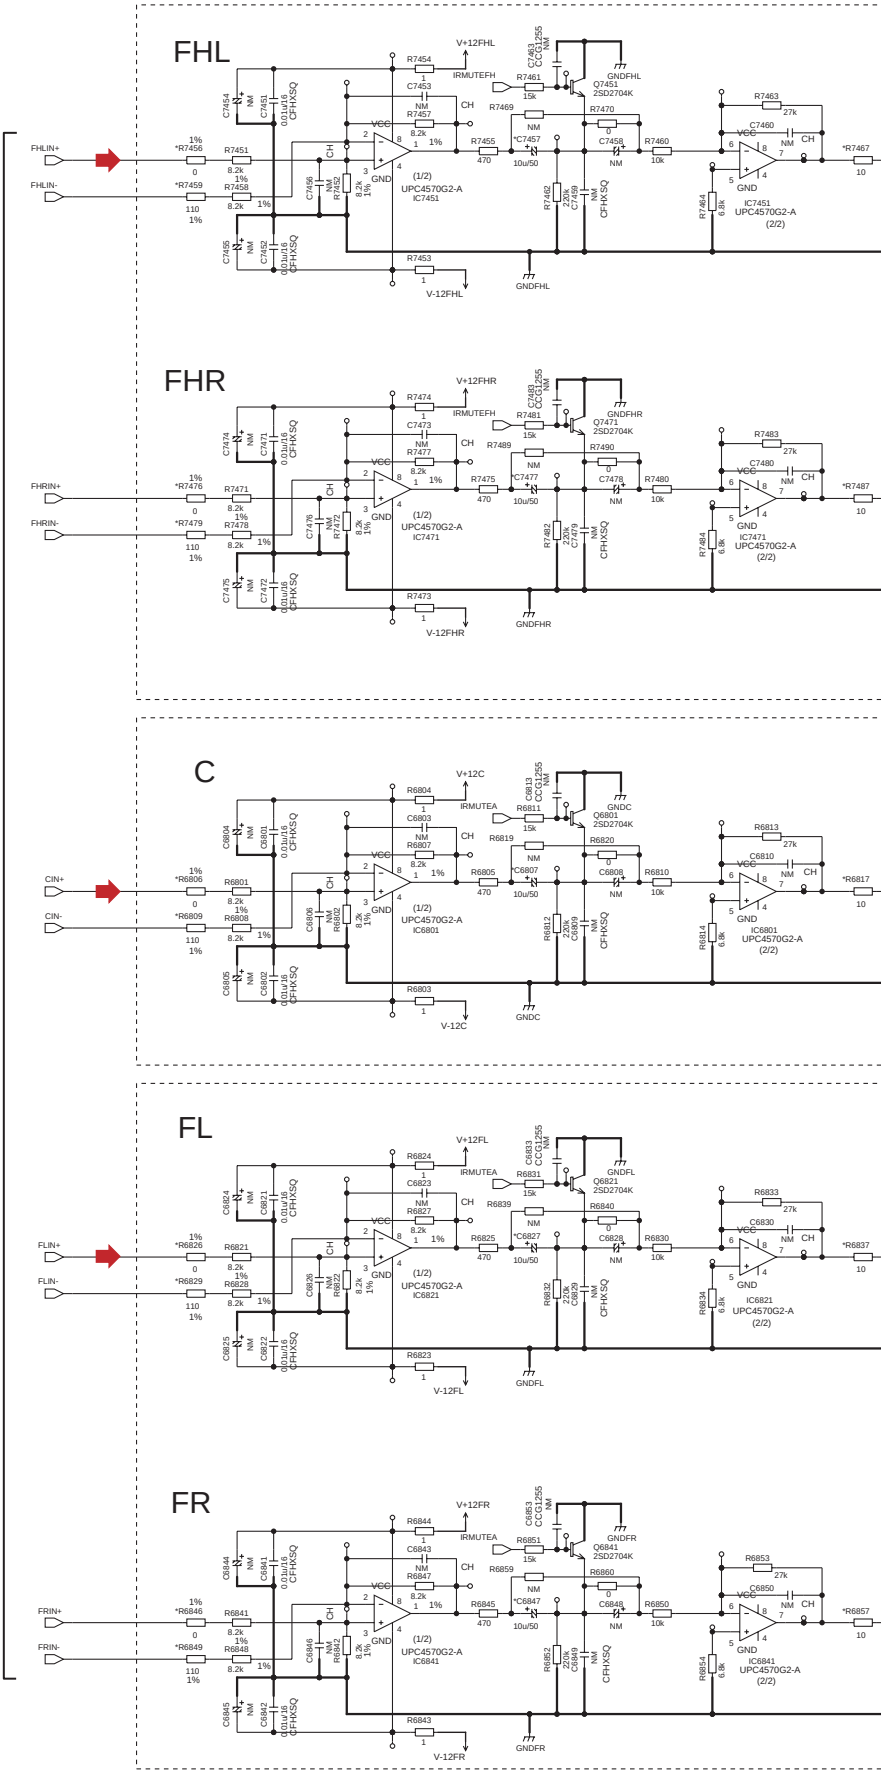

N 1/2

N 2/2

N 2/2 IR BUFFER_S ASSY(2/2) (AWX1542)

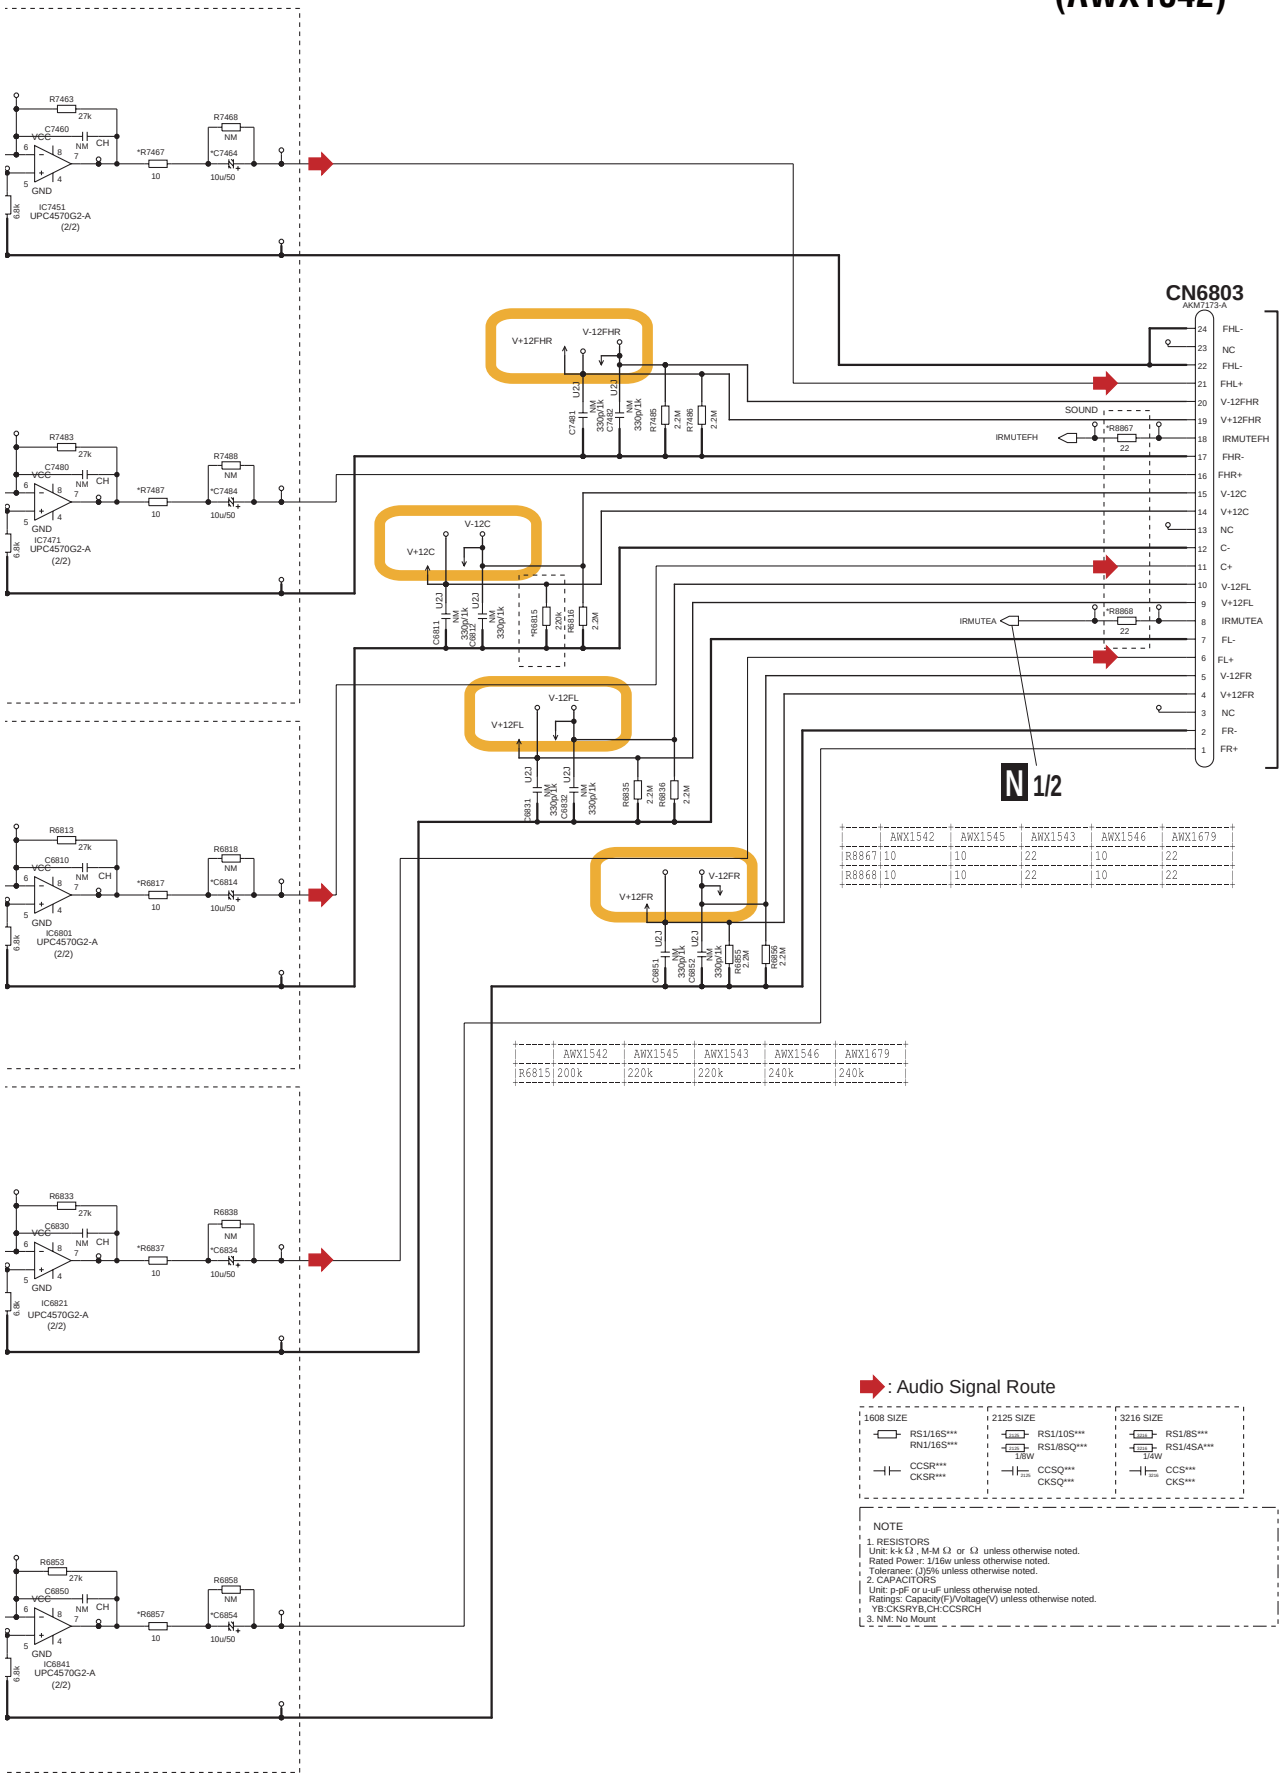

	AWX1542	AWX1545	AWX1543	AWX1546	AWX1679
R8867	10	10	22	10	22
R8868	10	10	22	10	22

	AWX1542	AWX1545	AWX1543	AWX1546	AWX1679
R6815	200k	220k	220k	240k	240k

: Audio Signal Route

1608 SIZE	2125 SIZE	3216 SIZE
RS1/16S*** RN1/16S***	RS1/10S*** RS1/8SQ*** 1/8W	RS1/8S*** RS1/4SA*** 1/4W
CCSR*** CKSR***	CCSQ*** CKSQ***	CCS*** CKS***

NOTE
1. RESISTORS
Unit: k-k Ω , M-M Ω or Ω unless otherwise noted.
Rated Power: 1/16w unless otherwise noted.
Tolerance: (J)5% unless otherwise noted.
2. CAPACITORS
Unit: p-pF or u-uF unless otherwise noted.
Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
YB:CKSRYB,CH:CCSRCH
3. NM: No Mount

10.35 BUFFER GND_S ASSY and IR INTERFACE_S ASSY

O BUFFER GND_S ASSY (AWX1544)

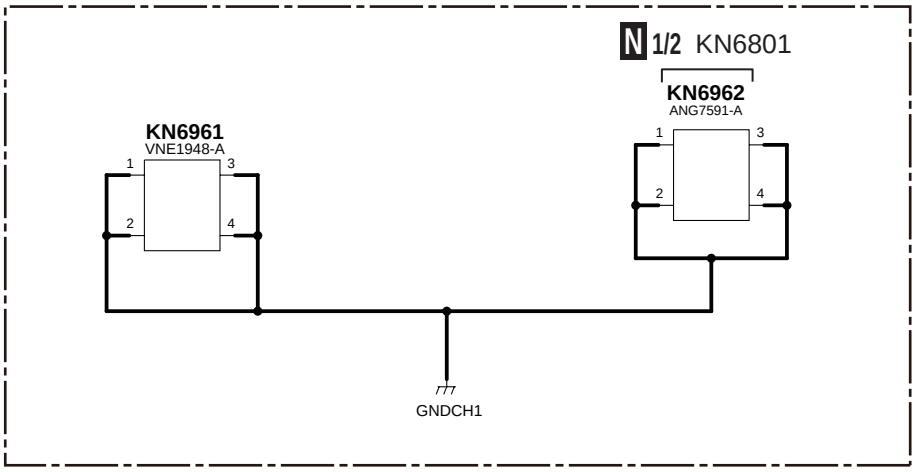

N 1/2
CN680

N 2/2
CN680

: Audio Signal Route

NOTE
1. RESISTORS
Unit: k-k Ω , M-M Ω or Ω unless otherwise noted.
Rated Power: 1/16w unless otherwise noted.
Toleranee: (J)5% unless otherwise noted.
2. CAPACITORS
Unit: p-pF or u-uF unless otherwise noted.
Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
YB:CKSRYB,CH:CCSRCH
3. NM: No Mount

1608 SIZE	2125 SIZE	3216 SIZE
RS1/16S*** RN1/16S***	RS1/10S***	RS1/8S***
	RS1/8SQ*** 1/8W	RS1/4SA*** 1/4W
CCSR*** CKSR***	CCSQ*** CKSQ***	CCS*** CKS***

P IR INTERFACE_S ASSY (AWX1637)

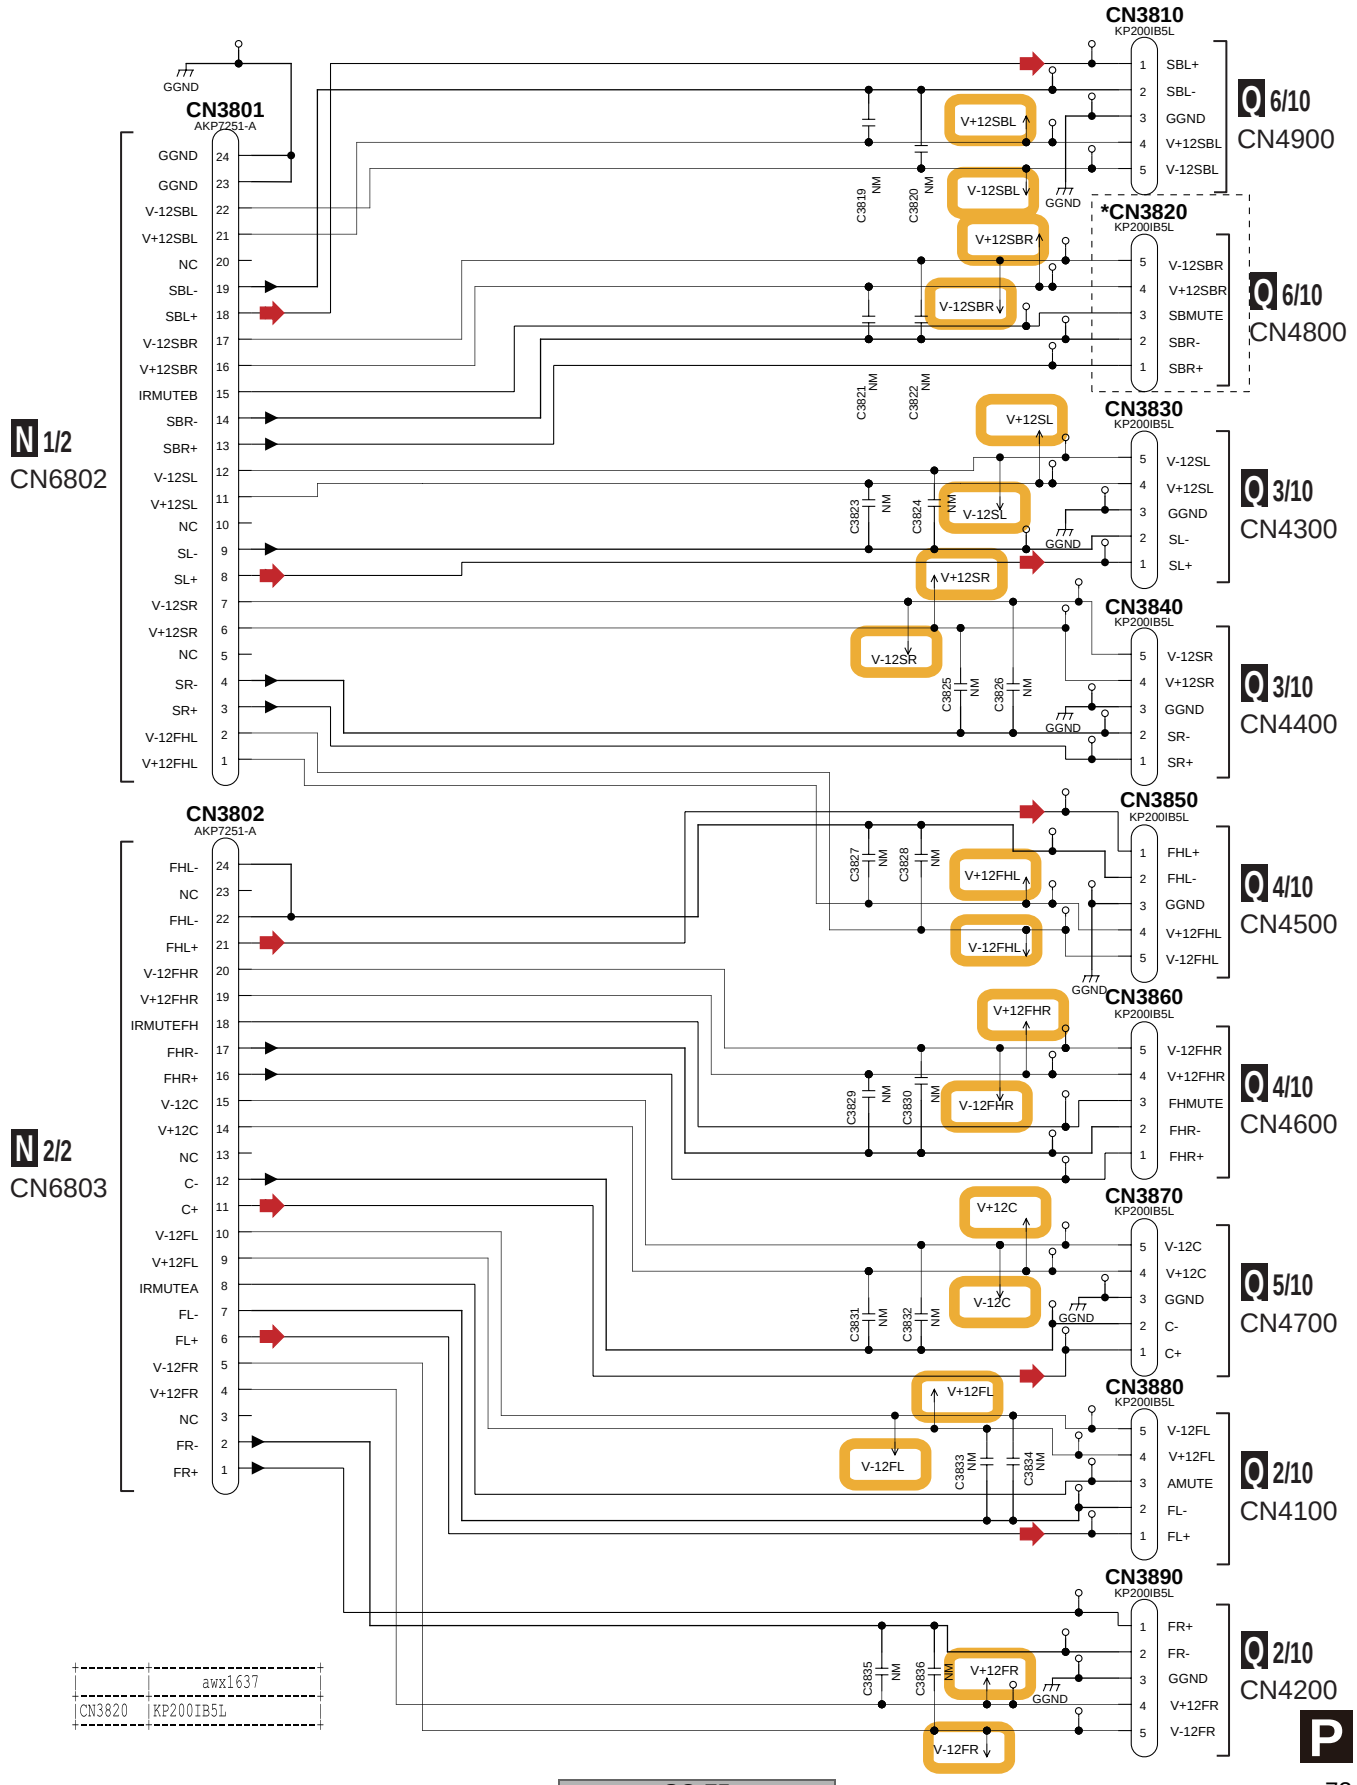

10.36 D-AMP_S ASSY (1/10)

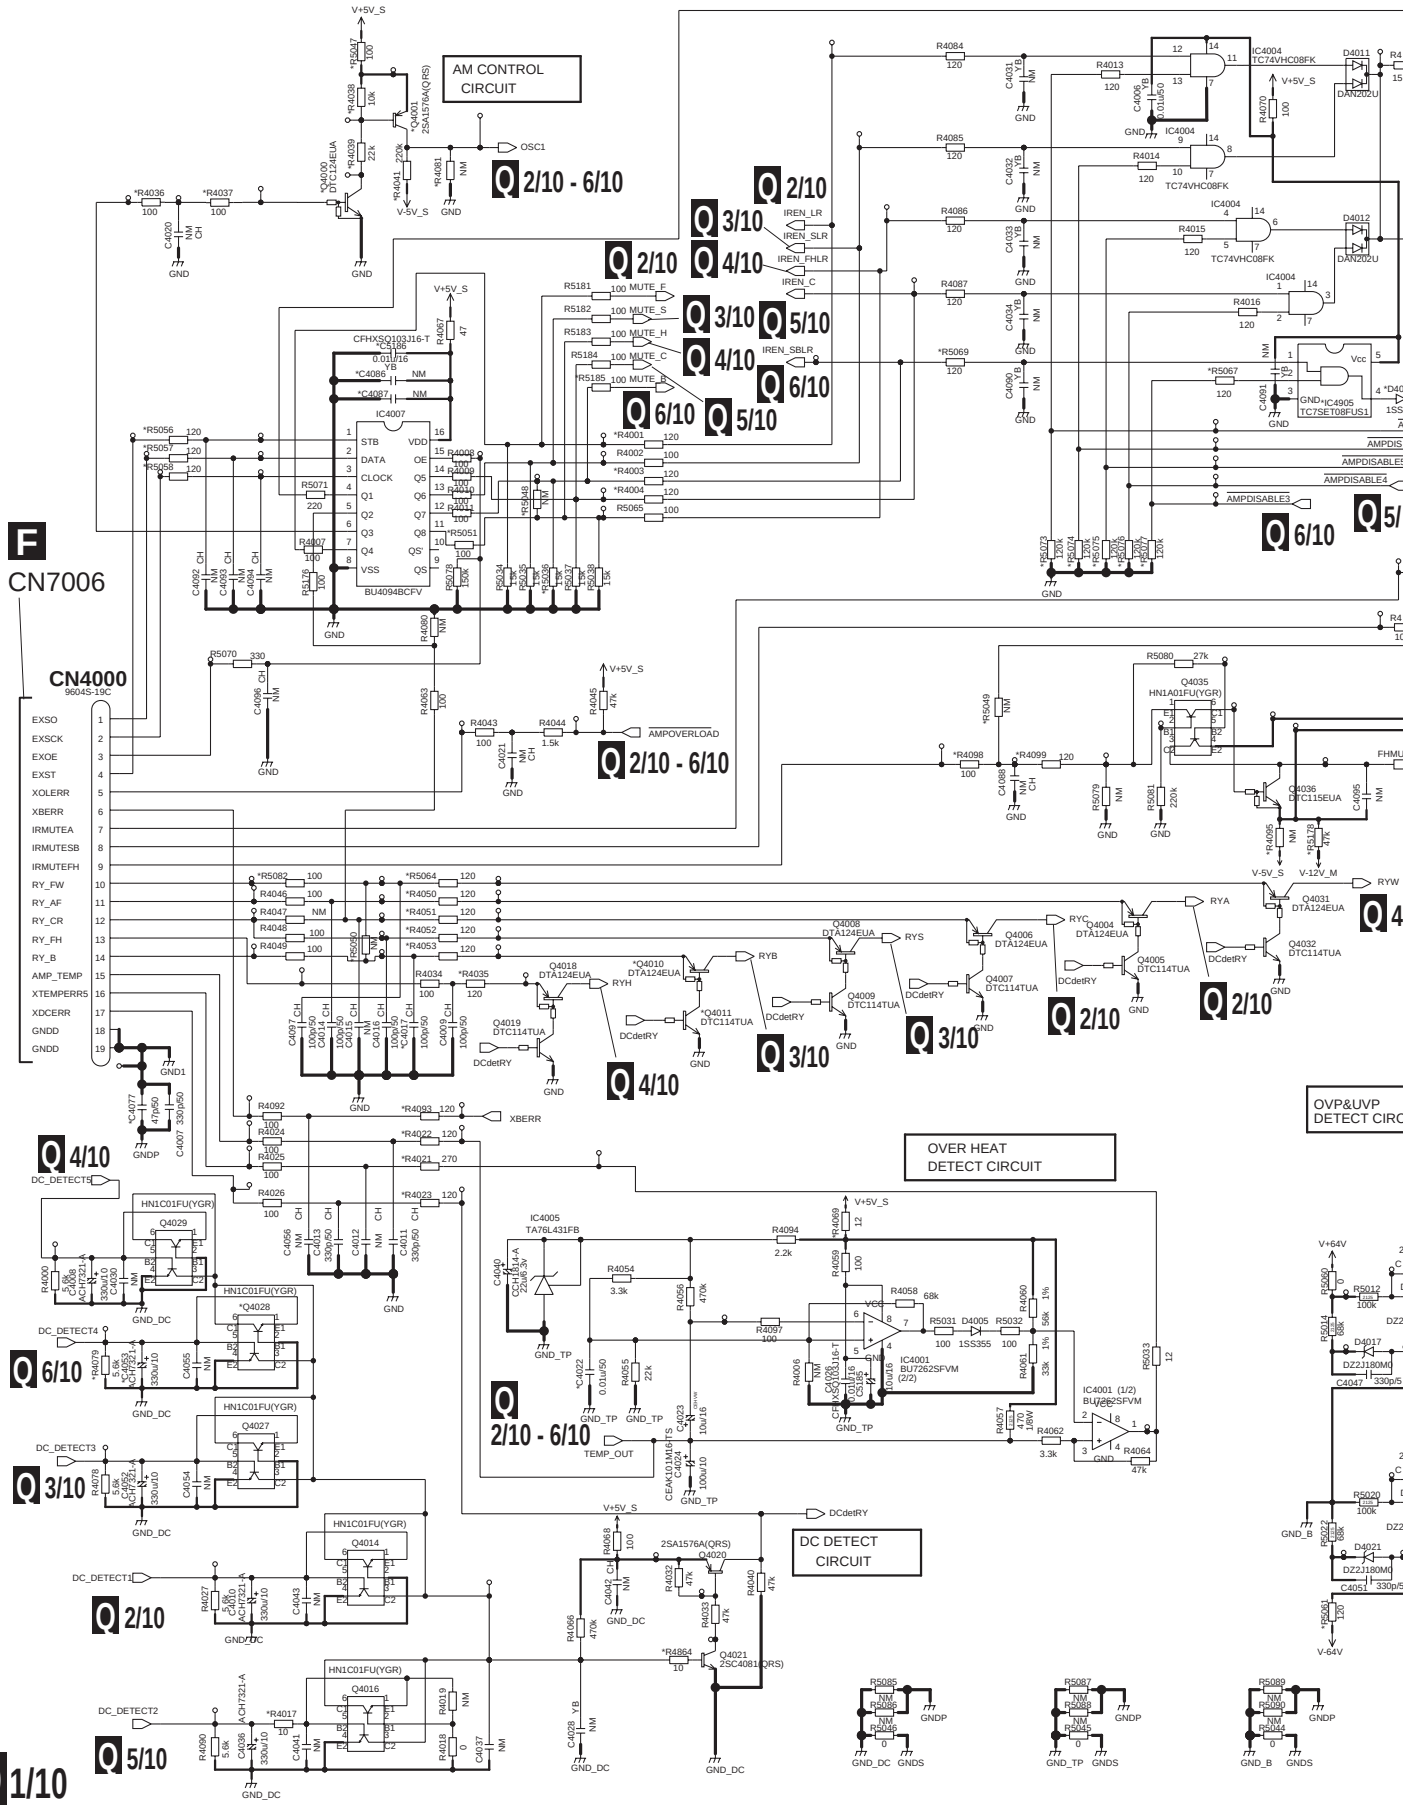

SC-75

The Δ mark found on some component parts should be replaced with same parts (safety regulation authorized) of identical designation.

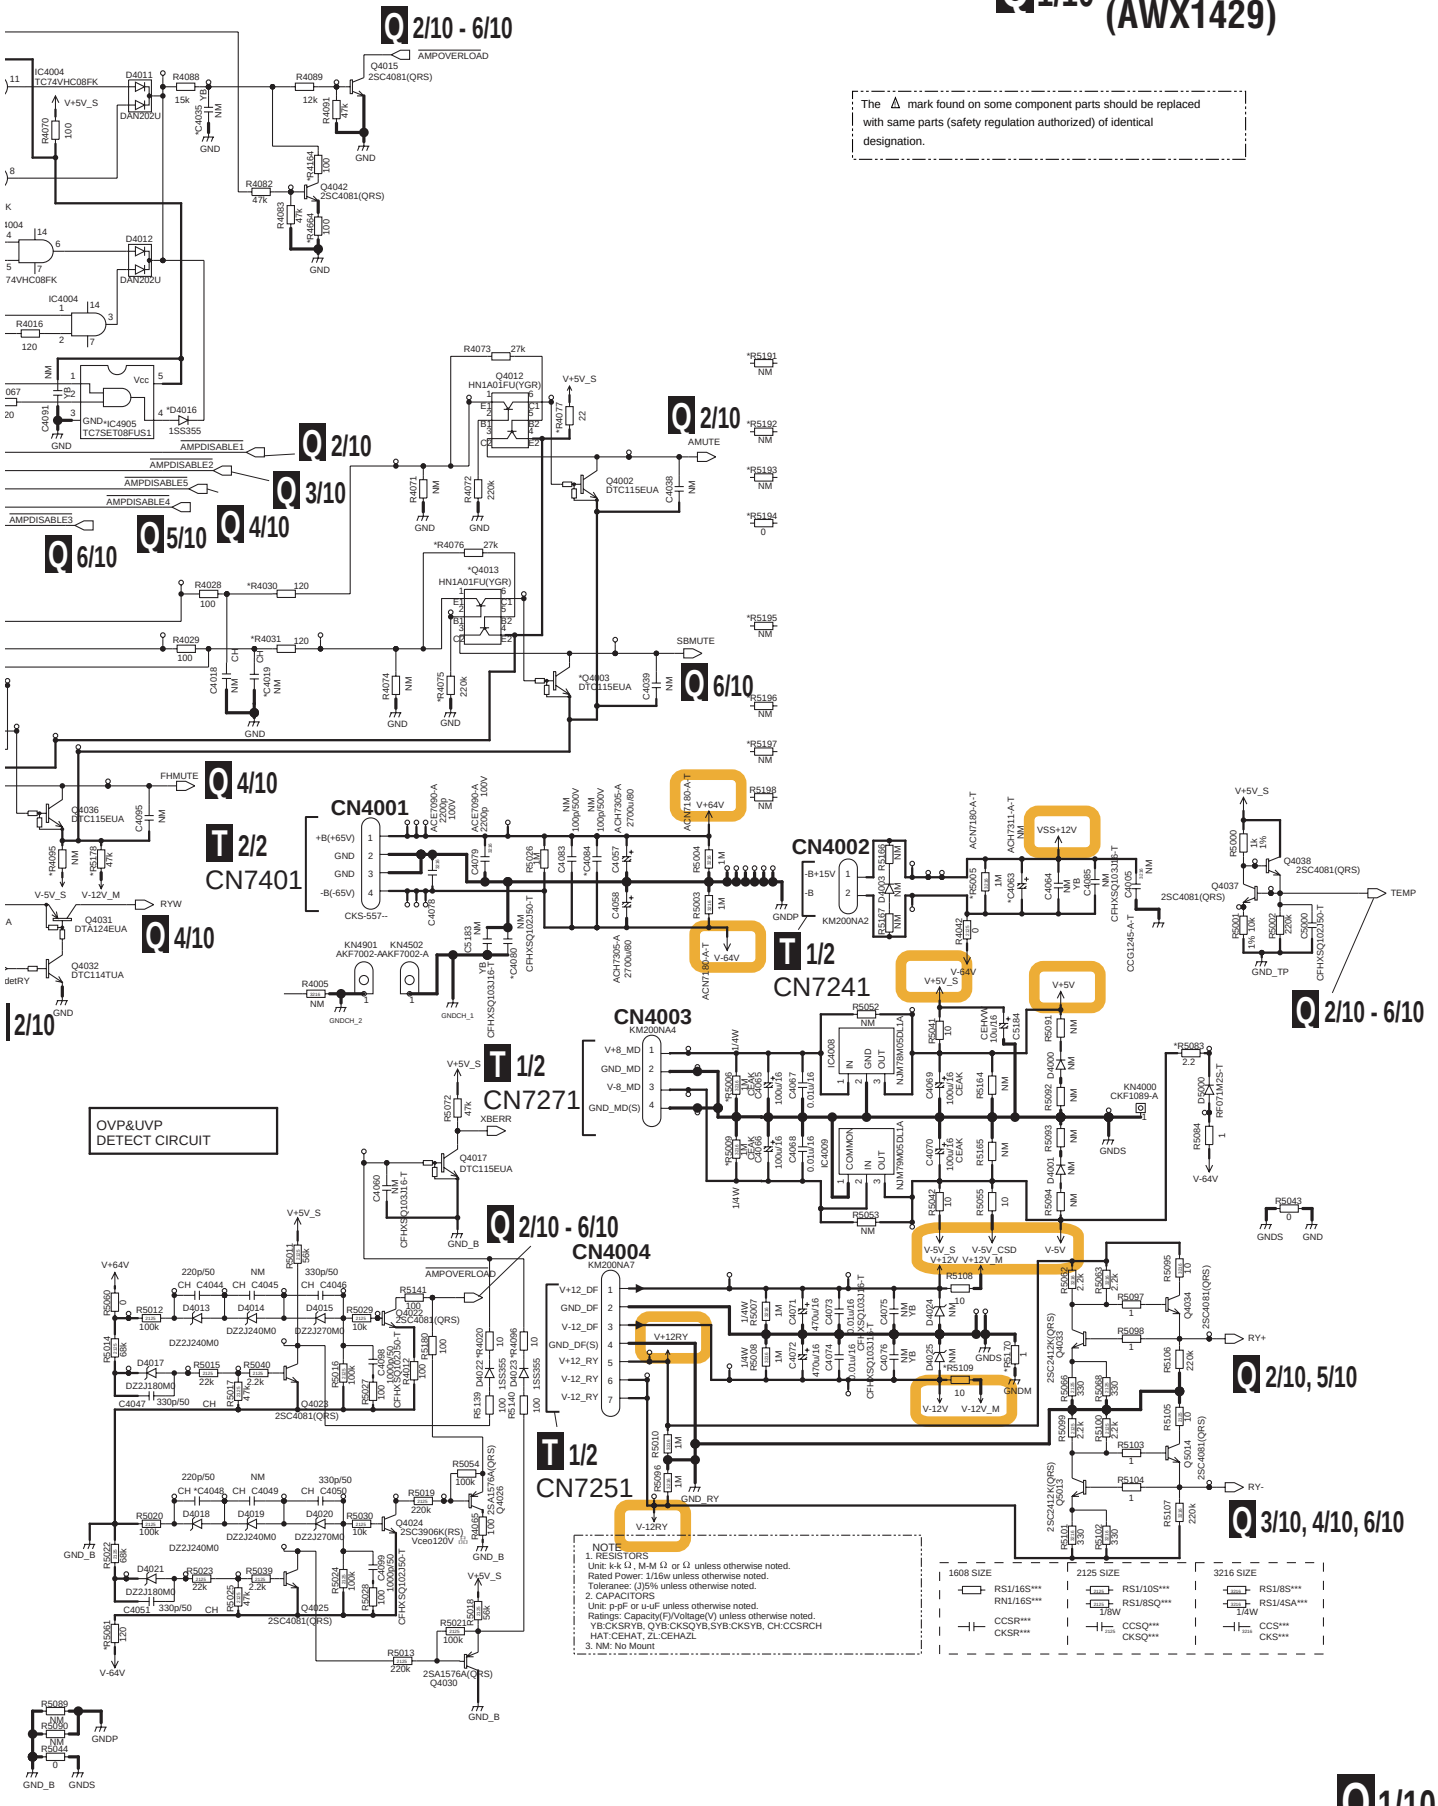

10.37 D-AMP_S ASSY (2/10)

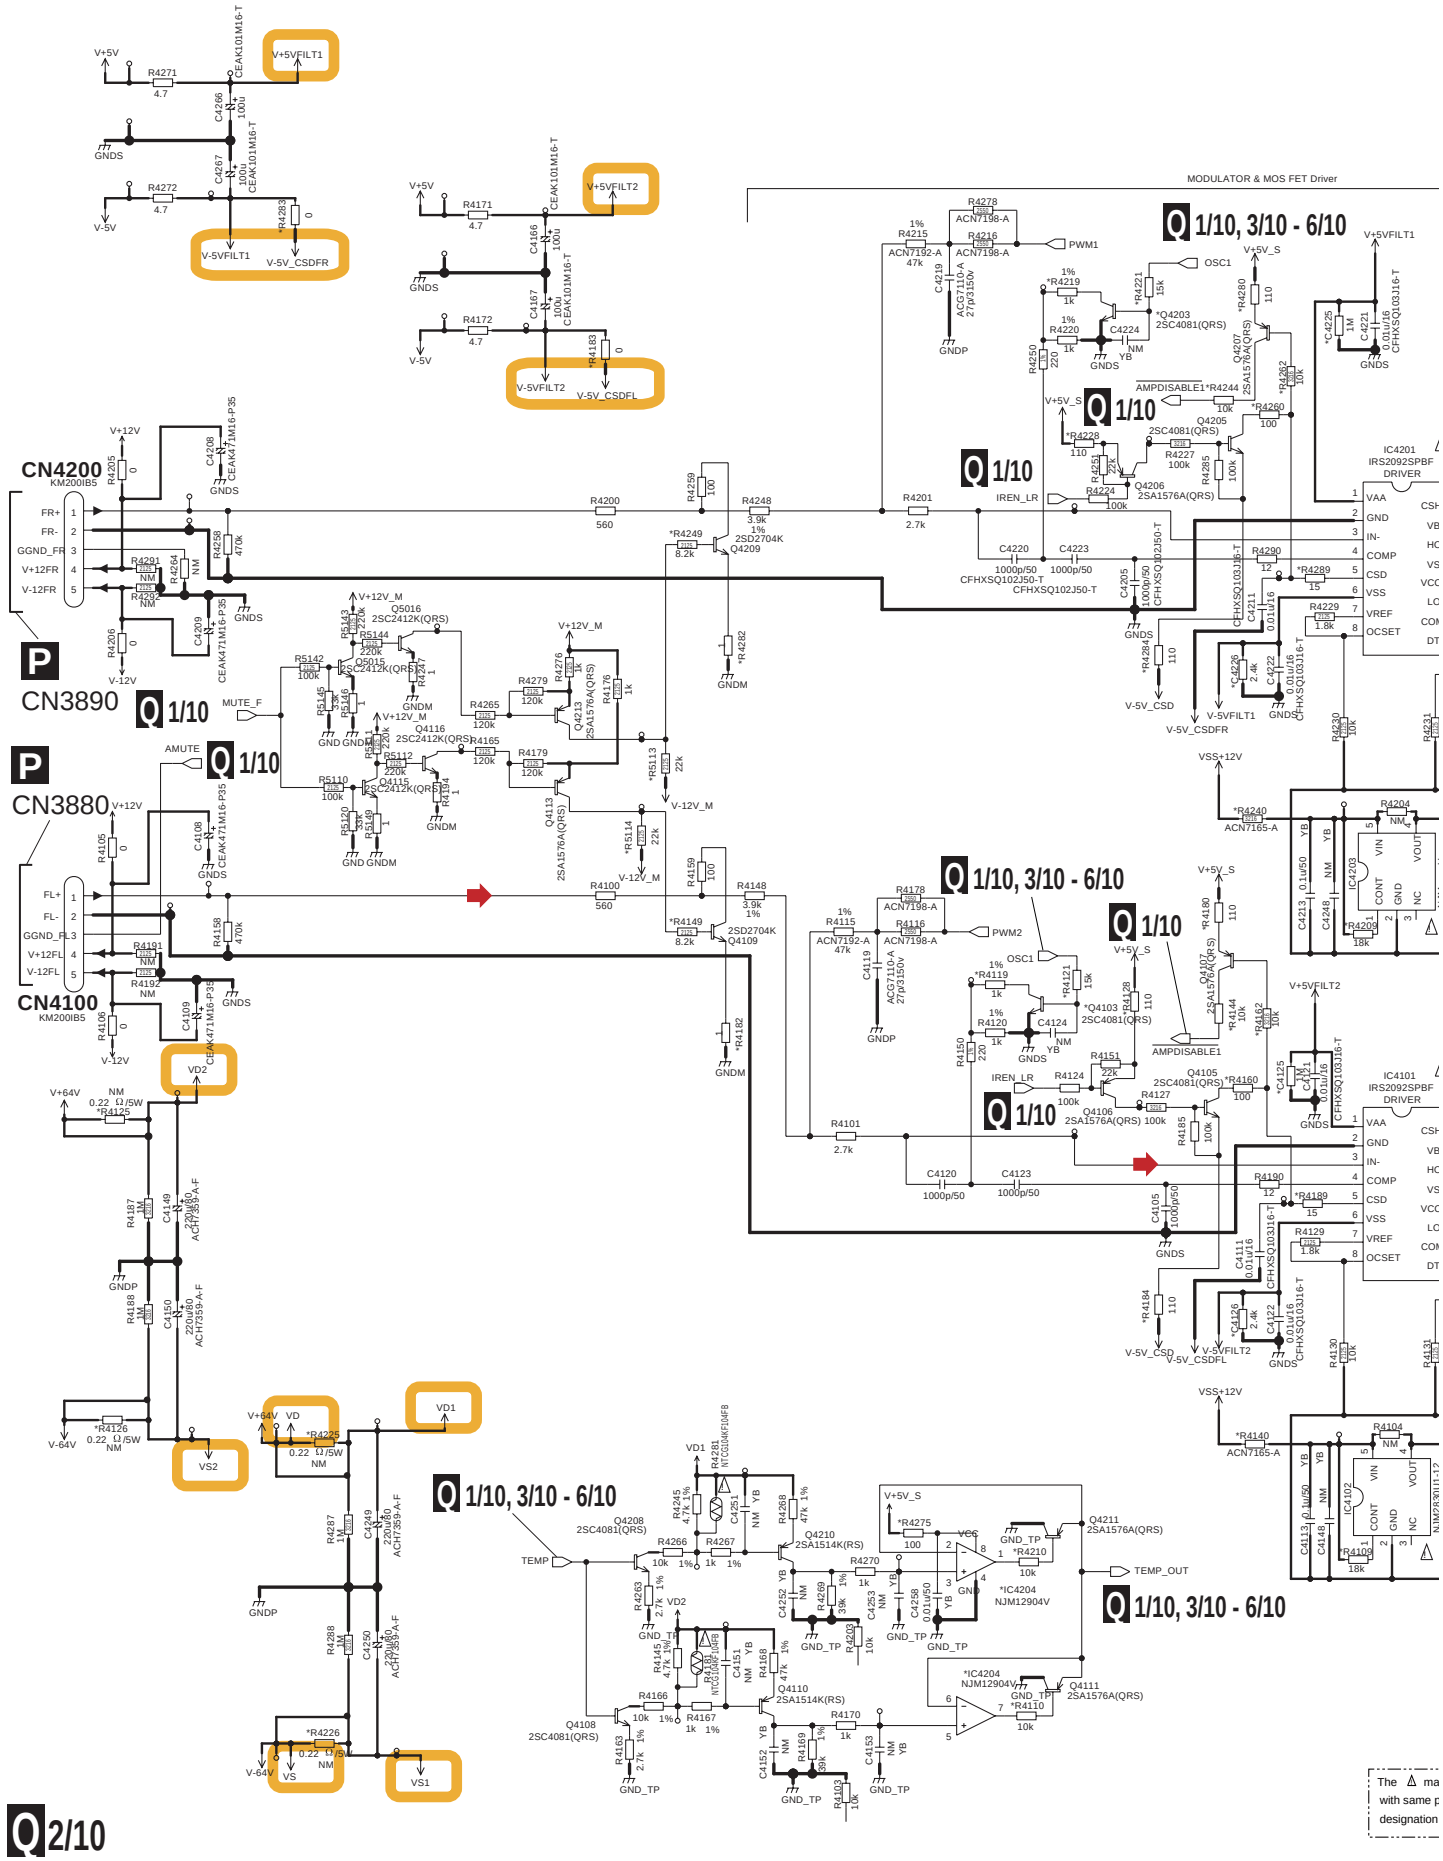

Q 2/10 D-AMP_S ASSY(2/10) (AWX1429)

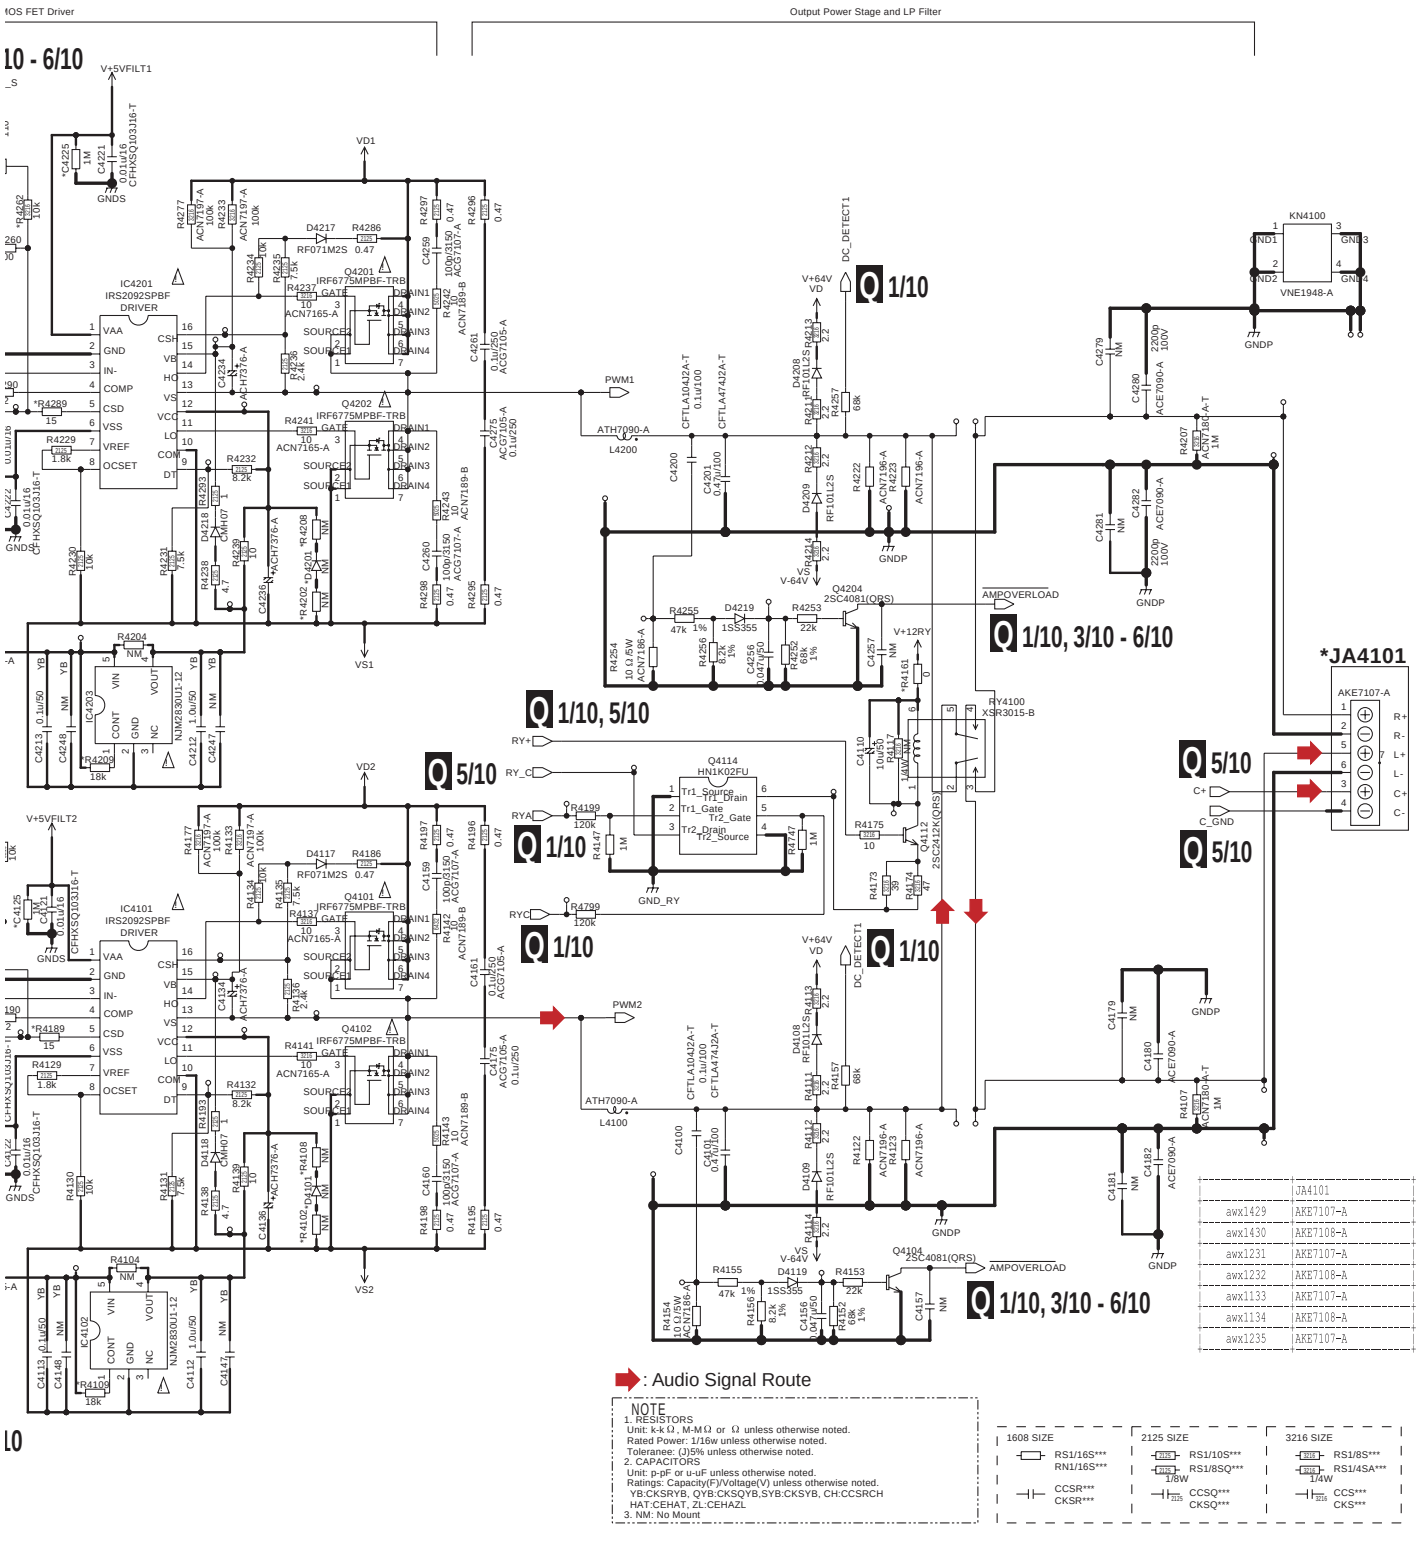

	JA4101
awx1429	AKE7107-A
awx1430	AKE7108-A
awx1231	AKE7107-A
awx1232	AKE7108-A
awx1133	AKE7107-A
awx1134	AKE7108-A
awx1235	AKE7107-A

The ⚠ mark found on some component parts should be replaced with same parts (safety regulation authorized) of identical designation.

10.38 D-AMP_S ASSY (3/10)

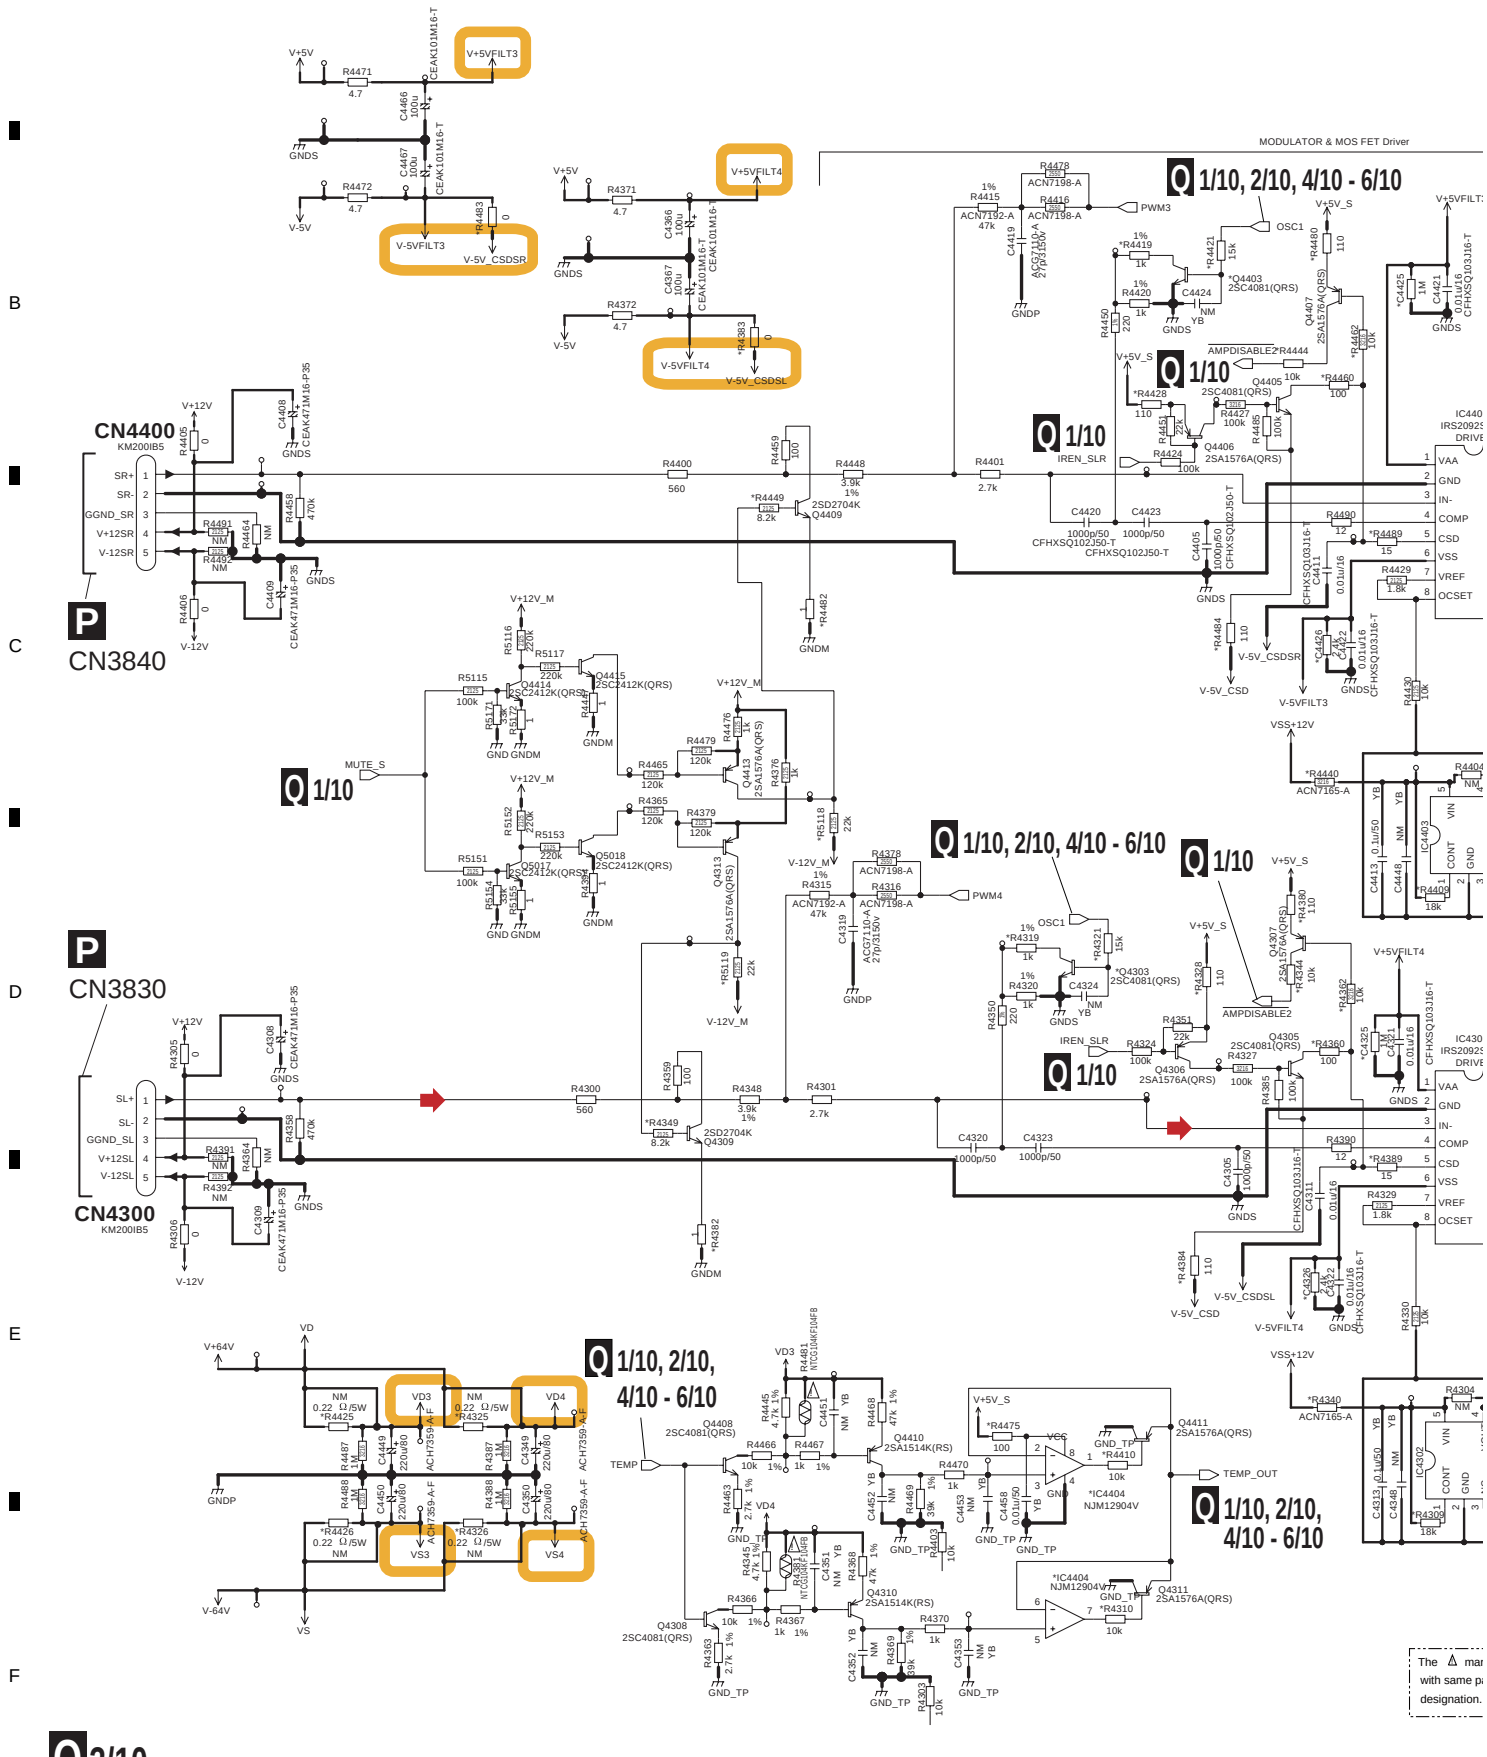

Q3/10 D-AMP_S ASSY(3/10) (AWX1429)

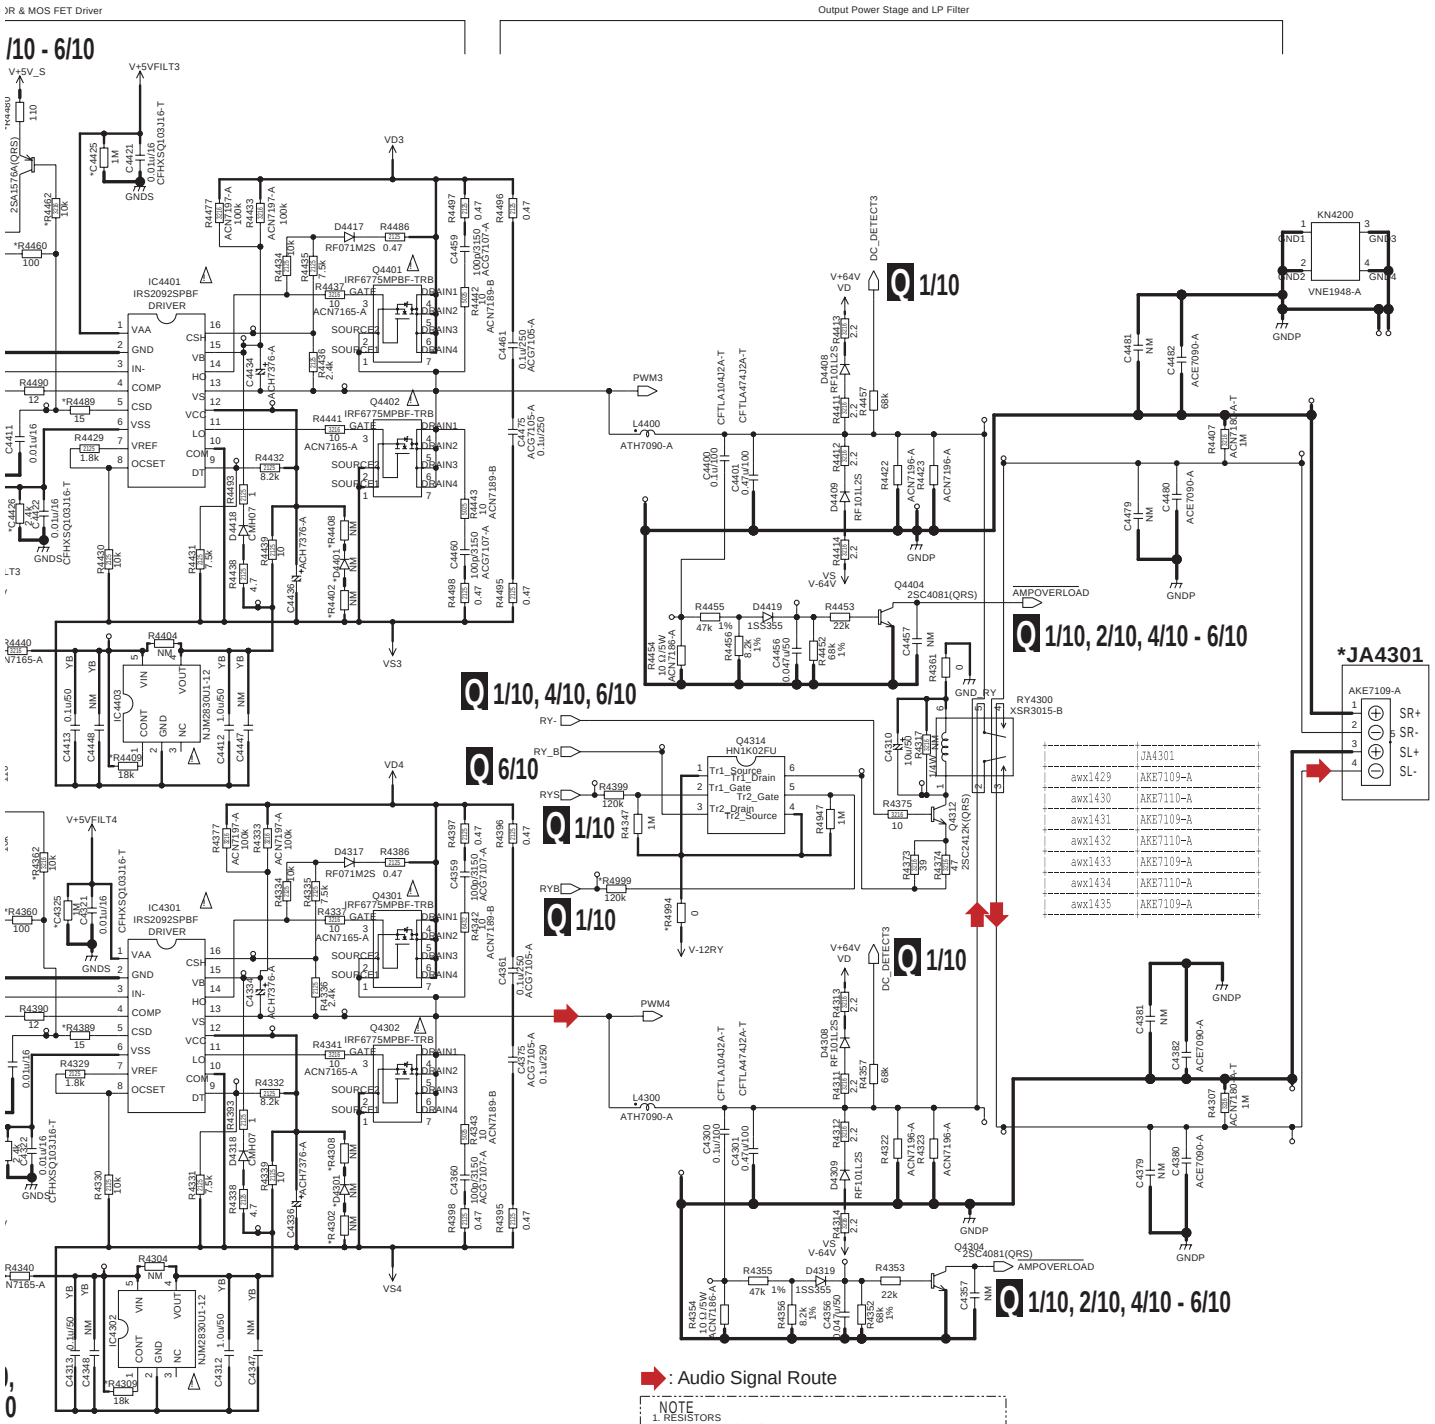

NOTE
1. RESISTORS
Unit: k-k Ω , M-M Ω or Ω unless otherwise noted.
Rated Power: 1/16w unless otherwise noted.
Tolerance: (J)5% unless otherwise noted.
2. CAPACITORS
Unit: p-pF or u-uF unless otherwise noted.
Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
YB:CKSRYB, QYB:CKSQYB,SYB:CKSYB, CH:CCSRCH
HAT:CEHAT, ZL:CEHAZL
3. NM: No Mount

1608 SIZE	2125 SIZE	3216 SIZE
RS1/16S*** RN1/16S***	RS1/10S*** RS1/8SQ*** 1/8W	RS1/8S*** RS1/4SA*** 1/4W
CCSR*** CKSR***	CCSQ*** CKSQ***	CCS*** CKS***

The △ mark found on some component parts should be replaced with same parts (safety regulation authorized) of identical designation.

10.39 D-AMP_S ASSY (4/10)

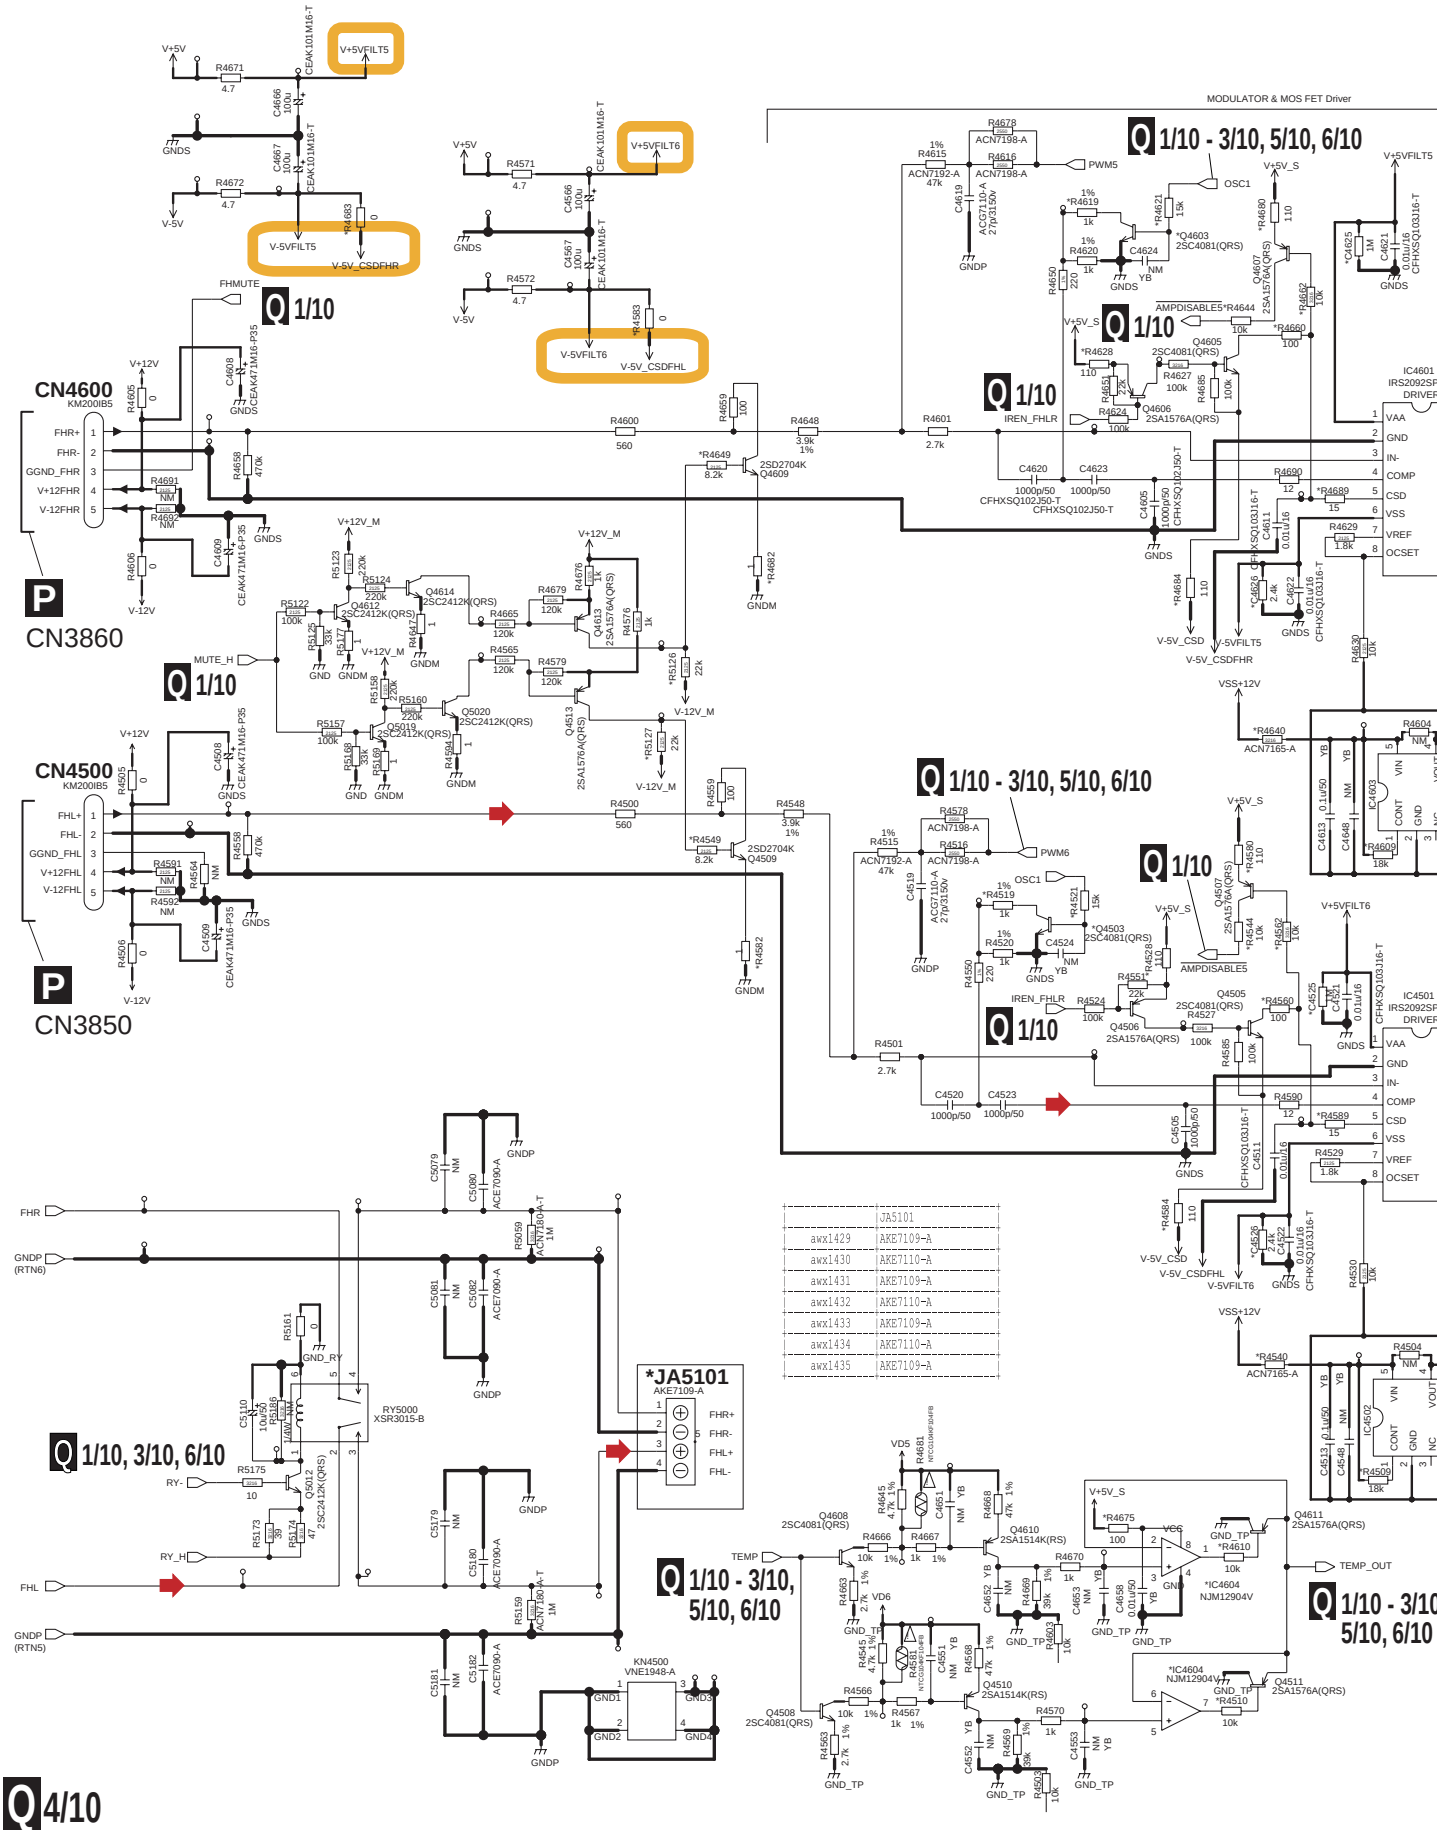

Q 4/10 D-AMP_S ASSY(4/10) (AWX1429)

R & MOS FET Driver

Output Power Stage and LP Filter

Q 5/10, 6/10

The △ mark found on some component parts should be replaced with same parts (safety regulation authorized) of identical designation.

Q 1/10

Q 1/10 - 3/10, 5/10, 6/10

Q 1/10, 3/10, 6/10

Q 1/10

Q 1/10

Q 1/10 - 3/10, 5/10, 6/10

	JA4501
awx1429	AKE7109-A
awx1430	AKE7110-A
awx1431	AKE7109-A
awx1432	AKE7110-A
awx1433	AKE7109-A
awx1434	AKE7110-A
awx1435	AKE7109-A

: Audio Signal Route

NOTE
1. RESISTORS
Unit: k-k Ω , M-M Ω or Ω unless otherwise noted.
Rated Power: 1/16w unless otherwise noted.
Tolerance: (J)5% unless otherwise noted.
2. CAPACITORS
Unit: p-pF or u-uF unless otherwise noted.
Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
YB:CKSRYB, QYB:CKSQYB,SYB:CKSYB, CH:CCSRCH
HAT:CEHAT, ZL:CEHAZL
3. NM: No Mount

1608 SIZE	2125 SIZE	3216 SIZE
RS1/16S*** RN1/16S***	RS1/10S*** RS1/8SQ*** 1/8W	RS1/8S*** RS1/4SA*** 1/4W
CCSR*** CKSR***	CCSQ*** CKSQ***	CCS*** CKS***

10.40 D-AMP_S ASSY (5/10)

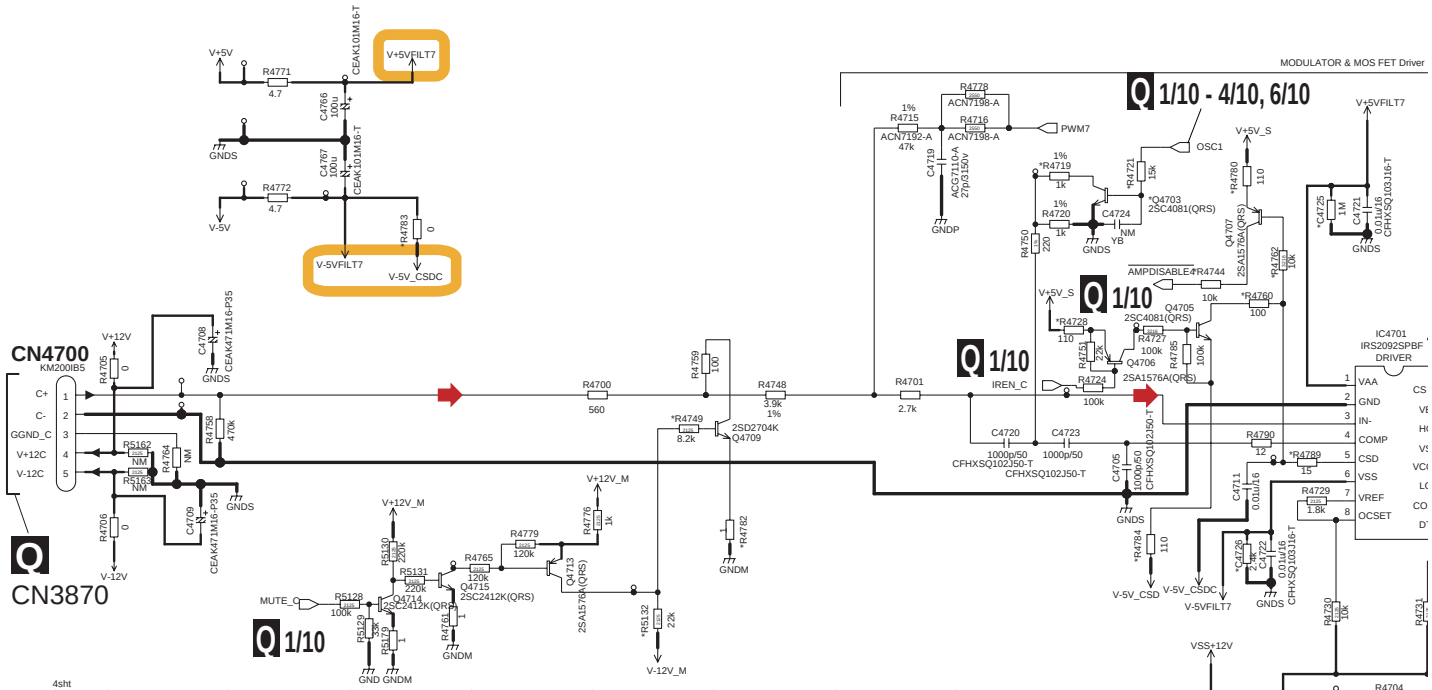

4sht

	awx1429	awx1430	awx1431	awx1432	awx1433	awx1434	awx1435
C4525	1M	1M	1M	1M	NM	1M	1M
C4526	2.4k	2.4k	2.4k	2.4k	NM	1.8k	1.8k
C4625	1M	1M	1M	1M	NM	1M	1M
C4626	2.4k	2.4k	2.4k	2.4k	NM	1.8k	1.8k
R4502	NM	1	1	NM	NM	1	1
R4508	NM	1	1	NM	NM	1	1
R4509	18k	22k	22k	22k	18k	22k	22k
R4510	10k	9.1k	9.1k	9.1k	10k	9.1k	9.1k
R4519	1k	1k	NM	1k	1k	1k	NM
R4521	15k	15k	NM	15k	15k	15k	NM
R4525	NM	ACN7094-A	ACN7094-A	NM	NM	ACN7094-A	ACN7094-A
R4526	NM	ACN7094-A	ACN7094-A	NM	NM	ACN7094-A	ACN7094-A
R4528	110	120	120	120	110	120	120
R4540	ACN7165-A	47	47	47	ACN7165-A	47	47
R4544	10k	12k	12k	12k	10k	12k	12k
R4549	8.2k	15k	15k	15k	8.2k	15k	15k
R4560	100	120	120	120	100	120	120
R4562	10k	12k	12k	12k	10k	12k	12k
R4580	110	150	150	150	110	150	150
R4582	1	10	10	10	1	10	10
R4583	0	10k	10k	10k	0	10k	10k
R4584	110	150	150	150	110	150	150
R4589	15	100	100	100	15	100	100
R4602	NM	1	1	NM	NM	1	1
R4608	NM	1	1	NM	NM	1	1
R4609	18k	22k	22k	22k	18k	22k	22k
R4610	10k	9.1k	9.1k	9.1k	10k	9.1k	9.1k
R4619	1k	1k	NM	1k	1k	1k	NM
R4621	15k	15k	NM	15k	15k	15k	NM
R4625	NM	ACN7094-A	ACN7094-A	NM	NM	ACN7094-A	ACN7094-A
R4626	NM	ACN7094-A	ACN7094-A	NM	NM	ACN7094-A	ACN7094-A
R4628	110	120	120	120	110	120	120
R4640	ACN7165-A	47	47	47	ACN7165-A	47	47
R4644	10k	12k	12k	12k	10k	12k	12k
R4649	8.2k	15k	15k	15k	8.2k	15k	15k
R4660	100	120	120	120	100	120	120
R4662	10k	12k	12k	12k	10k	12k	12k
R4675	100	120	120	120	100	120	120
R4680	110	150	150	150	110	150	150
R4682	1	10	10	10	1	10	10
R4683	0	10k	10k	10k	0	10k	10k
R4684	110	150	150	150	110	150	150
R4689	15	100	100	100	15	100	100
R5126	22k	47k	47k	47k	22k	47k	47k
R5127	22k	47k	47k	47k	22k	47k	47k
R5190	0	2.2	2.2	2.2	0	2.2	2.2
IC4604	NJM12904V	NJM2732V	NJM2732V	NJM2732V	NJM12904V	NJM2732V	NJM2732V
D4501	NM	1SS355	1SS355	NM	NM	1SS355	1SS355
D4601	NM	1SS355	1SS355	NM	NM	1SS355	1SS355
JA4501	AKE7109-A	AKE7110-A	AKE7109-A	AKE7110-A	AKE7109-A	AKE7110-A	AKE7109-A
JA5101	AKE7109-A	AKE7110-A	AKE7109-A	AKE7110-A	AKE7109-A	AKE7110-A	AKE7109-A
Q4503	2SC4081(QRS)	2SC4081(QRS)	NM	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	NM
Q4603	2SC4081(QRS)	2SC4081(QRS)	NM	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	NM

The △ mark found on some componen
with same parts (safety regulation author
designation.

Q 5/10

Q5/10 D-AMP_S ASSY(5/10) (AWX1429)

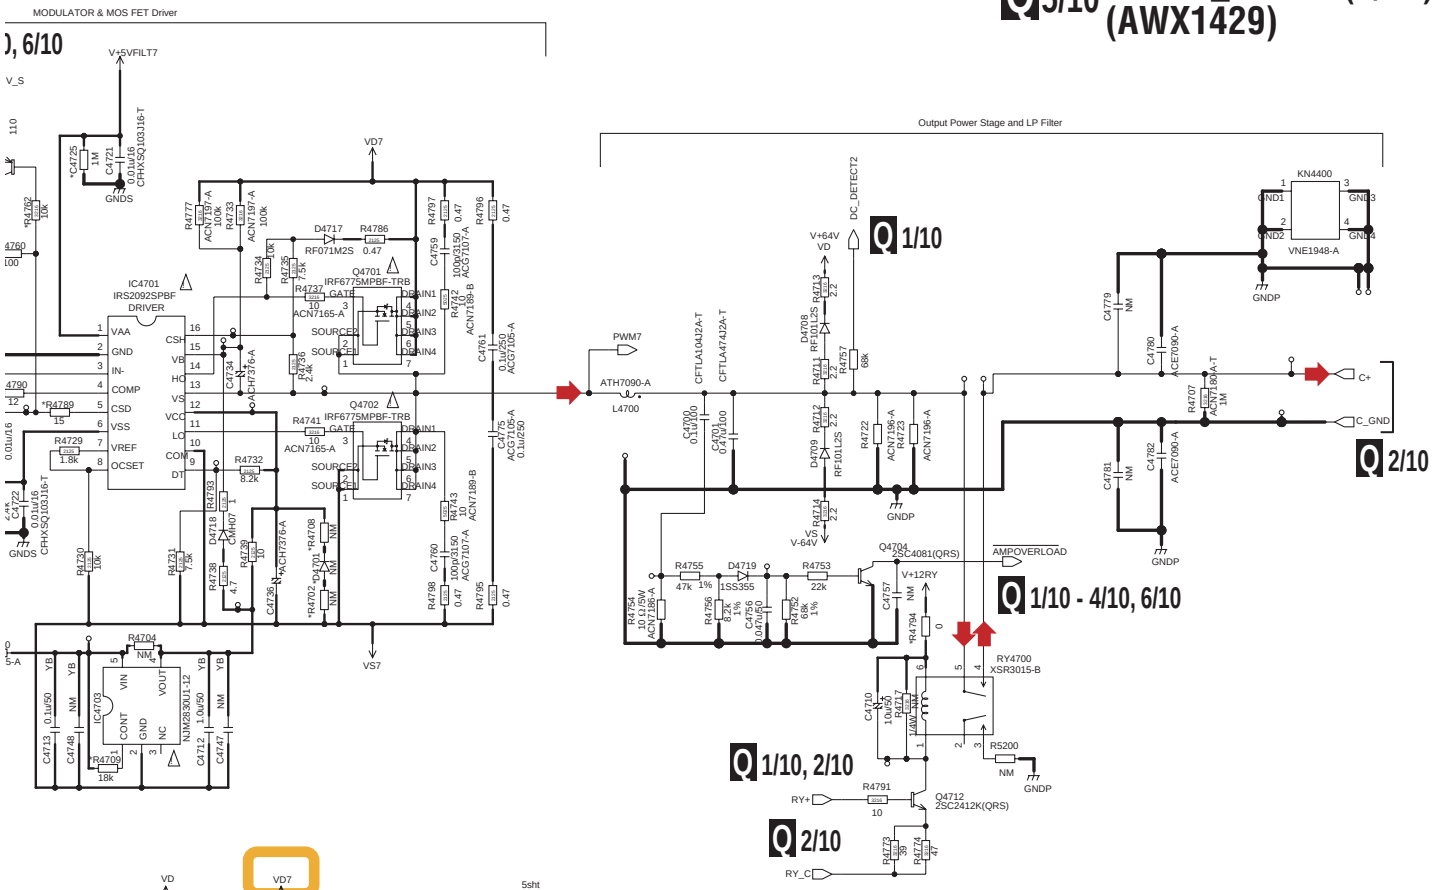

5sht	awx1429	awx1430	awx1431	awx1432	awx1433	awx1434	awx1435
C4725	1M	1M	1M	1M	NM	1M	1M
C4726	2.4k	2.4k	2.4k	2.4k	NM	1.8k	1.8k
R4702	NM	1	1	NM	NM	1	1
R4708	NM	1	1	NM	NM	1	1
R4709	18k	22k	22k	22k	18k	22k	22k
R4710	10k	9.1k	9.1k	9.1k	10k	9.1k	9.1k
R4719	1k	1k	NM	1k	1k	1k	NM
R4721	15k	15k	NM	15k	15k	15k	NM
R4725	NM	ACN7094-A	ACN7094-A	NM	NM	ACN7094-A	ACN7094-A
R4726	NM	ACN7094-A	ACN7094-A	NM	NM	ACN7094-A	ACN7094-A
R4728	110	120	120	120	110	120	120
R4740	ACN7165-A	47	47	47	ACN7165-A	47	47
R4744	10k	12k	12k	12k	10k	12k	12k
R4749	8.2k	15k	15k	15k	8.2k	15k	15k
R4760	100	120	120	120	100	120	120
R4762	10k	12k	12k	12k	10k	12k	12k
R4775	100	120	120	120	100	120	120
R4780	110	150	150	150	110	150	150
R4782	1	10	10	10	1	10	10
R4783	0	10k	10k	10k	0	10k	10k
R4784	110	150	150	150	110	150	150
R4789	15	100	100	100	15	100	100
R4794	0	4.7	4.7	4.7	0	4.7	4.7
RS132	22k	47k	47k	47k	22k	47k	47k
IC4704	NJM12904V	NJM2732V	NJM2732V	NJM2732V	NJM12904V	NJM2732V	NJM2732V
D4701	NM	1SS355	1SS355	NM	NM	1SS355	1SS355
Q4703	2SC4081(QRS)	2SC4081(QRS)	NM	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	NM

: Audio Signal Route

NOTE
1. RESISTORS
Unit: k-k Ω , M-M Ω or Ω unless otherwise noted.
Rated Power: 1/16w unless otherwise noted.
Tolerance: (J)5% unless otherwise noted.
2. CAPACITORS
Unit: p-pF or u-uF unless otherwise noted.
Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
YB:CKSRYB, QYB:CKSQYB,SYB:CKSYB, CH:CCSRCH
HAT:CEHAT, ZL:CEHAZL
3. NM: No Mount

1608 SIZE	2125 SIZE	3216 SIZE
RS1/16S*** RN1/16S***	RS1/10S***	RS1/8S***
	RS1/8SQ*** 1/8W	RS1/4SA*** 1/4W
CCSR*** CKSR***	CCSQ*** CKSQ***	CCS*** CKS***

Δ mark found on some component parts should be replaced
ame parts (safety regulation authorized) of identical
nation.

10.41 D-AMP_S ASSY (6/10)

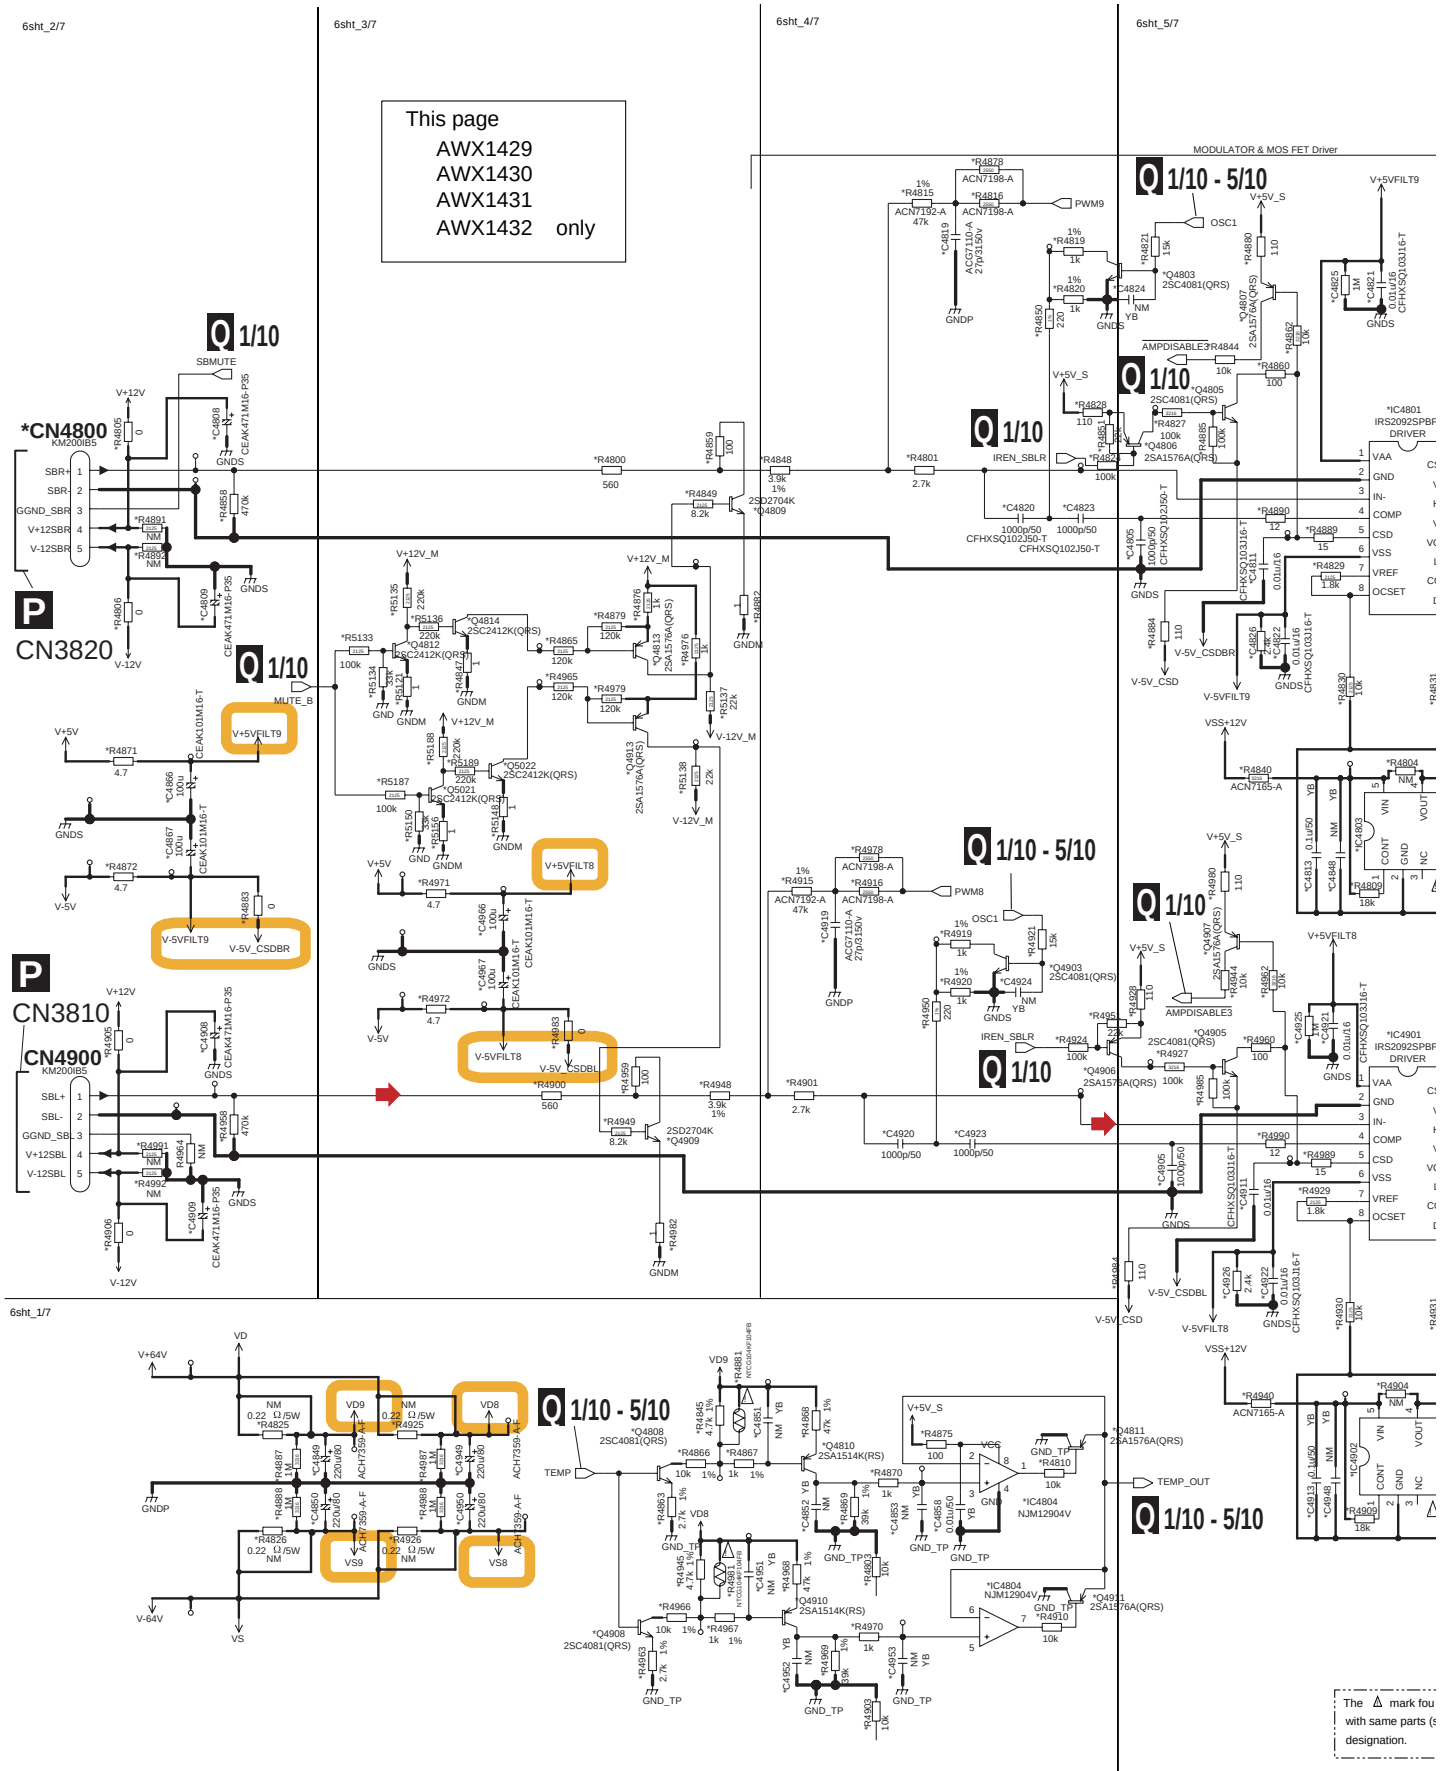

Q6/10 D-AMP_S ASSY(6/10) (AWX1429)

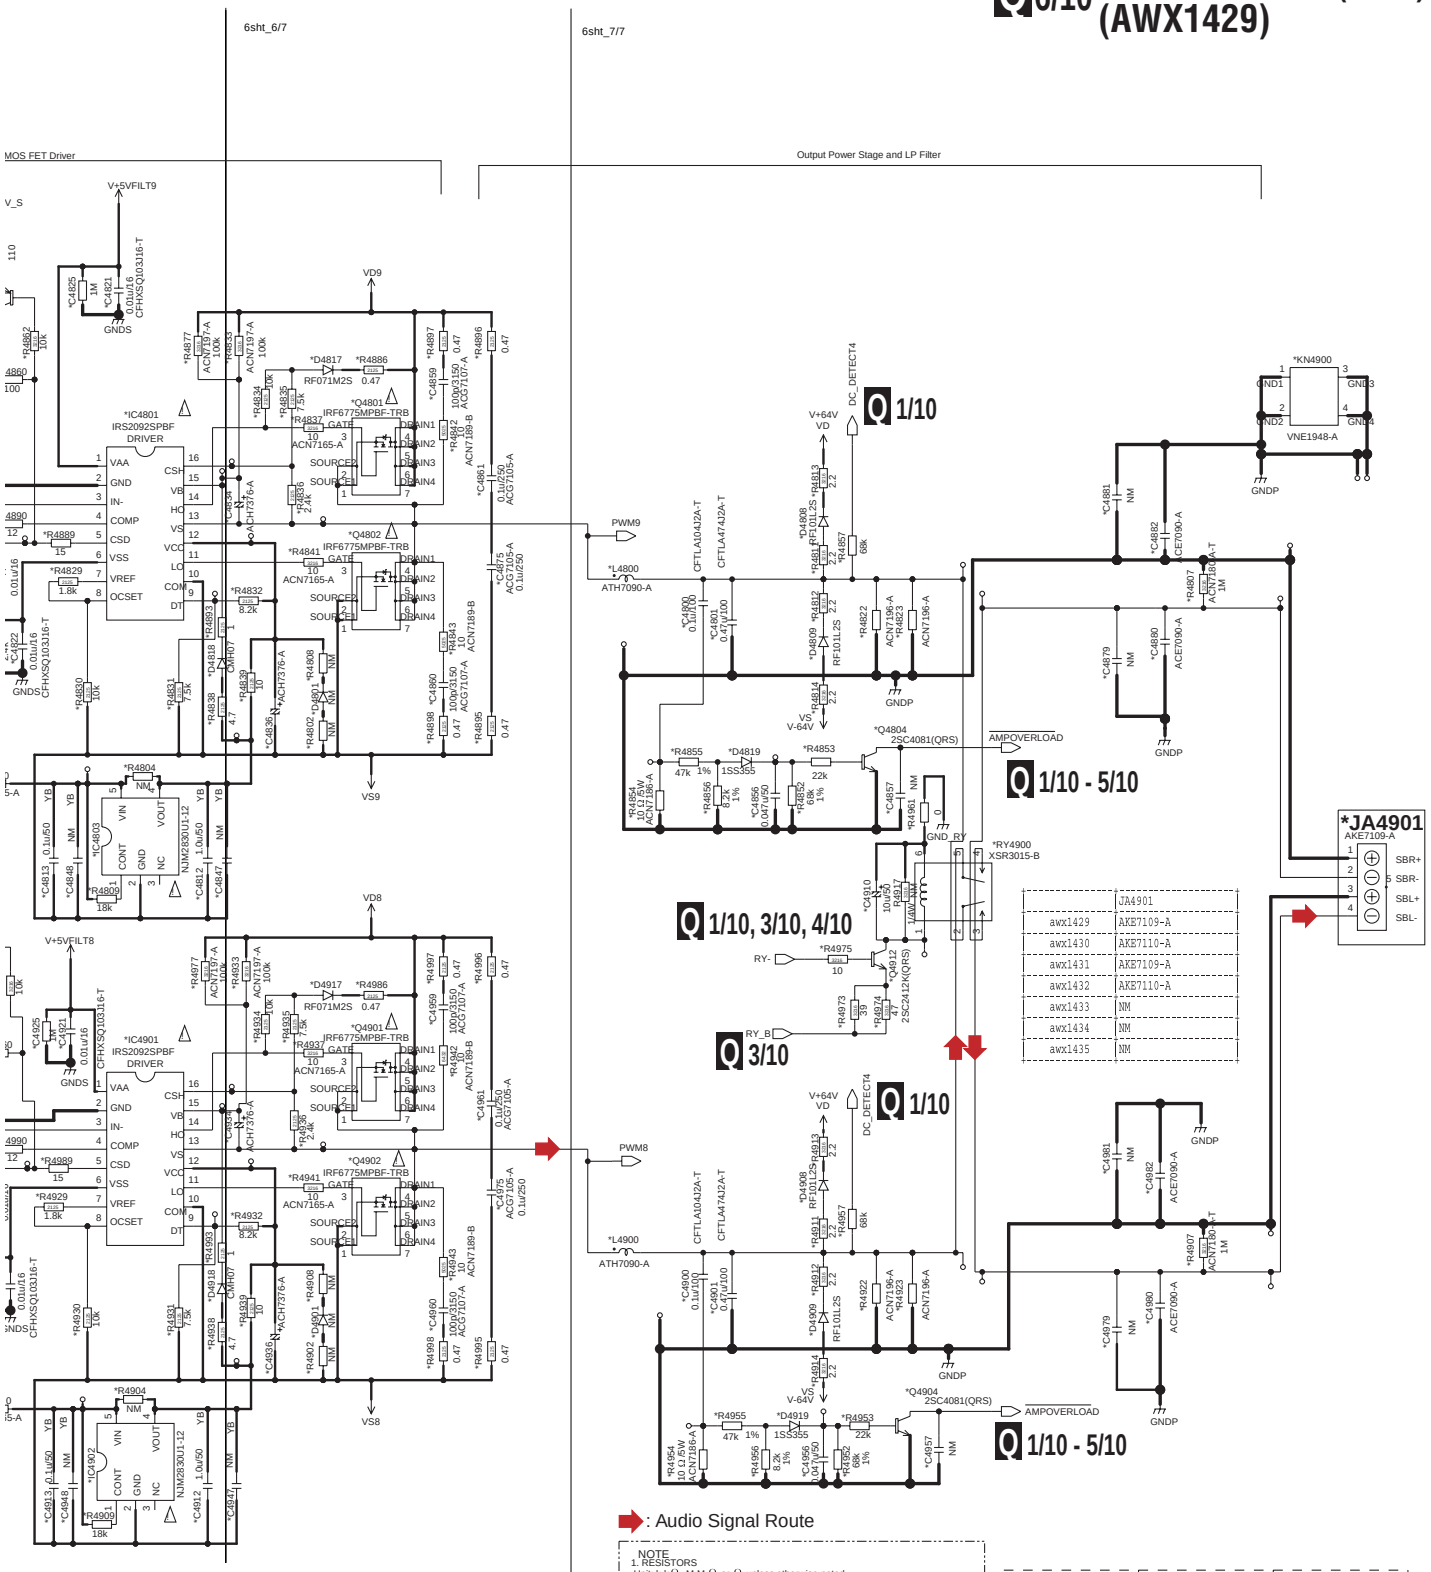

	JA4901
awx1429	AKE7109-A
awx1430	AKE7110-A
awx1431	AKE7109-A
awx1432	AKE7110-A
awx1433	NM
awx1434	NM
awx1435	NM

NOTE
1. RESISTORS
Unit: k-kΩ , M-MΩ or Ω unless otherwise noted.
Rated Power: 1/16w unless otherwise noted.
Toleranee: (J)5% unless otherwise noted.
2. CAPACITORS
Unit: p-pF or u-uF unless otherwise noted.
Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
YB:CKSRYB, QYB:CKSQYB,SYB:CKSYB, CH:CCSRCH
HAT:CEHAT, ZL:CEHAZL
3. NM: No Mount

1608 SIZE	2125 SIZE	3216 SIZE
RS1/16S*** RN1/16S***	RS1/10S*** RS1/8SQ*** 1/8W	RS1/8S*** RS1/4SA*** 1/4W
CCSR*** CKSR***	CCSQ*** CKSQ***	CCS*** CKS***

The Δ mark found on some component parts should be replaced with same parts (safety regulation authorized) of identical designation.

10.42 D-AMP_S ASSY (7/10)

1sht

	awx1429	awx1430	awx1431	awx1432	awx1433	awx1434	awx1435
C4017	100p/50	100p/50	100p/50	100p/50	NM	NM	NM
C4019	NM	NM	NM	NM	NM	NM	NM
C4022	0.1u/50	0.01u/50	0.01u/50	0.01u/50	0.1u/50	0.01u/50	0.01u/50
C4035	0.1u/50	NM	NM	NM	0.1u/50	NM	NM
C4048	330p/50	220p/50	220p/50	220p/50	330p/50	220p/50	220p/50
C4053	ACH7321-A	ACH7321-A	ACH7321-A	ACH7321-A	NM	NM	NM
C4063	220u/25	NM	NM	NM	220u/25	NM	NM
C4077	10p/50	47p/50	47p/50	47p/50	10p/50	47p/50	47p/50
C4080	1000p/50	NM	NM	NM	1000p/50	1000p/50	NM
C4084	NM	ACE7082-A	ACE7082-A	NM	NM	ACE7082-A	ACE7082-A
C4086	0.01u/50	NM	NM	NM	0.01u/50	NM	NM
C4087	100p/50	NM	NM	NM	100p/50	NM	NM
C5186	NM	0.01u/16	0.01u/16	0.01u/16	NM	0.01u/16	0.01u/16
R4001	120	120	120	120	100	100	100
R4003	120	120	120	120	NM	NM	NM
R4004	120	120	120	120	100	100	100
R4017	0	10	10	10	0	10	10
R4020	1	10	10	10	1	10	10
R4021	220	270	270	270	220	270	270
R4022	100	120	120	120	100	120	120
R4023	100	120	120	120	100	120	120
R4030	100	120	120	120	100	120	120
R4031	100	120	120	120	NM	NM	NM
R4035	100	120	120	120	100	120	120
R4036	100	100	NM	100	100	100	NM
R4037	100	100	NM	100	100	100	NM
R4038	10k	10k	NM	10k	10k	10k	NM
R4039	22k	22k	NM	22k	22k	22k	NM
R4041	220k	220k	NM	220k	220k	220k	NM
R4050	100	120	120	120	100	120	120
R4051	100	120	120	120	100	120	120
R4052	100	120	120	120	100	120	120
R4053	100	120	120	120	NM	NM	NM
R4069	12	12	12	12	10	12	12
R4075	220k	220k	220k	220k	NM	NM	NM
R4076	27k	27k	27k	27k	NM	NM	NM
R4077	10	22	22	22	10	22	22
R4079	5.6k	5.6k	5.6k	5.6k	NM	NM	NM
R4081	NM	NM	0	NM	NM	NM	0
R4093	100	120	120	120	100	120	120
R4095	22k	NM	NM	NM	22k	NM	NM
R4096	1	10	10	10	1	10	10
R4098	100	100	100	100	NM	NM	NM
R4099	100	120	120	120	100	120	120
R4164	0	100	100	100	0	100	100
R4664	0	100	100	100	0	100	100
R4864	0	10	10	10	0	10	10
R5005	NM	1M	1M	1M	NM	1M	1M
R5006	1M	1M	1M	1M	NM	1M	1M
R5009	1M	1M	1M	1M	NM	1M	1M
R5036	15k	15k	15k	15k	NM	NM	NM
R5047	100	100	NM	100	100	100	NM
R5048	NM	NM	NM	NM	0	0	0
R5049	NM	NM	NM	NM	0	0	0
R5050	NM	NM	NM	NM	0	0	0
R5051	100	100	100	100	NM	NM	NM
R5056	120	120	120	120	100	120	120
R5057	120	120	120	120	100	120	120
R5058	100	120	120	120	100	120	120
R5061	120	120	120	120	100	100	100
R5064	100	120	120	120	100	120	120
R5067	120	120	120	120	NM	NM	NM
R5069	120	120	120	120	NM	NM	NM
R5073	100k	120k	120k	120k	100k	120k	120k
R5074	100k	120k	120k	120k	100k	120k	120k
R5075	100k	120k	120k	120k	100k	120k	120k
R5076	100k	120k	120k	120k	100k	120k	120k
R5077	100k	120k	120k	120k	NM	NM	NM
R5082	100	100	100	100	NM	NM	NM
R5083	1	2.2	2.2	2.2	1	2.2	2.2
R5109	0	10	10	10	0	10	10
R5170	0	1	1	1	0	1	1
R5178	NM	47k	47k	47k	NM	47k	47k
R5185	100	100	100	100	NM	NM	NM
R5191	0	NM	NM	NM	NM	NM	NM

Q7/10 D-AMP_S ASSY(7/10) (AWX1429)

1sht

	awx1429	awx1430	awx1431	awx1432	awx1433	awx1434	awx1435
R5192	NM	0	NM	NM	NM	NM	NM
R5193	NM	NM	0	NM	NM	NM	NM
R5194	NM	NM	NM	0	NM	NM	NM
R5195	NM	NM	NM	NM	0	NM	NM
R5196	NM	NM	NM	NM	NM	0	NM
R5197	NM	NM	NM	NM	NM	NM	0
IC4905	TC7SET08FUS1	TC7SET08FUS1	TC7SET08FUS1	TC7SET08FUS1	NM	NM	NM
SUBASSY	AWX1429- /J	AWX1430- /J	AWX1431- /J	AWX1432- /J	AWX1433- /J	AWX1434- /J	AWX1435- /J
D4016	1SS355	1SS355	1SS355	1SS355	NM	NM	NM
Q4000	DTC124EUA	DTC124EUA	NM	DTC124EUA	DTC124EUA	DTC124EUA	NM
Q4001	2SA1576A(QRS)	2SA1576A(QRS)	NM	2SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)	NM
Q4003	DTC115EUA	DTC115EUA	DTC115EUA	DTC115EUA	NM	NM	NM
Q4010	DTA124EUA	DTA124EUA	DTA124EUA	DTA124EUA	NM	NM	NM
Q4011	DTC114TUA	DTC114TUA	DTC114TUA	DTC114TUA	NM	NM	NM
Q4013	HN1A01FU(YGR)	HN1A01FU(YGR)	HN1A01FU(YGR)	HN1A01FU(YGR)	NM	NM	NM
Q4028	HN1C01FU(YGR)	HN1C01FU(YGR)	HN1C01FU(YGR)	HN1C01FU(YGR)	NM	NM	NM

2sht

	awx1429	awx1430	awx1431	awx1432	awx1433	awx1434	awx1435
C4125	1M	1M	1M	1M	NM	1M	1M
C4126	2.4k	2.4k	2.4k	2.4k	NM	1.8k	1.8k
C4225	1M	1M	1M	1M	NM	1M	1M
C4226	2.4k	2.4k	2.4k	2.4k	NM	1.8k	1.8k
R4102	NM	1	1	NM	NM	1	1
R4108	NM	1	1	NM	NM	1	1
R4109	18k	22k	22k	22k	18k	22k	22k
R4110	10k	9.1k	9.1k	9.1k	10k	9.1k	9.1k
R4119	1k	1k	NM	1k	1k	1k	NM
R4121	15k	15k	NM	15k	15k	15k	NM
R4125	NM	ACN7094-A	ACN7094-A	NM	NM	ACN7094-A	ACN7094-A
R4126	NM	ACN7094-A	ACN7094-A	NM	NM	ACN7094-A	ACN7094-A
R4128	110	120	120	120	110	120	120
R4140	ACN7165-A	47	47	47	ACN7165-A	47	47
R4144	10k	12k	12k	12k	10k	12k	12k
R4149	8.2k	15k	15k	15k	8.2k	15k	15k
R4160	100	120	120	120	100	120	120
R4161	0	4.7	4.7	4.7	0	4.7	4.7
R4162	10k	12k	12k	12k	10k	12k	12k
R4180	110	150	150	150	110	150	150
R4182	1	10	10	10	1	10	10
R4183	0	10k	10k	10k	0	10k	10k
R4184	110	150	150	150	110	150	150
R4189	15	100	100	100	15	100	100
R4202	NM	1	1	NM	NM	1	1
R4208	NM	1	1	NM	NM	1	1
R4209	18k	22k	22k	22k	18k	22k	22k
R4210	10k	9.1k	9.1k	9.1k	10k	9.1k	9.1k
R4219	1k	1k	NM	1k	1k	1k	NM
R4221	15k	15k	NM	15k	15k	15k	NM
R4225	NM	ACN7094-A	ACN7094-A	NM	NM	ACN7094-A	ACN7094-A
R4226	NM	ACN7094-A	ACN7094-A	NM	NM	ACN7094-A	ACN7094-A
R4228	110	120	120	120	110	120	120
R4240	ACN7165-A	47	47	47	ACN7165-A	47	47
R4244	10k	12k	12k	12k	10k	12k	12k
R4249	8.2k	15k	15k	15k	8.2k	15k	15k
R4260	100	120	120	120	100	120	120
R4262	10k	12k	12k	12k	10k	12k	12k
R4275	100	120	120	120	100	120	120
R4280	110	150	150	150	110	150	150
R4282	1	10	10	10	1	10	10
R4283	0	10k	10k	10k	0	10k	10k
R4284	110	150	150	150	110	150	150
R4289	15	100	100	100	15	100	100
R5113	22k	47k	47k	47k	22k	47k	47k
R5114	22k	47k	47k	47k	22k	47k	47k
IC4204	NJM12904V	NJM2732V	NJM2732V	NJM2732V	NJM12904V	NJM2732V	NJM2732V
D4101	NM	1SS355	1SS355	NM	NM	1SS355	1SS355
D4201	NM	1SS355	1SS355	NM	NM	1SS355	1SS355
JA4101	AKE7107-A	AKE7108-A	AKE7107-A	AKE7108-A	AKE7107-A	AKE7108-A	AKE7107-A
Q4103	2SC4081(QRS)	2SC4081(QRS)	NM	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	NM
Q4203	2SC4081(QRS)	2SC4081(QRS)	NM	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	NM

10.43 D-AMP_S ASSY (8/10)

3sht

	awx1429	awx1430	awx1431	awx1432	awx1433	awx1434	awx1435
C4325	1M	1M	1M	1M	NM	1M	1M
C4326	2.4k	2.4k	2.4k	2.4k	NM	1.8k	1.8k
C4425	1M	1M	1M	1M	NM	1M	1M
C4426	2.4k	2.4k	2.4k	2.4k	NM	1.8k	1.8k
R4302	NM	1	1	NM	NM	1	1
R4308	NM	1	1	NM	NM	1	1
R4309	18k	22k	22k	22k	18k	22k	22k
R4310	10k	9.1k	9.1k	9.1k	10k	9.1k	9.1k
R4319	1k	1k	NM	1k	1k	1k	NM
R4321	15k	15k	NM	15k	15k	15k	NM
R4325	NM	ACN7094-A	ACN7094-A	NM	NM	ACN7094-A	ACN7094-A
R4326	NM	ACN7094-A	ACN7094-A	NM	NM	ACN7094-A	ACN7094-A
R4328	110	120	120	120	110	120	120
R4340	ACN7165-A	47	47	47	ACN7165-A	47	47
R4344	10k	12k	12k	12k	10k	12k	12k
R4349	8.2k	15k	15k	15k	8.2k	15k	15k
R4360	100	120	120	120	100	120	120
R4362	10k	12k	12k	12k	10k	12k	12k
R4380	110	150	150	150	110	150	150
R4382	1	10	10	10	1	10	10
R4383	0	10k	10k	10k	0	10k	10k
R4384	110	150	150	150	110	150	150
R4389	15	100	100	100	15	100	100
R4402	NM	1	1	NM	NM	1	1
R4408	NM	1	1	NM	NM	1	1
R4409	18k	22k	22k	22k	18k	22k	22k
R4410	10k	9.1k	9.1k	9.1k	10k	9.1k	9.1k
R4419	1k	1k	NM	1k	1k	1k	NM
R4421	15k	15k	NM	15k	15k	15k	NM
R4425	NM	ACN7094-A	ACN7094-A	NM	NM	ACN7094-A	ACN7094-A
R4426	NM	ACN7094-A	ACN7094-A	NM	NM	ACN7094-A	ACN7094-A
R4428	110	120	120	120	110	120	120
R4440	ACN7165-A	47	47	47	ACN7165-A	47	47
R4444	10k	12k	12k	12k	10k	12k	12k
R4449	8.2k	15k	15k	15k	8.2k	15k	15k
R4460	100	120	120	120	100	120	120
R4462	10k	12k	12k	12k	10k	12k	12k
R4475	100	120	120	120	100	120	120
R4480	110	150	150	150	110	150	150
R4482	1	10	10	10	1	10	10
R4483	0	10k	10k	10k	0	10k	10k
R4484	110	150	150	150	110	150	150
R4489	15	100	100	100	15	100	100
R4994	0	2.2	2.2	2.2	0	2.2	2.2
R4999	120k	120k	120k	120k	NM	NM	NM
R5118	22k	47k	47k	47k	22k	47k	47k
R5119	22k	47k	47k	47k	22k	47k	47k
IC4404	NJM12904V	NJM2732V	NJM2732V	NJM2732V	NJM12904V	NJM2732V	NJM2732V
D4301	NM	1SS355	1SS355	NM	NM	1SS355	1SS355
D4401	NM	1SS355	1SS355	NM	NM	1SS355	1SS355
JA4301	AKE7109-A	AKE7110-A	AKE7109-A	AKE7110-A	AKE7109-A	AKE7110-A	AKE7109-A
Q4303	2SC4081(QRS)	2SC4081(QRS)	NM	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	NM
Q4403	2SC4081(QRS)	2SC4081(QRS)	NM	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	NM

6sht_2/7

	awx1429	awx1430	awx1431	awx1432	awx1433	awx1434	awx1435
C4808	470u/16	470u/16	470u/16	470u/16	NM	NM	NM
C4809	470u/16	470u/16	470u/16	470u/16	NM	NM	NM
C4866	100u/16	100u/16	100u/16	100u/16	NM	NM	NM
C4867	100u/16	100u/16	100u/16	100u/16	NM	NM	NM
C4908	470u/16	470u/16	470u/16	470u/16	NM	NM	NM
C4909	470u/16	470u/16	470u/16	470u/16	NM	NM	NM
R4805	0	0	0	0	NM	NM	NM
R4806	0	0	0	0	NM	NM	NM
R4858	470k	470k	470k	470k	NM	NM	NM
R4871	4.7	4.7	4.7	4.7	NM	NM	NM
R4872	4.7	4.7	4.7	4.7	NM	NM	NM
R4883	0	10k	10k	10k	NM	NM	NM
R4891	NM	NM	NM	NM	NM	NM	NM
R4892	NM	NM	NM	NM	NM	NM	NM
R4905	0	0	0	0	NM	NM	NM
R4906	0	0	0	0	NM	NM	NM
R4958	470k	470k	470k	470k	NM	NM	NM
R4991	NM	NM	NM	NM	NM	NM	NM
R4992	NM	NM	NM	NM	NM	NM	NM

6sht_2/7

	awx1429	awx1430	awx1431	awx1432	awx1433	awx1434	awx1435
CN4800	KM200IB5	KM200IB5	KM200IB5	KM200IB5	NM	NM	NM
TP54	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP362	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP363	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP371	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP372	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP499	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP503	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP504	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM

6sht_1/7

	awx1429	awx1430	awx1431	awx1432	awx1433	awx1434	awx1435
C4849	ACH7359-A	ACH7359-A	ACH7359-A	ACH7359-A	NM	NM	NM
C4850	ACH7359-A	ACH7359-A	ACH7359-A	ACH7359-A	NM	NM	NM
C4851	NM	NM	NM	NM	NM	NM	NM
C4852	NM	NM	NM	NM	NM	NM	NM
C4853	NM	NM	NM	NM	NM	NM	NM
C4858	0.01u/50	0.01u/50	0.01u/50	0.01u/50	NM	NM	NM
C4949	ACH7359-A	ACH7359-A	ACH7359-A	ACH7359-A	NM	NM	NM
C4950	ACH7359-A	ACH7359-A	ACH7359-A	ACH7359-A	NM	NM	NM
C4951	NM	NM	NM	NM	NM	NM	NM
C4952	NM	NM	NM	NM	NM	NM	NM
C4953	NM	NM	NM	NM	NM	NM	NM
R4803	10k	10k	10k	10k	NM	NM	NM
R4810	10k	9.1k	9.1k	9.1k	NM	NM	NM
R4825	NM	ACN7094-A	ACN7094-A	NM	NM	NM	NM
R4826	NM	ACN7094-A	ACN7094-A	NM	NM	NM	NM
R4845	4.7k	4.7k	4.7k	4.7k	NM	NM	NM
R4863	2.7k	2.7k	2.7k	2.7k	NM	NM	NM
R4866	10k	10k	10k	10k	NM	NM	NM
R4867	1k	1k	1k	1k	NM	NM	NM
R4868	47k	47k	47k	47k	NM	NM	NM
R4869	39k	39k	39k	39k	NM	NM	NM
R4870	1k	1k	1k	1k	NM	NM	NM
R4875	100	120	120	120	NM	NM	NM
R4887	1M	1M	1M	1M	NM	NM	NM
R4888	1M	1M	1M	1M	NM	NM	NM
R4903	10k	10k	10k	10k	NM	NM	NM
R4910	10k	9.1k	9.1k	9.1k	NM	NM	NM
R4925	NM	ACN7094-A	ACN7094-A	NM	NM	NM	NM
R4926	NM	ACN7094-A	ACN7094-A	NM	NM	NM	NM
R4945	4.7k	4.7k	4.7k	4.7k	NM	NM	NM
R4963	2.7k	2.7k	2.7k	2.7k	NM	NM	NM
R4966	10k	10k	10k	10k	NM	NM	NM
R4967	1k	1k	1k	1k	NM	NM	NM
R4968	47k	47k	47k	47k	NM	NM	NM
R4969	39k	39k	39k	39k	NM	NM	NM
R4970	1k	1k	1k	1k	NM	NM	NM
R4987	1M	1M	1M	1M	NM	NM	NM
R4988	1M	1M	1M	1M	NM	NM	NM
R4881	NTCG104KF104FB	NTCG104KF104FB	NTCG104KF104FB	NTCG104KF104FB	NM	NM	NM
R4981	NTCG104KF104FB	NTCG104KF104FB	NTCG104KF104FB	NTCG104KF104FB	NM	NM	NM
IC4804	NJM12904V	NJM2732V	NJM2732V	NJM2732V	NM	NM	NM
Q4808	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	NM	NM	NM
Q4810	2SA1514K(RS)	2SA1514K(RS)	2SA1514K(RS)	2SA1514K(RS)	NM	NM	NM
Q4811	2SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)	NM	NM	NM
Q4908	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	NM	NM	NM
Q4910	2SA1514K(RS)	2SA1514K(RS)	2SA1514K(RS)	2SA1514K(RS)	NM	NM	NM
Q4911	2SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)	NM	NM	NM
TP376	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP377	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP379	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP380	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP398	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP399	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP400	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP401	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP402	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP403	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM

10.44 D-AMP_S ASSY (9/10)

6sht_3/7

	awx1429	awx1430	awx1431	awx1432	awx1433	awx1434	awx1435
C4966	100u/16	100u/16	100u/16	100u/16	NM	NM	NM
C4967	100u/16	100u/16	100u/16	100u/16	NM	NM	NM
R4800	560	560	560	560	NM	NM	NM
R4847	1	1	1	1	NM	NM	NM
R4849	8.2k	15k	15k	15k	NM	NM	NM
R4859	100	100	100	100	NM	NM	NM
R4865	120k	120k	120k	120k	NM	NM	NM
R4876	1k	1k	1k	1k	NM	NM	NM
R4879	120k	120k	120k	120k	NM	NM	NM
R4882	1	10	10	10	NM	NM	NM
R4900	560	560	560	560	NM	NM	NM
R4948	3.9k	3.9k	3.9k	3.9k	NM	NM	NM
R4949	8.2k	15k	15k	15k	NM	NM	NM
R4959	100	100	100	100	NM	NM	NM
R4965	120k	120k	120k	120k	NM	NM	NM
R4971	4.7	4.7	4.7	4.7	NM	NM	NM
R4972	4.7	4.7	4.7	4.7	NM	NM	NM
R4976	1k	1k	1k	1k	NM	NM	NM
R4979	120k	120k	120k	120k	NM	NM	NM
R4982	1	10	10	10	NM	NM	NM
R4983	0	10k	10k	10k	NM	NM	NM
R5121	1	1	1	1	NM	NM	NM
R5133	100k	100k	100k	100k	NM	NM	NM
R5134	33k	33k	33k	33k	NM	NM	NM
R5135	220k	220k	220k	220k	NM	NM	NM
R5136	220k	220k	220k	220k	NM	NM	NM
R5137	22k	47k	47k	47k	NM	NM	NM
R5138	22k	47k	47k	47k	NM	NM	NM
R5148	1	1	1	1	NM	NM	NM
R5150	33k	33k	33k	33k	NM	NM	NM
R5156	1	1	1	1	NM	NM	NM
R5187	100k	100k	100k	100k	NM	NM	NM
R5188	220k	220k	220k	220k	NM	NM	NM
R5189	220k	220k	220k	220k	NM	NM	NM
Q4809	2SD2704K	2SD2704K	2SD2704K	2SD2704K	NM	NM	NM
Q4812	2SC2412K(QRS)	2SC2412K(QRS)	2SC2412K(QRS)	2SC2412K(QRS)	NM	NM	NM
Q4813	2SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)	NM	NM	NM
Q4814	2SC2412K(QRS)	2SC2412K(QRS)	2SC2412K(QRS)	2SC2412K(QRS)	NM	NM	NM
Q4909	2SD2704K	2SD2704K	2SD2704K	2SD2704K	NM	NM	NM
Q4913	2SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)	NM	NM	NM
Q5021	2SC2412K(QRS)	2SC2412K(QRS)	2SC2412K(QRS)	2SC2412K(QRS)	NM	NM	NM
Q5022	2SC2412K(QRS)	2SC2412K(QRS)	2SC2412K(QRS)	2SC2412K(QRS)	NM	NM	NM
TP364	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP365	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP366	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP367	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP368	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM

6sht_4/7

	awx1429	awx1430	awx1431	awx1432	awx1433	awx1434	awx1435
C4819	ACG7110-A	ACG7110-A	ACG7110-A	ACG7110-A	NM	NM	NM
C4820	1000p/50	1000p/50	1000p/50	1000p/50	NM	NM	NM
C4823	1000p/50	1000p/50	1000p/50	1000p/50	NM	NM	NM
C4919	ACG7110-A	ACG7110-A	ACG7110-A	ACG7110-A	NM	NM	NM
C4920	1000p/50	1000p/50	1000p/50	1000p/50	NM	NM	NM
C4923	1000p/50	1000p/50	1000p/50	1000p/50	NM	NM	NM
C4924	NM	NM	NM	NM	NM	NM	NM
R4801	2.7k	2.7k	2.7k	2.7k	NM	NM	NM
R4815	ACN7192-A	ACN7192-A	ACN7192-A	ACN7192-A	NM	NM	NM
R4816	ACN7198-A	ACN7198-A	ACN7198-A	ACN7198-A	NM	NM	NM
R4819	1k	1k	NM	1k	NM	NM	NM
R4820	1k	1k	1k	1k	NM	NM	NM
R4828	110	120	120	120	NM	NM	NM
R4848	3.9k	3.9k	3.9k	3.9k	NM	NM	NM
R4850	220	220	220	220	NM	NM	NM
R4851	22k	22k	22k	22k	NM	NM	NM
R4878	ACN7198-A	ACN7198-A	ACN7198-A	ACN7198-A	NM	NM	NM
R4901	2.7k	2.7k	2.7k	2.7k	NM	NM	NM
R4915	ACN7192-A	ACN7192-A	ACN7192-A	ACN7192-A	NM	NM	NM
R4916	ACN7198-A	ACN7198-A	ACN7198-A	ACN7198-A	NM	NM	NM
R4919	1k	1k	NM	1k	NM	NM	NM
R4920	1k	1k	1k	1k	NM	NM	NM
R4921	15k	15k	NM	15k	NM	NM	NM
R4924	100k	100k	100k	100k	NM	NM	NM
R4950	220	220	220	220	NM	NM	NM
R4978	ACN7198-A	ACN7198-A	ACN7198-A	ACN7198-A	NM	NM	NM
Q4903	2SC4081(QRS)	2SC4081(QRS)	NM	2SC4081(QRS)	NM	NM	NM

6sht_4/7

	awx1429	awx1430	awx1431	awx1432	awx1433	awx1434	awx1435
TP240	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP245	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP461	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP525	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM

6sht_5/7

	awx1429	awx1430	awx1431	awx1432	awx1433	awx1434	awx1435
C4805	1000p/50	1000p/50	1000p/50	1000p/50	NM	NM	NM
C4811	0.01u/16	0.01u/16	0.01u/16	0.01u/16	NM	NM	NM
C4812	1.0u/50	1.0u/50	1.0u/50	1.0u/50	NM	NM	NM
C4813	0.1u/50	0.1u/50	0.1u/50	0.1u/50	NM	NM	NM
C4821	0.01u/16	0.01u/16	0.01u/16	0.01u/16	NM	NM	NM
C4822	0.01u/16	0.01u/16	0.01u/16	0.01u/16	NM	NM	NM
C4848	NM	NM	NM	NM	NM	NM	NM
C4905	1000p/50	1000p/50	1000p/50	1000p/50	NM	NM	NM
C4911	0.01u/16	0.01u/16	0.01u/16	0.01u/16	NM	NM	NM
C4912	1.0u/50	1.0u/50	1.0u/50	1.0u/50	NM	NM	NM
C4913	0.1u/50	0.1u/50	0.1u/50	0.1u/50	NM	NM	NM
C4921	0.01u/16	0.01u/16	0.01u/16	0.01u/16	NM	NM	NM
C4922	0.01u/16	0.01u/16	0.01u/16	0.01u/16	NM	NM	NM
C4948	NM	NM	NM	NM	NM	NM	NM
C4825	1M	1M	1M	1M	NM	NM	NM
C4826	2.4k	2.4k	2.4k	2.4k	NM	NM	NM
C4925	1M	1M	1M	1M	NM	NM	NM
C4926	2.4k	2.4k	2.4k	2.4k	NM	NM	NM
R4804	NM	NM	NM	NM	NM	NM	NM
R4809	18k	22k	22k	22k	NM	NM	NM
R4821	15k	15k	NM	15k	NM	NM	NM
R4827	100k	100k	100k	100k	NM	NM	NM
R4829	1.8k	1.8k	1.8k	1.8k	NM	NM	NM
R4830	10k	10k	10k	10k	NM	NM	NM
R4831	7.5k	7.5k	7.5k	7.5k	NM	NM	NM
R4840	ACN7165-A	47	47	47	NM	NM	NM
R4844	10k	12k	12k	12k	NM	NM	NM
R4860	100	120	120	120	NM	NM	NM
R4862	10k	12k	12k	12k	NM	NM	NM
R4877	ACN7197-A	ACN7197-A	ACN7197-A	ACN7197-A	NM	NM	NM
R4880	110	150	150	150	NM	NM	NM
R4884	110	150	150	150	NM	NM	NM
R4885	100k	100k	100k	100k	NM	NM	NM
R4889	15	100	100	100	NM	NM	NM
R4890	12	12	12	12	NM	NM	NM
R4904	NM	NM	NM	NM	NM	NM	NM
R4909	18k	22k	22k	22k	NM	NM	NM
R4927	100k	100k	100k	100k	NM	NM	NM
R4928	110	120	120	120	NM	NM	NM
R4929	1.8k	1.8k	1.8k	1.8k	NM	NM	NM
R4930	10k	10k	10k	10k	NM	NM	NM
R4931	7.5k	7.5k	7.5k	7.5k	NM	NM	NM
R4940	ACN7165-A	47	47	47	NM	NM	NM
R4944	10k	12k	12k	12k	NM	NM	NM
R4960	100	120	120	120	NM	NM	NM
R4962	10k	12k	12k	12k	NM	NM	NM
R4977	ACN7197-A	ACN7197-A	ACN7197-A	ACN7197-A	NM	NM	NM
R4980	110	150	150	150	NM	NM	NM
R4984	110	150	150	150	NM	NM	NM
R4985	100k	100k	100k	100k	NM	NM	NM
R4989	15	100	100	100	NM	NM	NM
R4990	12	12	12	12	NM	NM	NM
IC4801	IRS2092SPBF	IRS2092SPBF	IRS2092SPBF	IRS2092SPBF	NM	NM	NM
IC4803	NJM2830U1-12	NJM2830U1-12	NJM2830U1-12	NJM2830U1-12	NM	NM	NM
IC4901	IRS2092SPBF	IRS2092SPBF	IRS2092SPBF	IRS2092SPBF	NM	NM	NM
IC4902	NJM2830U1-12	NJM2830U1-12	NJM2830U1-12	NJM2830U1-12	NM	NM	NM
Q4805	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	NM	NM	NM
Q4806	2SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)	NM	NM	NM
Q4807	2SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)	NM	NM	NM
Q4905	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	NM	NM	NM
Q4907	2SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)	2SA1576A(QRS)	NM	NM	NM
TP255	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP272	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP425	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP429	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP434	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP442	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP533	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP534	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM

10.45 D-AMP_S ASSY (10/10)

6sht_7/7

	awx1429	awx1430	awx1431	awx1432	awx1433	awx1434	awx1435
C4800	0.1u/100	0.1u/100	0.1u/100	0.1u/100	NM	NM	NM
C4801	0.47u/100	0.47u/100	0.47u/100	0.47u/100	NM	NM	NM
C4856	0.047u/50	0.047u/50	0.047u/50	0.047u/50	NM	NM	NM
C4857	NM	NM	NM	NM	NM	NM	NM
C4879	NM	NM	NM	NM	NM	NM	NM
C4880	ACE7090-A	ACE7090-A	ACE7090-A	ACE7090-A	NM	NM	NM
C4881	NM	NM	NM	NM	NM	NM	NM
C4882	ACE7090-A	ACE7090-A	ACE7090-A	ACE7090-A	NM	NM	NM
C4900	0.1u/100	0.1u/100	0.1u/100	0.1u/100	NM	NM	NM
C4901	0.47u/100	0.47u/100	0.47u/100	0.47u/100	NM	NM	NM
C4910	10u/50	10u/50	10u/50	10u/50	NM	NM	NM
C4956	0.047u/50	0.047u/50	0.047u/50	0.047u/50	NM	NM	NM
C4957	NM	NM	NM	NM	NM	NM	NM
C4979	NM	NM	NM	NM	NM	NM	NM
C4980	ACE7090-A	ACE7090-A	ACE7090-A	ACE7090-A	NM	NM	NM
C4981	NM	NM	NM	NM	NM	NM	NM
C4982	ACE7090-A	ACE7090-A	ACE7090-A	ACE7090-A	NM	NM	NM
R4807	1M	1M	1M	1M	0	0	0
R4811	2.2	2.2	2.2	2.2	NM	NM	NM
R4812	2.2	2.2	2.2	2.2	NM	NM	NM
R4813	2.2	2.2	2.2	2.2	NM	NM	NM
R4814	2.2	2.2	2.2	2.2	NM	NM	NM
R4822	ACN7196-A	ACN7196-A	ACN7196-A	ACN7196-A	0	0	0
R4823	ACN7196-A	ACN7196-A	ACN7196-A	ACN7196-A	NM	NM	NM
R4852	68k	68k	68k	68k	NM	NM	NM
R4853	22k	22k	22k	22k	NM	NM	NM
R4854	ACN7186-A	ACN7186-A	ACN7186-A	ACN7186-A	NM	NM	NM
R4855	47k	47k	47k	47k	NM	NM	NM
R4856	8.2k	8.2k	8.2k	8.2k	NM	NM	NM
R4857	68k	68k	68k	68k	NM	NM	NM
R4907	1M	1M	1M	1M	0	0	0
R4911	2.2	2.2	2.2	2.2	NM	NM	NM
R4912	2.2	2.2	2.2	2.2	NM	NM	NM
R4913	2.2	2.2	2.2	2.2	NM	NM	NM
R4914	2.2	2.2	2.2	2.2	NM	NM	NM
R4922	ACN7196-A	ACN7196-A	ACN7196-A	ACN7196-A	0	0	0
R4923	ACN7196-A	ACN7196-A	ACN7196-A	ACN7196-A	NM	NM	NM
R4952	68k	68k	68k	68k	NM	NM	NM
R4953	22k	22k	22k	22k	NM	NM	NM
R4954	ACN7186-A	ACN7186-A	ACN7186-A	ACN7186-A	NM	NM	NM
R4955	47k	47k	47k	47k	NM	NM	NM
R4956	8.2k	8.2k	8.2k	8.2k	NM	NM	NM
R4957	68k	68k	68k	68k	NM	NM	NM
R4961	0	0	0	0	NM	NM	NM
R4973	39	39	39	39	NM	NM	NM
R4974	47	47	47	47	NM	NM	NM
R4975	10	10	10	10	NM	NM	NM
L4800	ATH7090-A	ATH7090-A	ATH7090-A	ATH7090-A	NM	NM	NM
L4900	ATH7090-A	ATH7090-A	ATH7090-A	ATH7090-A	NM	NM	NM
D4808	RF101L2S	RF101L2S	RF101L2S	RF101L2S	NM	NM	NM
D4809	RF101L2S	RF101L2S	RF101L2S	RF101L2S	NM	NM	NM
D4819	1SS355	1SS355	1SS355	1SS355	NM	NM	NM
D4908	RF101L2S	RF101L2S	RF101L2S	RF101L2S	NM	NM	NM
D4909	RF101L2S	RF101L2S	RF101L2S	RF101L2S	NM	NM	NM
D4919	1SS355	1SS355	1SS355	1SS355	NM	NM	NM
JA4901	AKE7109-A	AKE7110-A	AKE7109-A	AKE7110-A	NM	NM	NM
KN4900	VNE1948-A	VNE1948-A	VNE1948-A	VNE1948-A	NM	NM	NM
Q4804	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	NM	NM	NM
Q4904	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	2SC4081(QRS)	NM	NM	NM
Q4912	2SC2412K(QRS)	2SC2412K(QRS)	2SC2412K(QRS)	2SC2412K(QRS)	NM	NM	NM
RY4900	XSR3015-B	XSR3015-B	XSR3015-B	XSR3015-B	NM	NM	NM
TP369	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP370	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP375	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP382	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP383	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP384	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP385	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP386	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP387	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP388	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP389	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP390	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP392	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP394	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP395	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP396	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP397	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM

6sht_6/7

	awx1429	awx1430	awx1431	awx1432	awx1433	awx1434	awx1435
C4834	ACH7376-A	ACH7376-A	ACH7376-A	ACH7376-A	NM	NM	NM
C4836	ACH7376-A	ACH7376-A	ACH7376-A	ACH7376-A	NM	NM	NM
C4847	NM	NM	NM	NM	NM	NM	NM
C4859	ACG7107-A	ACG7107-A	ACG7107-A	ACG7107-A	NM	NM	NM
C4860	ACG7107-A	ACG7107-A	ACG7107-A	ACG7107-A	NM	NM	NM
C4861	ACG7105-A	ACG7105-A	ACG7105-A	ACG7105-A	NM	NM	NM
C4875	ACG7105-A	ACG7105-A	ACG7105-A	ACG7105-A	NM	NM	NM
C4934	ACH7376-A	ACH7376-A	ACH7376-A	ACH7376-A	NM	NM	NM
C4936	ACH7376-A	ACH7376-A	ACH7376-A	ACH7376-A	NM	NM	NM
C4947	NM	NM	NM	NM	NM	NM	NM
C4959	ACG7107-A	ACG7107-A	ACG7107-A	ACG7107-A	NM	NM	NM
C4960	ACG7107-A	ACG7107-A	ACG7107-A	ACG7107-A	NM	NM	NM
C4961	ACG7105-A	ACG7105-A	ACG7105-A	ACG7105-A	NM	NM	NM
C4975	ACG7105-A	ACG7105-A	ACG7105-A	ACG7105-A	NM	NM	NM
R4802	NM	1	1	NM	NM	NM	NM
R4808	NM	1	1	NM	NM	NM	NM
R4832	8.2k	8.2k	8.2k	8.2k	NM	NM	NM
R4833	ACN7197-A	ACN7197-A	ACN7197-A	ACN7197-A	NM	NM	NM
R4834	10k	10k	10k	10k	NM	NM	NM
R4835	7.5k	7.5k	7.5k	7.5k	NM	NM	NM
R4836	2.4k	2.4k	2.4k	2.4k	NM	NM	NM
R4837	ACN7165-A	ACN7165-A	ACN7165-A	ACN7165-A	NM	NM	NM
R4839	10	10	10	10	NM	NM	NM
R4841	ACN7165-A	ACN7165-A	ACN7165-A	ACN7165-A	NM	NM	NM
R4842	ACN7189-B	ACN7189-B	ACN7189-B	ACN7189-B	NM	NM	NM
R4843	ACN7189-B	ACN7189-B	ACN7189-B	ACN7189-B	NM	NM	NM
R4886	0.47	0.47	0.47	0.47	NM	NM	NM
R4895	0.47	0.47	0.47	0.47	NM	NM	NM
R4896	0.47	0.47	0.47	0.47	NM	NM	NM
R4897	0.47	0.47	0.47	0.47	NM	NM	NM
R4898	0.47	0.47	0.47	0.47	NM	NM	NM
R4902	NM	1	1	NM	NM	NM	NM
R4908	NM	1	1	NM	NM	NM	NM
R4932	8.2k	8.2k	8.2k	8.2k	NM	NM	NM
R4933	ACN7197-A	ACN7197-A	ACN7197-A	ACN7197-A	NM	NM	NM
R4934	10k	10k	10k	10k	NM	NM	NM
R4935	7.5k	7.5k	7.5k	7.5k	NM	NM	NM
R4936	2.4k	2.4k	2.4k	2.4k	NM	NM	NM
R4937	ACN7165-A	ACN7165-A	ACN7165-A	ACN7165-A	NM	NM	NM
R4939	10	10	10	10	NM	NM	NM
R4941	ACN7165-A	ACN7165-A	ACN7165-A	ACN7165-A	NM	NM	NM
R4942	ACN7189-B	ACN7189-B	ACN7189-B	ACN7189-B	NM	NM	NM
R4943	ACN7189-B	ACN7189-B	ACN7189-B	ACN7189-B	NM	NM	NM
R4986	0.47	0.47	0.47	0.47	NM	NM	NM
R4995	0.47	0.47	0.47	0.47	NM	NM	NM
R4996	0.47	0.47	0.47	0.47	NM	NM	NM
R4997	0.47	0.47	0.47	0.47	NM	NM	NM
R4998	0.47	0.47	0.47	0.47	NM	NM	NM
D4801	NM	1SS355	1SS355	NM	NM	NM	NM
D4817	RF071M2S	RF071M2S	RF071M2S	RF071M2S	NM	NM	NM
D4901	NM	1SS355	1SS355	NM	NM	NM	NM
D4917	RF071M2S	RF071M2S	RF071M2S	RF071M2S	NM	NM	NM
Q4801	IRF6775MPBF	IRF6775MPBF	IRF6775MPBF	IRF6775MPBF	NM	NM	NM
Q4802	IRF6775MPBF	IRF6775MPBF	IRF6775MPBF	IRF6775MPBF	NM	NM	NM
Q4901	IRF6775MPBF	IRF6775MPBF	IRF6775MPBF	IRF6775MPBF	NM	NM	NM
Q4902	IRF6775MPBF	IRF6775MPBF	IRF6775MPBF	IRF6775MPBF	NM	NM	NM
TP282	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP287	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP292	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP297	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP307	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP315	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP319	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP323	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP327	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM
TP331	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	U_TESTPOINT_1.2	NM	NM	NM

10.46 PRIMARY ASSY (1/2)

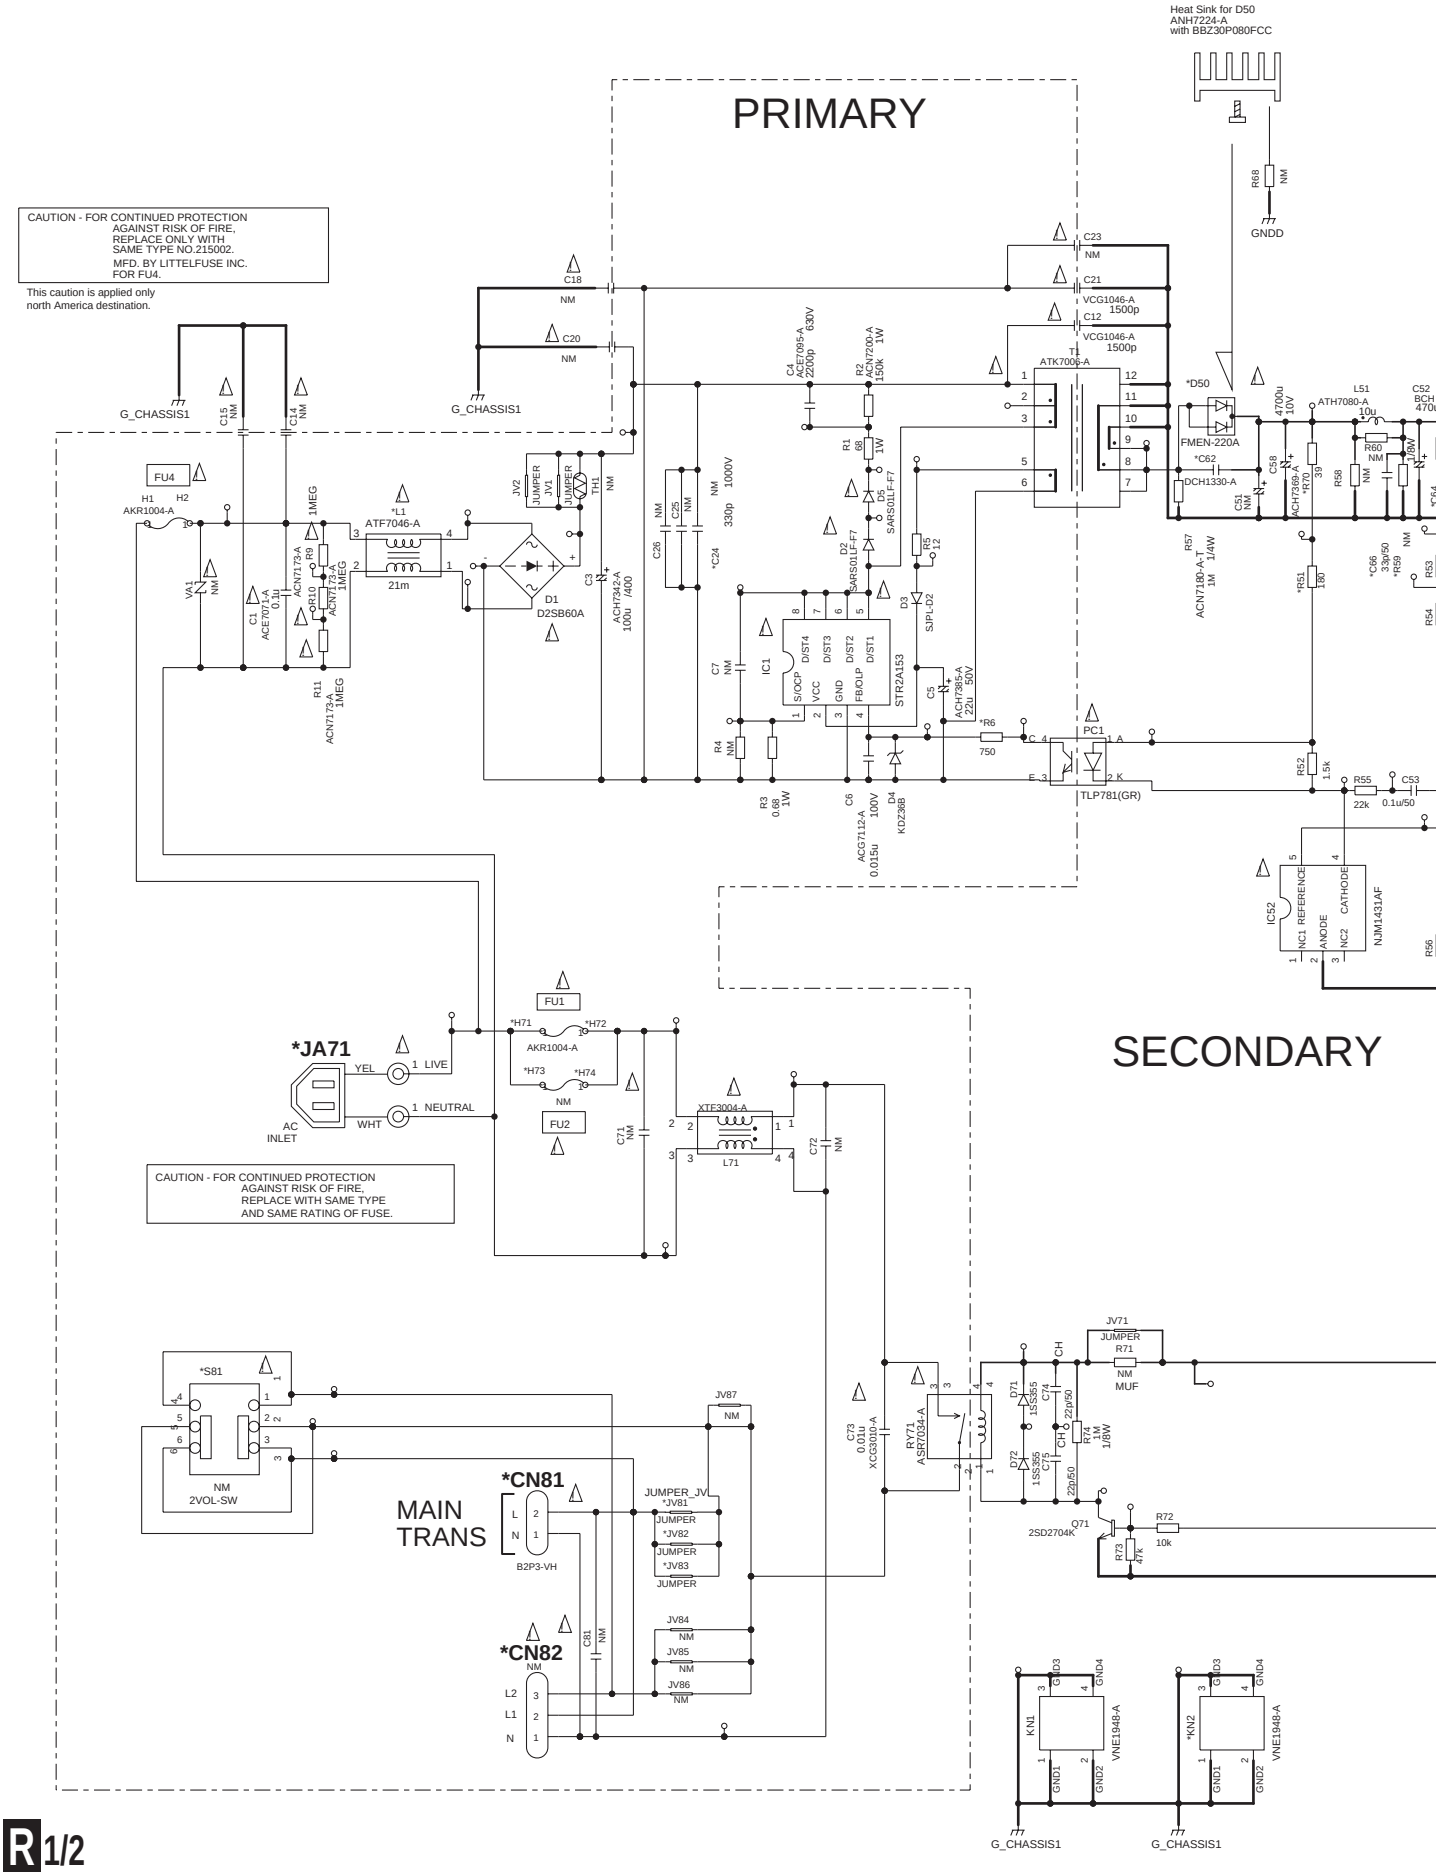

R1/2 PRIMARY ASSY(1/2) (AWX1614)

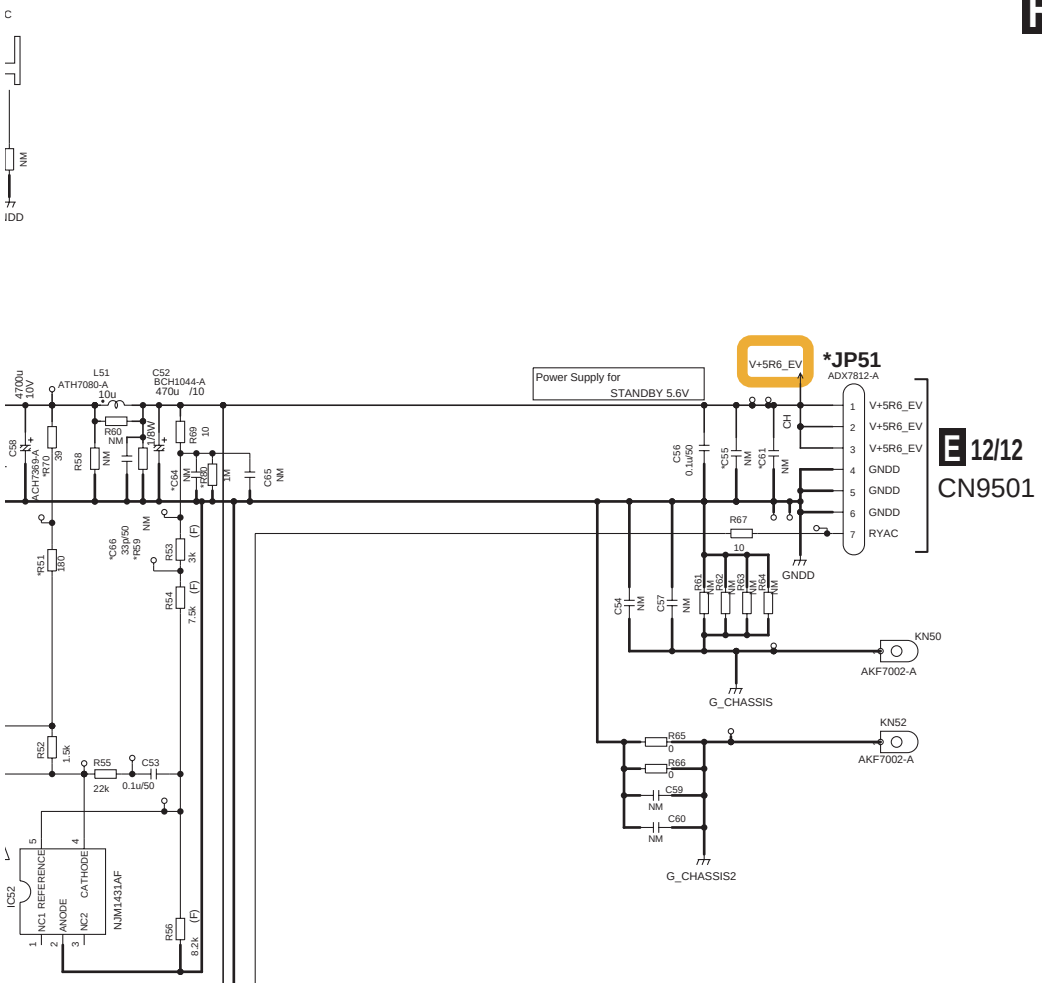

DARY

The △ mark found on some component parts should be replaced with same parts (safety regulation authorized) of identical designation.

NOTE

1. RESISTORS
Unit: k-kΩ , M-MΩ or Ω unless otherwise noted.
Rated Power: 1/10w unless otherwise noted.
Toleranee: (J)5% unless otherwise noted.
MUF : RD1/4MUF
2. CAPACITORS
Unit: p-pF or u-uF unless otherwise noted.
Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
CH : CCSRCH , CFTLA : CFTLA
AK : CEAK
NO MARKED : CKSRYB or CEAT
3. NM: No Mount

VNE1948-A

10.47 PRIMARY ASSY (2/2)

	AWX1394	AWX1447	AWX1448	AWX1449	AWX1450	AWX1451	AWX1614	AWX1615	AWX1466	AWX1616
C24	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM
C55	330p/50	NM	NM	NM	NM	NM	330p/50	NM	NM	NM
C61	10p/50	10p/50	10p/50	10p/50	10p/50	10p/50	10p/50	NM	NM	NM
C62	NM	DCH1330-A	DCH1330-A	DCH1330-A	DCH1330-A	DCH1330-A	NM	DCH1330-A	DCH1330-A	DCH1330-A
C64	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM
C66	NM	33p/50	33p/50	33p/50	33p/50	33p/50	NM	33p/50	33p/50	33p/50
R6	470	1k	1k	1k	1k	1k	470	750	750	750
R51	220	180	180	180	180	180	220	180	180	180
R59	3.6M	NM	NM	NM	NM	NM	3.6M	NM	NM	NM
R70	0	39	39	39	39	39	0	39	39	39
R80	NM	1M	1M	1M	1M	1M	NM	1M	1M	1M
L1	ATF7046-A	ATF7050-A	ATF7046-A	ATF7050-A	ATF7046-A	ATF7050-A	ATF7046-A	ATF7050-A	ATF7046-A	ATF7050-A
CN81	B2P3-VH	NM	B2P3-VH	NM	NM	NM	B2P3-VH	NM	B2P3-VH	NM
CN82	NM	B3P5-VH	NM	B3P5-VH	B3P5-VH	B3P5-VH	NM	B3P5-VH	NM	B3P5-VH
D50	FMW-2206	FMEN-220A	FMEN-220A	FMEN-220A	FMEN-220A	FMEN-220A	FMEN-220A	FMEN-220A	FMEN-220A	FMEN-220A
H71	AKR1004-A	AKR1004-A	NM	AKR1004-A	AKR1004-A	AKR1004-A	AKR1004-A	AKR1004-A	AKR1004-A	AKR1004-A
H72	AKR1004-A	AKR1004-A	NM	AKR1004-A	AKR1004-A	AKR1004-A	AKR1004-A	AKR1004-A	AKR1004-A	AKR1004-A
H73	NM	NM	AKR7004-A	NM	NM	NM	NM	NM	NM	NM
H74	NM	NM	AKR7004-A	NM	NM	NM	NM	NM	NM	NM
JA71	ADX7513-A	ADX7513-A	ADX7513-A	ADX7513-A	ADX7513-A	ADX7464-B	ADX7513-A	ADX7513-A	ADX7513-A	ADX7513-A
JA71_1	ADX7513-A_1	ADX7513-A_1	ADX7513-A_1	ADX7513-A_1	ADX7513-A_1	ADX7464-B_1	ADX7513-A_1	ADX7513-A_1	ADX7513-A_1	ADX7513-A_
JP51	ADX7812-A	ADX7812-A	ADX7812-A	ADX7812-A	ADX7812-A	ADX7812-A	ADX7812-A	ADX7812-A	ADX7812-A	ADX7812-A
JV81	JUMPER	JUMPER	JUMPER	NM	JUMPER	JUMPER	JUMPER	JUMPER	JUMPER	NM
JV82	JUMPER	JUMPER	JUMPER	NM	JUMPER	JUMPER	JUMPER	JUMPER	JUMPER	NM
JV83	JUMPER	JUMPER	JUMPER	NM	JUMPER	JUMPER	JUMPER	JUMPER	JUMPER	NM
KN2	VNE1948-A	VNE1948-A	VNE1948-A	NM	VNE1948-A	VNE1948-A	VNE1948-A	VNE1948-A	VNE1948-A	NM
S81	NM	NM	NM	AKX7020-A	NM	NM	NM	NM	NM	AKX7020-A

R2/2 PRIMARY ASSY(2/2) (AWX1614)

WX1466	AWX1616	AWX1617	AWX1618	AWX1460	AWX1461	AWX1467	AWX1640	AWX1641	AWX1468	AWX1469
	NM	NM	NM	NM	NM	NM	NM	NM	NM	ACG7106-A
	NM	NM	NM	330p/50	330p/50	NM	330p/50	330p/50	330p/50	330p/50
	NM	NM	NM	10p/50	10p/50	NM	10p/50	10p/50	10p/50	10p/50
1330-A	DCH1330-A	DCH1330-A	DCH1330-A	NM	NM	DCH1330-A	NM	NM	NM	NM
	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM
/50	33p/50	33p/50	33p/50	NM	33p/50	33p/50	NM	NM	NM	NM
	750	750	750	470	470	750	470	470	470	470
	180	180	180	220	220	180	220	220	220	220
	NM	NM	NM	3.6M	NM	NM	3.6M	3.6M	3.6M	3.6M
	39	39	39	0	0	39	0	0	0	0
	1M	1M	1M	NM	1M	1M	NM	NM	NM	NM
7046-A △	ATF7050-A △	ATF7046-A △	ATF7050-A △	ATF7046-A △	ATF7050-A △	ATF7046-A △	ATF7046-A △	ATF7050-A △	ATF7050-A △	ATF7050-A △
3-VH △	NM	NM	NM	B2P3-VH △	NM	B2P3-VH △	B2P3-VH △	NM	NM	NM
	B3P5-VH △	B3P5-VH △	B3P5-VH △	NM	B3P5-VH △	NM	NM	B3P5-VH △	B3P5-VH △	B3P5-VH △
N-220A	FMEN-220A	FMEN-220A	FMEN-220A	FMEN-220A	FMEN-220A	FMEN-220A	FMEN-220A	FMEN-220A	FMEN-220A	FMEN-220A
1004-A	AKR1004-A	AKR1004-A	AKR1004-A	AKR1004-A	AKR1004-A	AKR1004-A	AKR1004-A	AKR1004-A	AKR1004-A	AKR1004-A
1004-A	AKR1004-A	AKR1004-A	AKR1004-A	AKR1004-A	AKR1004-A	AKR1004-A	AKR1004-A	AKR1004-A	AKR1004-A	AKR1004-A
	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM
	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM
7513-A △	ADX7513-A △	ADX7513-A △	ADX7464-B △	ADX7513-A △	ADX7513-A △	ADX7513-A △	ADX7513-A △	ADX7513-A △	ADX7513-A △	ADX7464-B △
7513-A_1 △	ADX7513-A_1 △	ADX7513-A △	ADX7464-B_1 △	ADX7513-A_1 △	ADX7513-A_1 △	ADX7513-A_1 △	ADX7513-A_1 △	ADX7513-A_1 △	ADX7513-A_1 △	ADX7464-B_1 △
7812-A	ADX7812-A	ADX7812-A	ADX7812-A	ADX7792-A	ADX7792-A	ADX7792-A	ADX7792-A	ADX7792-A	ADX7792-A	ADX7792-A
PER	NM	JUMPER	JUMPER	JUMPER	JUMPER	JUMPER	JUMPER	JUMPER	NM	JUMPER
PER	NM	JUMPER	JUMPER	JUMPER	JUMPER	JUMPER	JUMPER	JUMPER	NM	JUMPER
PER	NM	JUMPER	JUMPER	JUMPER	JUMPER	JUMPER	JUMPER	JUMPER	NM	JUMPER
1948-A	NM	VNE1948-A	VNE1948-A	VNE1948-A	VNE1948-A	VNE1948-A	VNE1948-A	VNE1948-A	NM	VNE1948-A
	AKX7020-A △	NM	NM	NM	NM	NM	NM	NM	AKX7020-A △	NM

The △ mark found on some component parts should be replaced with same parts (safety regulation authorized) of identical designation.

NOTE

1. RESISTORS
Unit: k-k Ω , M-MΩ or Ω unless otherwise noted.
Rated Power: 1/10w unless otherwise noted.
Toleranee: (J)5% unless otherwise noted.
MUF : RD1/4MUF
2. CAPACITORS
Unit: p-pF or u-uF unless otherwise noted.
Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
CH : CCSRCH , CFTLA : CFTLA
AK : CEAK
NO MARKED : CKSRYB or CEAT
3. NM: No Mount

10.48 A-REG_S ASSY

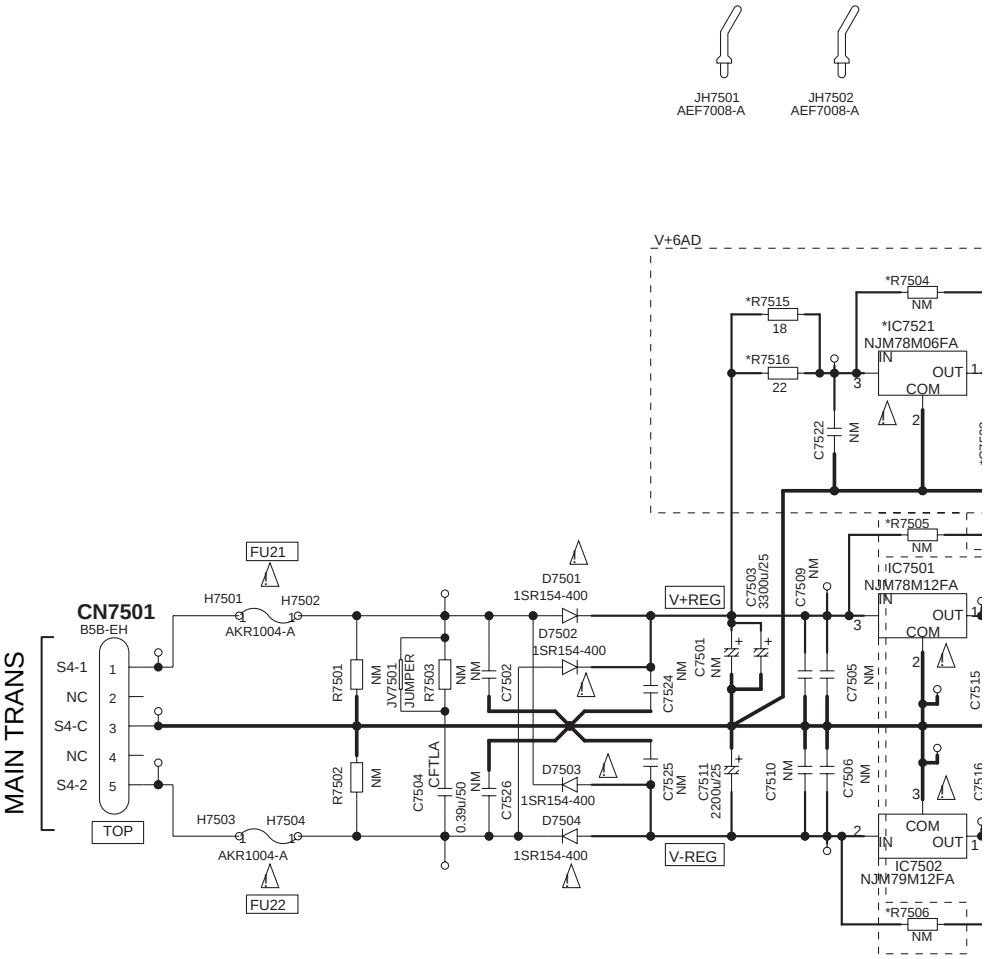

	AWX1401	AWX1596	AWX1597	AWX1452	AWX1598	AWX1599
C7523	100u/35	100u/35	100u/35	NM	NM	NM
R7504	NM	22k	NM	NM	NM	NM
R7515	18	18	18	NM	NM	NM
R7516	22	22	22	NM	NM	NM
IC7521	NJM78M06FA	NJM78M06FA	NJM78M06FA	NM	NM	NM
R7505	NM	27k	NM	NM	27k	NM
R7506	NM	27k	NM	NM	27k	NM
R7513	1M	NM	1M	1M	NM	1M
D7506	NM	1SS355	NM	1SS355	1SS355	NM
D7507	NM	1SS355	NM	1SS355	1SS355	NM

S A-REG_S ASSY (AWX1596)

JH7502
F7008-A

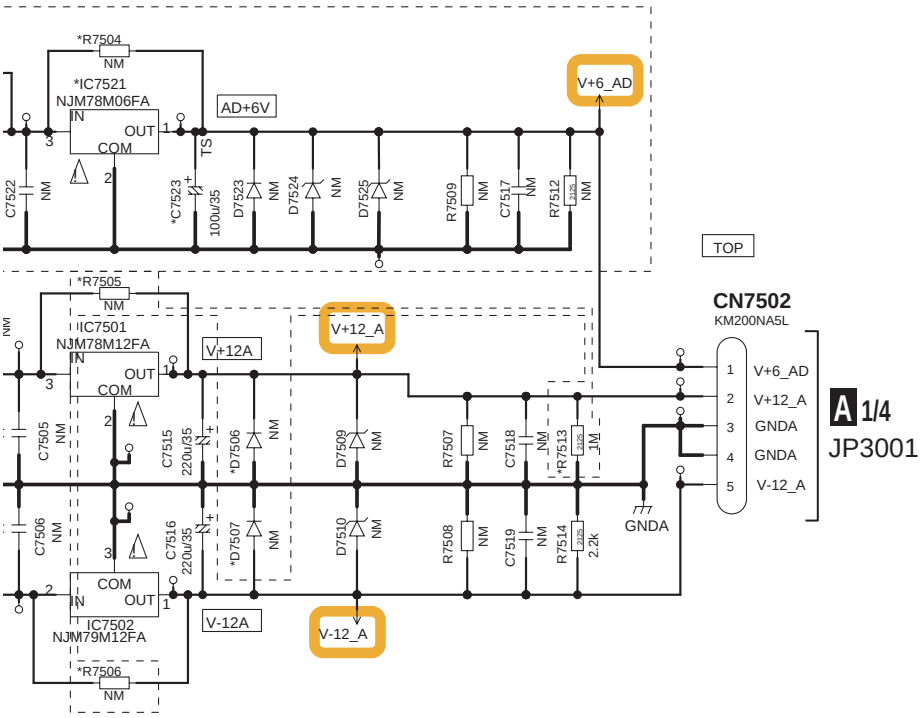

The ⚠ mark found on some component parts should be replaced with same parts (safety regulation authorized) of identical designation.

NOTE

1.RESISTORS
Unit: k-k Ω , M-M Ω or Ω
unless otherwise noted.
Rated power: 1/10W unless otherwise noted.
Tolerance: (J) ±5% unless otherwise noted.
2125 : RS1/8SQ
MUF : RS1/4MUF

2.CAPACITORS
Unit: p-pF, or μ F unless otherwise noted.
Ratings: Capacity(μ F)/Voltage(V) unless otherwise noted.
NP : CEANP
CFTLA : CFTLA
AK : CEAK
NO MARKED : CEAT or CKSRYB

3. NM : NO MOUNT

10.49 IR REG_S ASSY (1/2)

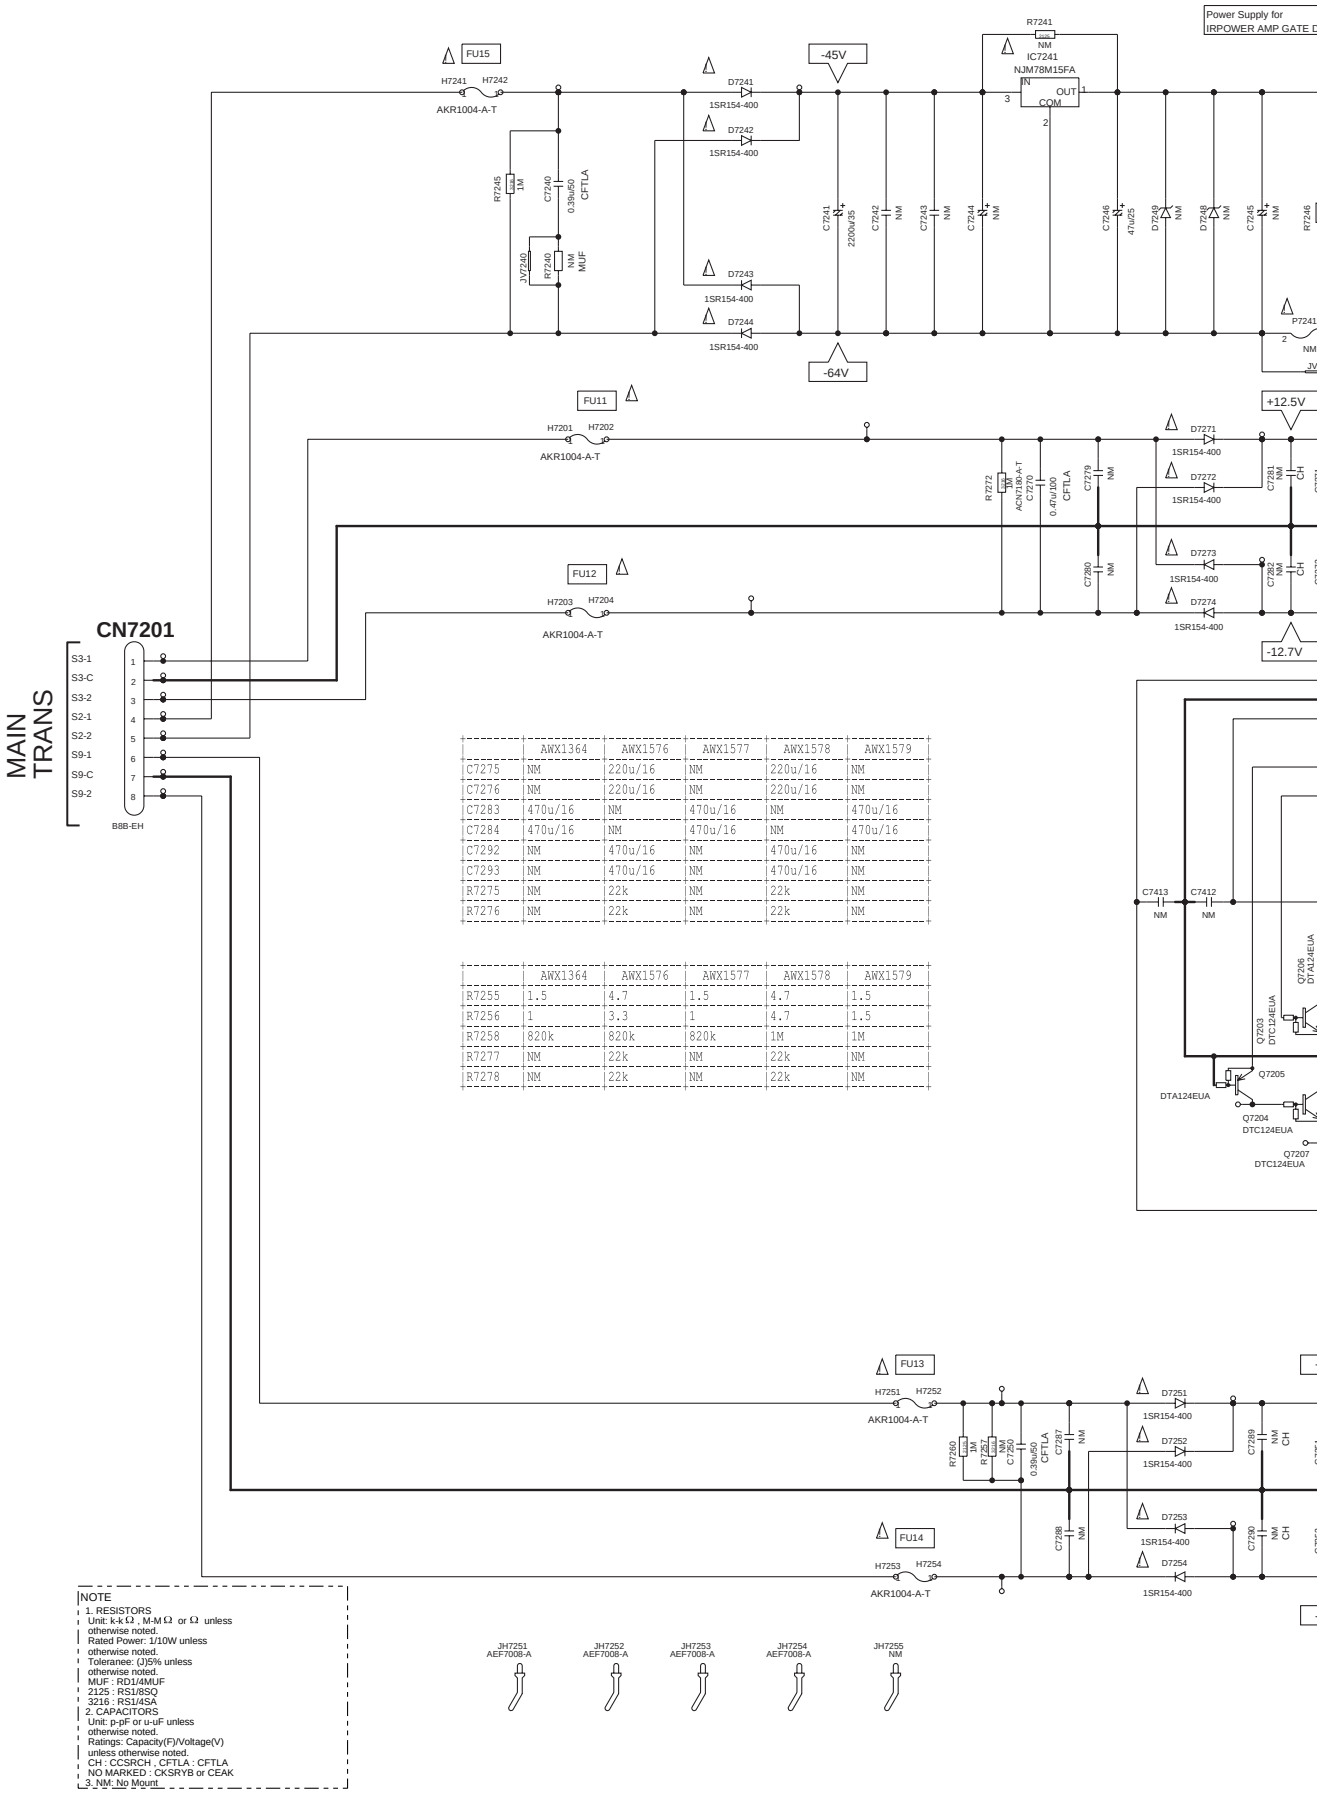

	AWX1364	AWX1576	AWX1577	AWX1578	AWX1579
C7275	NM	220u/16	NM	220u/16	NM
C7276	NM	220u/16	NM	220u/16	NM
C7283	470u/16	NM	470u/16	NM	470u/16
C7284	470u/16	NM	470u/16	NM	470u/16
C7292	NM	470u/16	NM	470u/16	NM
C7293	NM	470u/16	NM	470u/16	NM
R7275	NM	22k	NM	22k	NM
R7276	NM	22k	NM	22k	NM

	AWX1364	AWX1576	AWX1577	AWX1578	AWX1579
R7255	1.5	4.7	1.5	4.7	1.5
R7256	1	3.3	1	4.7	1.5
R7258	820k	820k	820k	1M	1M
R7277	NM	22k	NM	22k	NM
R7278	NM	22k	NM	22k	NM

NOTE
1. RESISTORS
Unit: k-k Ω , M-M Ω or Ω unless otherwise noted.
Rated Power: 1/10W unless otherwise noted.
Toleranee: (J)5% unless otherwise noted.
MUF : RD1/4MUF
2125 : RS1/8SQ
3216 : RS1/4SA
2. CAPACITORS
Unit: p-pF or u-uF unless otherwise noted.
Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
CH : CCSRCH , CFTLA : CFTLA
NO MARKED : CKSRYB or CEAK
3. NM: No Mount

T 1/2

T1/2 IR REG_S ASSY(1/2) (AWX1576)

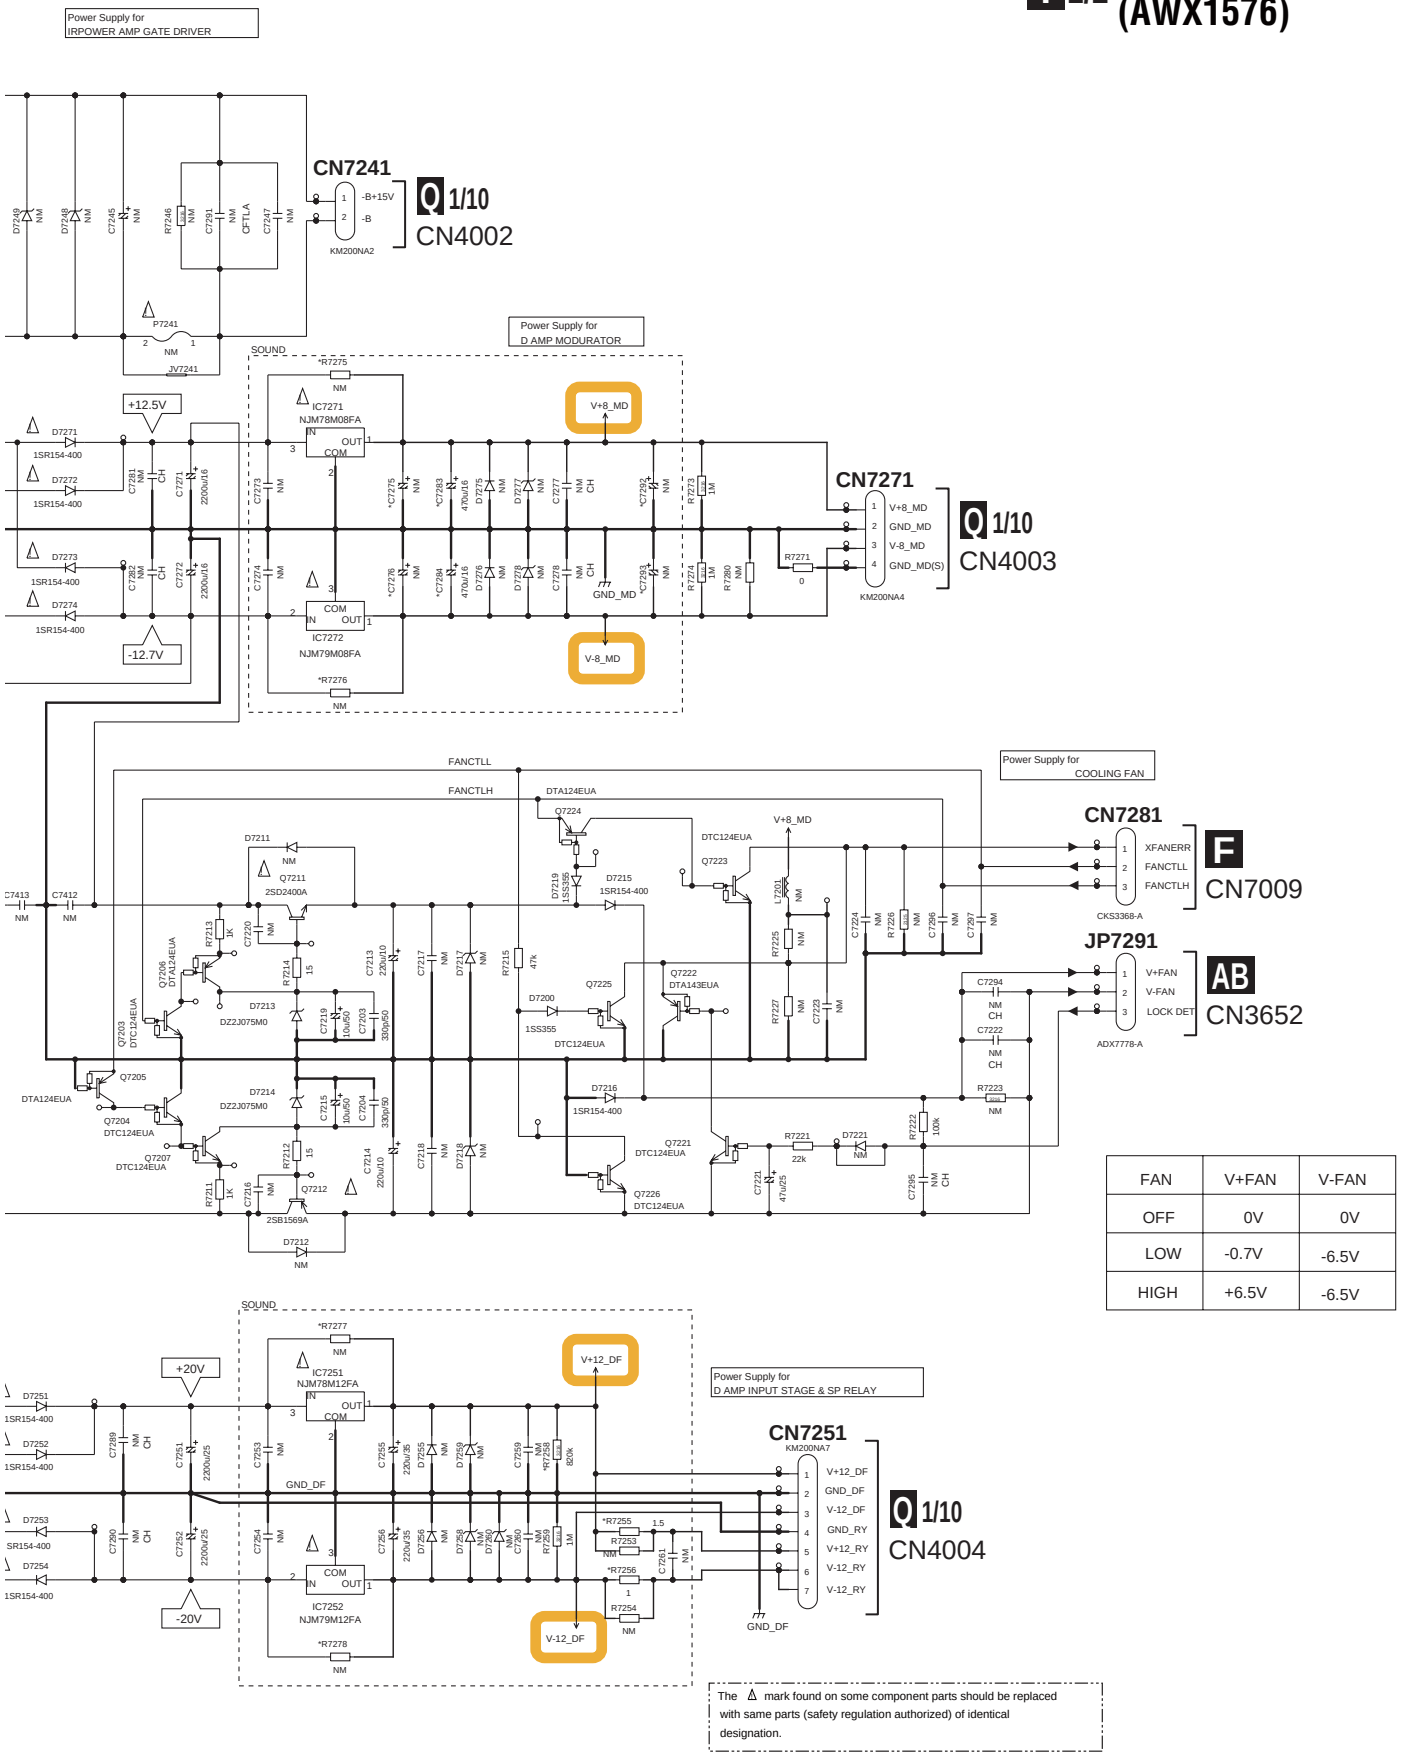

FAN	V+FAN	V-FAN
OFF	0V	0V
LOW	-0.7V	-6.5V
HIGH	+6.5V	-6.5V

The ⚠ mark found on some component parts should be replaced with same parts (safety regulation authorized) of identical designation.

10.50 IR REG_S ASSY (2/2)

T 2/2 IR REG_S ASSY(2/2) (AWX1576)

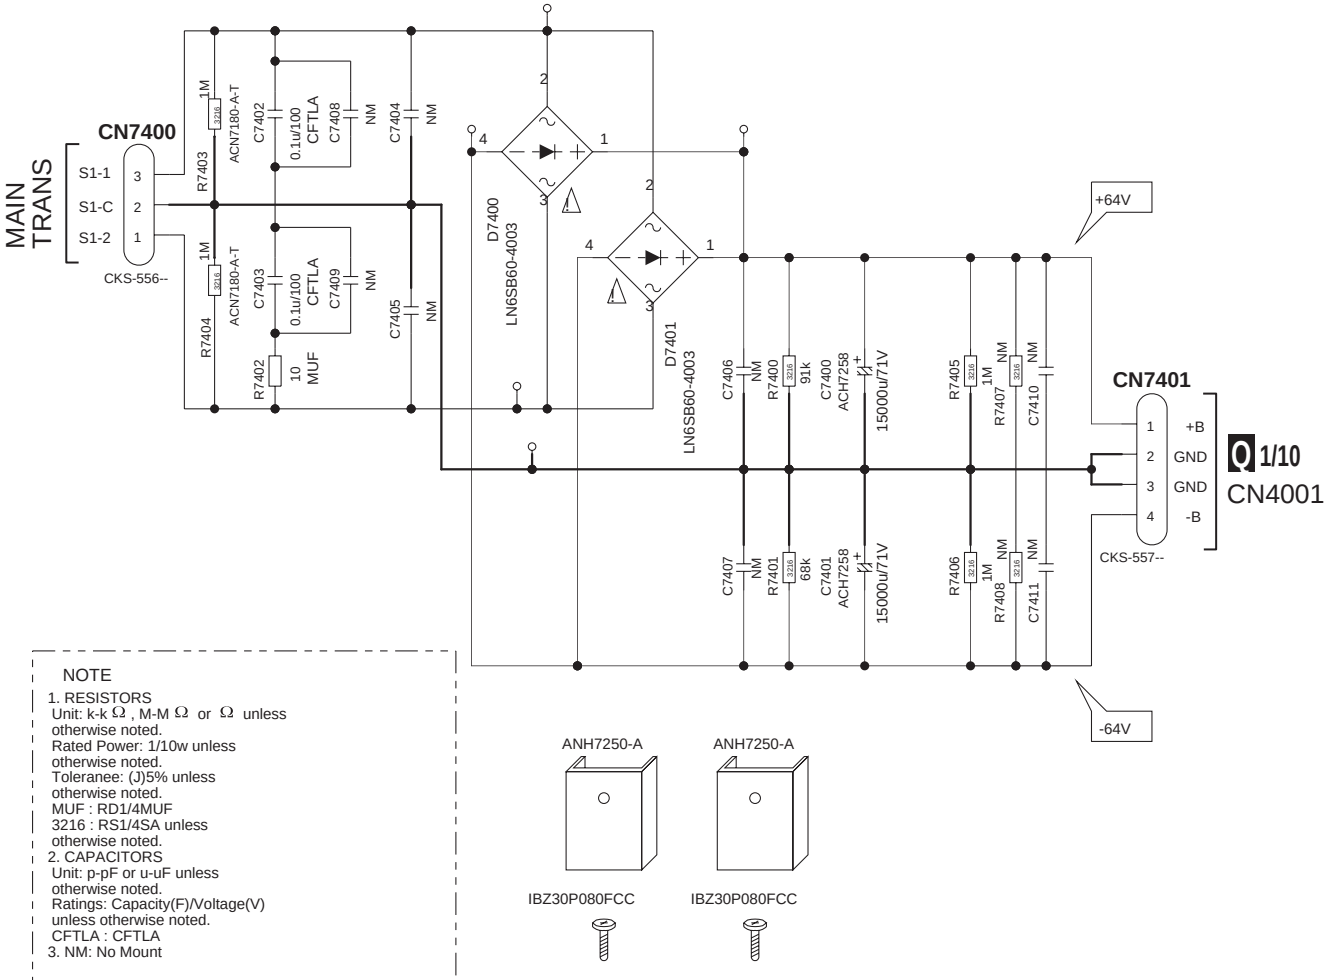

NOTE
1. RESISTORS
Unit: k-k Ω , M-M Ω or Ω unless otherwise noted.
Rated Power: 1/10w unless otherwise noted.
Toleranee: (J)5% unless otherwise noted.
MUF : RD1/4MUF
3216 : RS1/4SA unless otherwise noted.
2. CAPACITORS
Unit: p-pF or u-uF unless otherwise noted.
Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
CFTLA : CFTLA
3. NM: No Mount

The ⚠ mark found on some component parts should be replaced with same parts (safety regulation authorized) of identical designation.

10.51 V-REG_S ASSY (1/3)

U1/3 V-REG_S ASSY(1/3) (AWX1600)

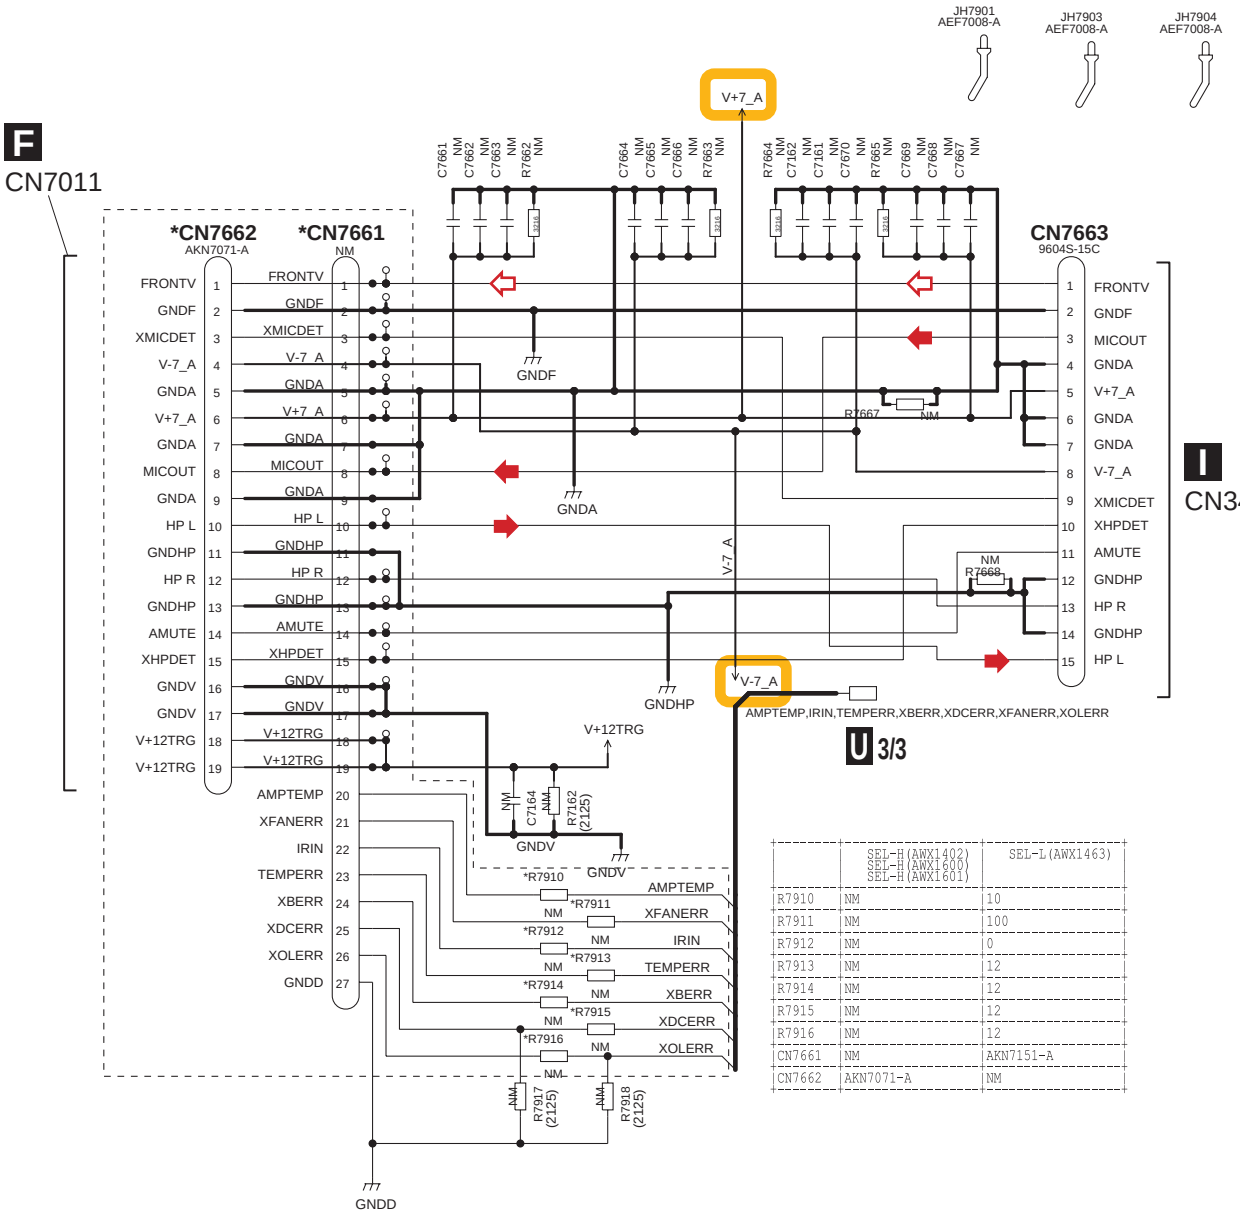

	SEL-H(AWX1402) SEL-H(AWX1600) SEL-H(AWX1601)	SEL-L(AWX1463)
R7910	NM	10
R7911	NM	100
R7912	NM	0
R7913	NM	12
R7914	NM	12
R7915	NM	12
R7916	NM	12
CN7661	NM	AKN7151-A
CN7662	AKN7071-A	NM

: Video Signal Route

: Audio Signal Route

NOTE

1. RESISTORS
Unit: k-k Ω , M-M Ω or Ω unless otherwise noted.
Rated Power: 1/16w unless otherwise noted.
Toleranee: (J)5% unless otherwise noted.
2. CAPACITORS
Unit: p-pF or u-uF unless otherwise noted.
Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
3. NM: No Mount

U1/3

U1/3

10.52 V-REG_S ASSY (2/3)

The ⚠ mark found on some component parts should be replaced with same parts (safety regulation authorized) of identical designation.

CAUTION-
FOR CONTINUED PROTECTION AGAINST RISK OF FIRE,
REPLACE WITH SAME TYPE NO. 49101.6 MFD.
BY LITTELFUSE INC. FOR P4081

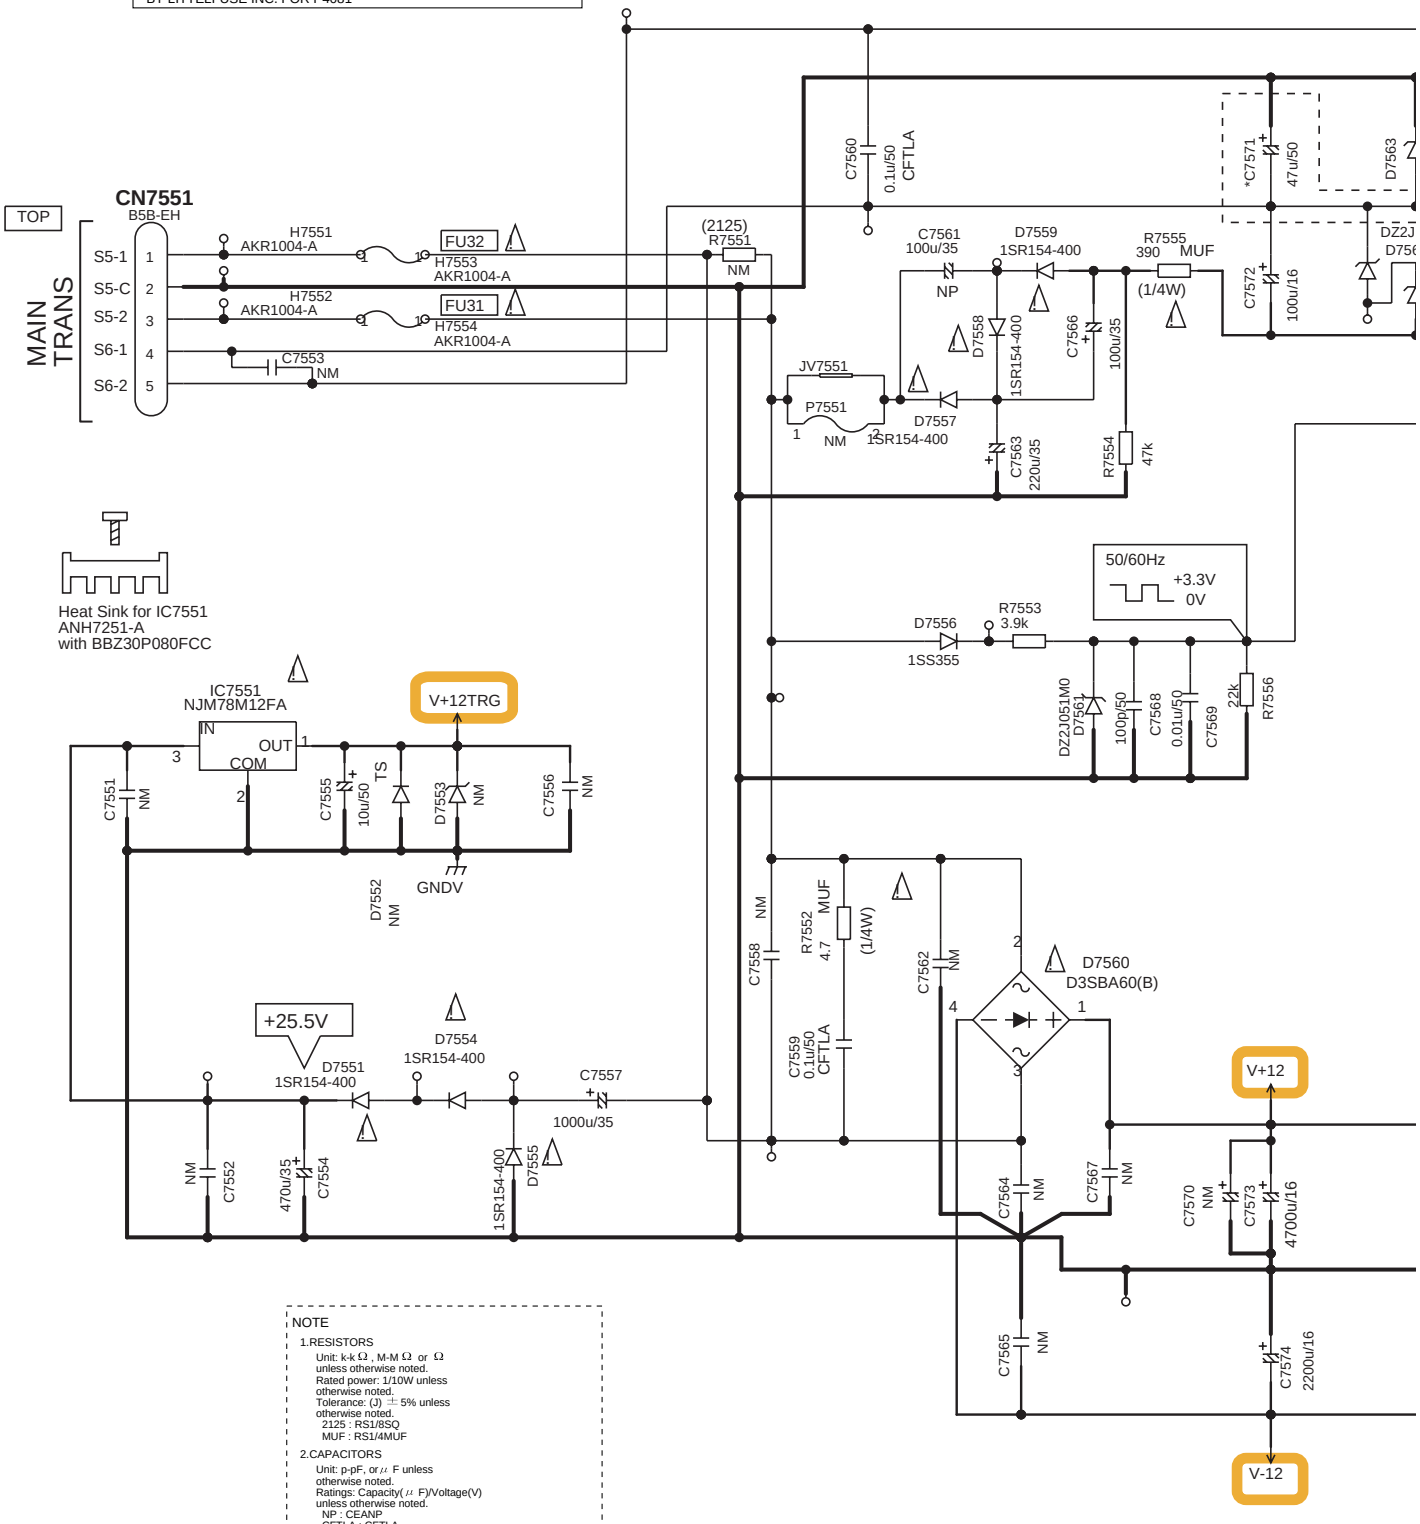

NOTE

1.RESISTORS
Unit: k-k Ω , M-M Ω or Ω
unless otherwise noted.
Rated power: 1/10W unless otherwise noted.
Tolerance: (J) ±5% unless otherwise noted.
2125 : RS1/8SQ
MUF : RS1/4MUF

2.CAPACITORS
Unit: p-pF, or μ F unless otherwise noted.
Ratings: Capacity(μ F)/Voltage(V) unless otherwise noted.
NP : CEANP
CFTLA ; CFTLA
AK : CEAK
NO MARKED : CEAT or CKSRYB

3. NM : NO MOUNT

	SEL-H(AWX1402)	SEL-L(AWX1463)	SEL-H(AWX1600)	SEL-H(AWX1601)	SEL-L/J(AWX1681)
C7571	47u/50	47u/50	47u/50	100u/35	47u/50
C7575	NM	NM	NM	100p/50	NM
R7557	NM	NM	NM	1M	NM

U 2/3 V-REG_S ASSY(2/3) (AWX1600)

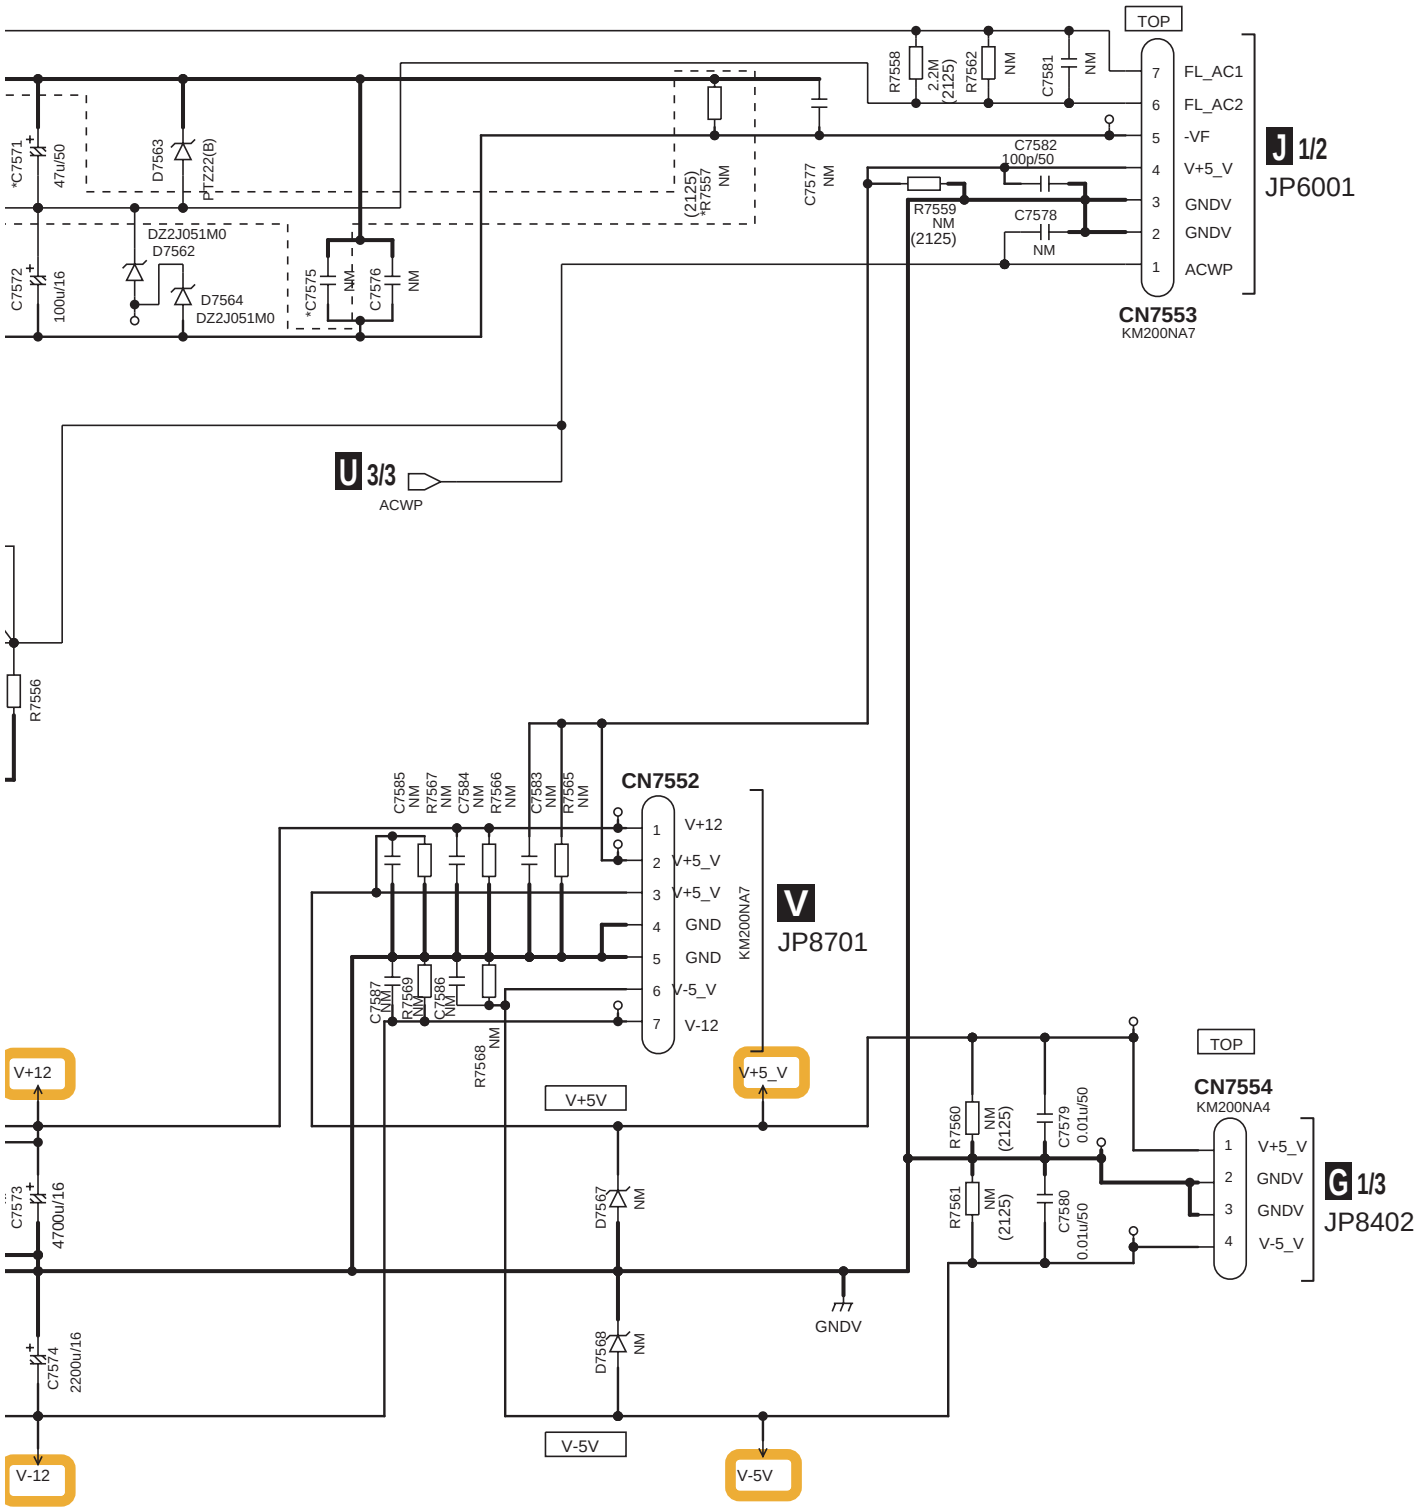

10.53 V-REG_S ASSY (3/3)

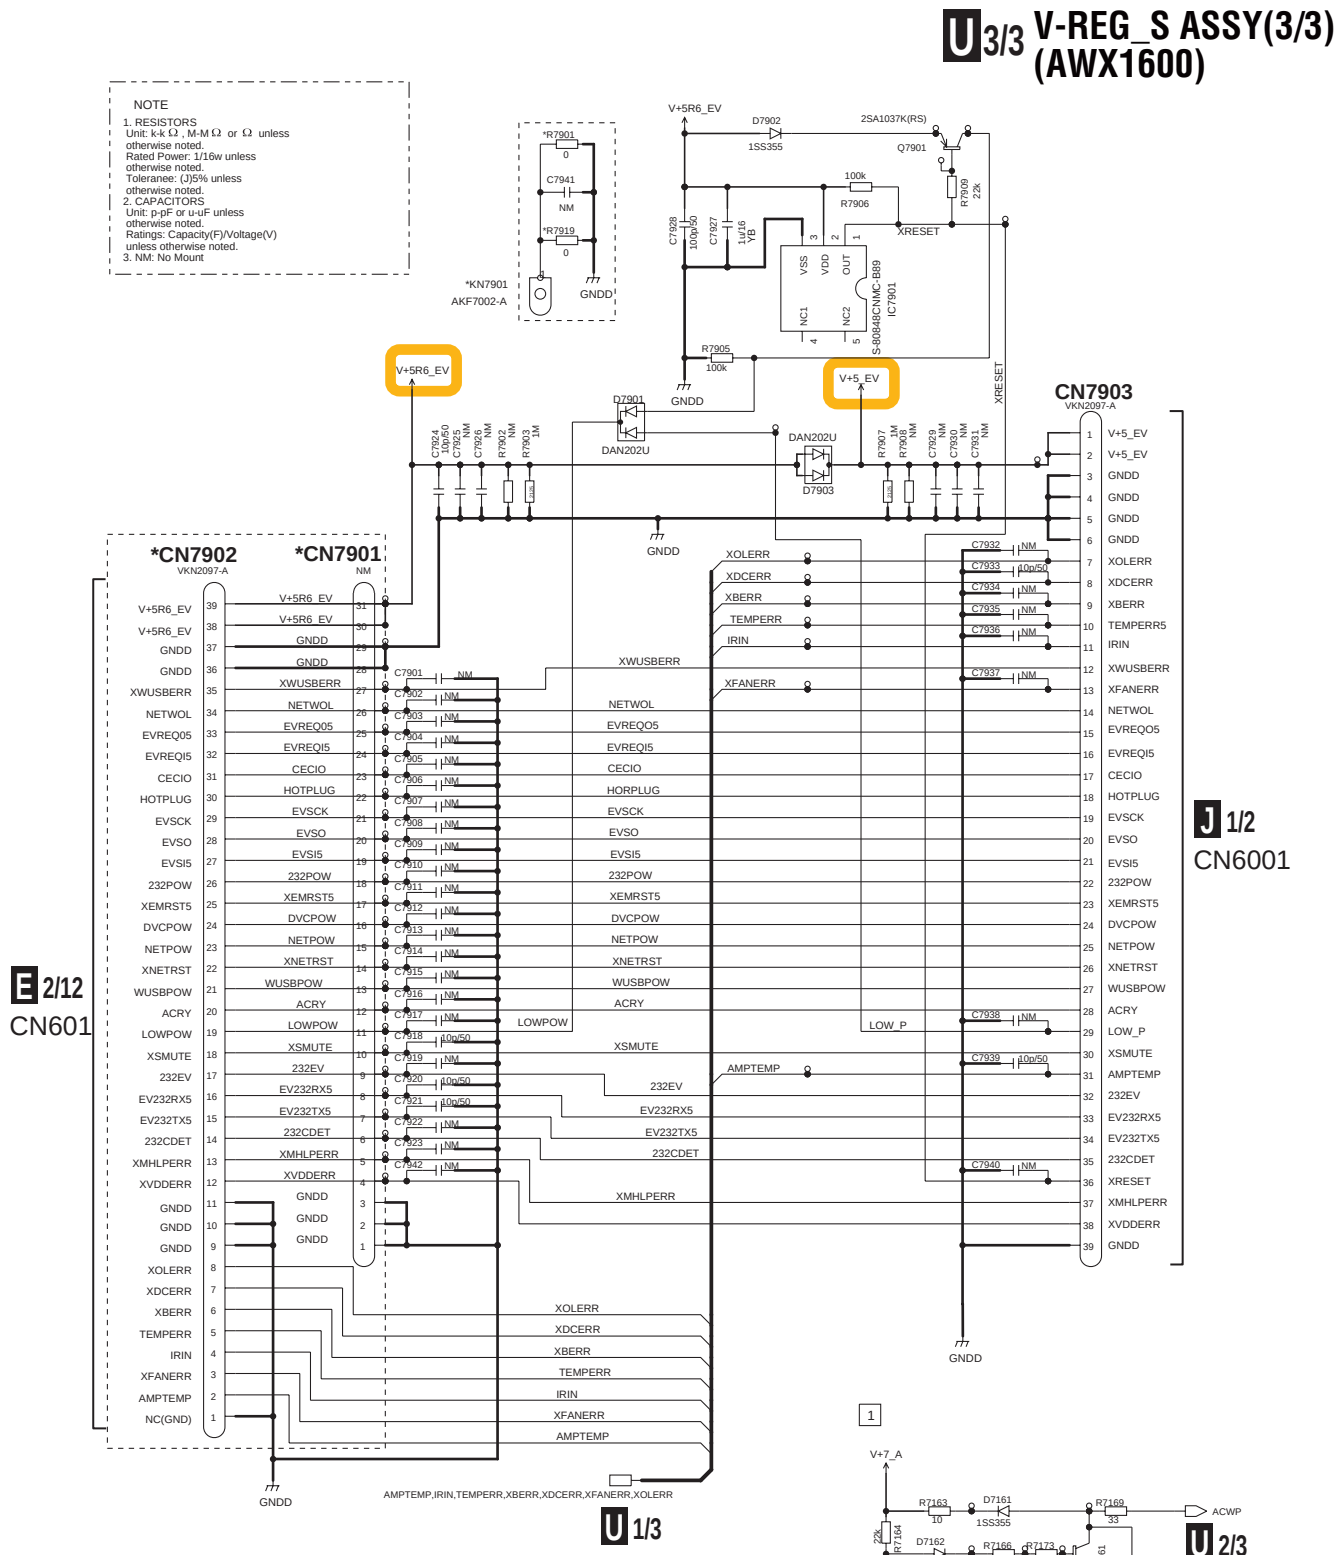

	SEL-H/SY (AWX1402)	SEL-L/CU,SY (AWX1463)	SEL-H/CU (AWX1600)	SEL-H/J (AWX1601)	SEL-L/J (AWX1681)
CN7901	NM	VKN1262-A	NM	NM	VKN1262-A
CN7902	VKN2097-A	NM	VKN2097-A	VKN2097-A	NM
R7901	0	NM	NM	0	0
R7919	0	NM	NM	0	0
KN7901	AKF7002-A	NM	NM	AKF7002-A	AKF7002-A

10.54 VREG CHILD_S ASSY

V VREG CHILD_S ASSY (AWX1404)

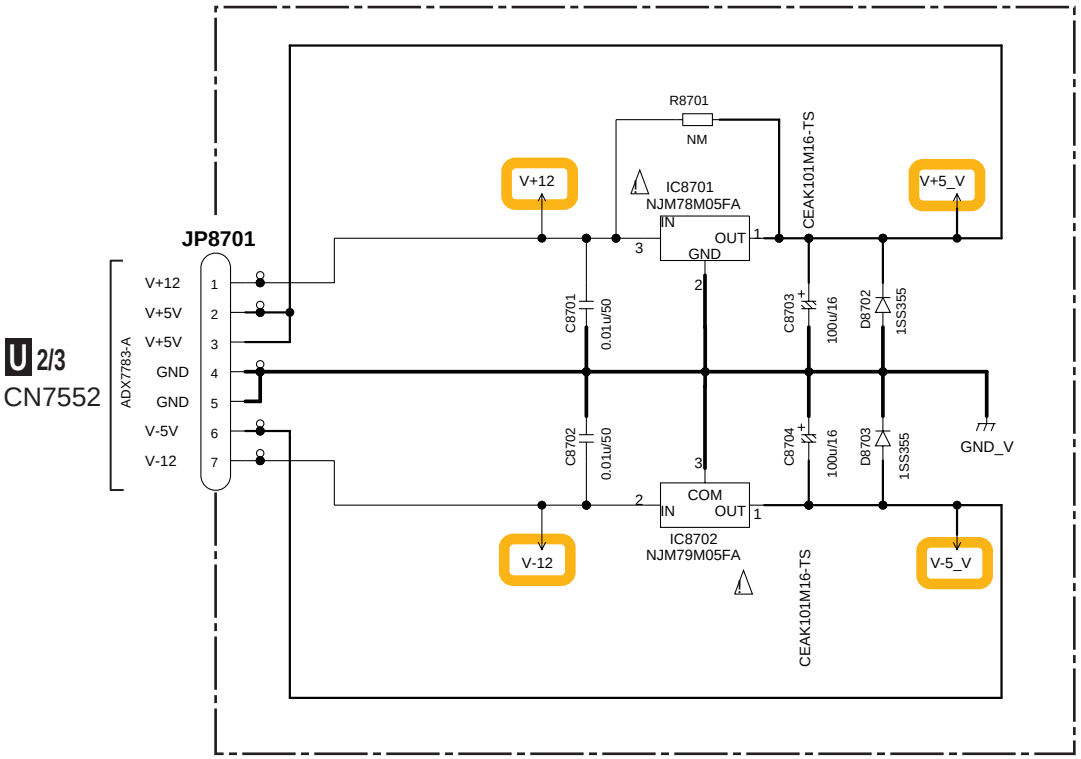

CAUTION - FOR CONTINUED PROTECTION AGAINST RISK OF FIRE,
REPLACE WITH SAME TYPE AND RATINGS OF FUSE.

NOTE

1. RESISTORS
Unit: k-kΩ , M-M Ω or Ω unless otherwise noted.
Rated Power: 1/16w unless otherwise noted.
Toleranee: (J)5% unless otherwise noted.
MUF : RD1/4MUF
2. CAPACITORS
Unit: p-pF or u-uF unless otherwise noted.
Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
CH : CCSRCH , CFTLA : CFTLA
NP : CEANP , AK : CEAK
NO MARKED : CKSRYB or CEAT
3. NM: No Mount

The Δ mark found on some component parts should be replaced with same parts (safety regulation authorized) of identical designation.

10.55 CONNECT_S ASSY

W CONNECT_S ASSY (AWX1583)

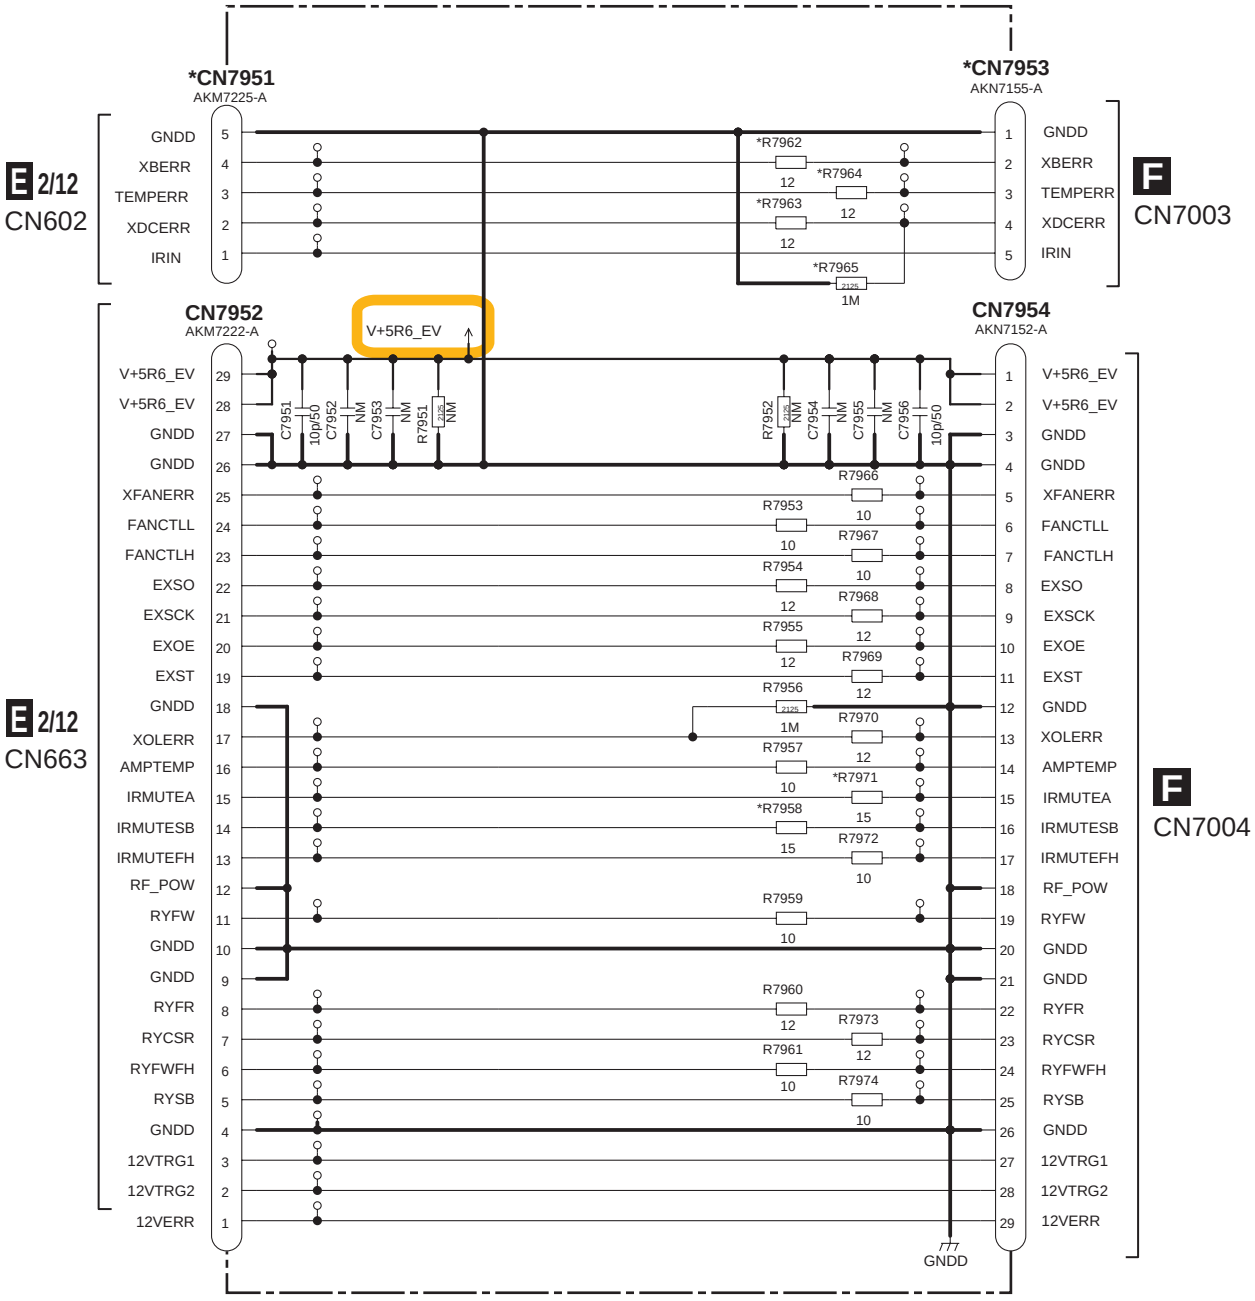

	awx1366	awx1583	awx1584	awx1464	awx1585
R7958	15	15	15	15	15
R7962	12	12	12	NM	NM
R7963	12	12	12	NM	NM
R7964	12	12	12	NM	NM
R7965	1M	1M	1M	NM	NM
R7971	15	15	15	15	15
CN7951	AKM7225-A	AKM7225-A	AKM7225-A	NM	NM
CN7953	AKN7155-A	AKN7155-A	AKN7155-A	NM	NM

NOTE

1. RESISTORS
Unit: k-kΩ , M-M Ω or Ω unless otherwise noted.
Rated Power: 1/16w unless otherwise noted.
Toleranee: (J)5% unless otherwise noted.

2. CAPACITORS
Unit: p-pF or u-uF unless otherwise noted.
Ratings: Capacity(F)/Voltage(V) unless otherwise noted.

3. NM: No Mount

10.56 A-DAC BRIDGE ASSY

X A-DAC BRIDGE ASSY (AWX1360)

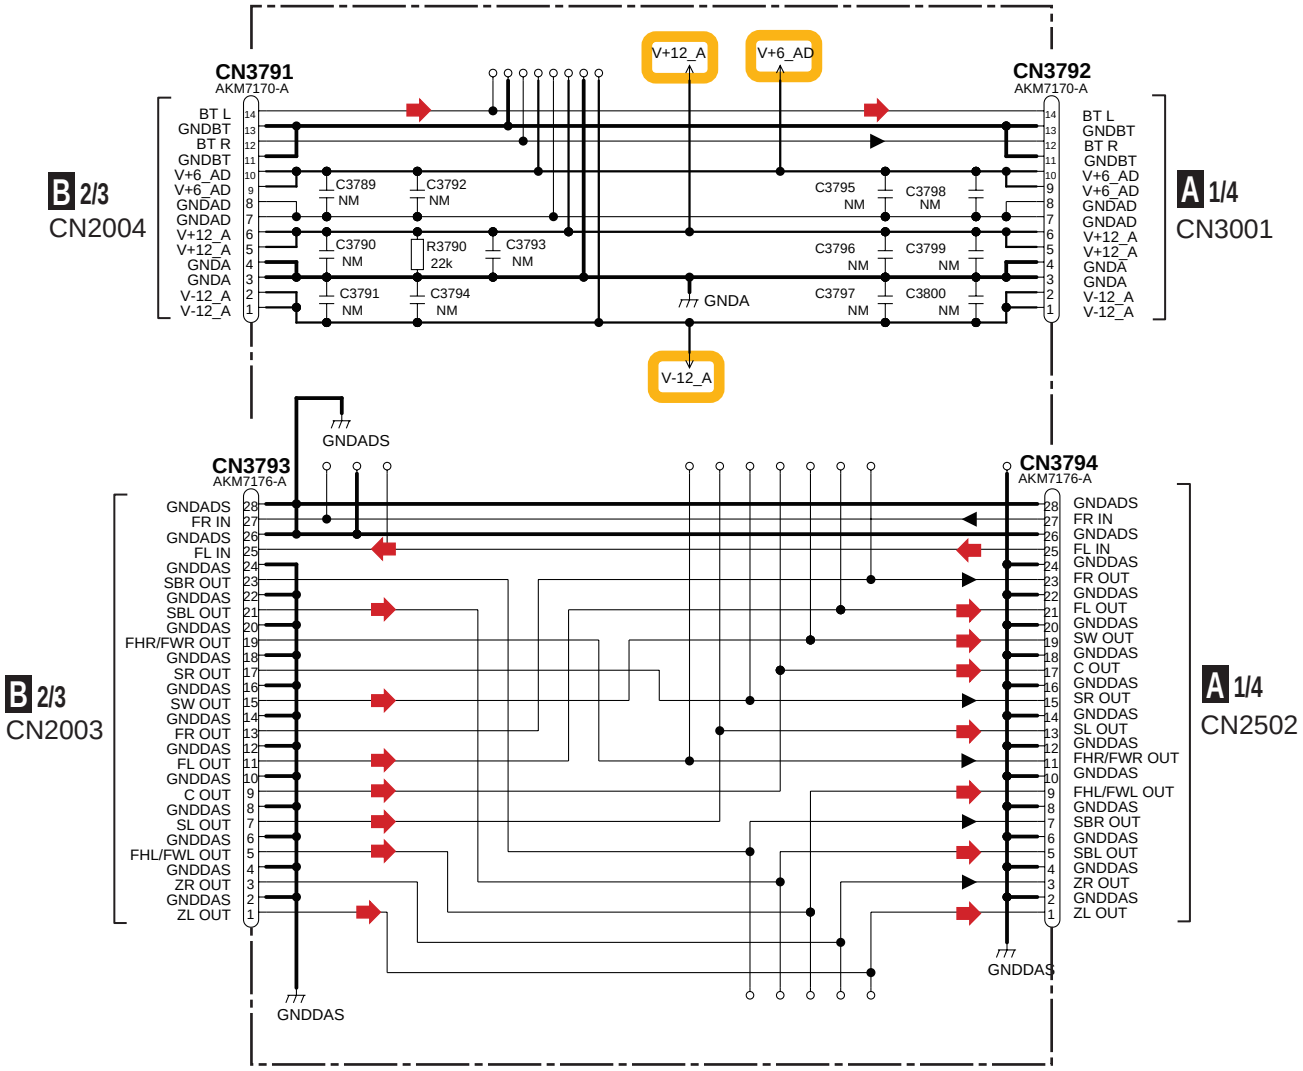

: Audio Signal Route

NOTE
1. RESISTORS
Unit: k-kΩ , M-MΩ or Ω unless otherwise noted.
Rated Power: 1/10w unless otherwise noted.
Toleranee: (J)5% unless otherwise noted.

2. CAPACITORS
Unit: p-pF or u-uF unless otherwise noted.
Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
CH : CCSRCH
NO MARKED : CKSRYB
3. NM: No Mount

10.57 D-AUDIO BRIDGE ASSY

Y D-AUDIO BRIDGE ASSY (AWX1358)

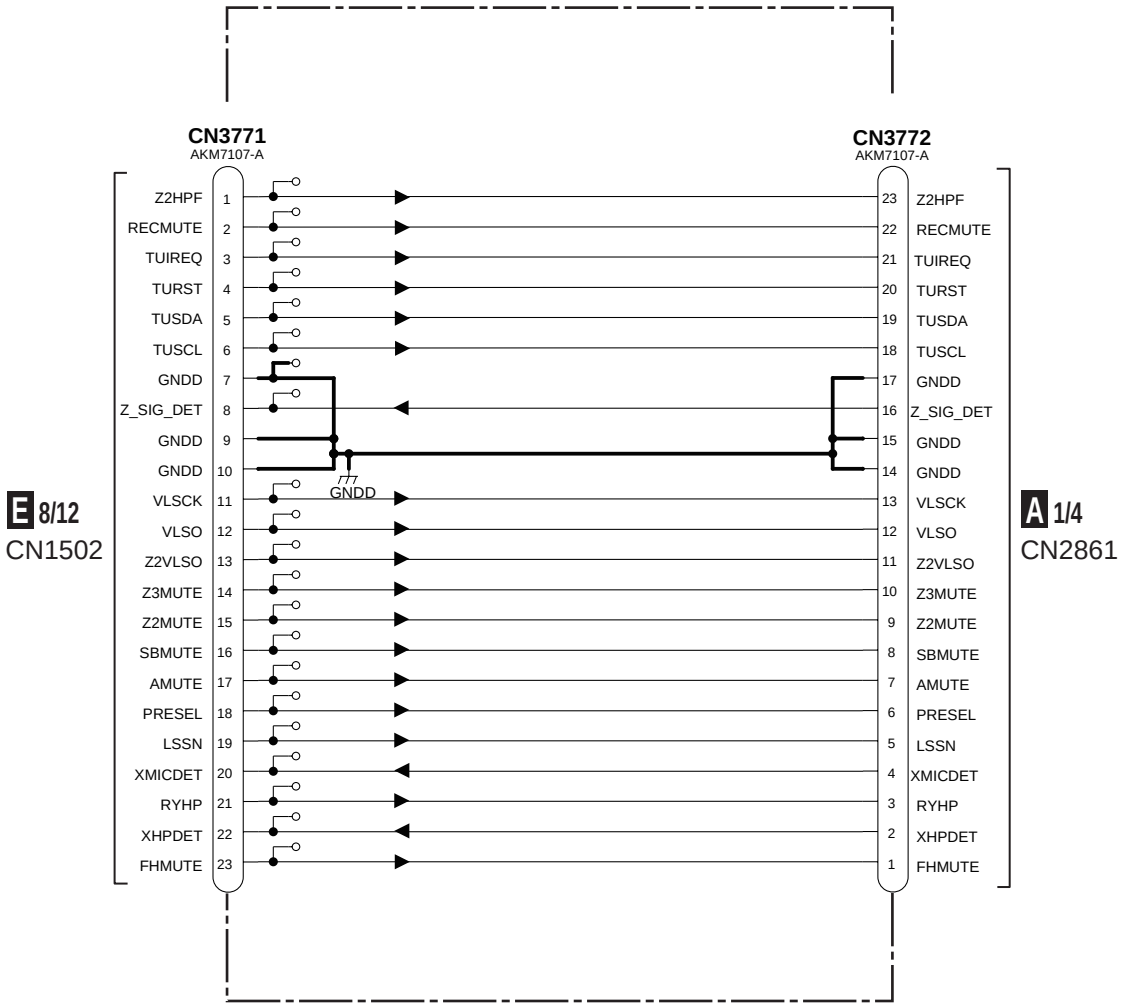

NOTE
1. RESISTORS
Unit: k-k Ω , M-MΩ or Ω unless otherwise noted.
Rated Power: 1/10w unless otherwise noted.
Toleranee: (J)5% unless otherwise noted.

2. CAPACITORS
Unit: p-pF or u-uF unless otherwise noted.
Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
CH : CCSRCH
NO MARKED : CKSRYB
3. NM: No Mount

10.58 D-DAC BRIDGE ASSY

Z D-DAC BRIDGE ASSY (AWX1359)

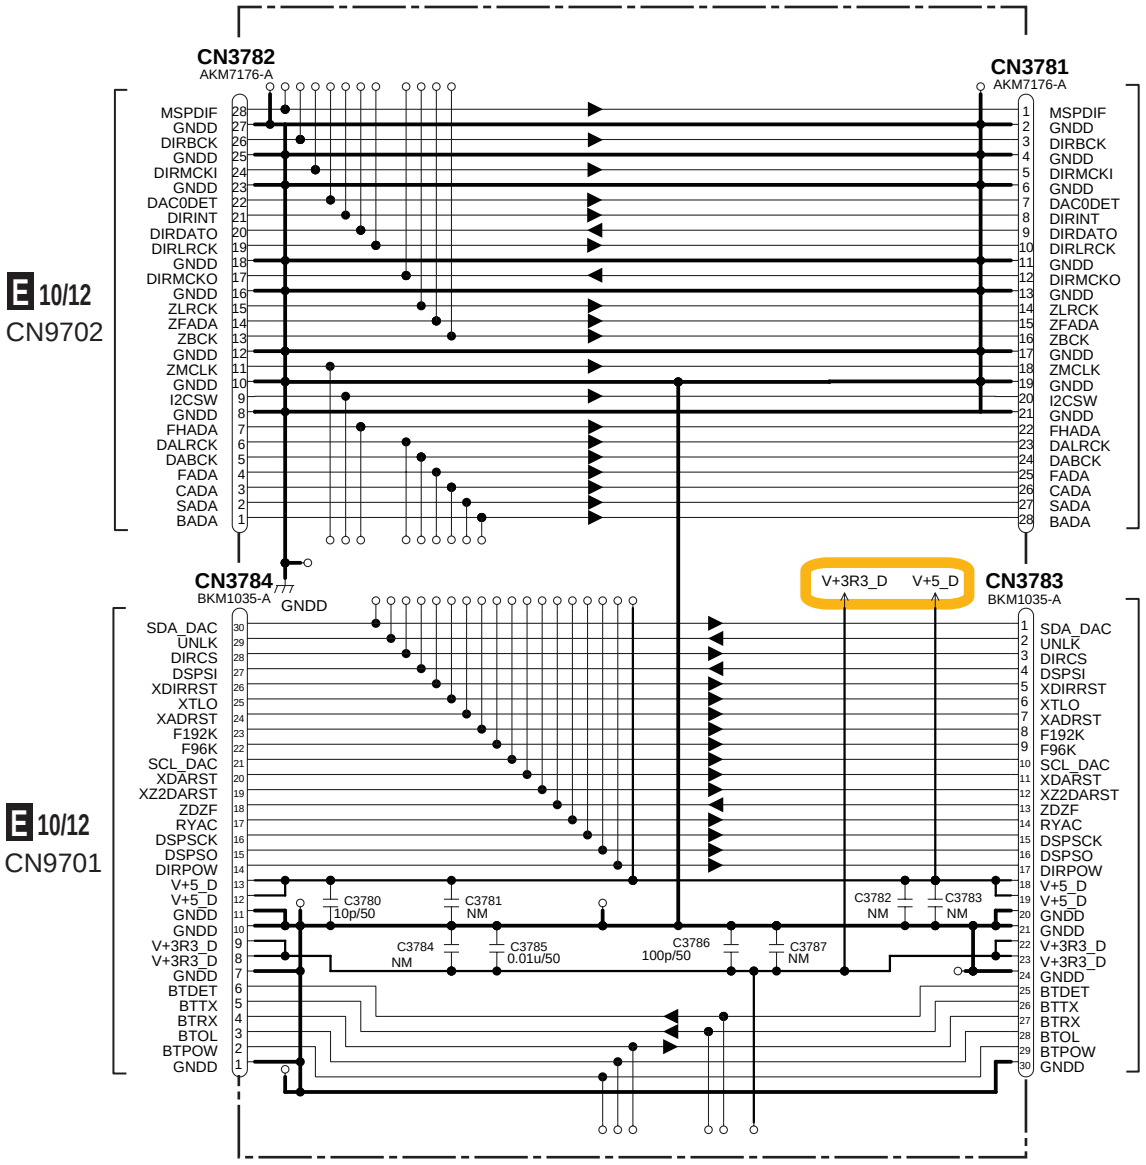

NOTE
1. RESISTORS
Unit: k-k Ω , M-M Ω or Ω unless otherwise noted.
Rated Power: 1/10w unless otherwise noted.
Toleranee: (J)5% unless otherwise noted.

2. CAPACITORS
Unit: p-pF or u-uF unless otherwise noted.
Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
CH : CCSRCH
NO MARKED : CKSRYB
3. NM: No Mount

10.59 PRE BRIDGE_S ASSY

AA PRE BRIDGE_S ASSY (AWX1367)

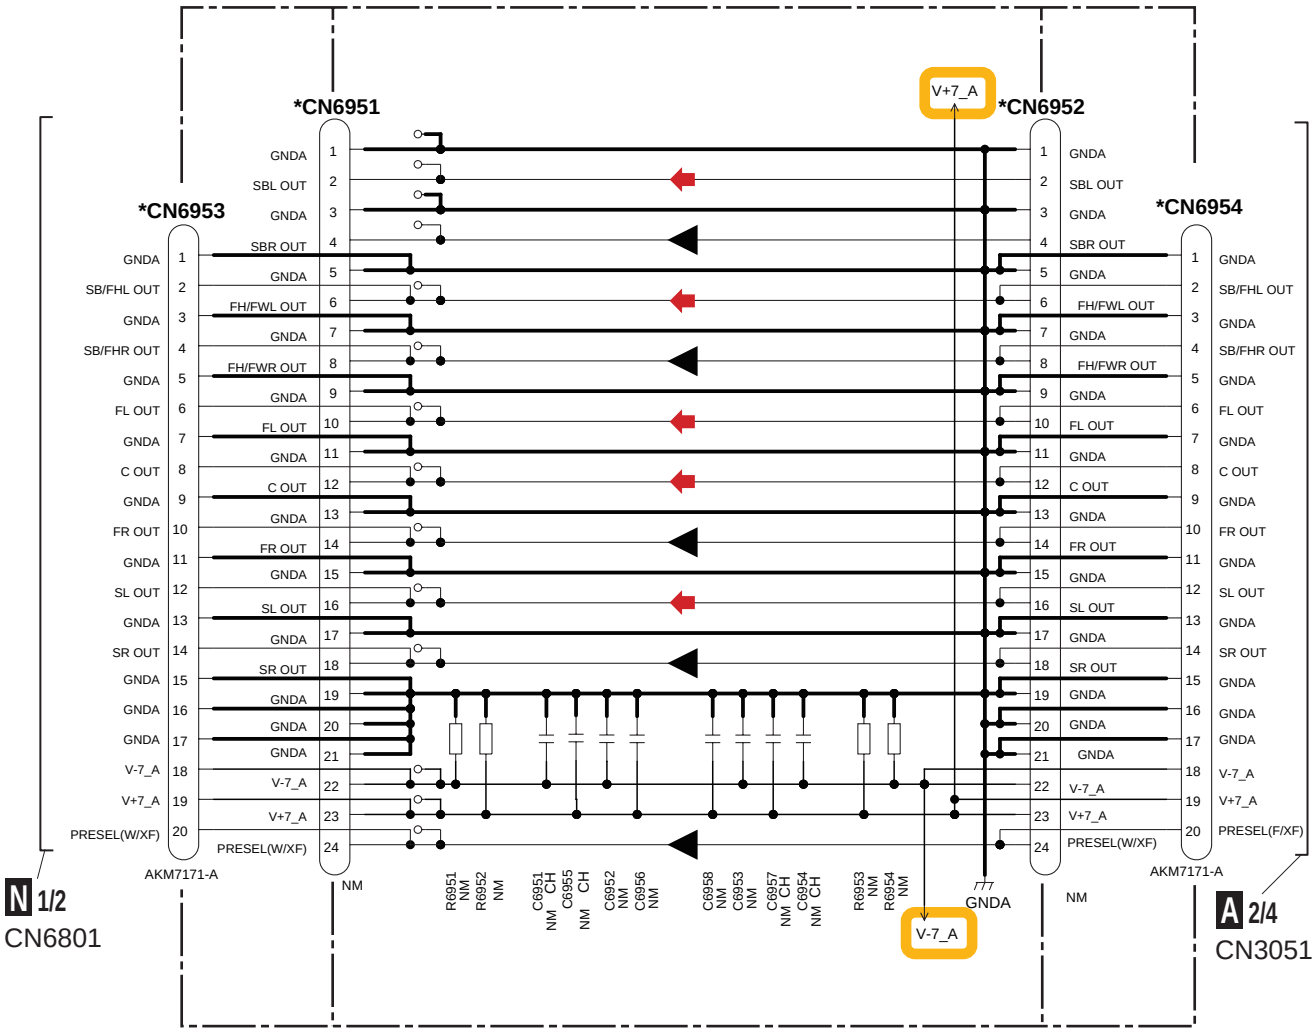

1. RESISTORS
   Unit: k-kΩ , M-MΩ or Ω unless otherwise noted.
   Rated Power: 1/10w unless otherwise noted.
   Toleranee: (J)5% unless otherwise noted.

2. CAPACITORS
   Unit: p-pF or u-uF unless otherwise noted.
   Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
   CH : CCSRCH
   NO MARKED : CKSRYB
3. NM: No Mount

	AWX1367(SEL-H)
CN6951	AKM7173-A
CN6952	AKM7173-A
CN6953	NM
CN6954	NM

: Audio Signal Route

10.60 FAN CONNECT, MIC HP GUARD, BIND DM CABLE_S, P WIRE GUARD_S, FFC GUARD_S, BINDFAN CABLE_S and TRANS VREG STYL_S ASSYS

AB FAN CONNECT ASSY (AWX1361)

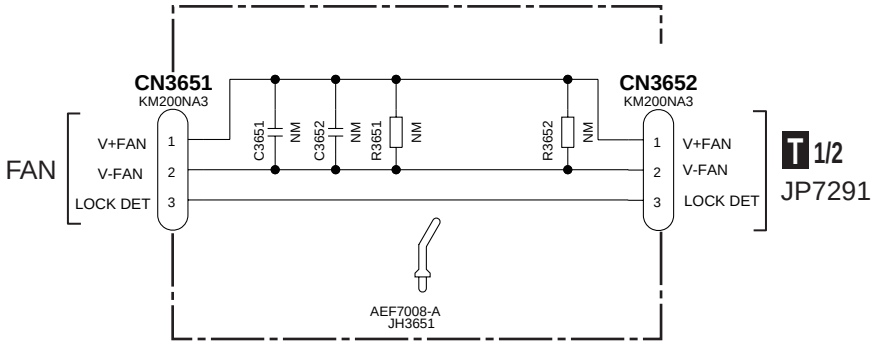

NOTE
1. RESISTORS
Unit: k-k Ω , M-M Ω or Ω unless otherwise noted.
Rated Power: 1/10w unless otherwise noted.
Toleranee: (J)5% unless otherwise noted.

2. CAPACITORS
Unit: p-pF or u-uF unless otherwise noted.
Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
CH : CCSRCH
NO MARKED : CKSRYB
3. NM: No Mount

AC MIC HP GUARD ASSY (AWX1397)



AD BIND DM CABLE_S ASSY (AWX1407)

AE P WIRE GUARD_S ASSY (AWX1408)

AF FFC GUARD_S ASSY (AWX1406)

AG BINDFAN CABLE_S ASSY (AWX1409)

AH TRANS VREG STYL_S ASSY (AWX1368)

10.61 VREG GUARD, PANEL GUARD and IR EDGE GUARD_S ASSYS

AI VREG GUARD ASSY (AWX1398)

AJ PANEL GUARD ASSY (AWX1399)

AK IR EDGE GUARD_S ASSY (AWX1230)

AI AJ AK

AI AJ AK

A

B

C

D

E

F

11. PCB CONNECTION DIAGRAM
11.1 AUDIO ASSY

SIDE A

A AUDIO ASSY **AA** CN6952 **X** CN3794 **X** CN3792

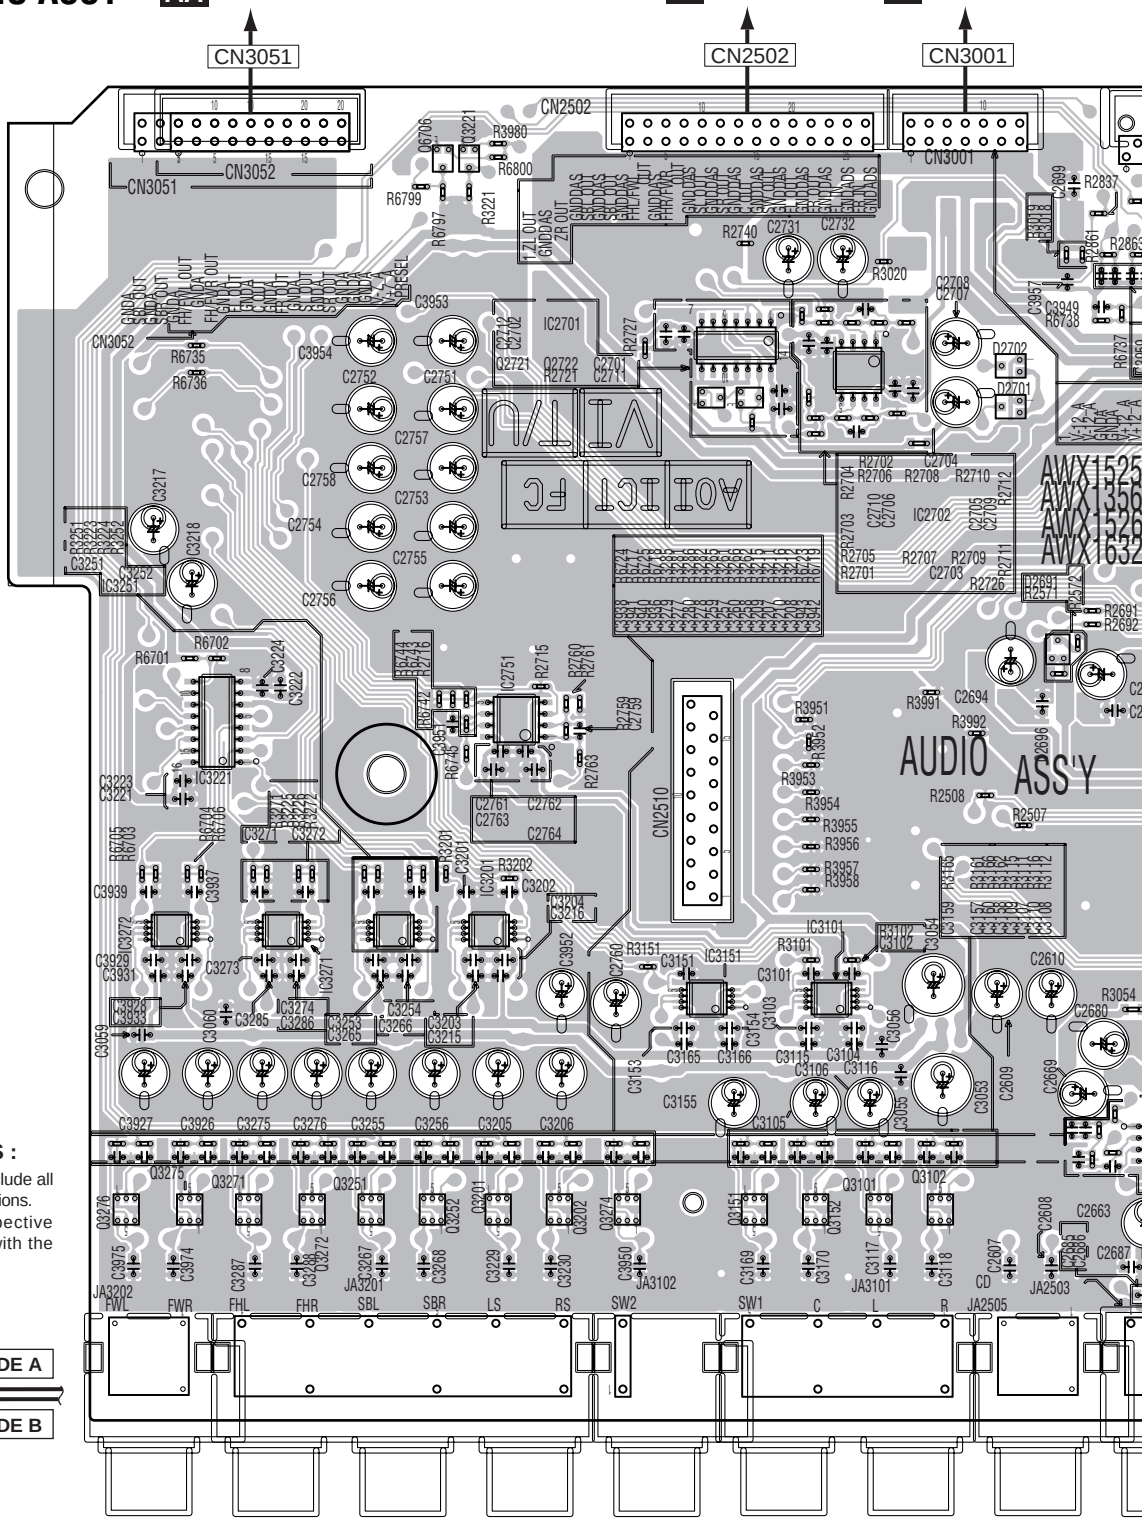

NOTE FOR PCB DIAGRAMS :

1. The parts mounted on this PCB include all necessary parts for several destinations. For further information for respective destinations, be sure to check with the schematic diagram.
2. View point of PCB diagrams.



Q6706 Q3221

Q2721 Q2722

Q: Q3276 Q3275 Q3271 Q3272 Q3251 Q3252 Q3201 Q3202 Q3274 Q3151 Q3152 Q3101 Q3102

IC: IC2701 IC2702

IC3221 IC2751

IC3272 IC3271 IC3251 IC3201 IC3151 IC3101

SIDE A

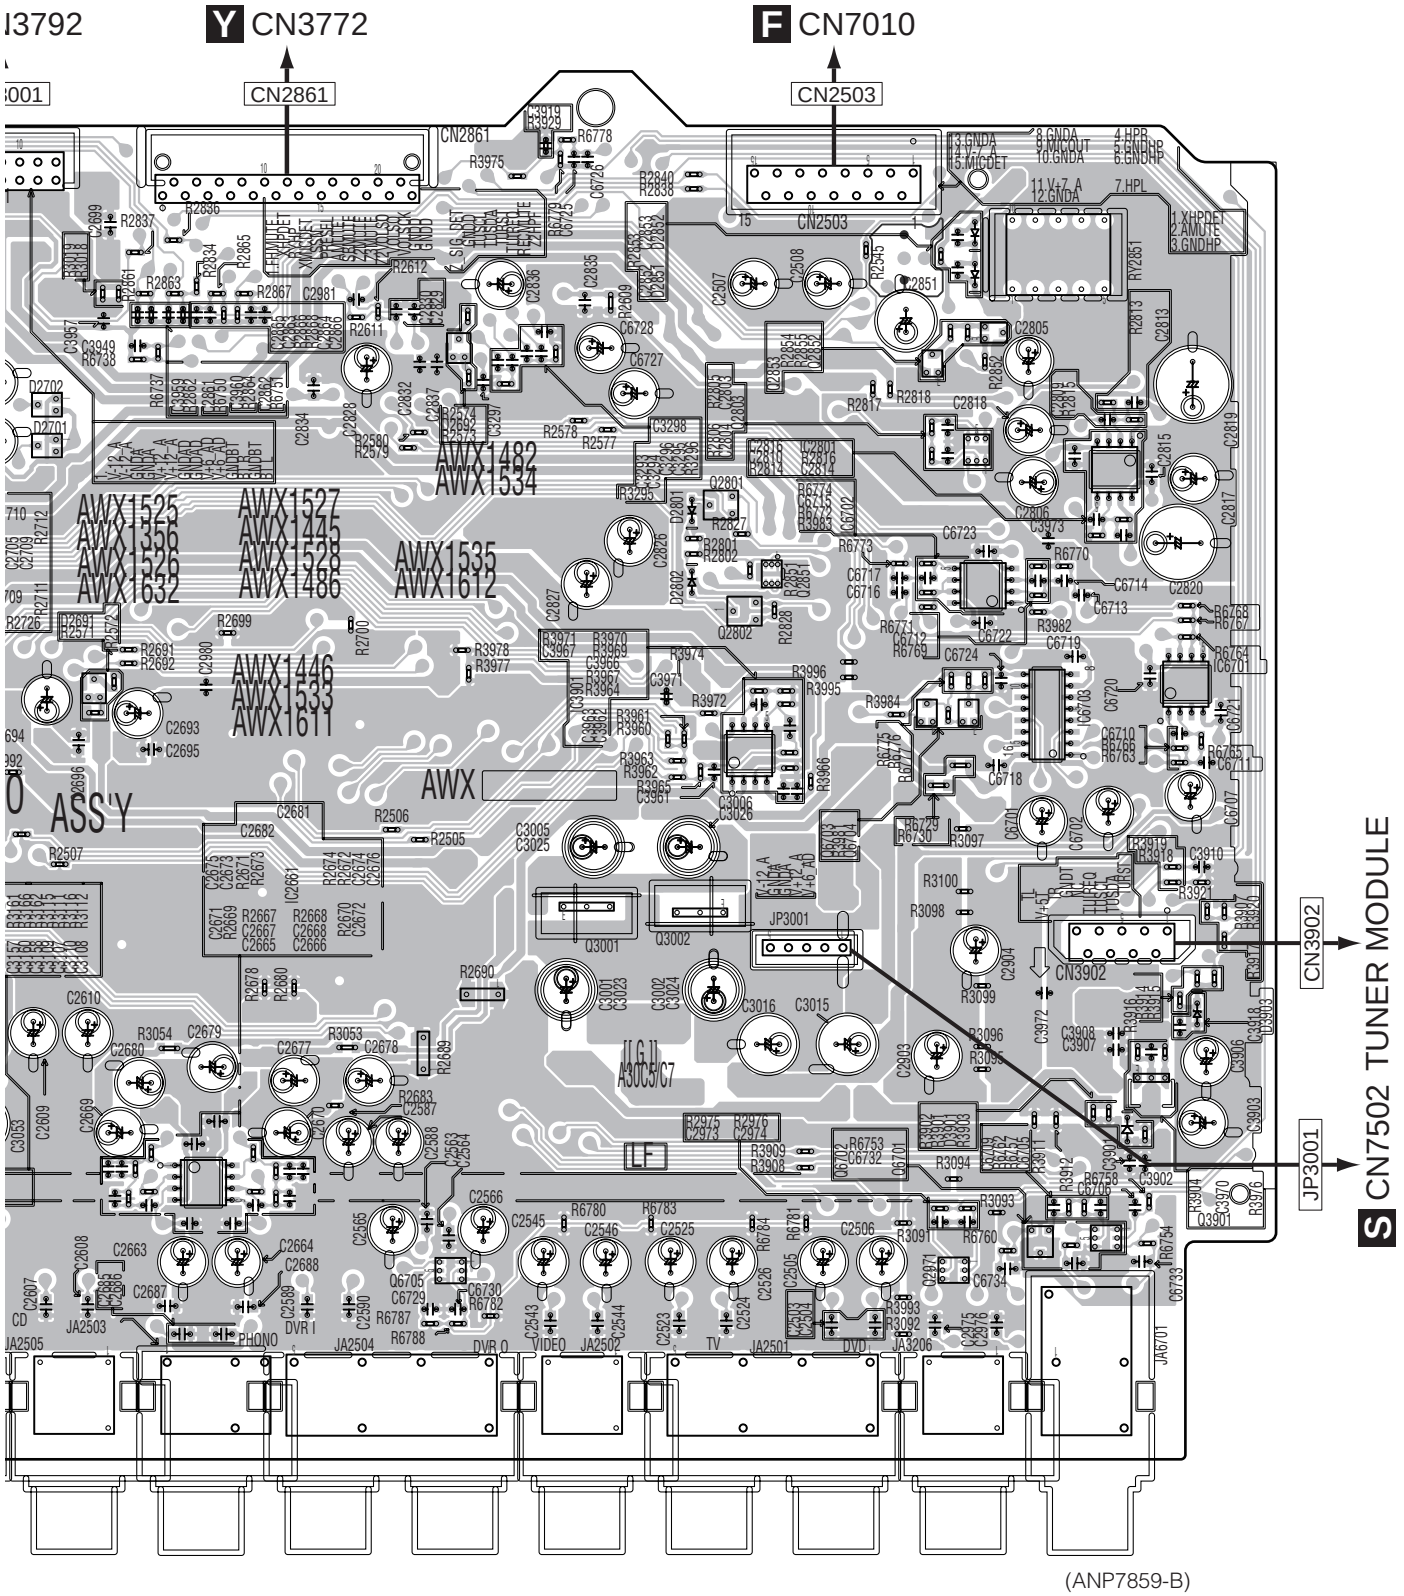
Y CN3772
F CN7010
CN2861
CN2503
CN3902
JP3001
S CN7502 TUNER MODULE
AWX1525
AWX1356
AWX1526
AWX1632
AWX1527
AWX1445
AWX1528
AWX1486
AWX1482
AWX1534
AWX1535
AWX1612
AWX1446
AWX1533
AWX1611
AWX
ASS'Y
(ANP7859-B)

SIDE B

A AUDIO ASSY

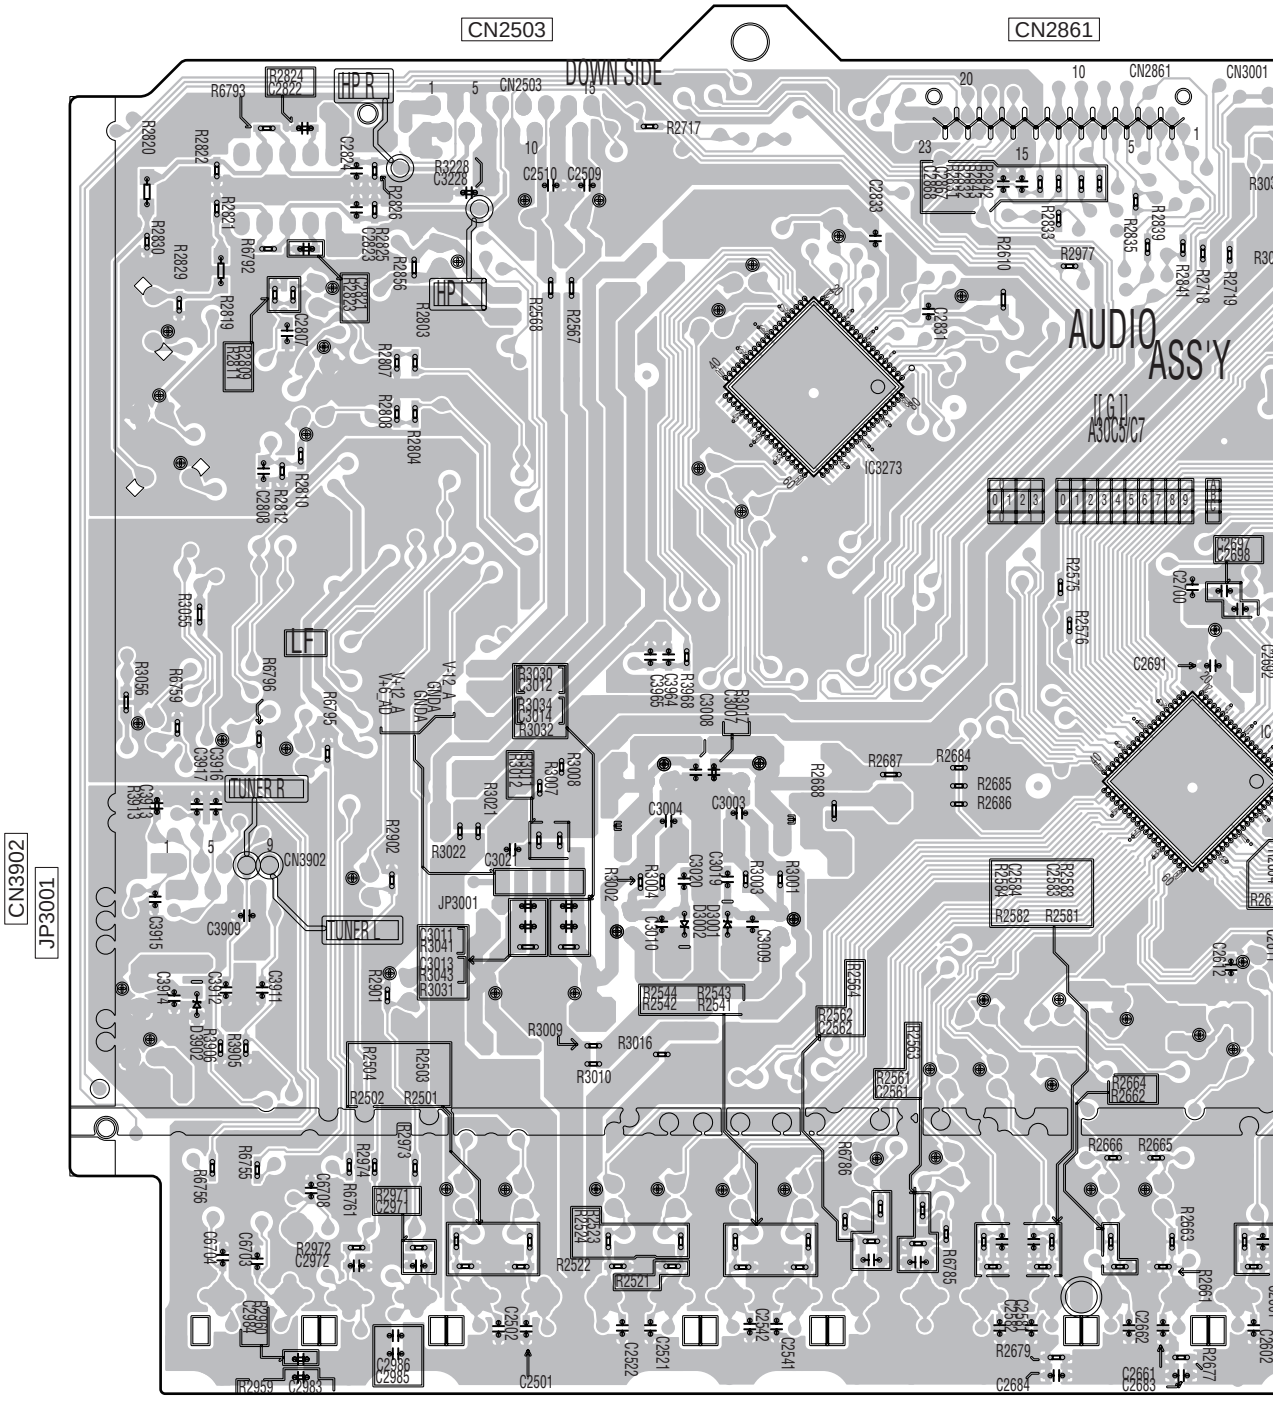

SIDE B

A

B

C

D

E

F

CN3001 CN2502 CN3051

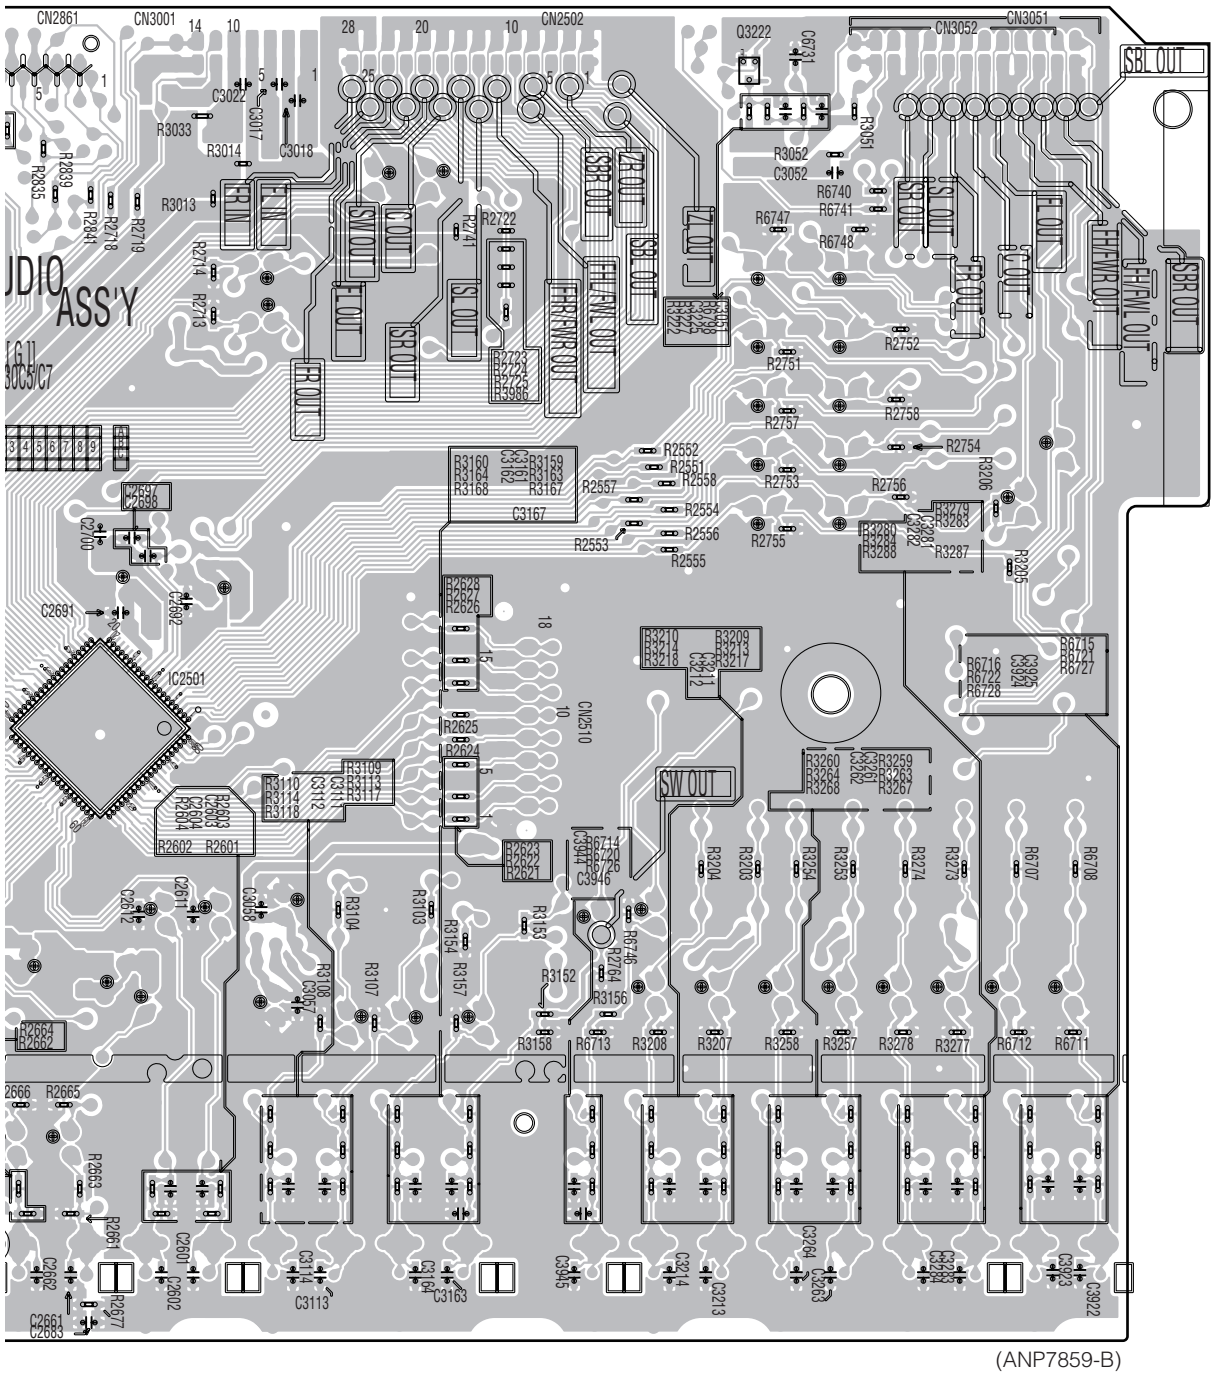

Q3222

IC2501

11.2 DAC HIGH ASSY

SIDE A **SIDE A**

B DAC HIGH ASSY

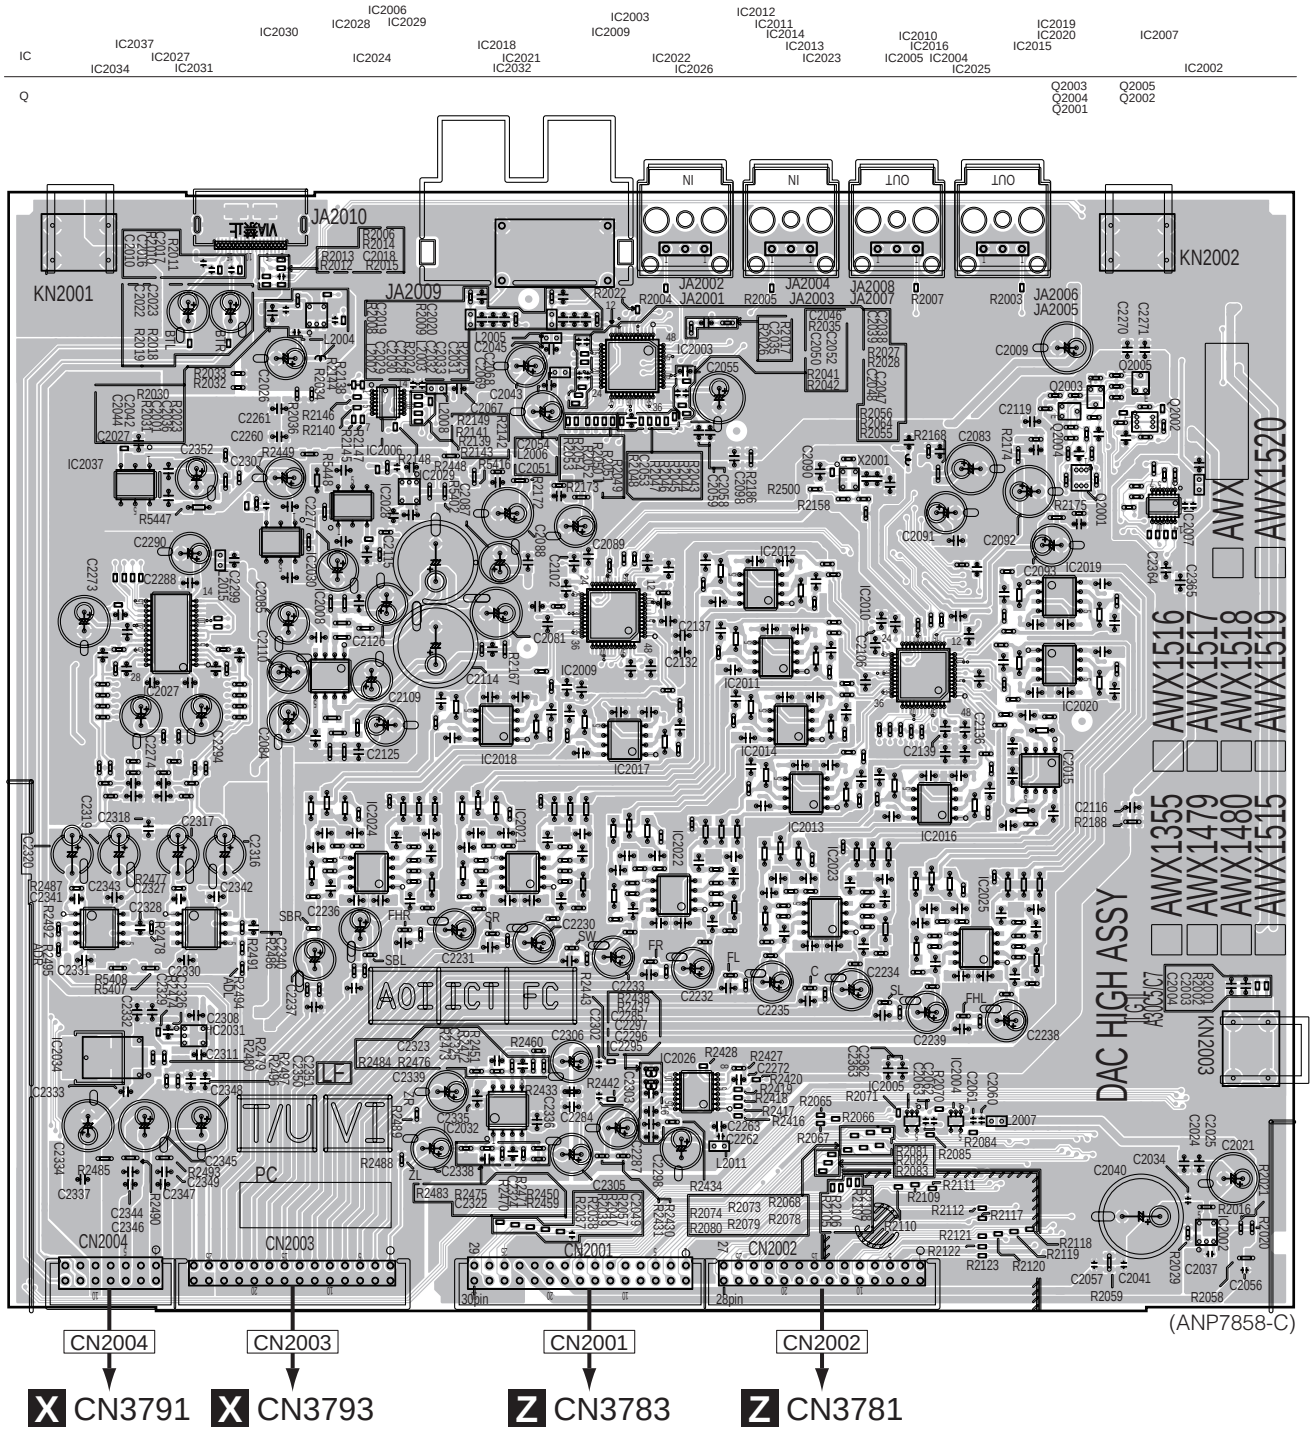

CN2004 CN2003 CN2001 CN2002

X CN3791 X CN3793 Z CN3783 Z CN3781

SIDE B

SIDE B

B DAC HIGH ASSY

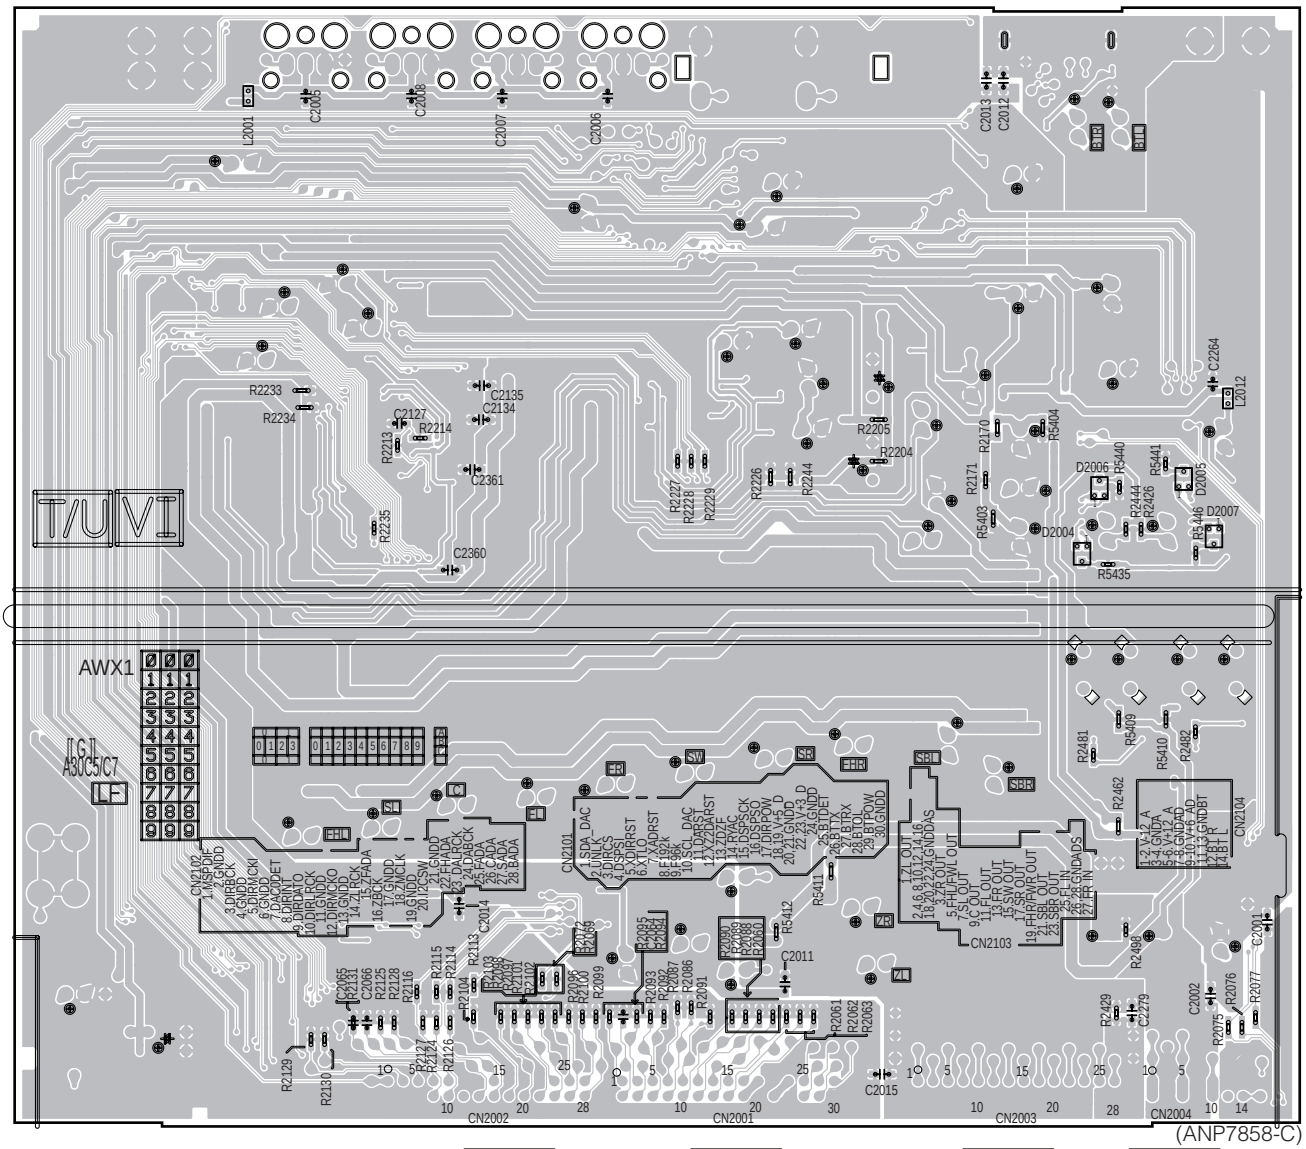

11.3 FRONT HDMI USB ASSY and USB RECT_S ASSY

SIDE A **SIDE A**

C FRONT HDMI USB ASSY

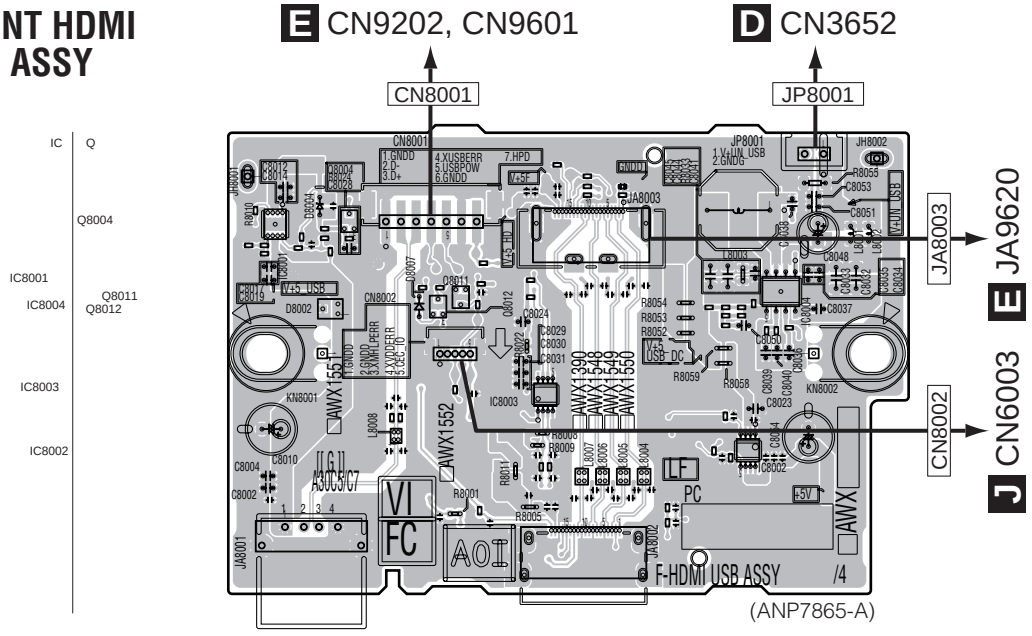

D USB RECT_S ASSY

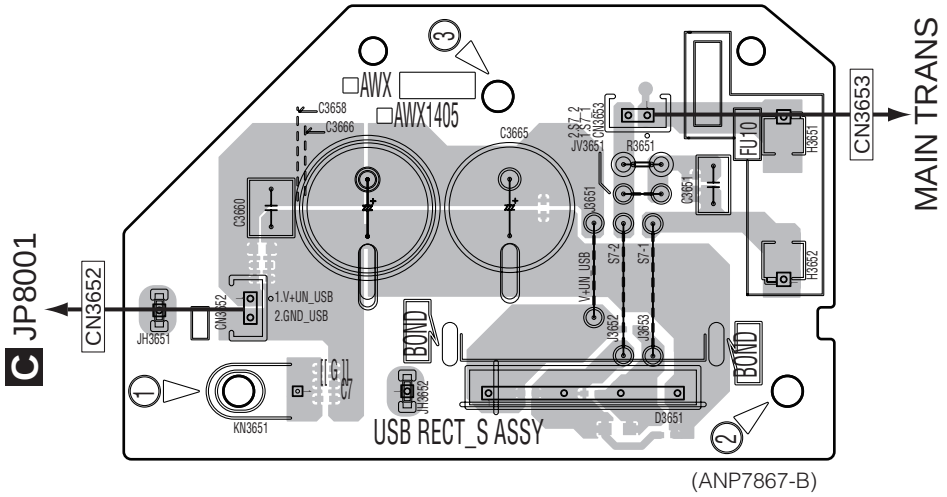

C D C D

SIDE B

SIDE B

C FRONT HDMI USB ASSY

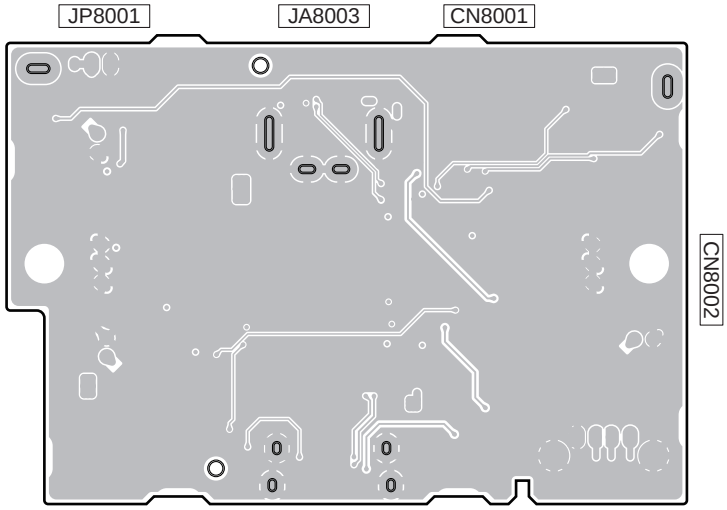

(ANP7865-A)

D USB RECT_S ASSY

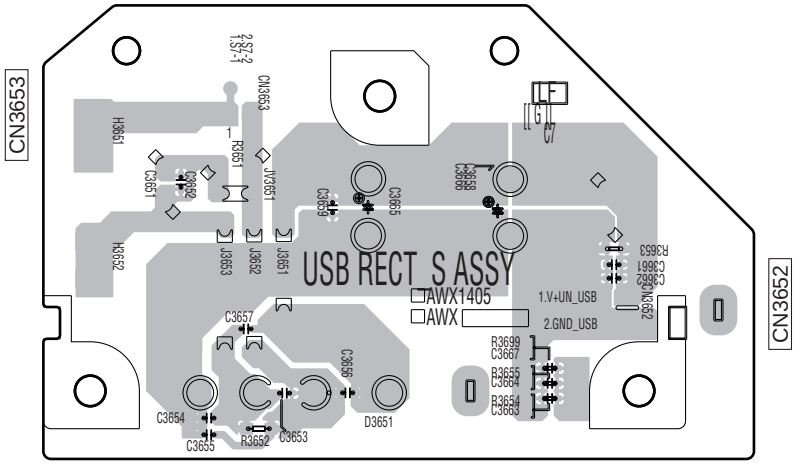

(ANP7867-B)

11.4 DIGITAL MAIN ASSY

SIDE A

E DIGITAL MAIN ASSY

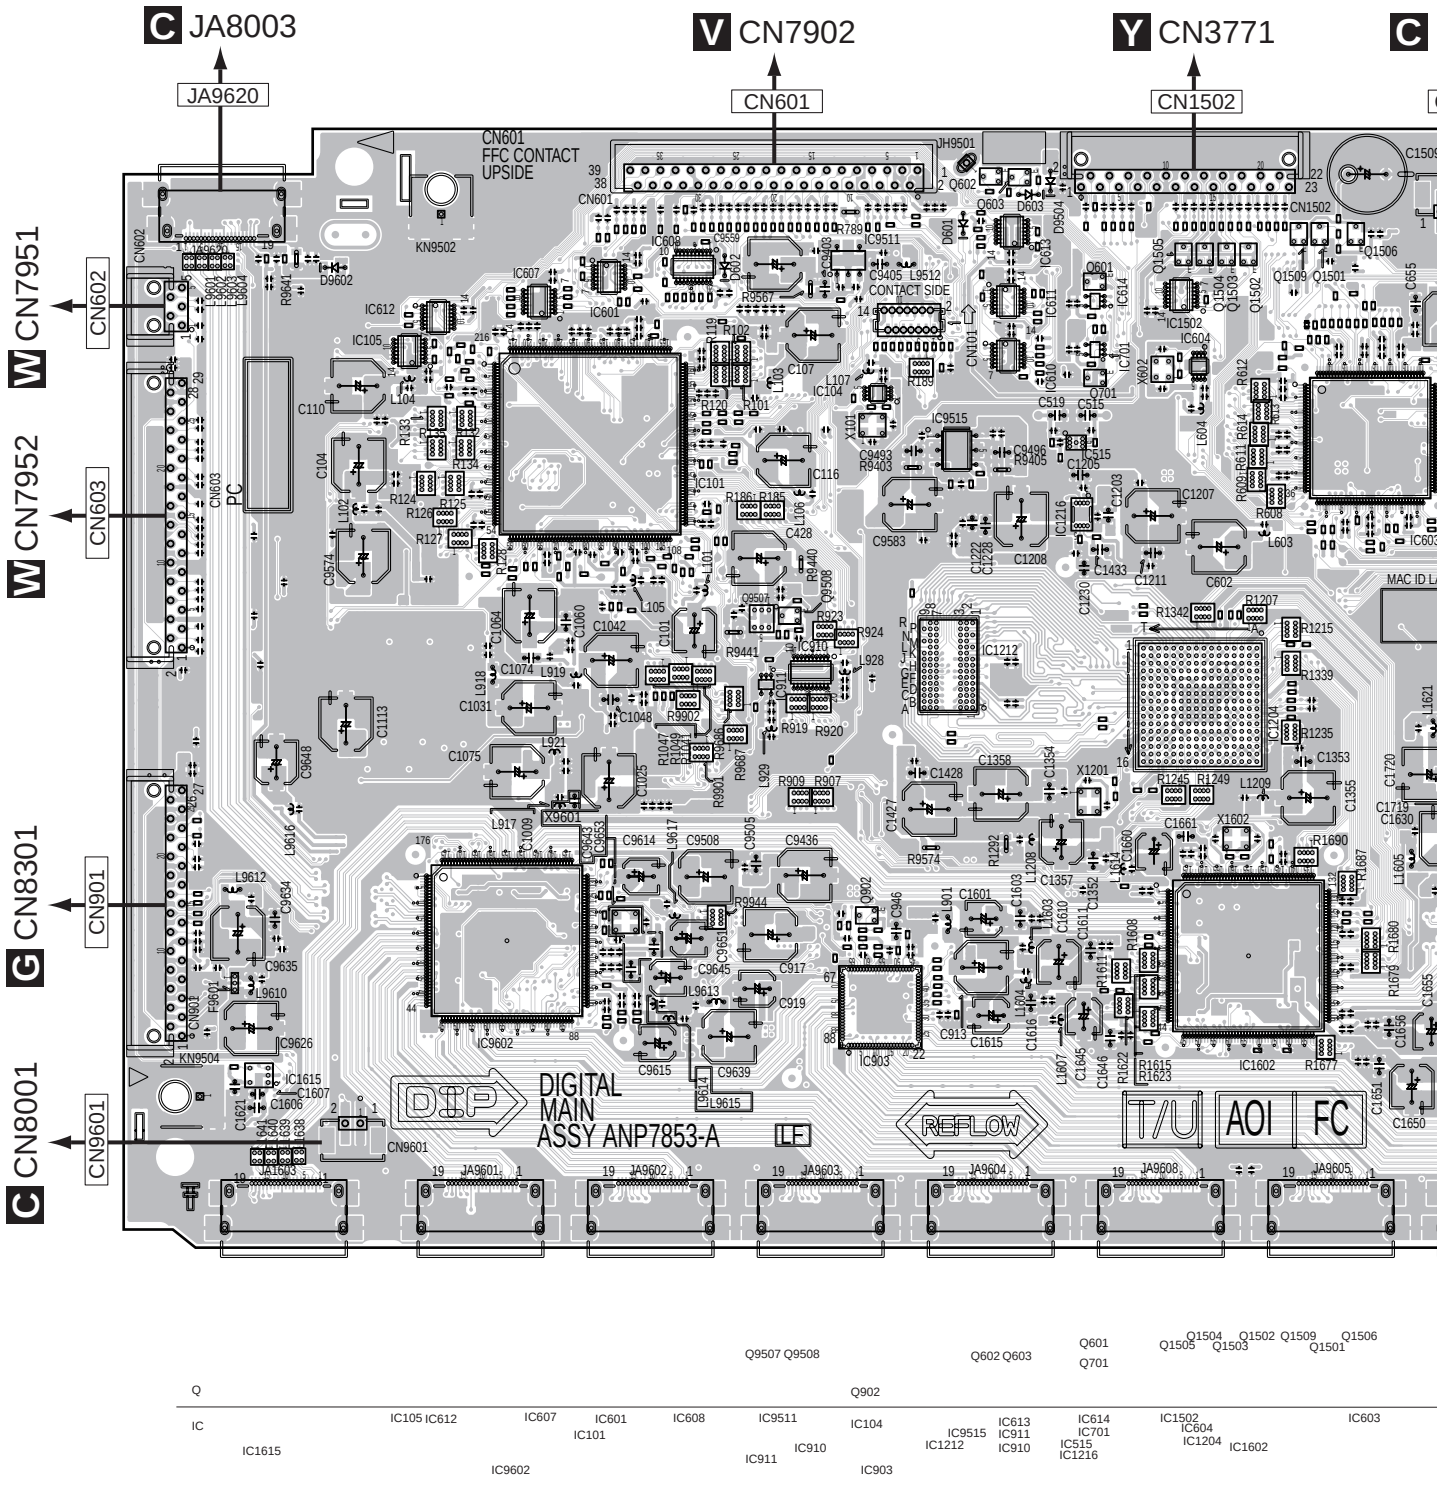

SIDE A

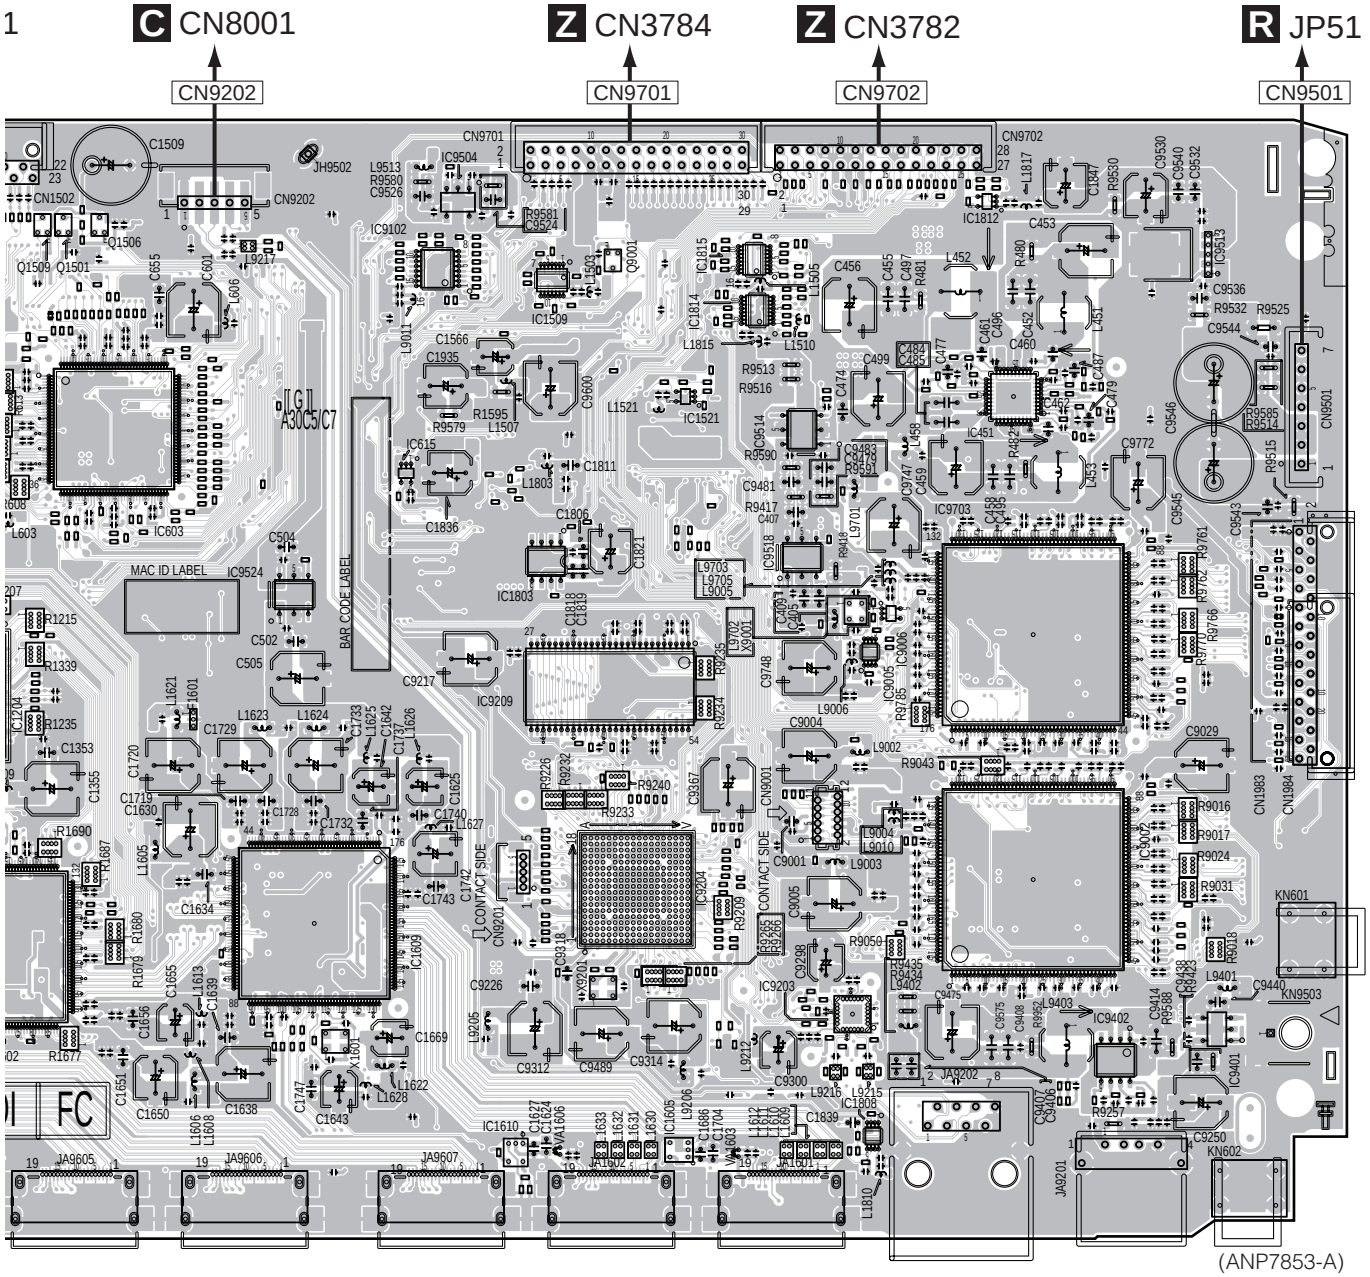
C CN8001
Z CN3784
Z CN3782
R JP51
CN9202
CN9701
CN9702
CN9501
MAC ID LABEL
BAR CODE LABEL
CONTACT SIDE
(ANP7853-A)

SIDE B

E DIGITAL MAIN ASSY

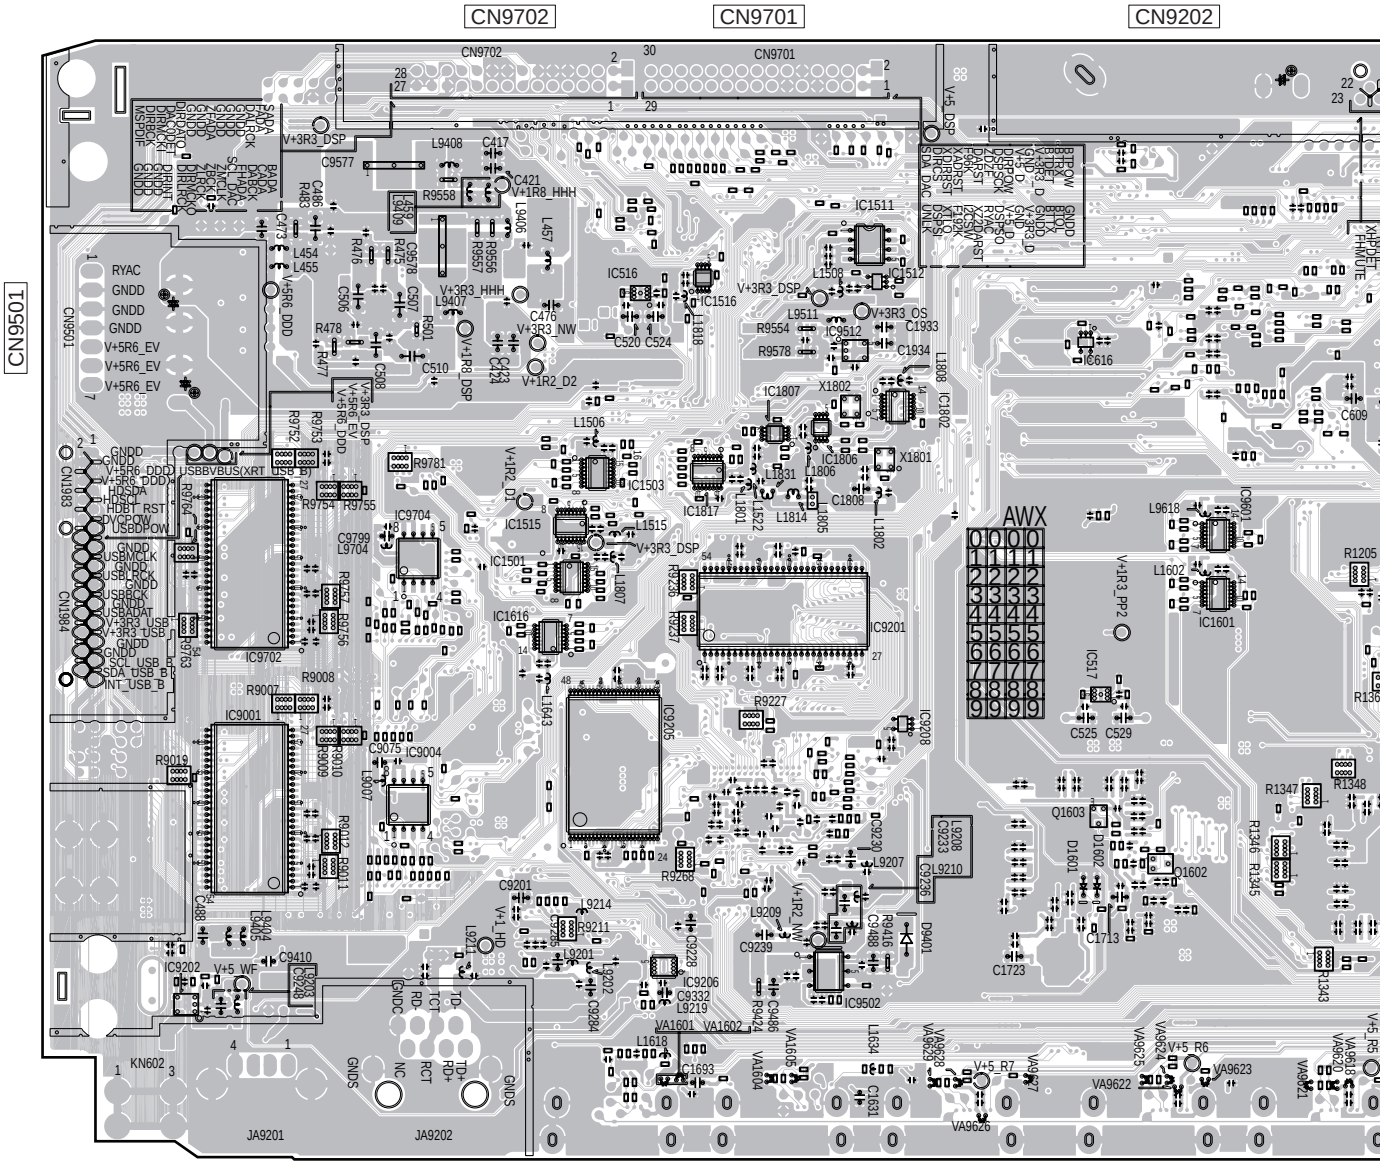

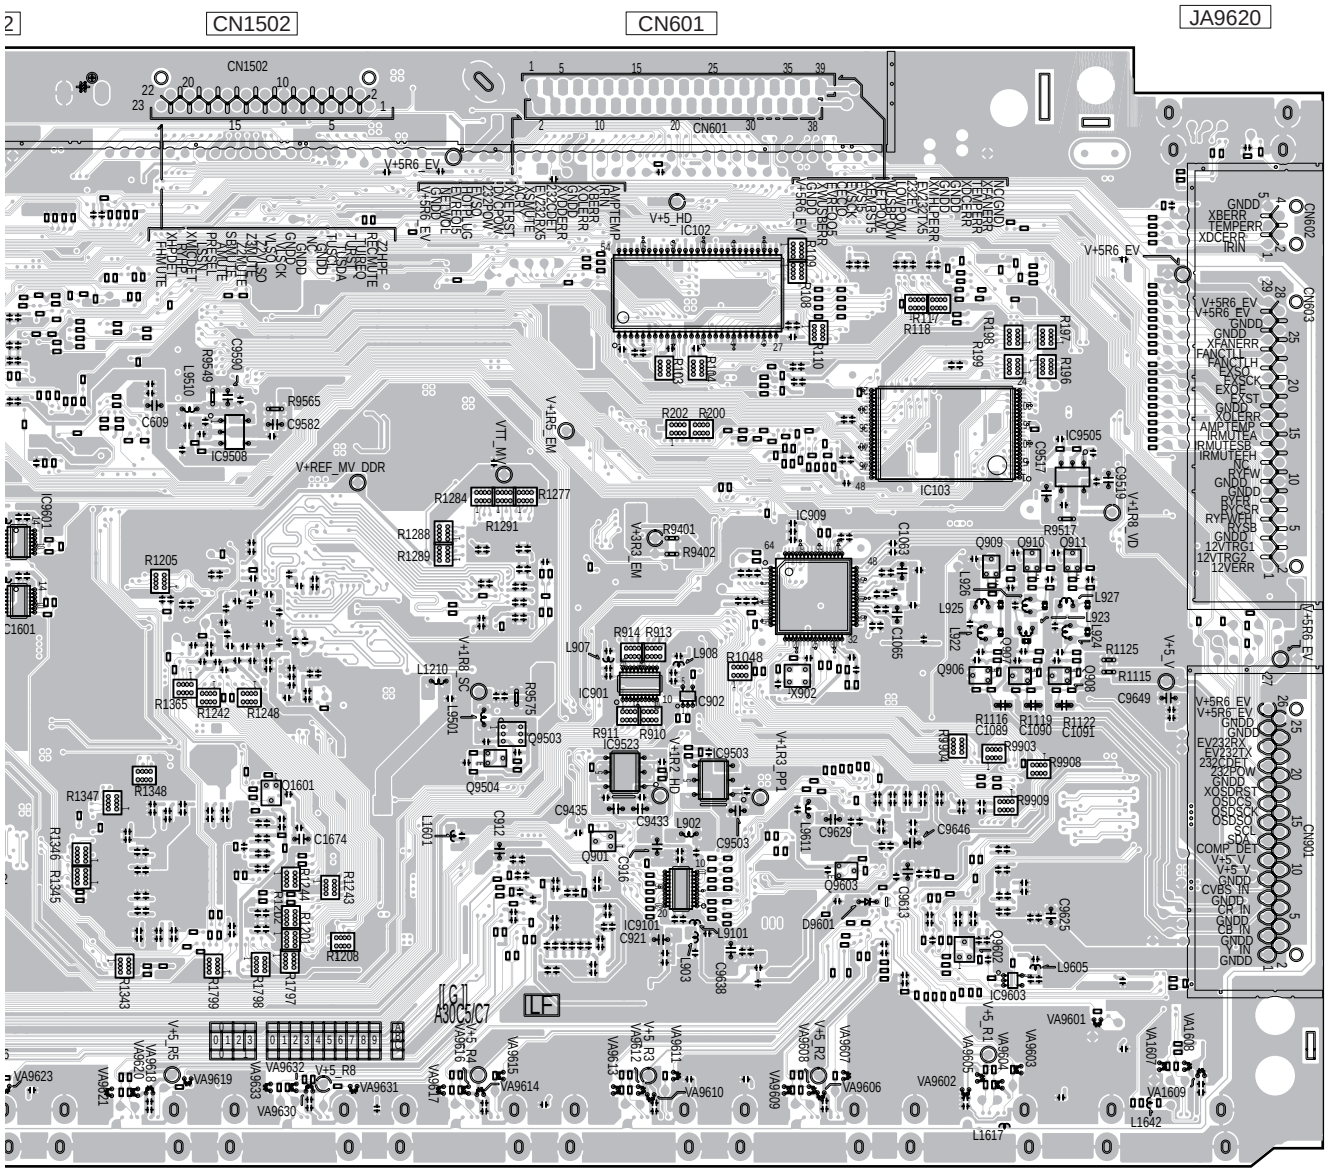
CN1502
CN601
JA9620
CN602
CN603
CN901
CN9601
IC9508
IC103
IC909
IC9505
IC9603
IC9503
IC9523
IC9101
IC901
IC902
IC102
IC9601
IC1601
Q1601
Q9503
Q9504
Q901
Q9603
Q9602
Q909
Q910
Q911
Q906
Q907
Q908

(ANP7853-A)

11.5 INTERFACE_S ASSY

SIDE A

F INTERFACE_S ASSY

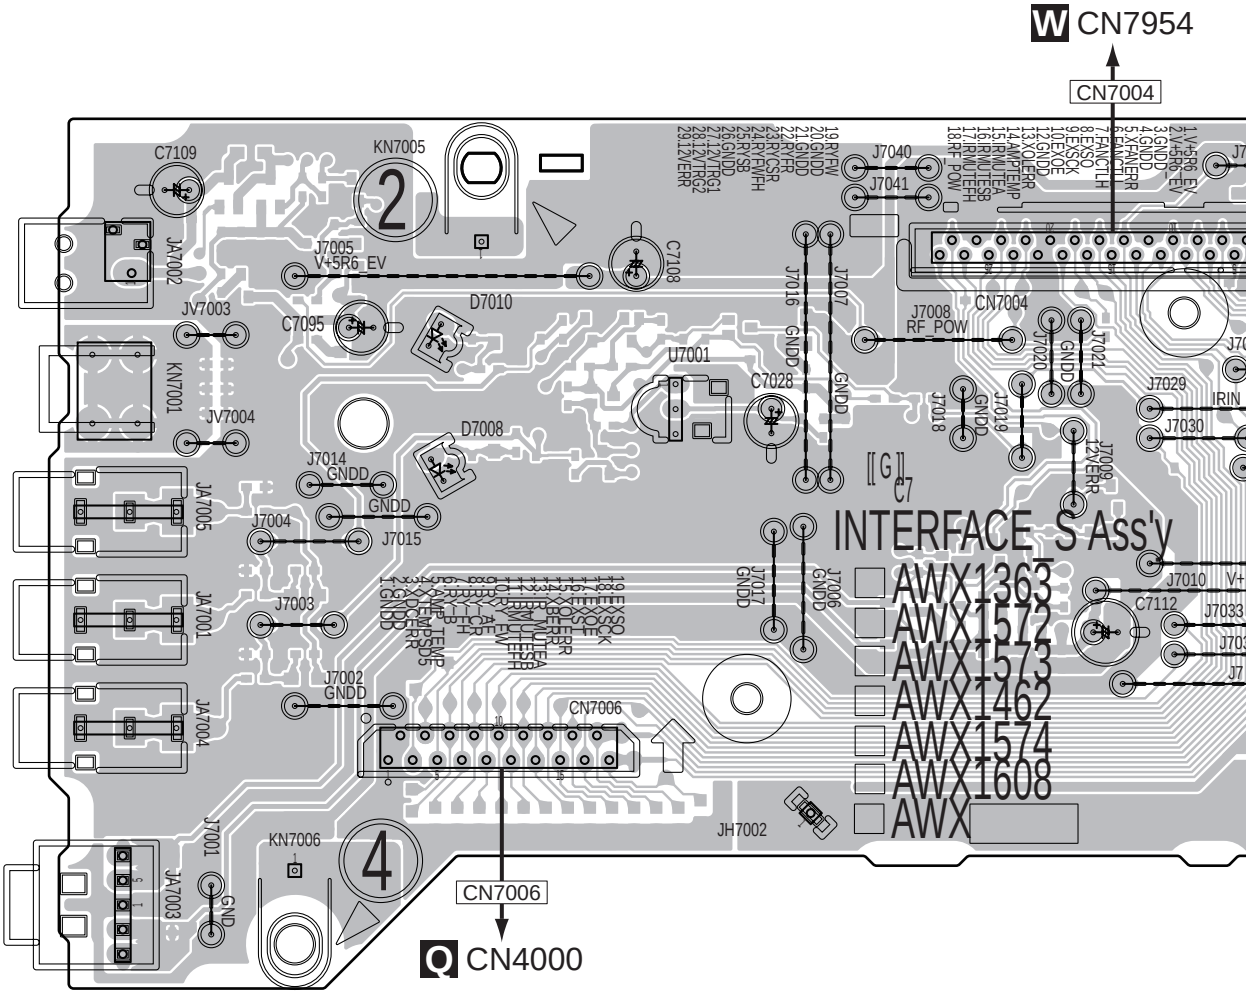

SIDE A

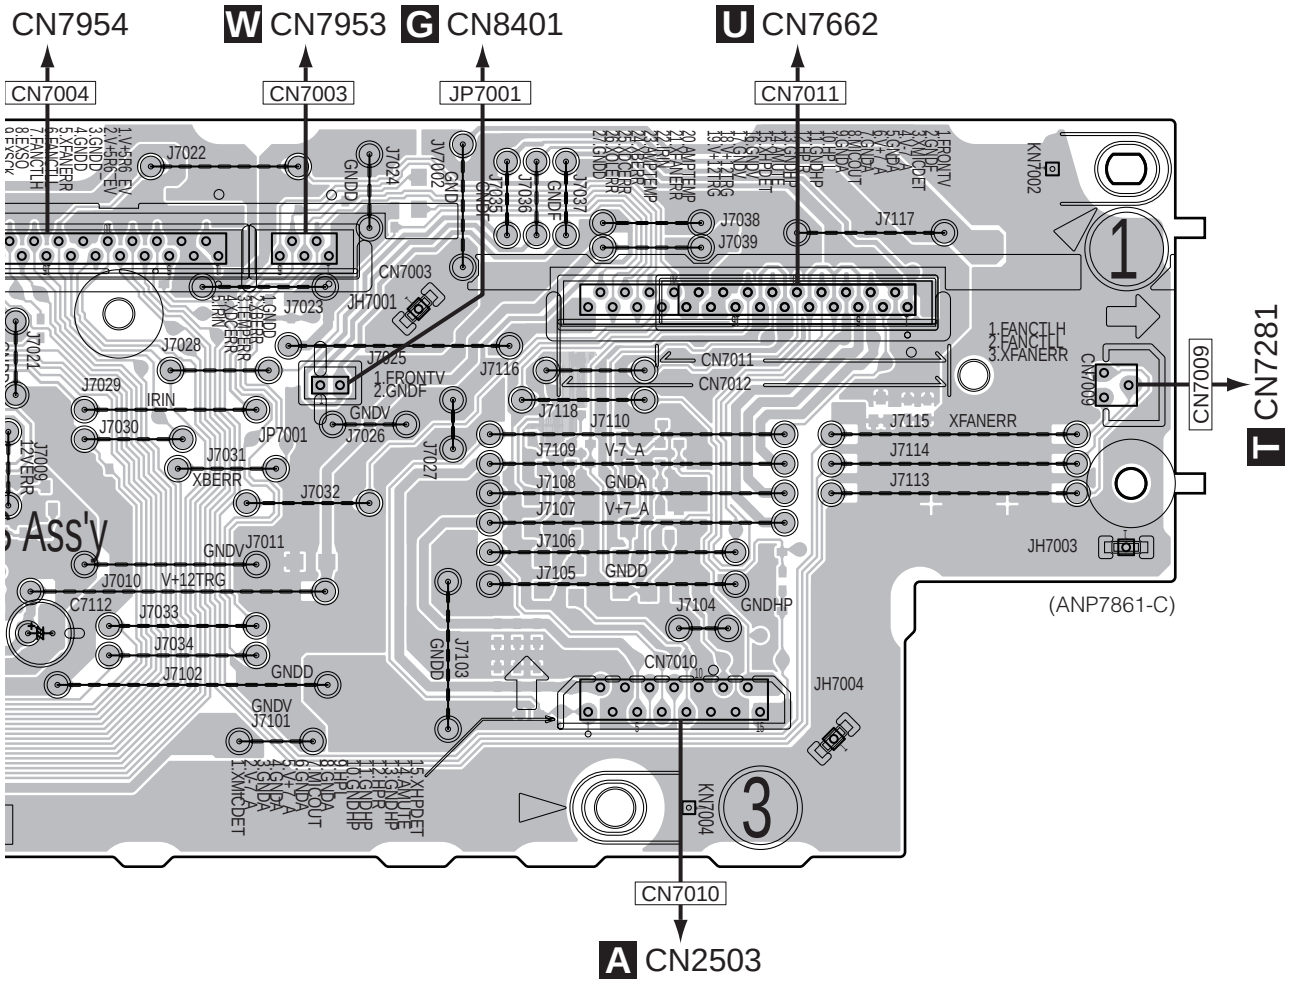
CN7954
W CN7953
G CN8401
U CN7662
CN7004
CN7003
JP7001
CN7011
CN7003
JH7001
CN7011
CN7012
CN7009
T CN7281
JH7003
(ANP7861-C)
JH7004
CN7010
A CN2503
KN7002
KN7004
1
3
J7022
J7024
J7023
J7021
J7028
J7025
J7116
J7029
IRIN
J7030
J7026
J7027
J7031
XBERR
J7032
J7011
J7010
V+12TRG
C7112
J7033
J7034
J7102
GNDD
GNDV
J7101
J7103
J7035
J7036
J7037
J7038
J7039
J7117
J7118
J7110
J7109
V-7_A
J7108
GNDA
J7107
V+7_A
J7106
J7105
GNDD
J7104
GNDHP
J7115
XFANERR
J7114
J7113
1.FRONTV
2.GNDF
1.FANCTLH
2.FANCTLL
3.XFANERR
Ass'y

SIDE B

F INTERFACE_S ASSY

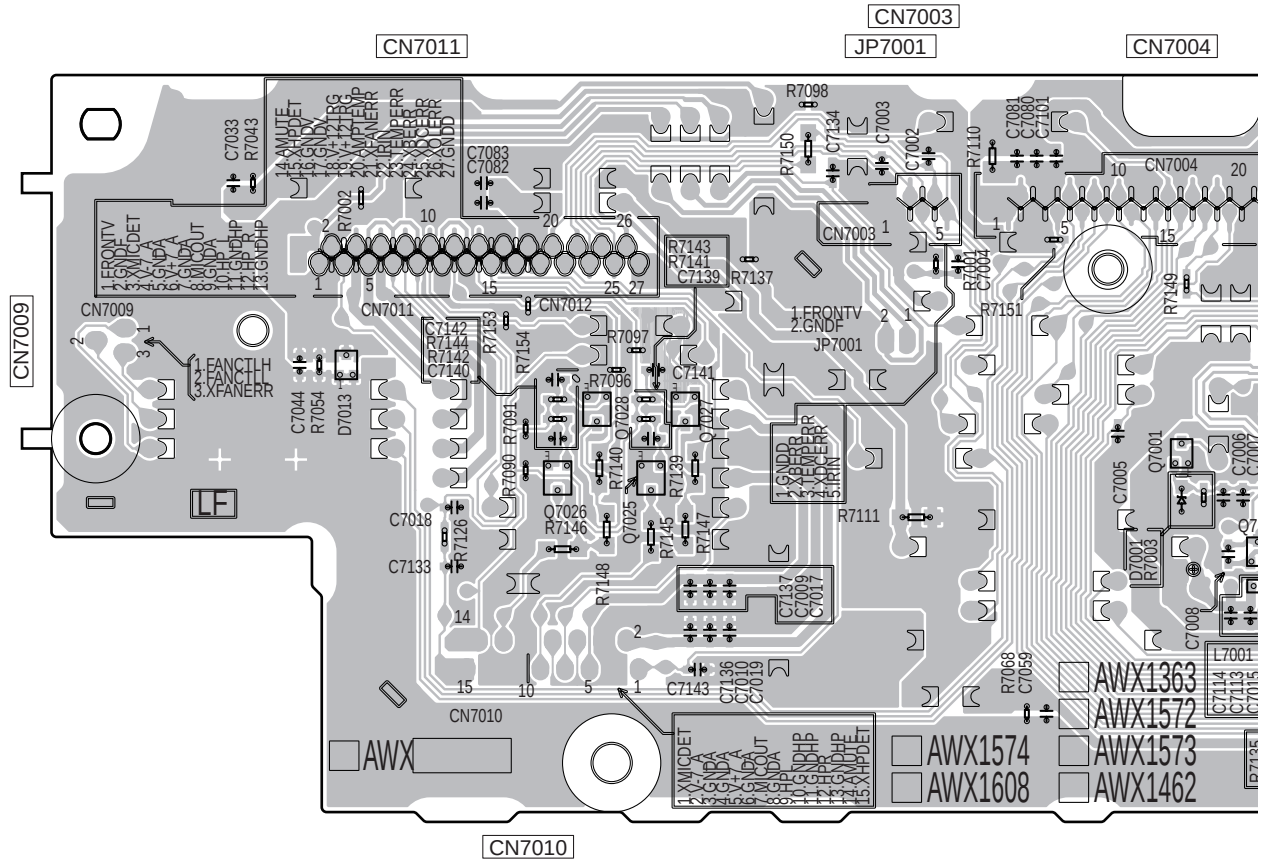

Q7028 Q7027 Q7001
Q7026 Q7025 Q70
Q
IC

SIDE B

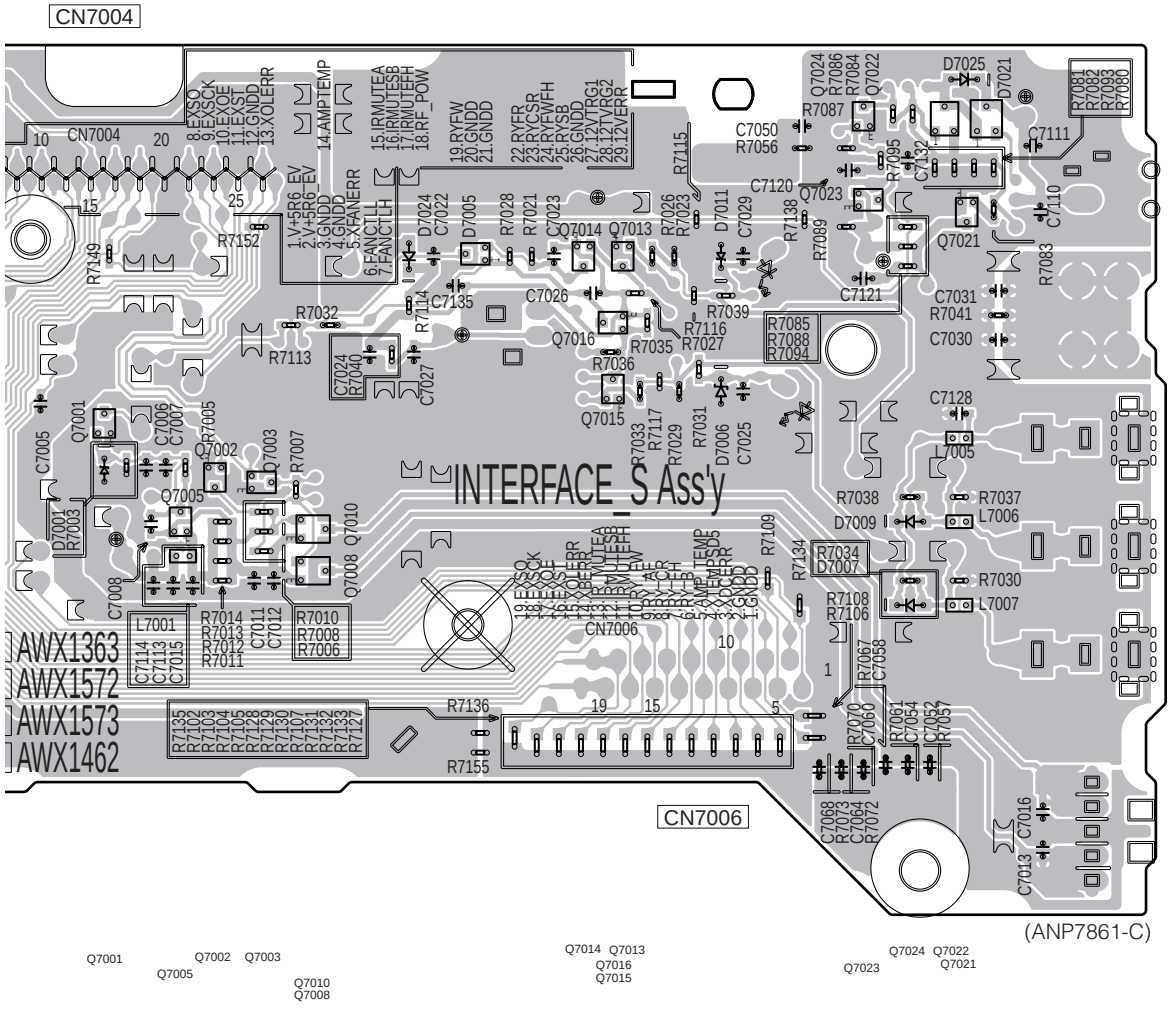
CN7004
CN7006
INTERFACE S Ass'y
AWX1363
AWX1572
AWX1573
AWX1462
(ANP7861-C)

11.6 COMPONENT ASSY

SIDE A

SIDE A

G COMPONENT ASSY

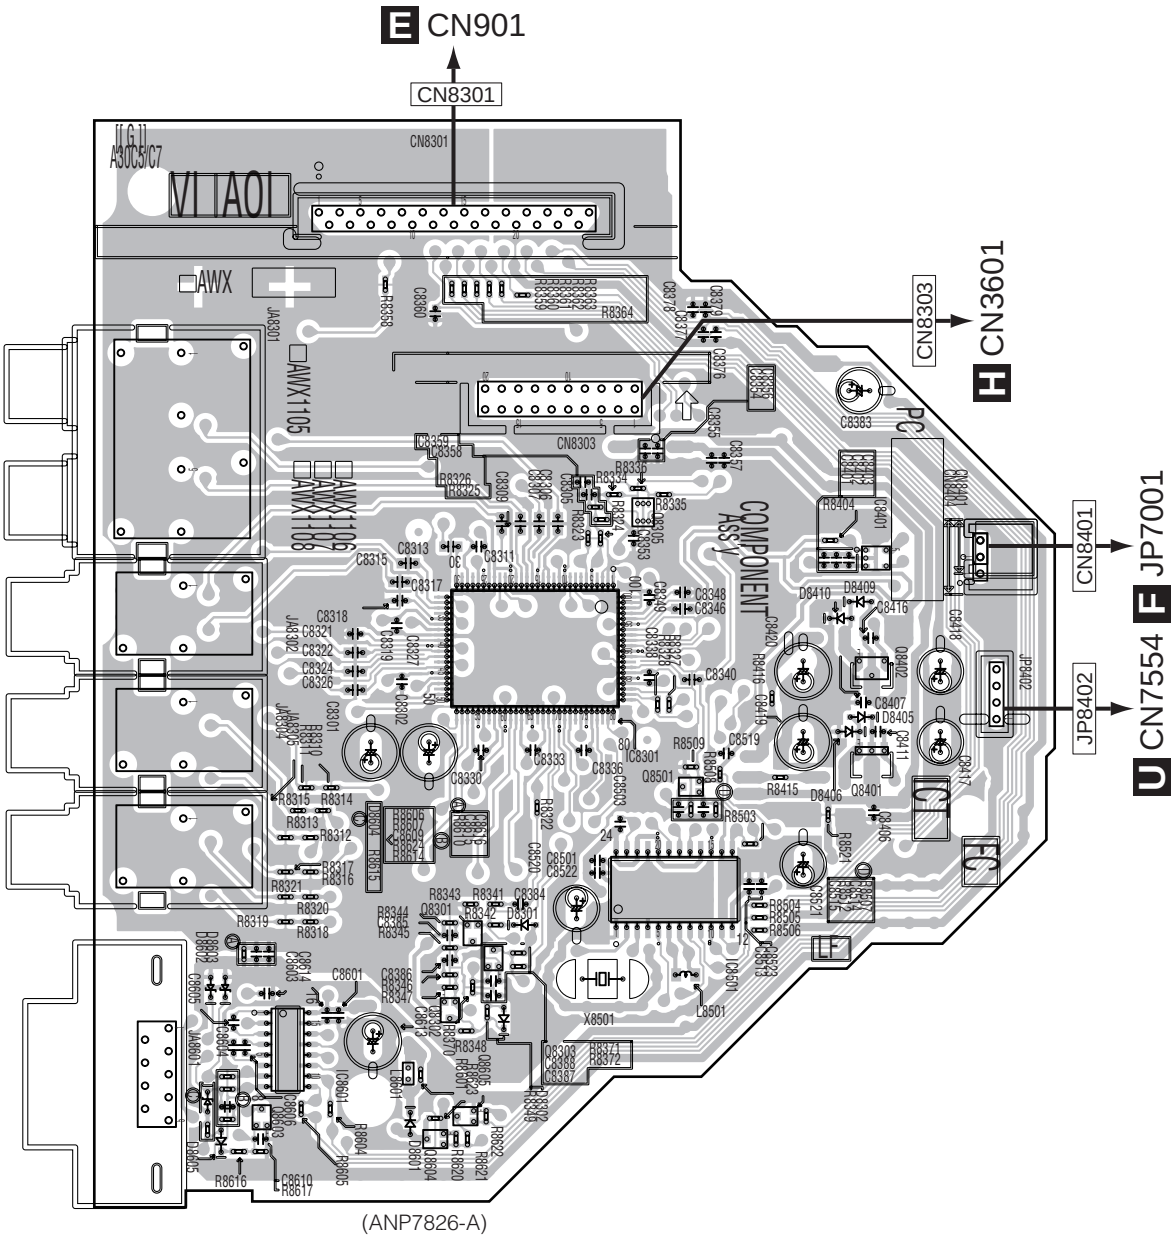

SIDE B

G COMPONENT ASSY

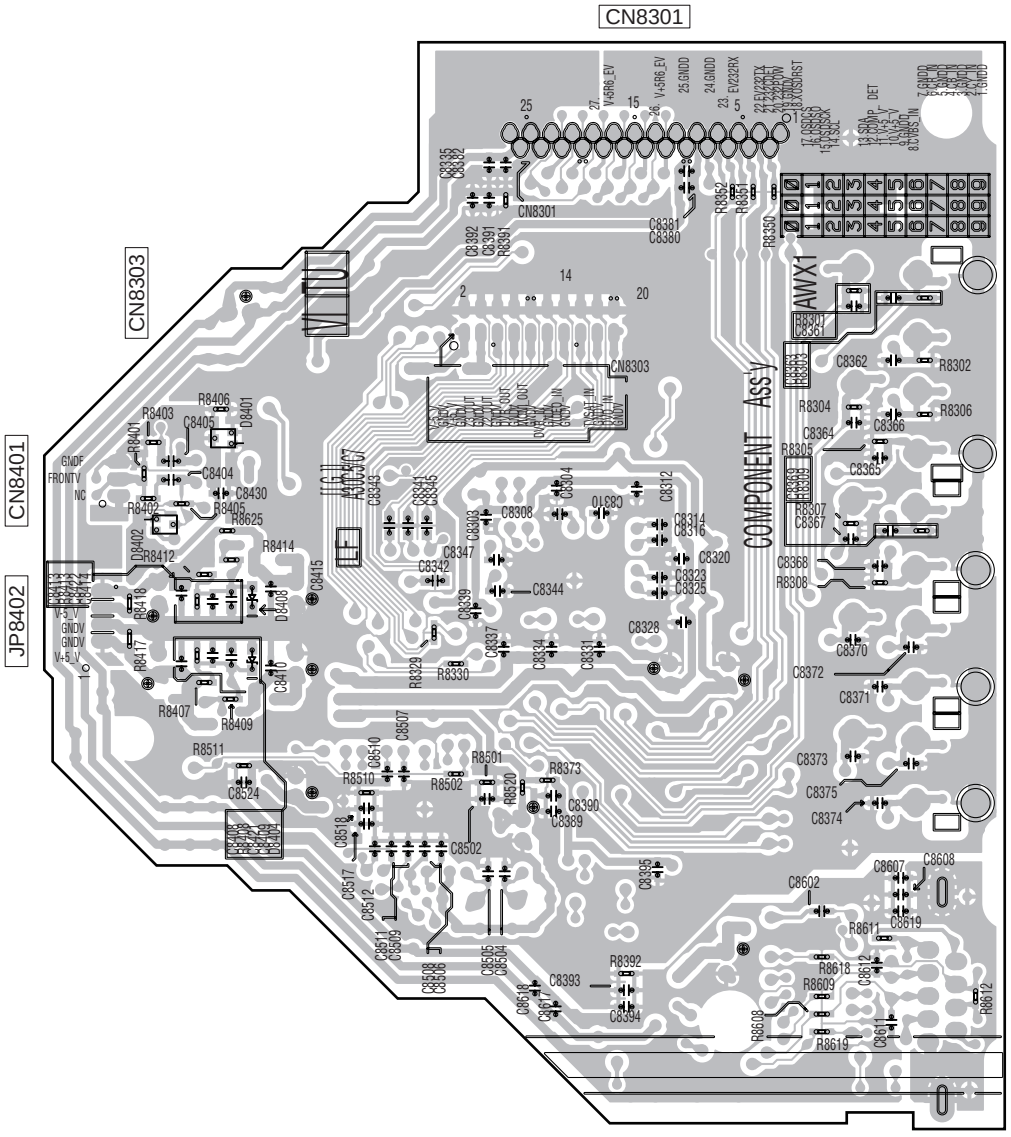

(ANP7826-A)

11.7 COMPOSITE ASSY

SIDE A

SIDE A

H COMPOSITE ASSY

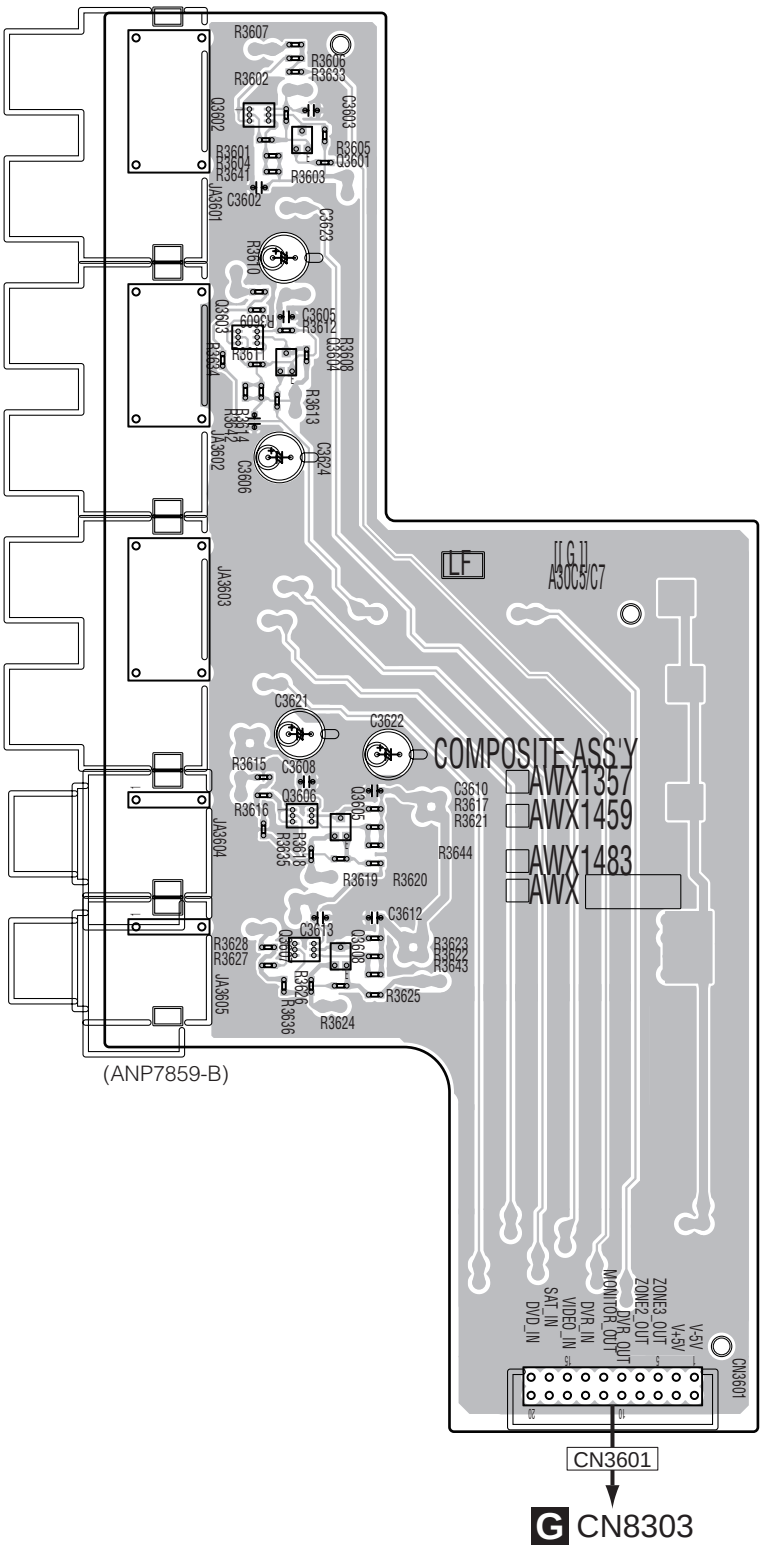

SIDE B

SIDE B

H COMPOSITE ASSY

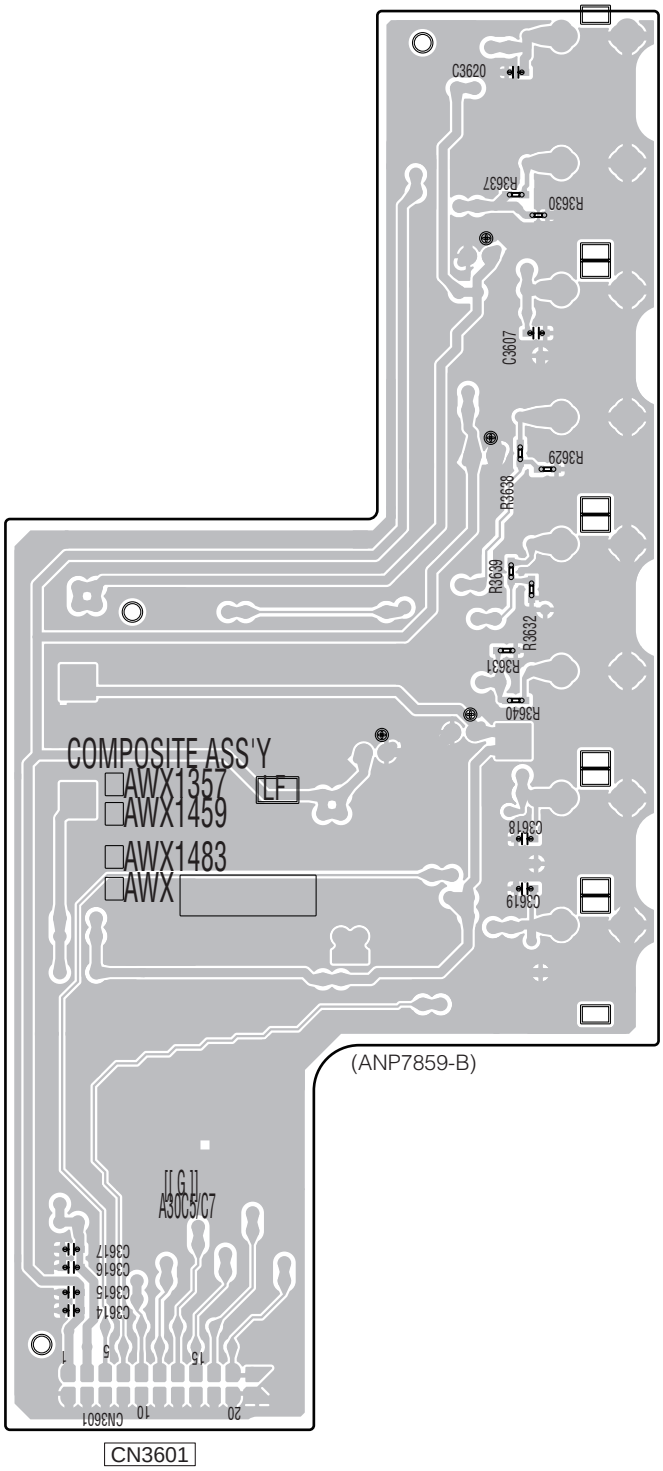

11.8 MIC HP, DISPLAY, VOL, POWER SW and ENCODER ASSYS

SIDE A

I MIC HP ASSY

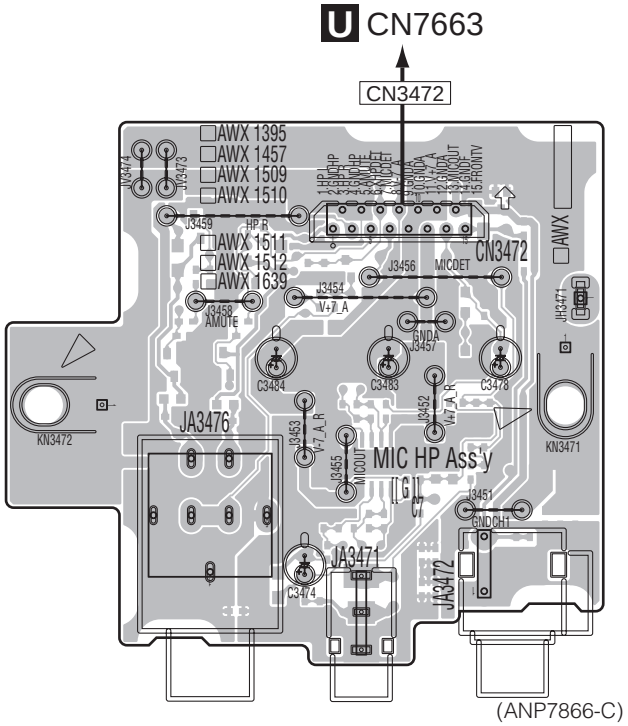

J DISPLAY ASSY

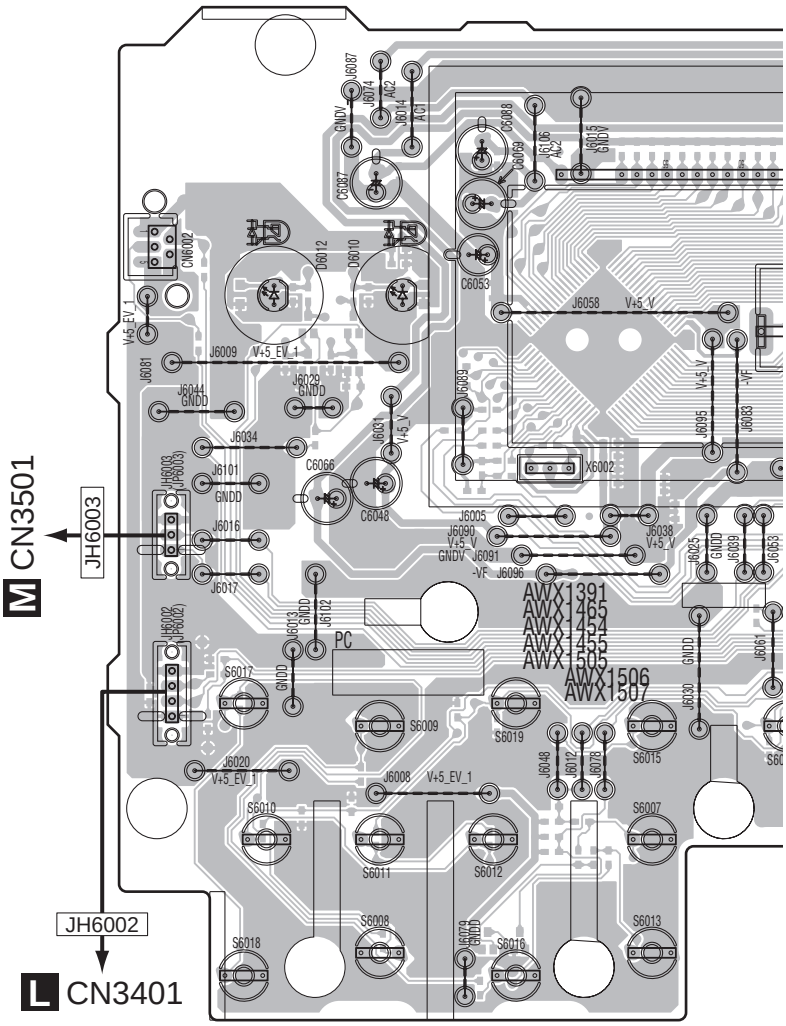

K VOL ASSY

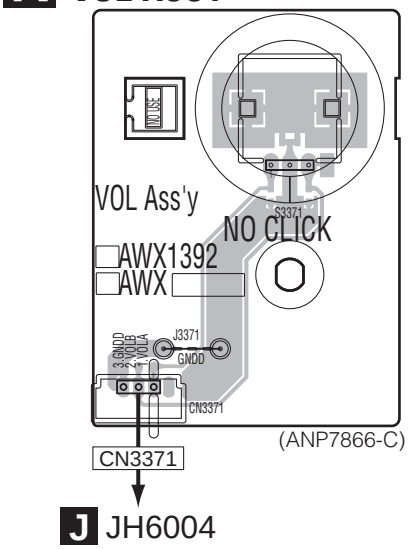

L POWER SW ASSY

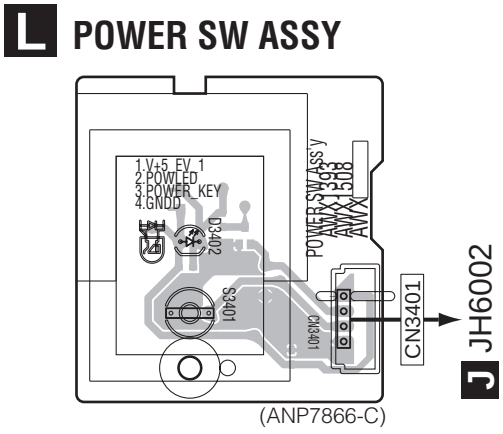

I J K L

SIDE A

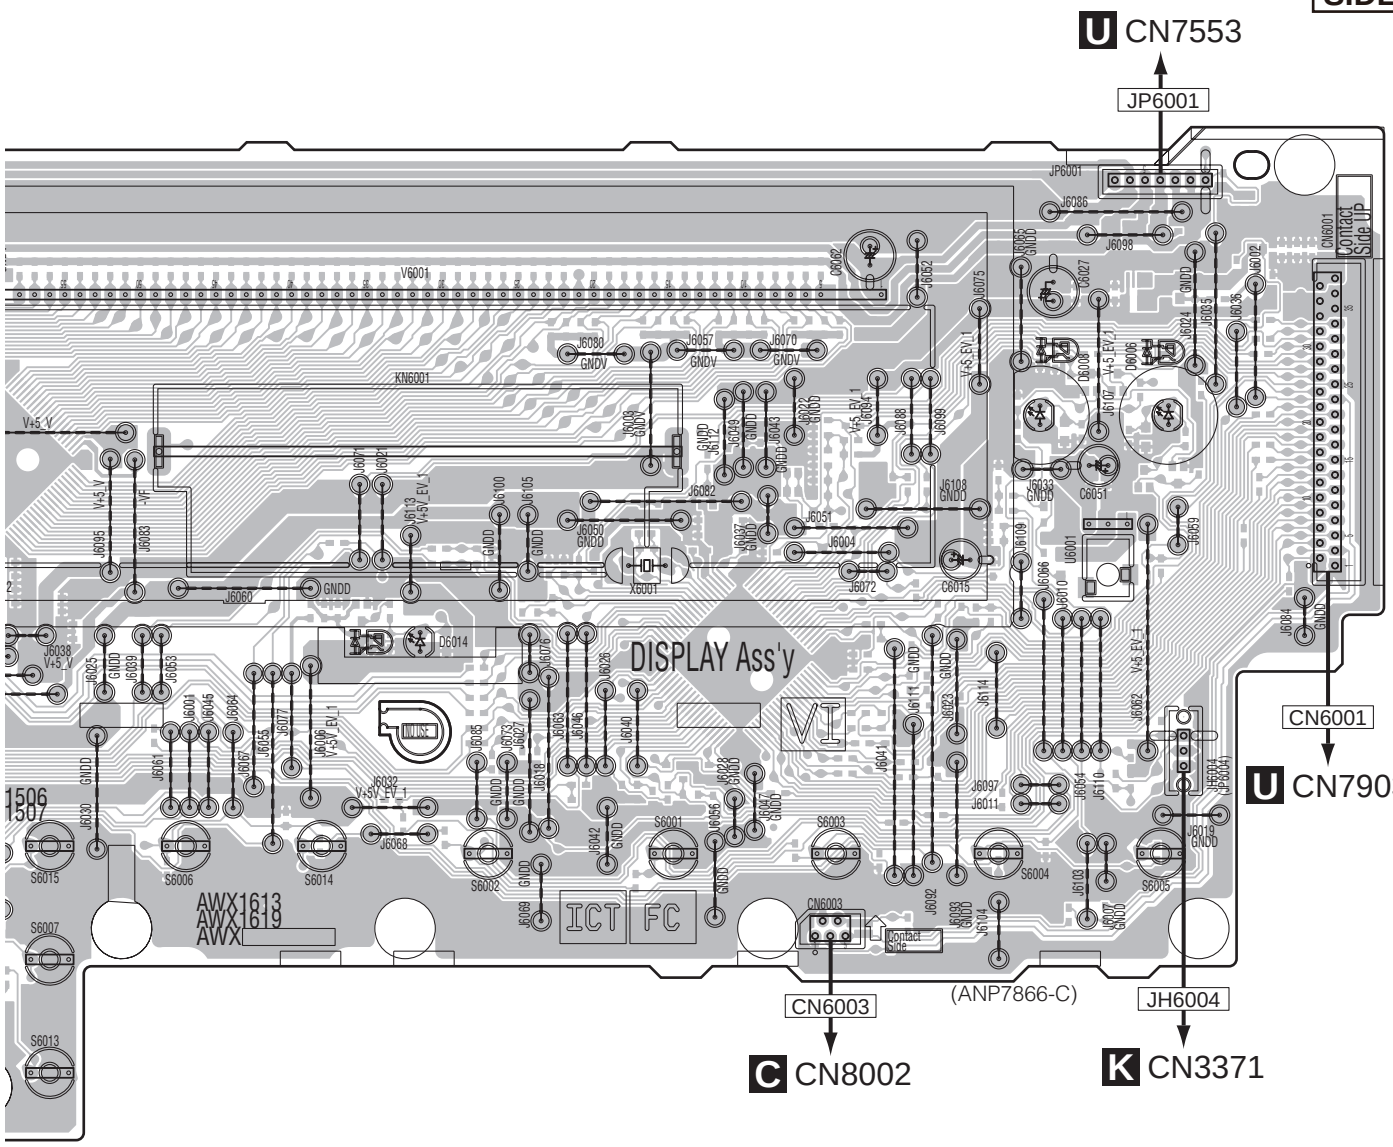

M ENCODER ASSY

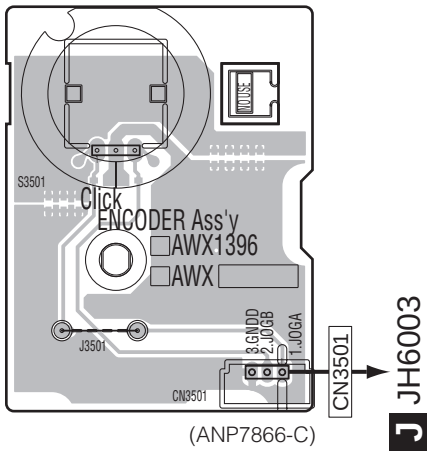

J JH6002

SIDE B

J DISPLAY ASSY

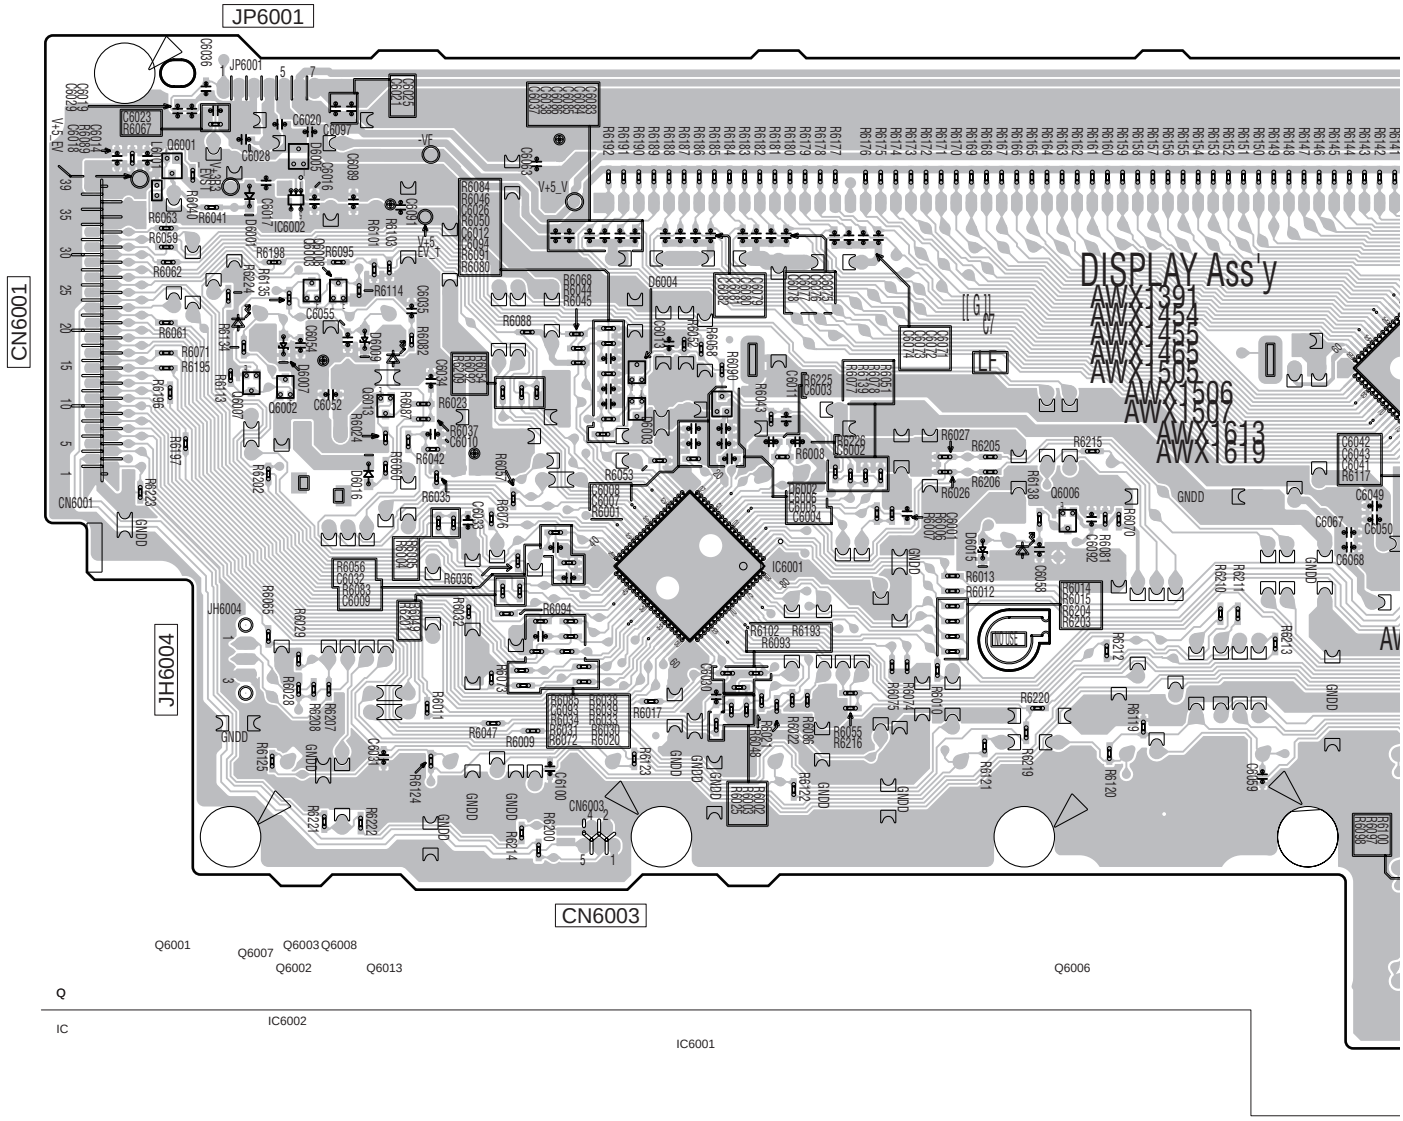

M ENCODER ASSY

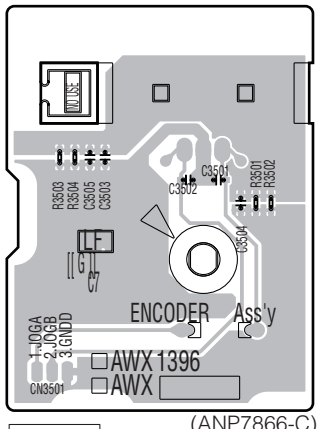

(ANP7866-C)

SIDE B

I MIC HP ASSY

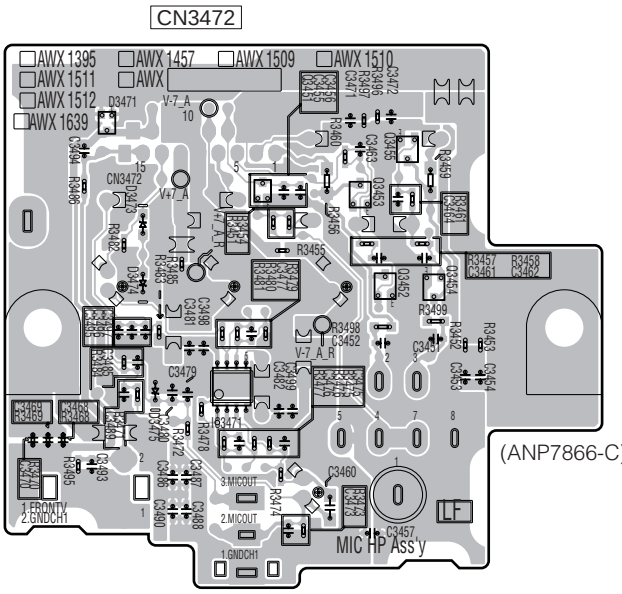

Q3451 Q3455 Q3453 Q3452 Q3454

IC IC3471

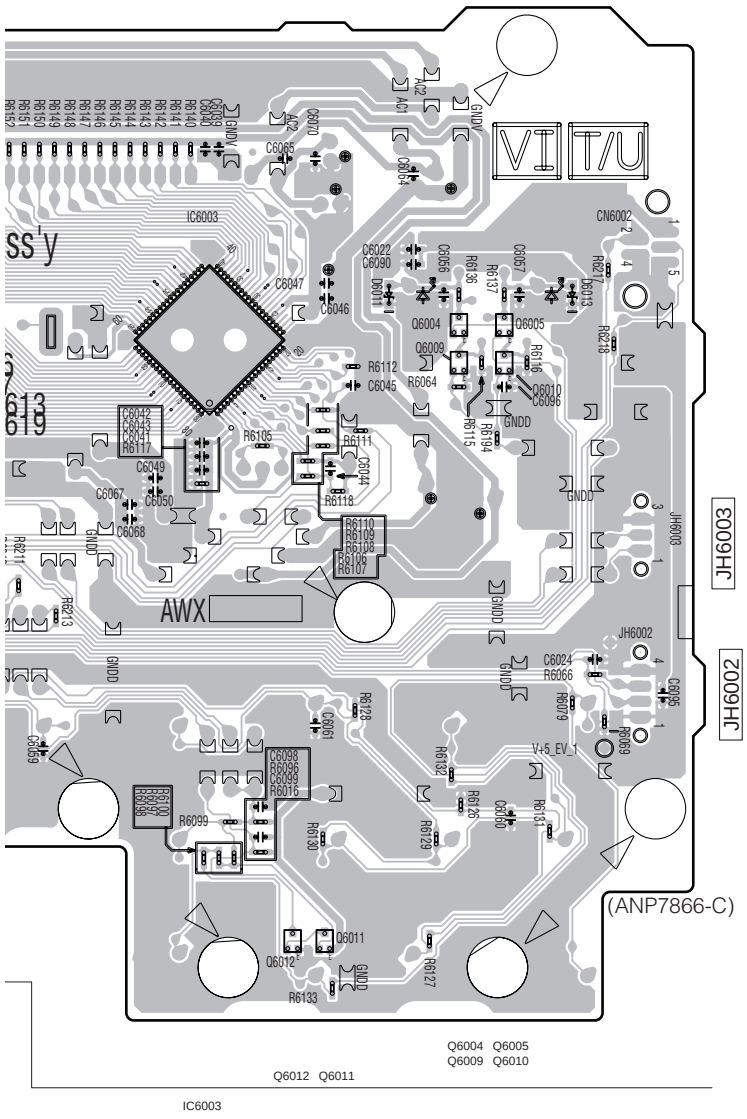

Q6004 Q6005 Q6009 Q6010

Q6012 Q6011

IC6003

K VOL ASSY

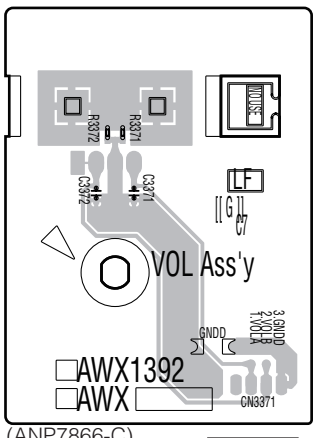

CN3371

L POWER SW ASSY

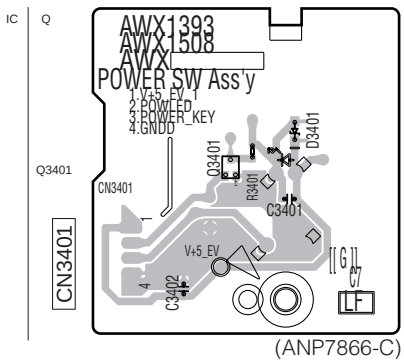

IC Q

Q3401

CN3401

11.9 IR BUFFER_S ASSY

SIDE A

N IR BUFFER_S ASSY

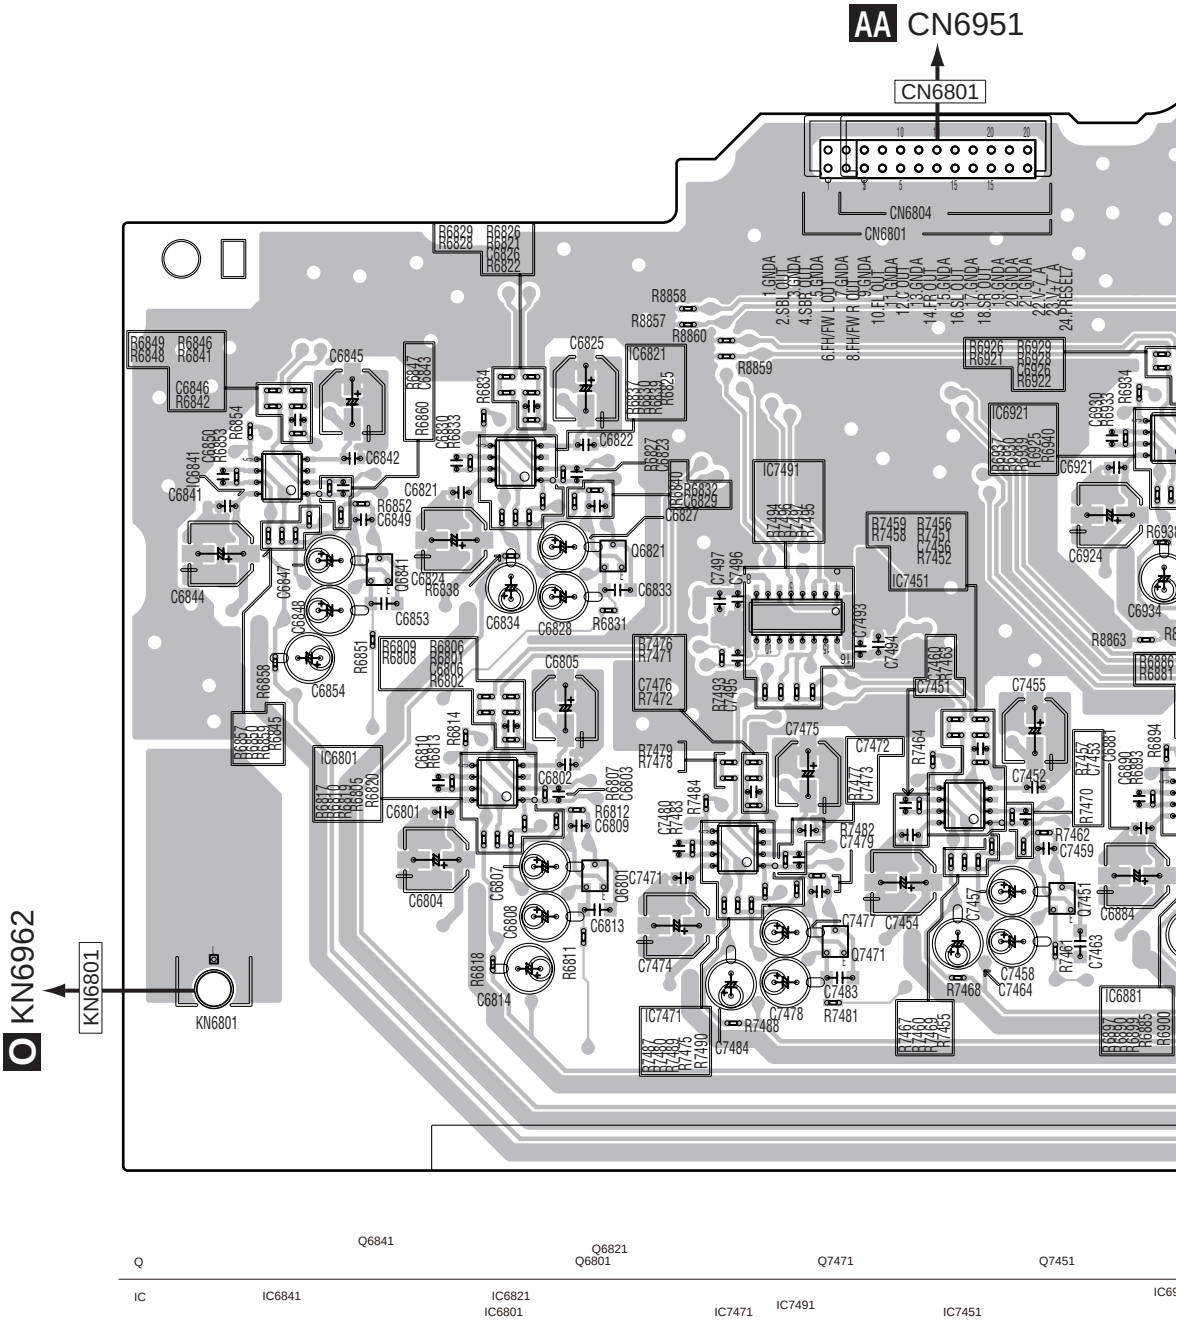

SIDE A

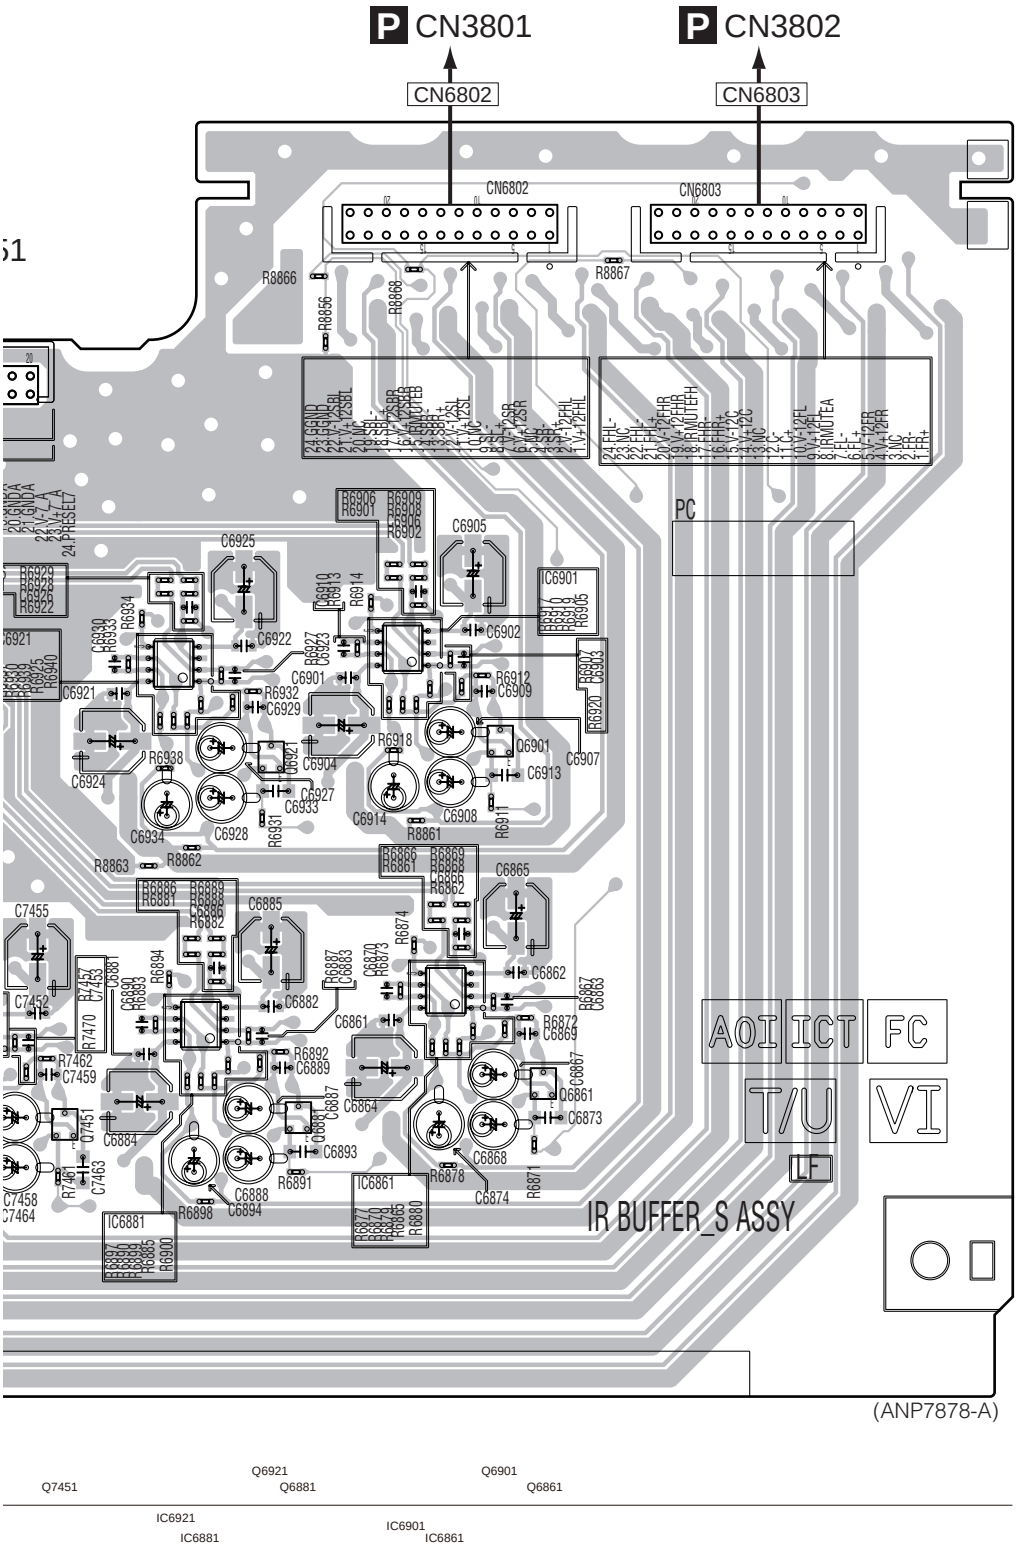
P CN3801
P CN3802
CN6802
CN6803
CN6802
CN6803
R8866
R8867
R8856
R8868
PC
AOI
ICT
FC
T/U
VI
LF
IR BUFFER_S ASSY
(ANP7878-A)
Q6921
Q6901
Q7451
Q6881
Q6861
IC6921
IC6901
IC6881
IC6861

SIDE B

A

N IR BUFFER_S ASSY

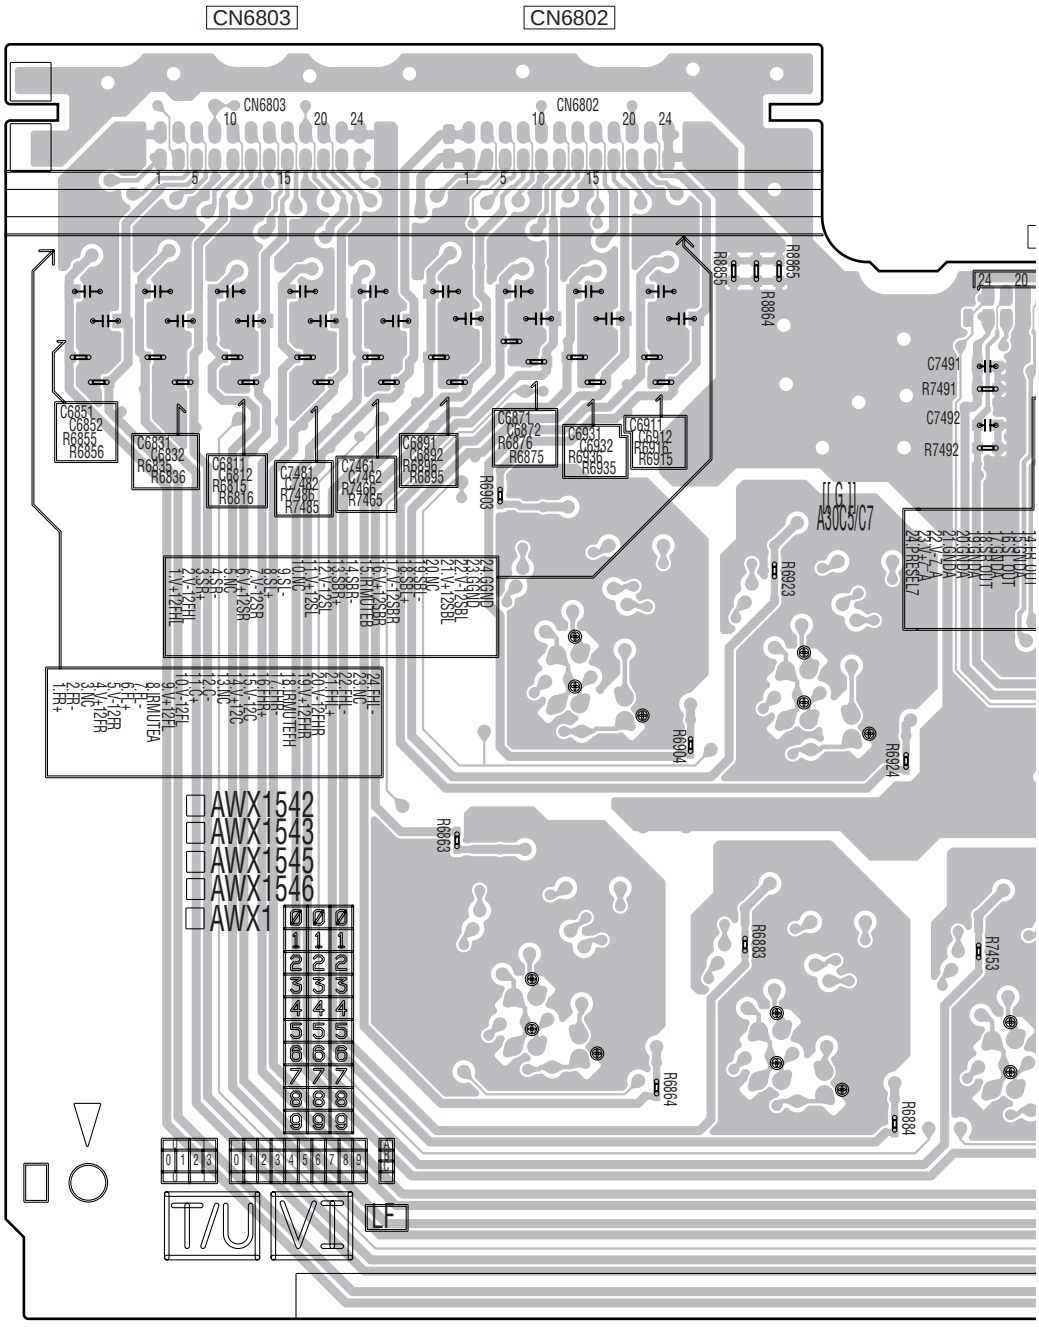

B

C

D

E

F

SIDE B

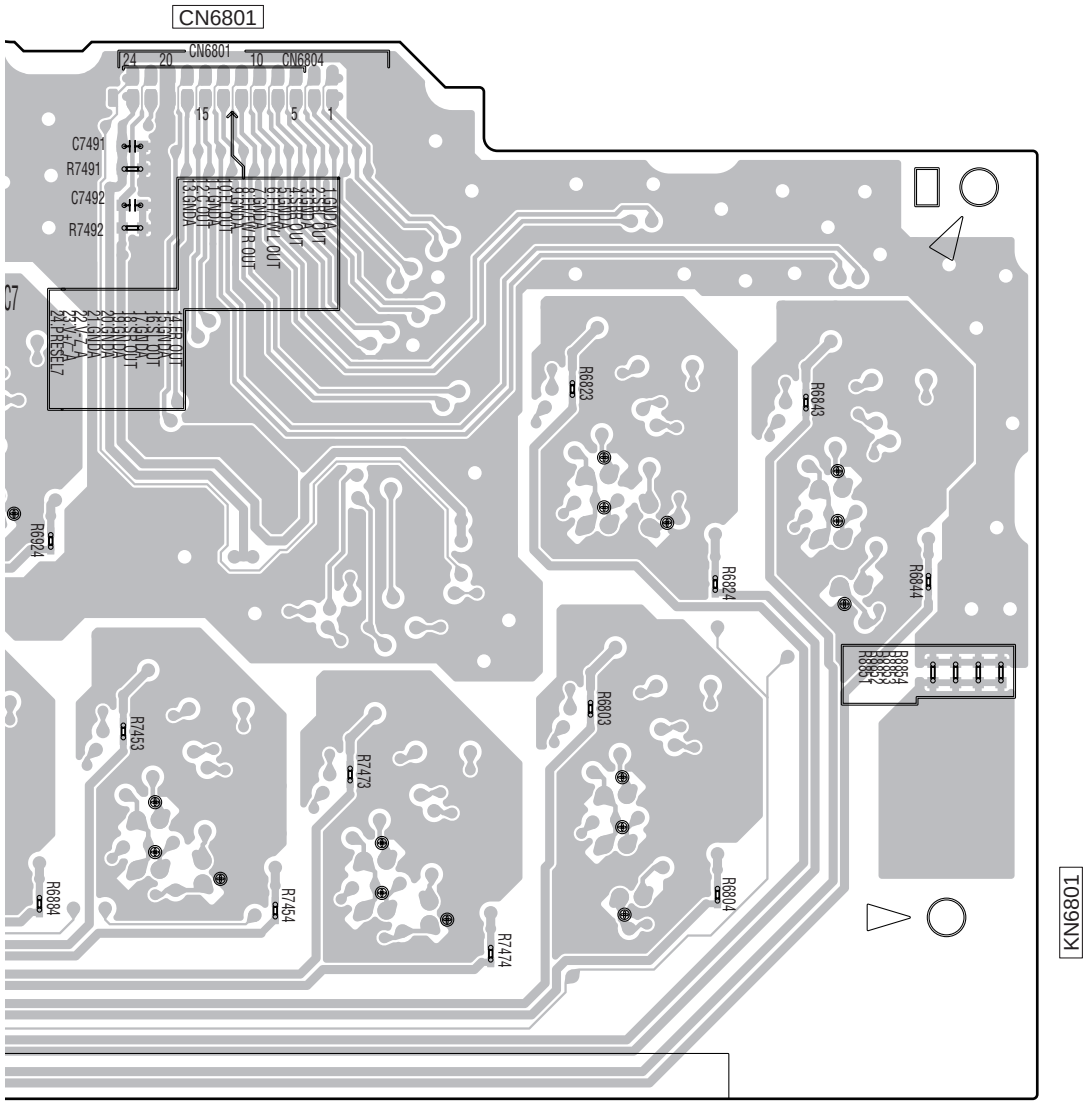

(ANP7878-A)

11.10 BUFFER GND ASSY and IR INTERFACE_S ASSY

SIDE A

SIDE A

P IR INTERFACE_S ASSY

O BUFFER GND_S ASSY

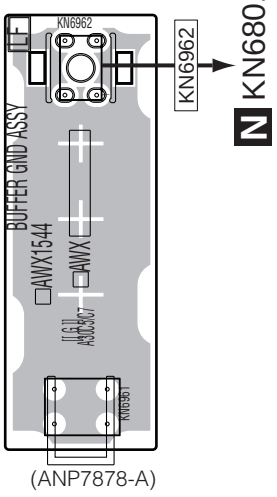

(ANP7878-A)

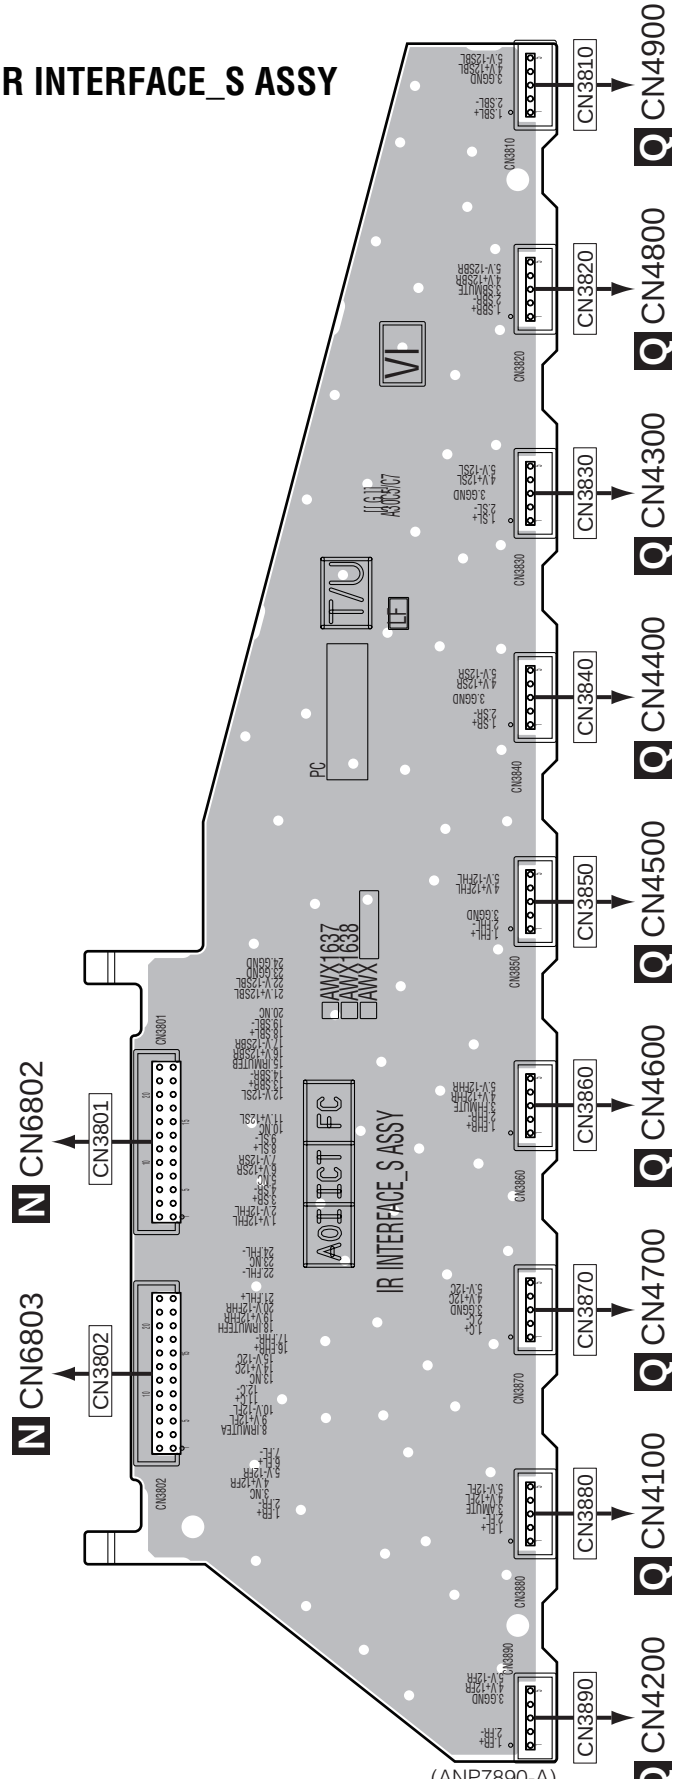

(ANP7890-A)

O P

O P

SIDE B

SIDE B

P IR INTERFACE_S ASSY

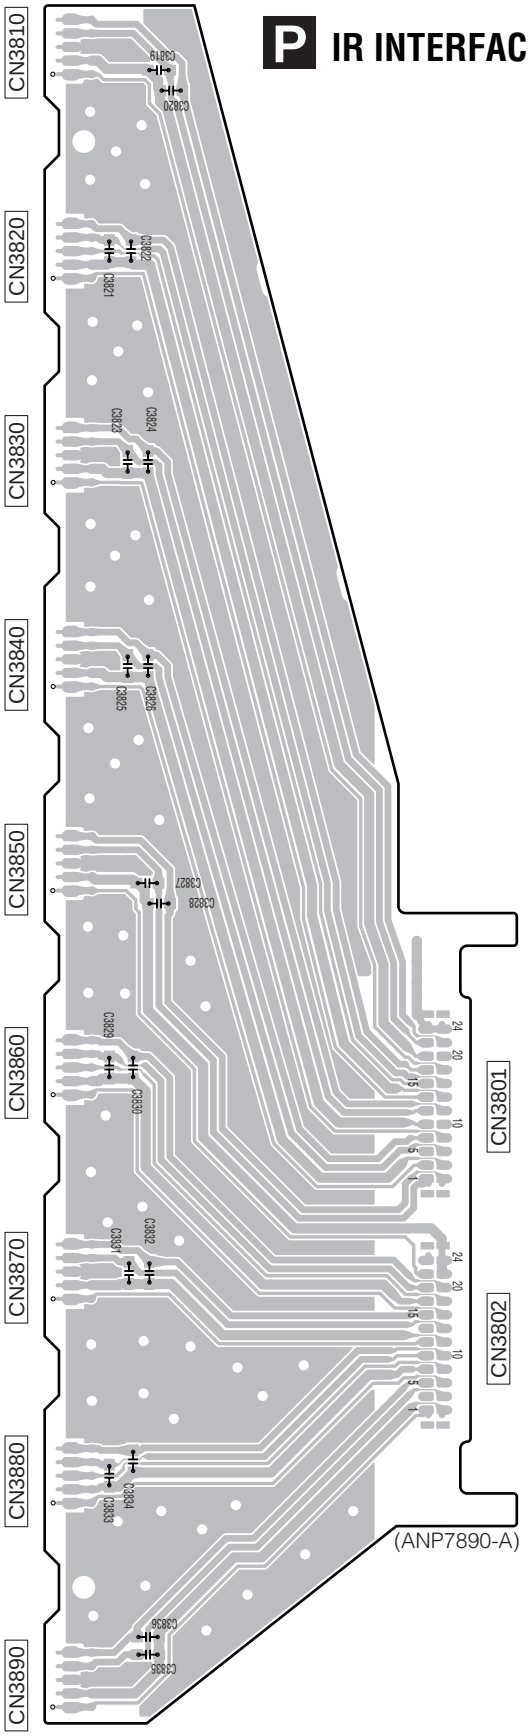

(ANP7890-A)

O BUFFER GND_S ASSY

KN6962

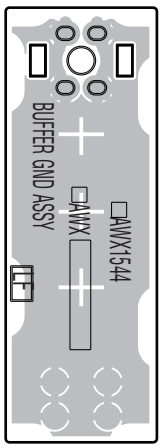

(ANP7878-A)

O P

O P

11.11 D-AMP_S ASSY

SIDE A

Q D-AMP_S ASSY

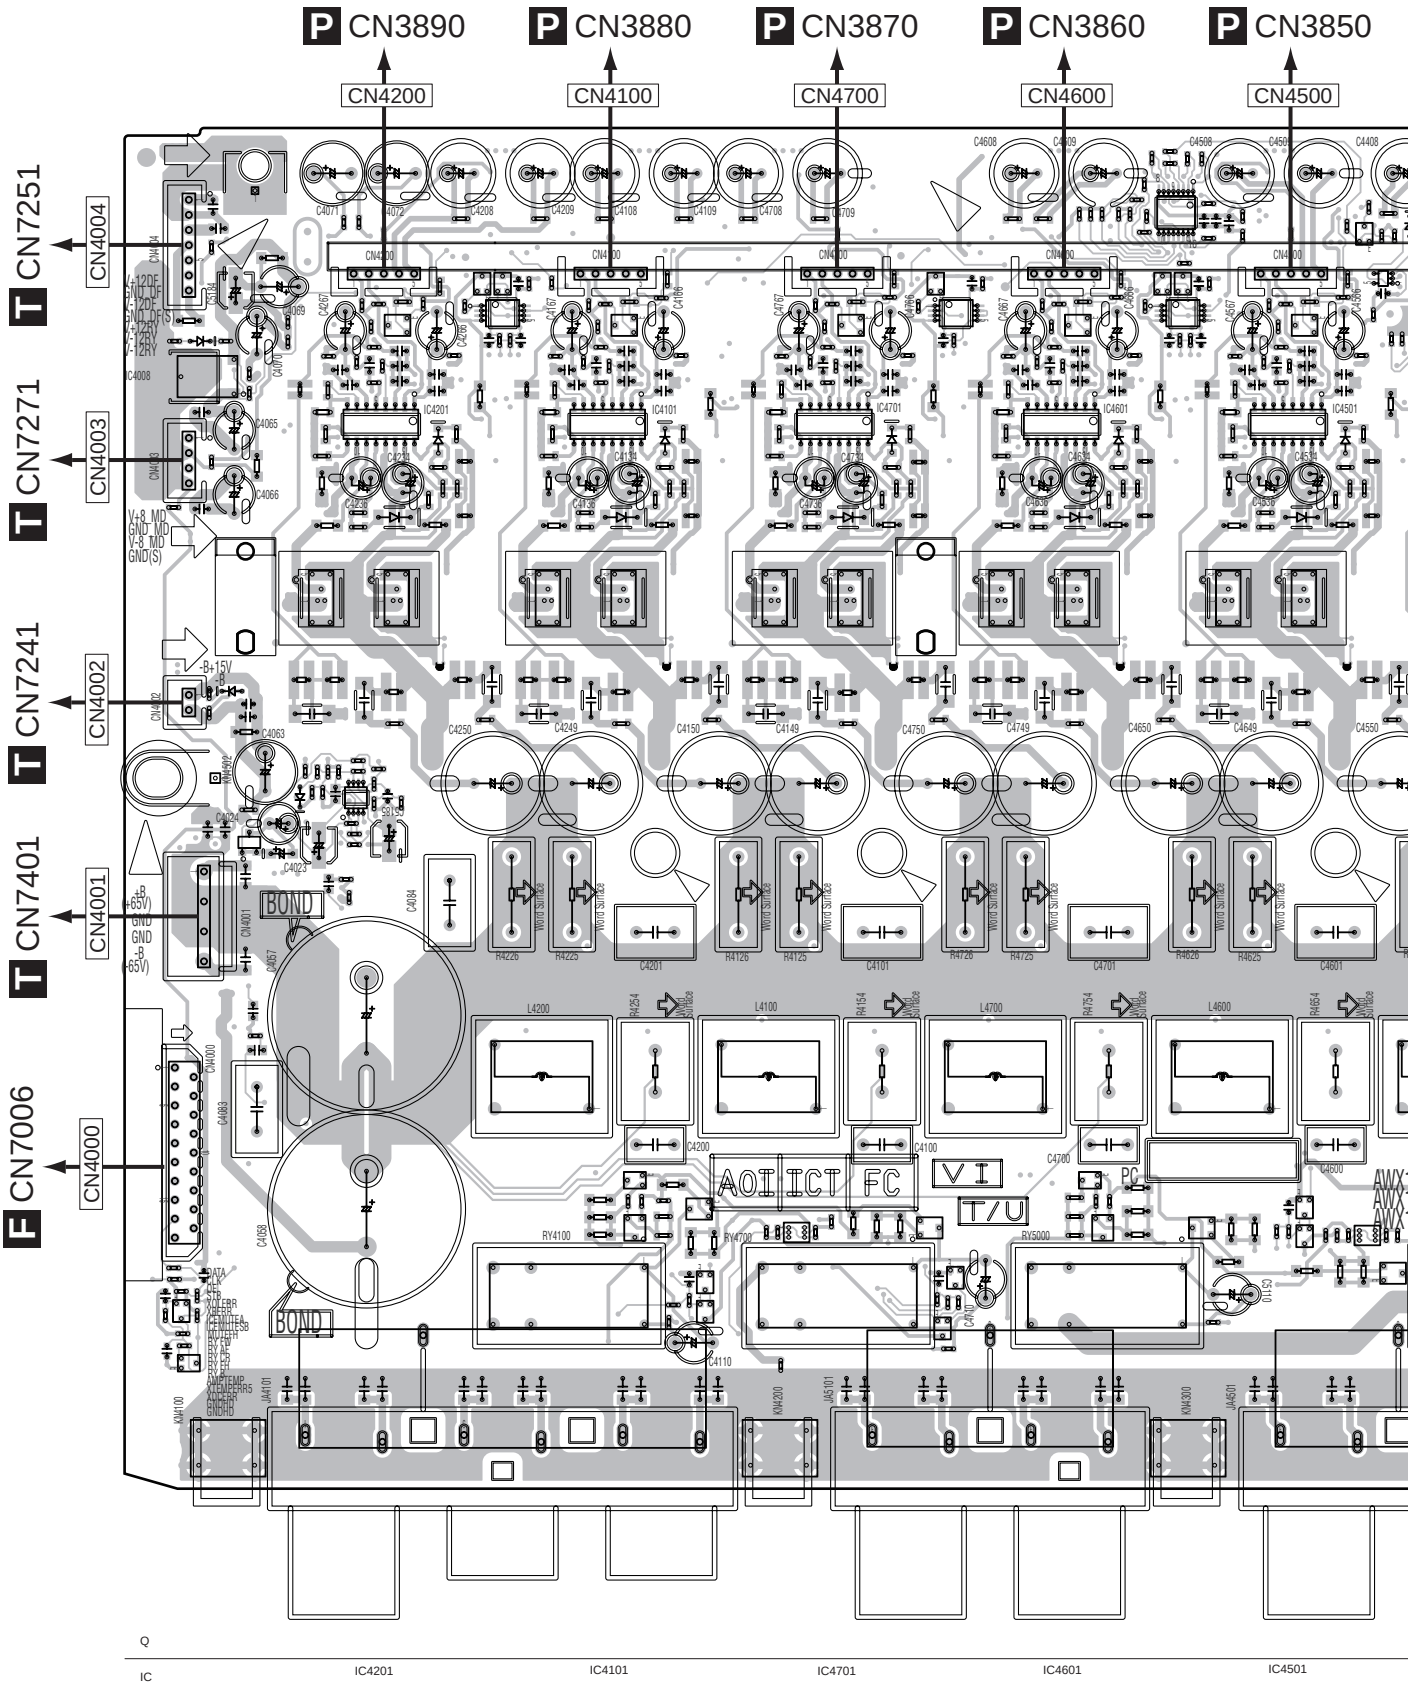

SIDE A

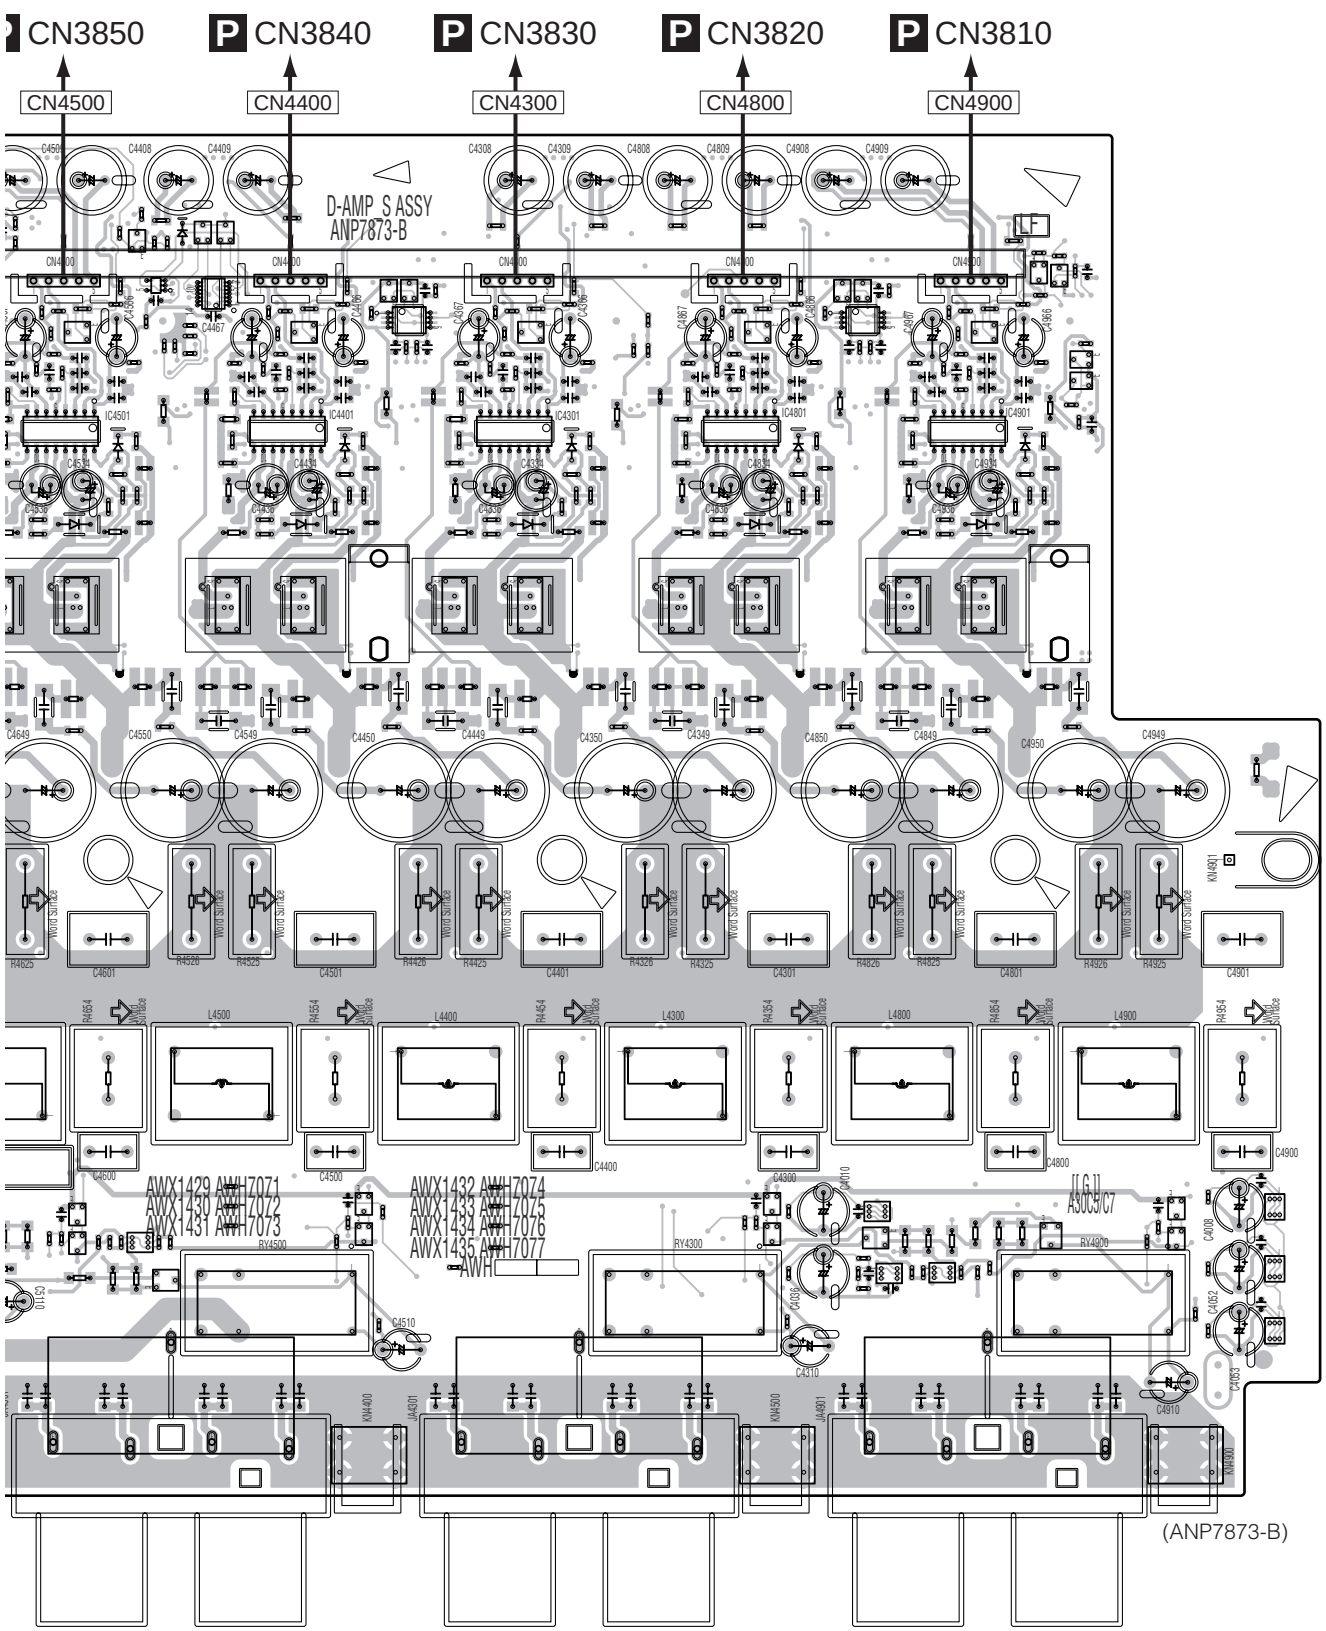
CN3850
CN3840
CN3830
CN3820
CN3810
CN4500
CN4400
CN4300
CN4800
CN4900
D-AMP. S ASSY
ANP7873-B
AWX1429 AWH7071
AWX1430 AWH7072
AWX1431 AWH7073
AWX1432 AWH7074
AWX1433 AWH7075
AWX1434 AWH7076
AWX1435 AWH7077
AWH
(ANP7873-B)
IC4501
IC4401
IC4301
IC4801
IC4901

SIDE B

Q D-AMP_S ASSY (CUXJ MODEL, UXJCB MODEL)

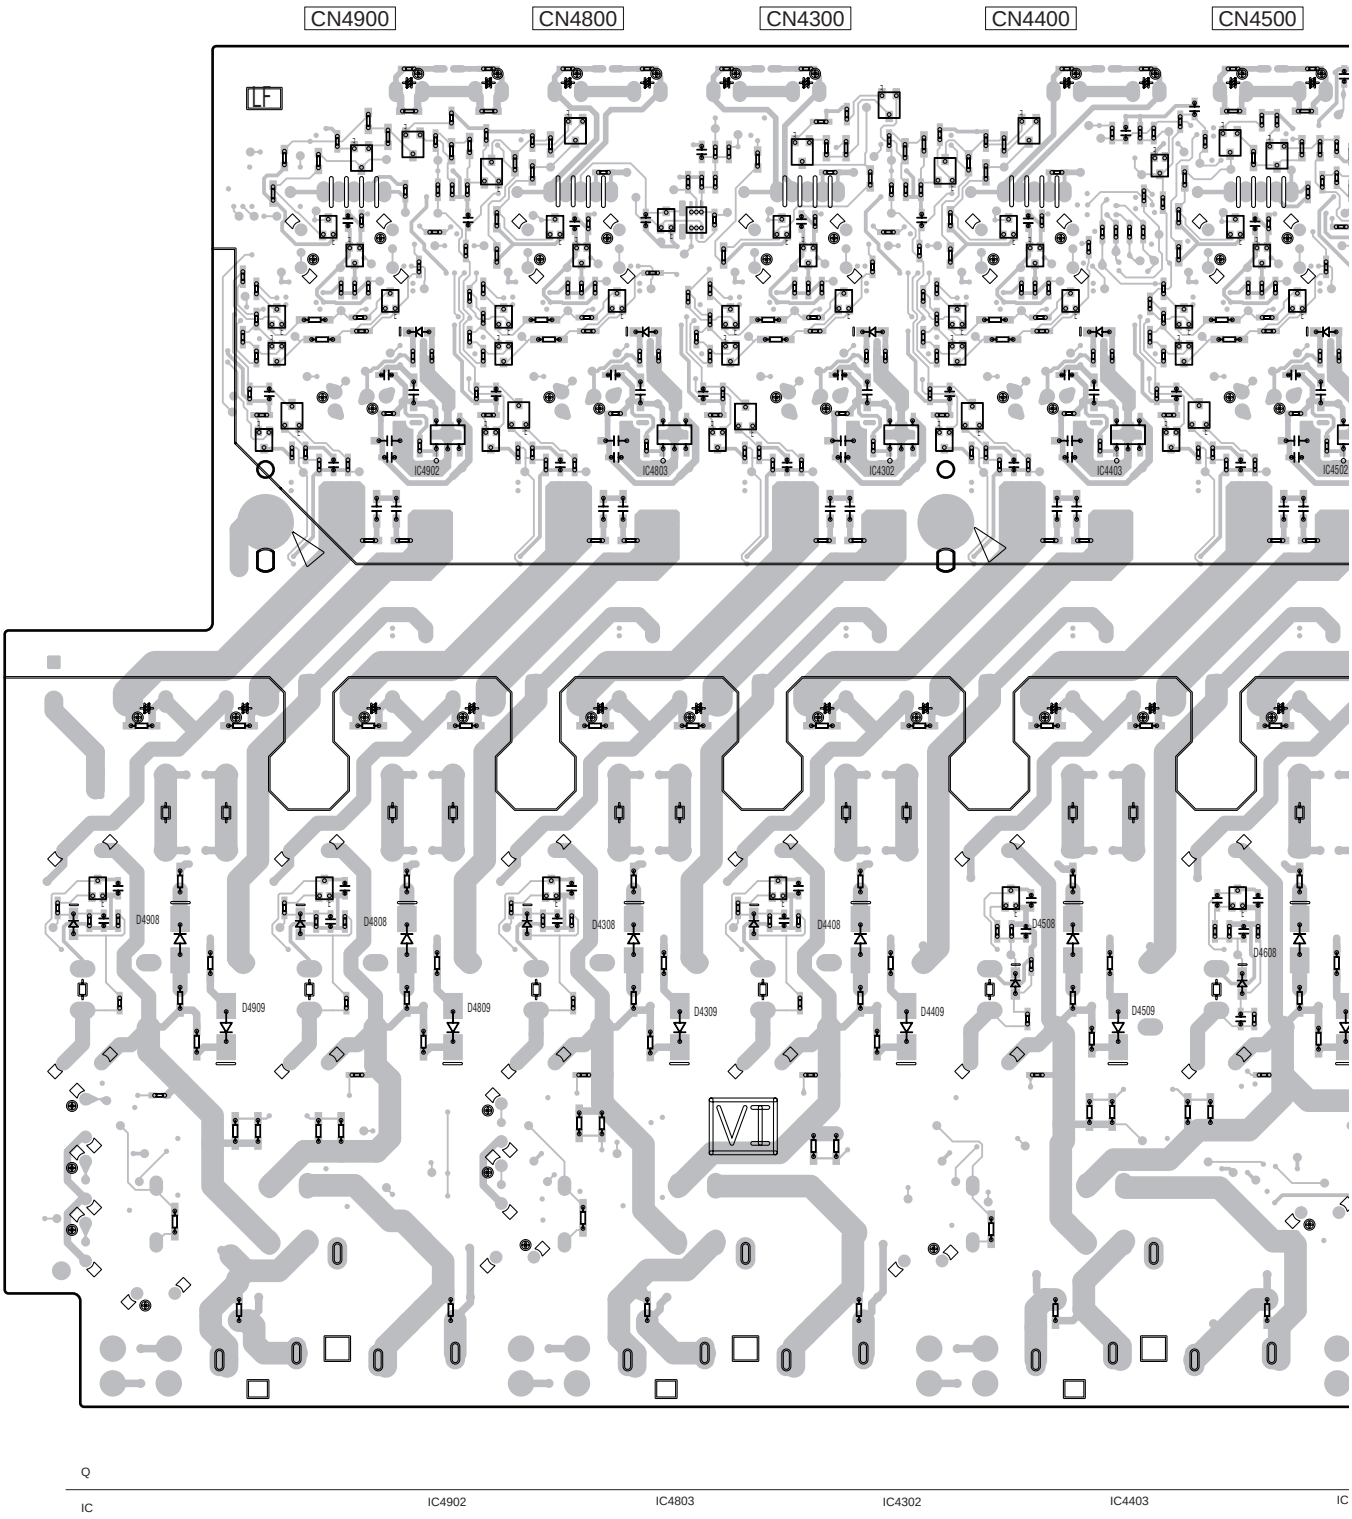

SIDE B

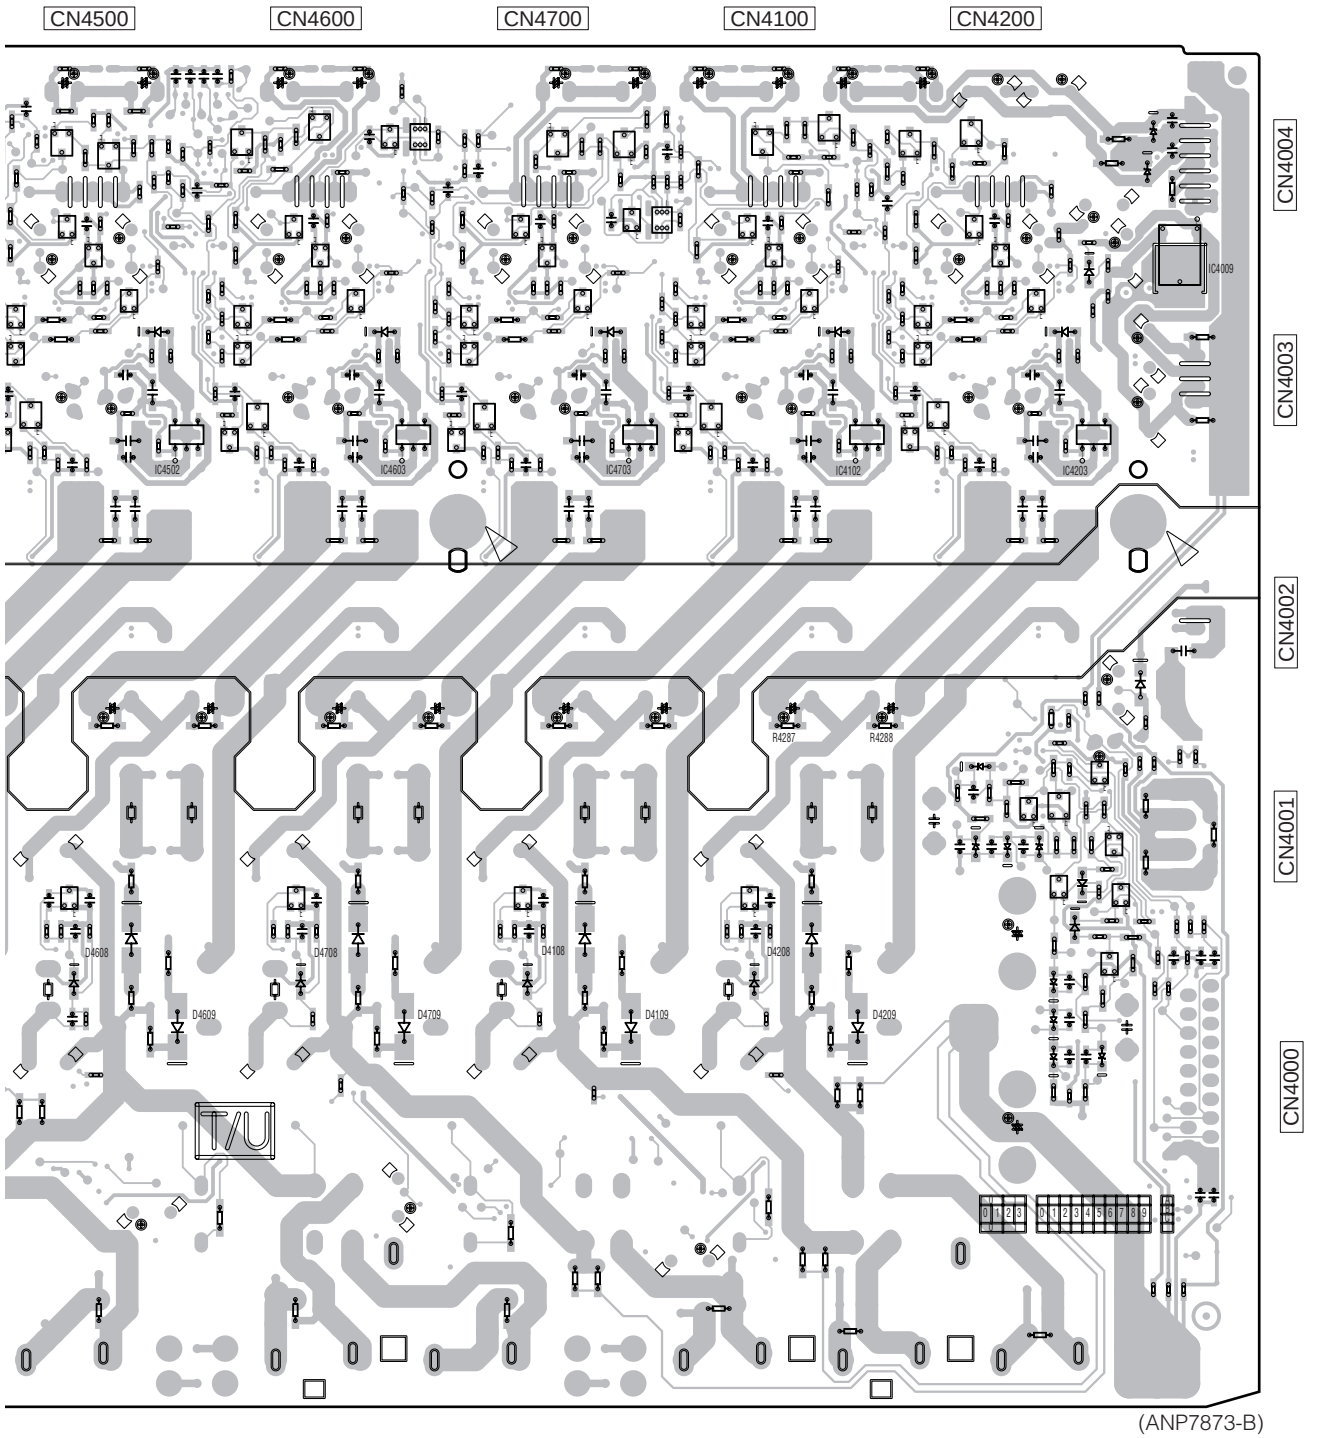

(ANP7873-B)

IC4502 IC4603 IC4703 IC4102 IC4203 IC4009

SIDE B

D-AMP_S ASSY (SYXJ8 MODEL, JXJ MODEL)

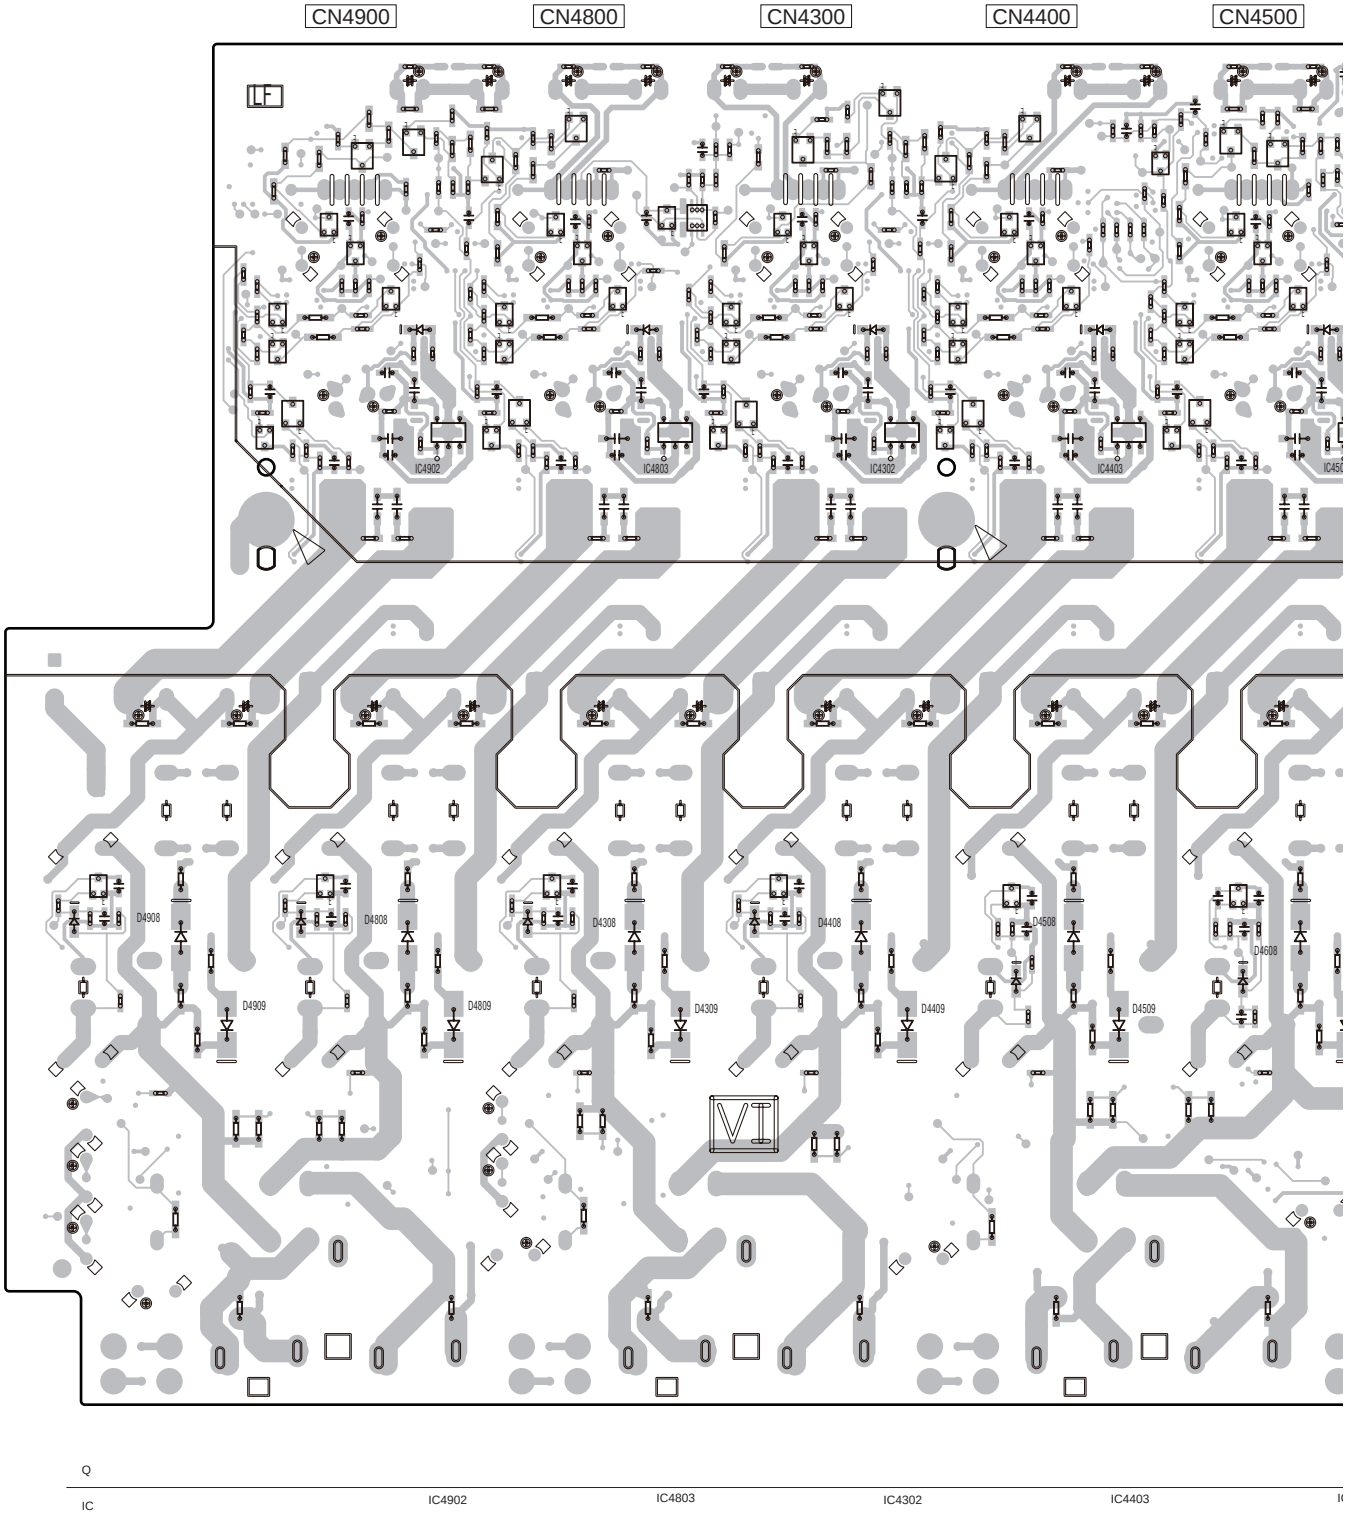

SIDE B

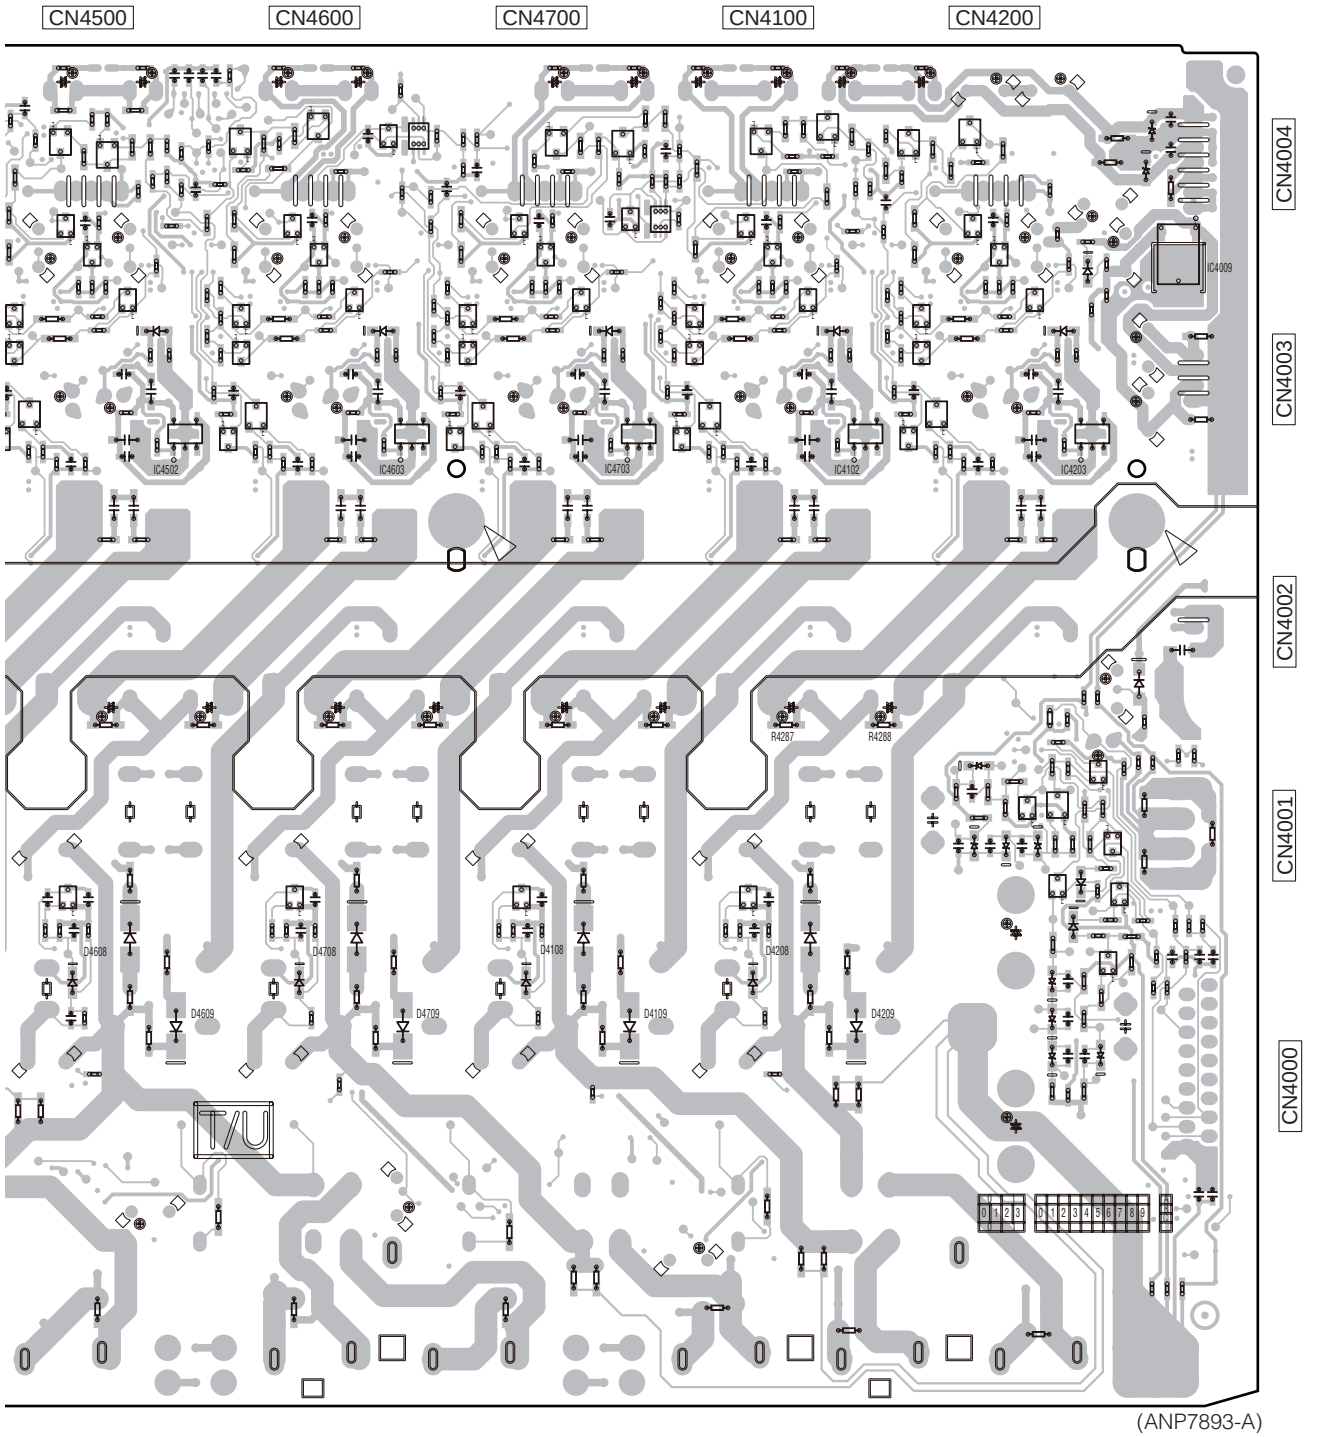

(ANP7893-A)

IC4502 IC4603 IC4703 IC4102 IC4203 IC4009

11.12 PRIMARY ASSY

SIDE A

SIDE A

R PRIMARY ASSY

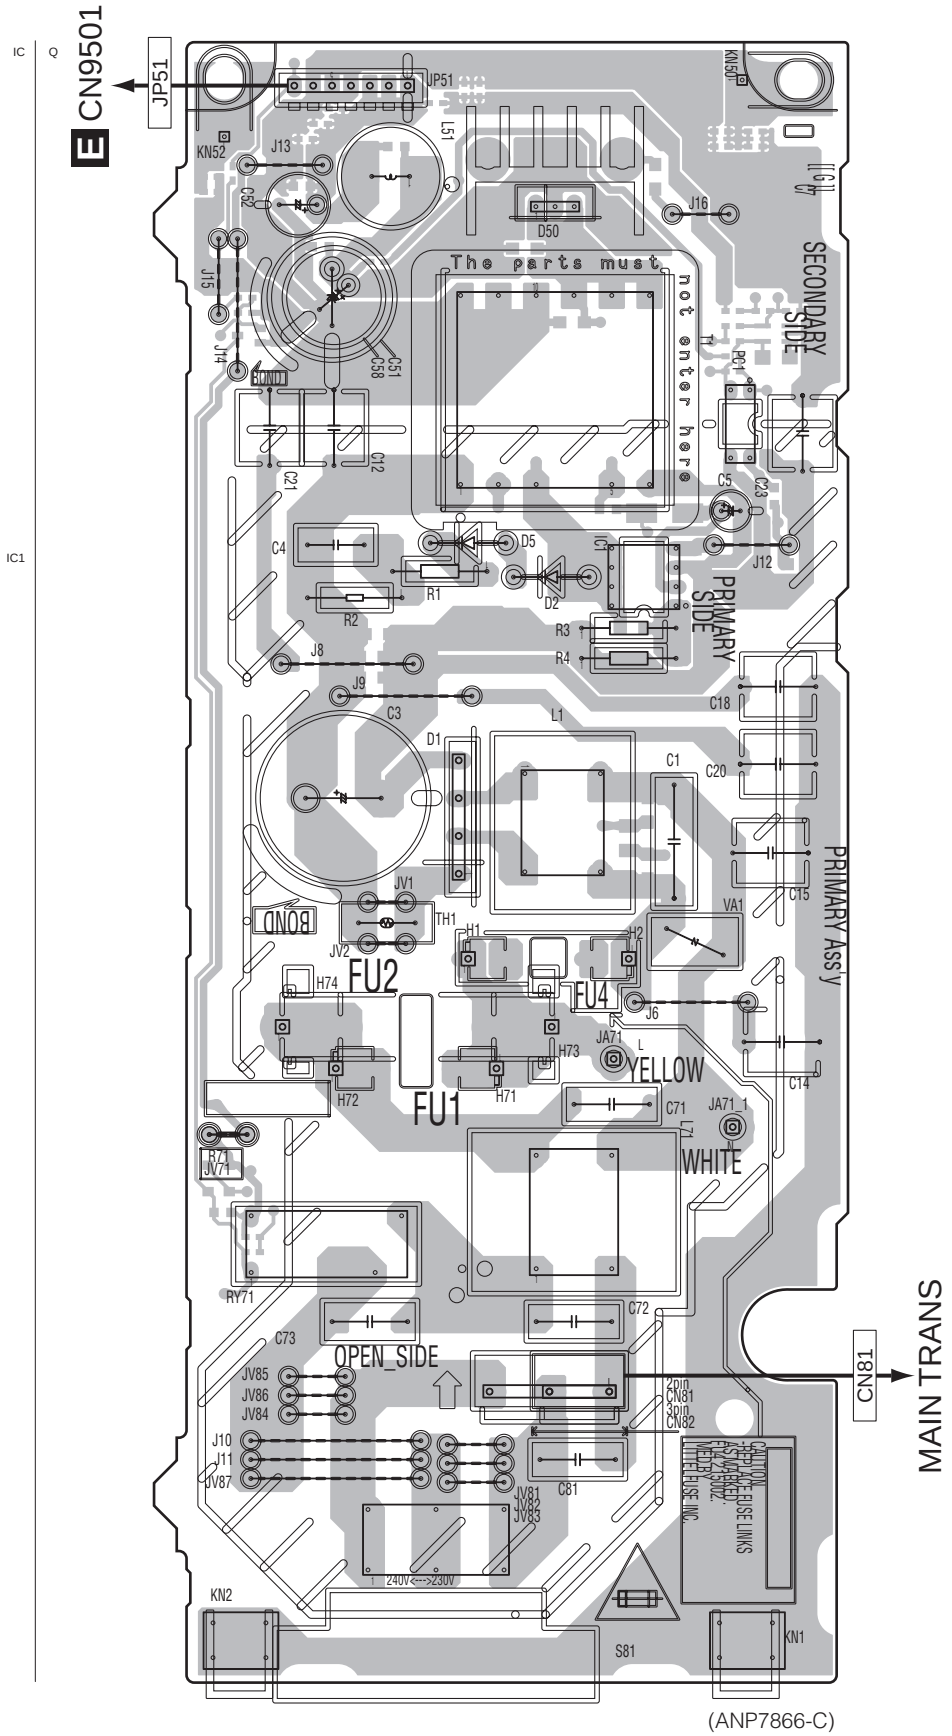

(ANP7866-C)

SIDE B

SIDE B

R PRIMARY ASSY

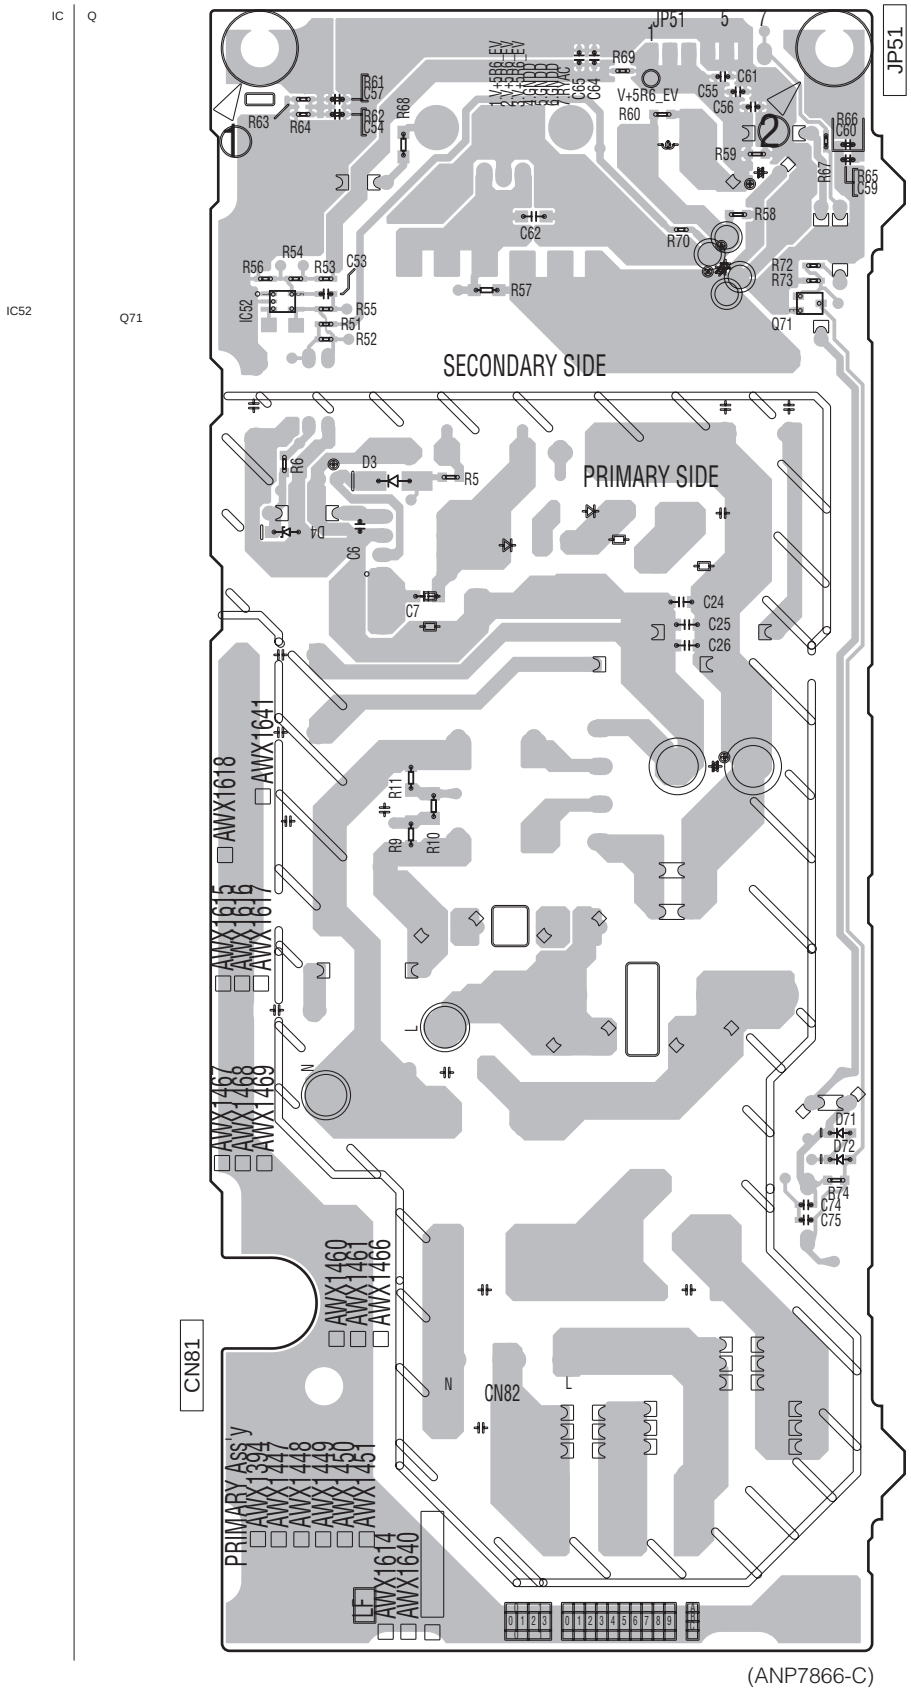

(ANP7866-C)

11.13 A-REG_S ASSY and IR REG_S ASSY

SIDE A

S A-REG_S ASSY

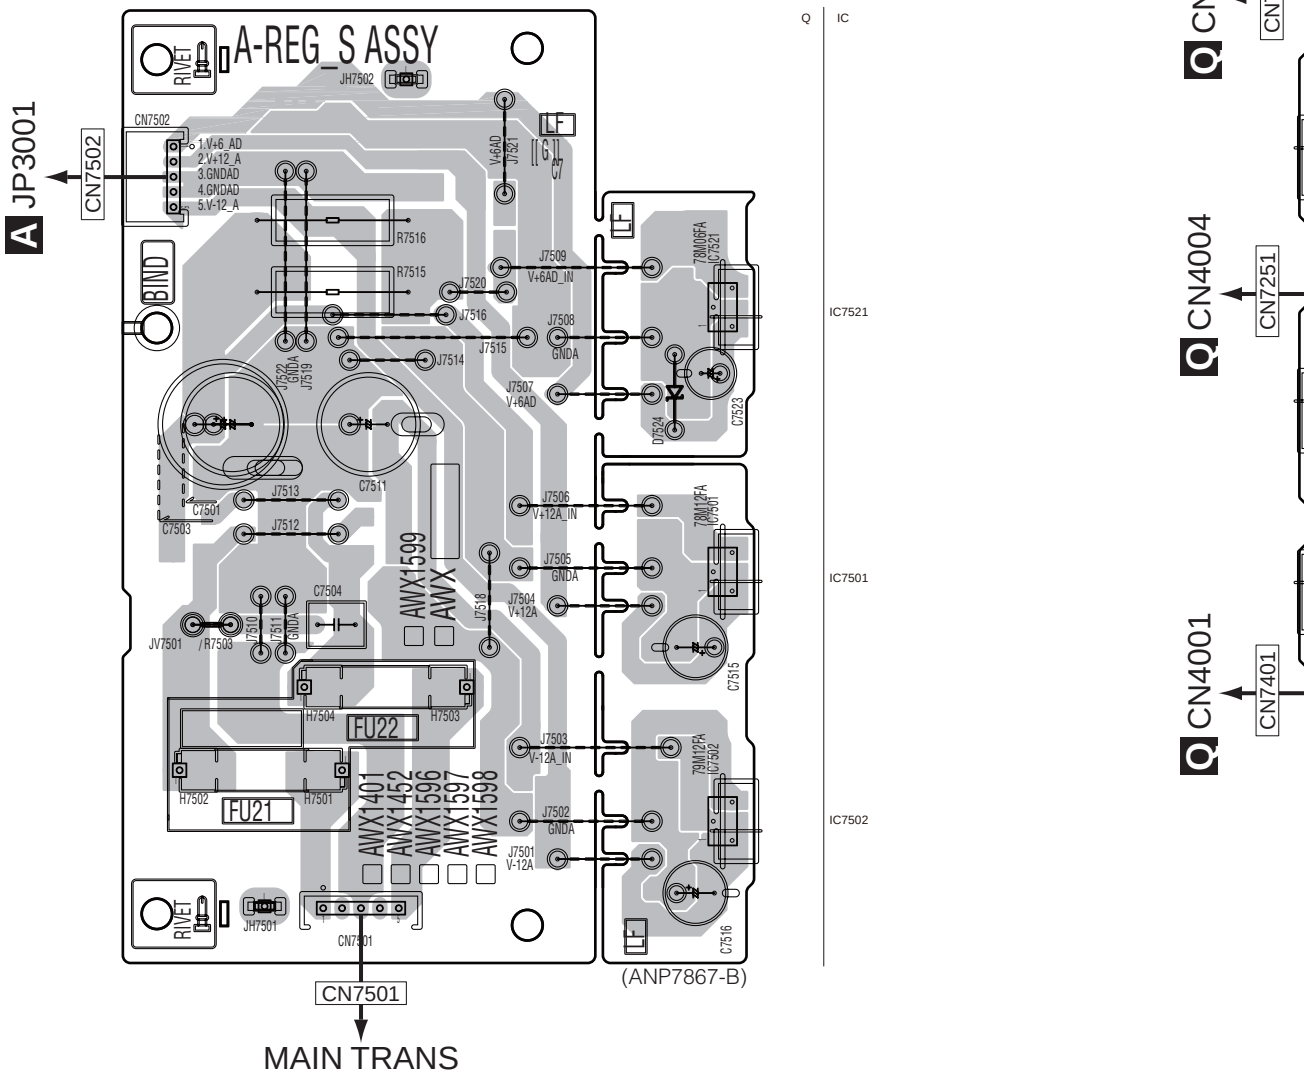

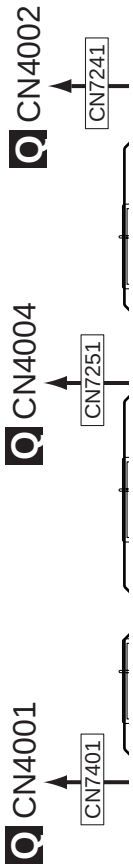

T IR REG_S ASSY

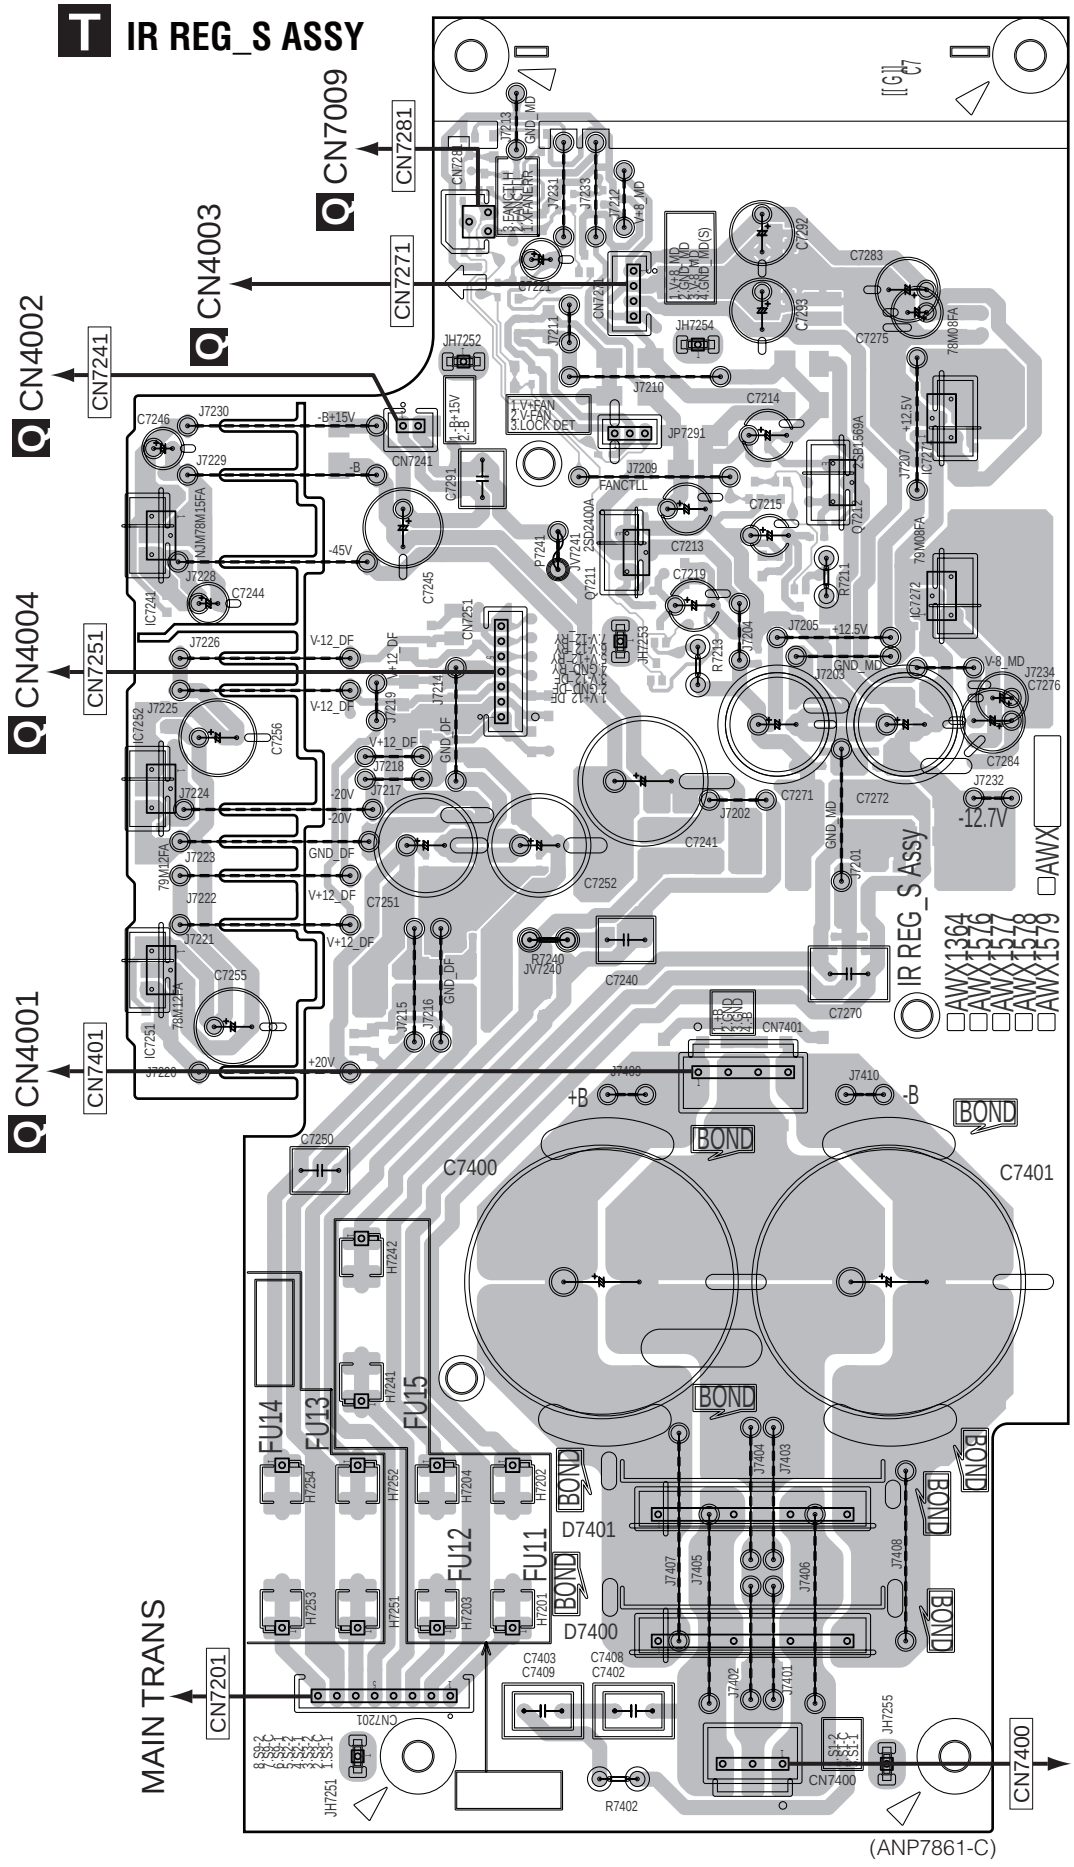

Q IC

IC7271
Q7212
Q7211
IC7241
IC7272
IC7252
IC7251

T IR REG_S ASSY

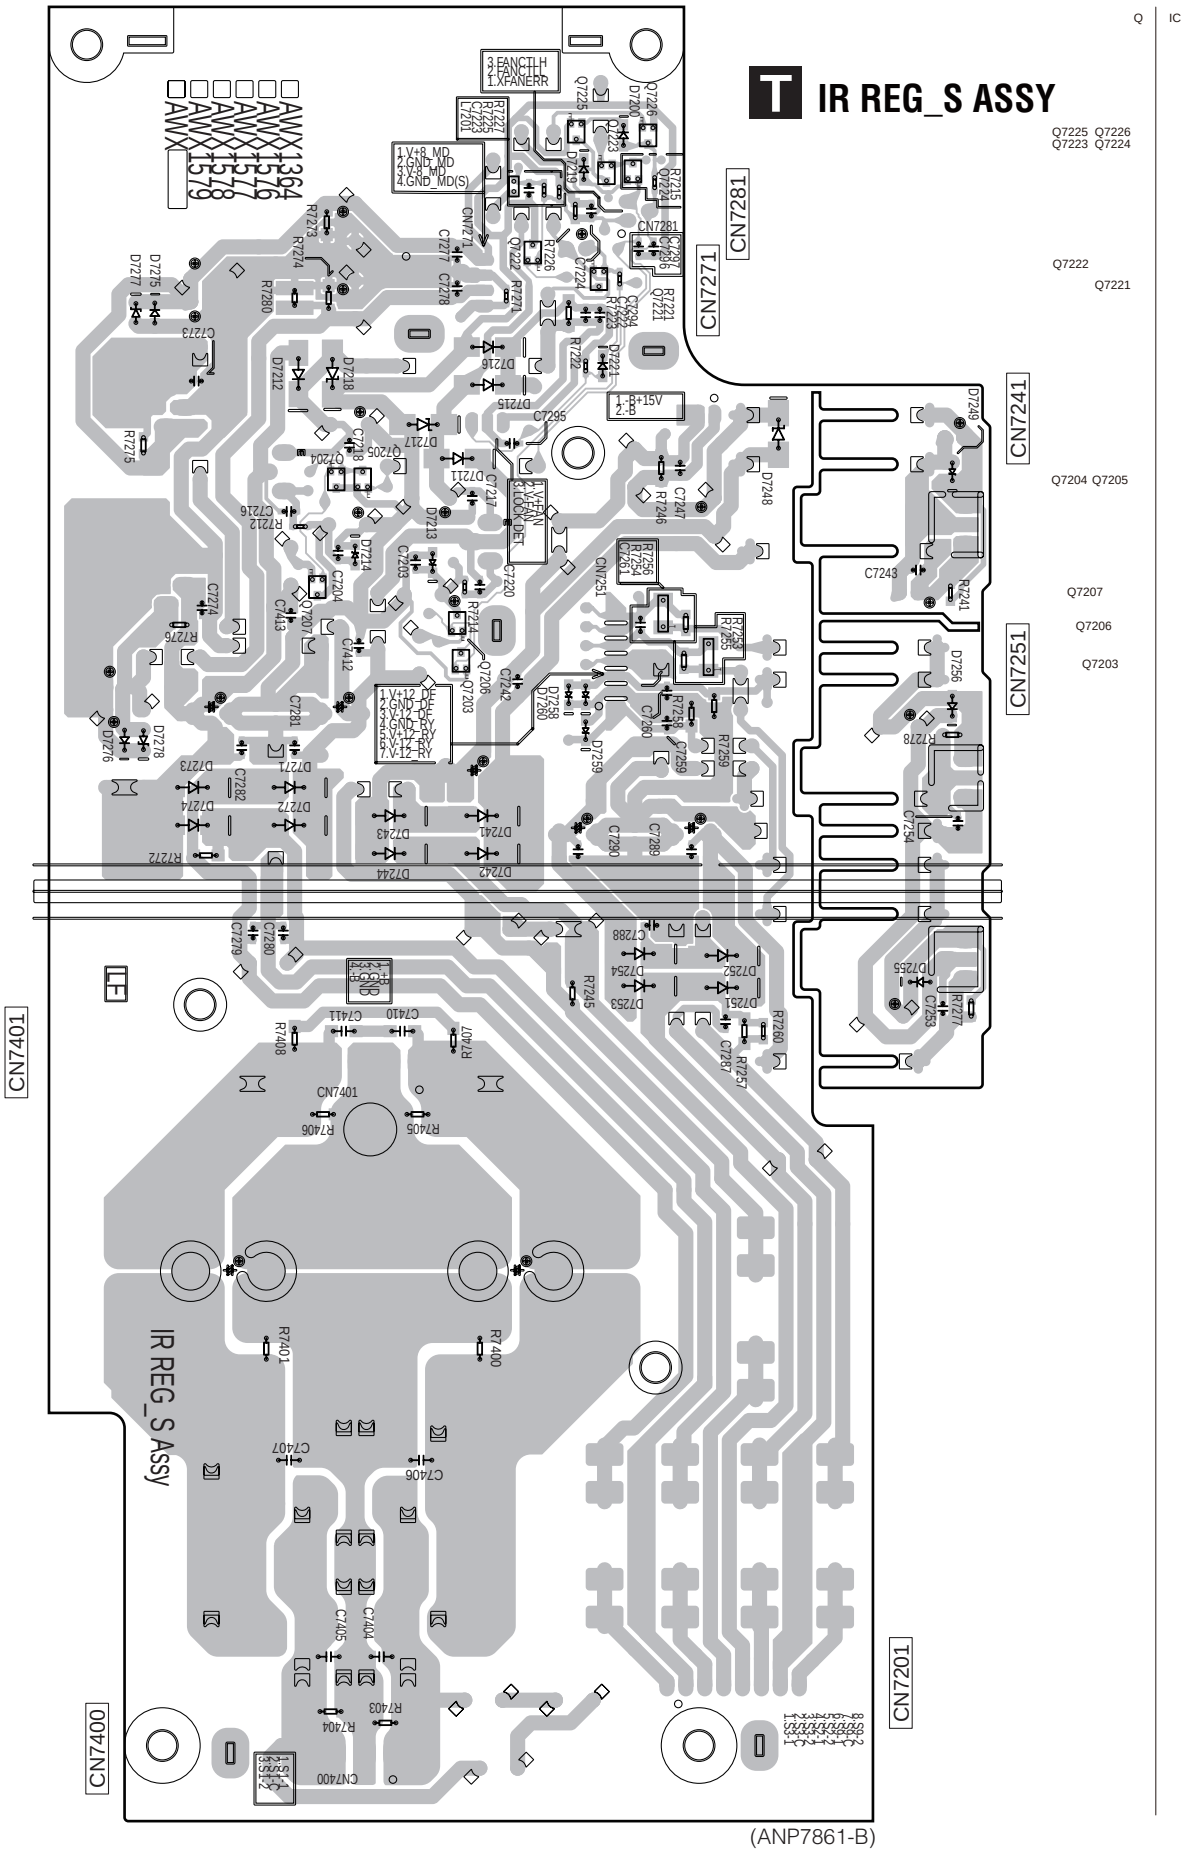

(ANP7861-B)

S A-REG_S ASSY

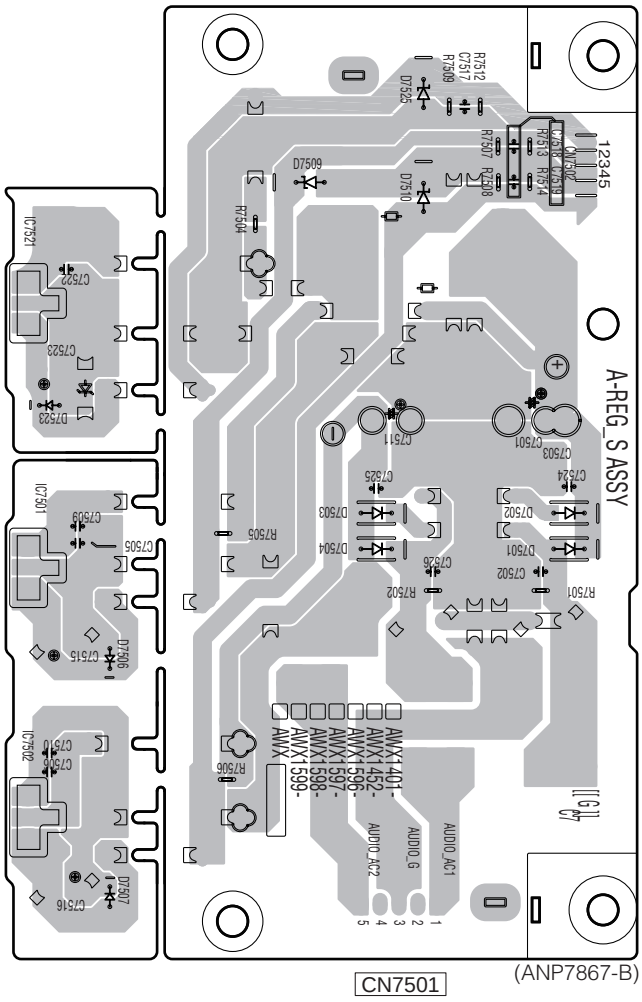

(ANP7867-B)

11.14 V-REG_S ASSY

SIDE A

SIDE A

U V-REG_S ASSY

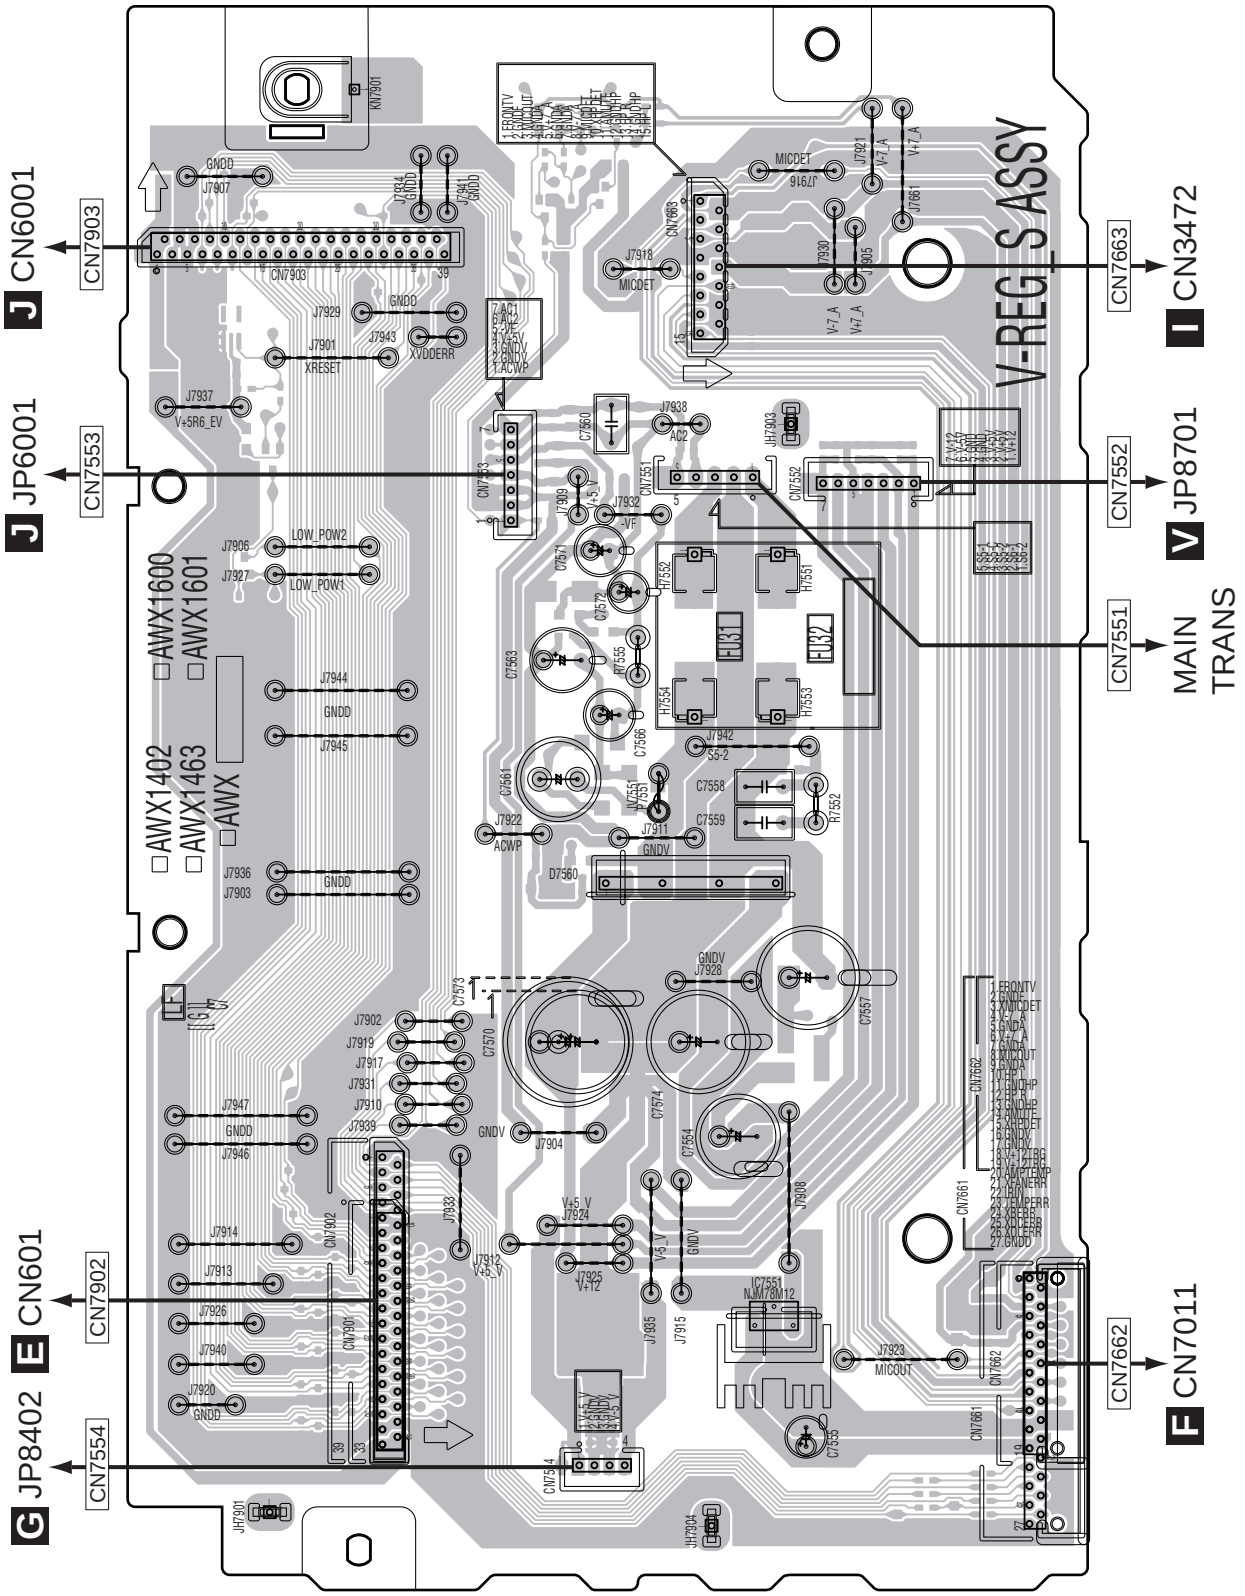

Q

IC

IC7551

U U

SIDE B

U V-REG_S ASSY

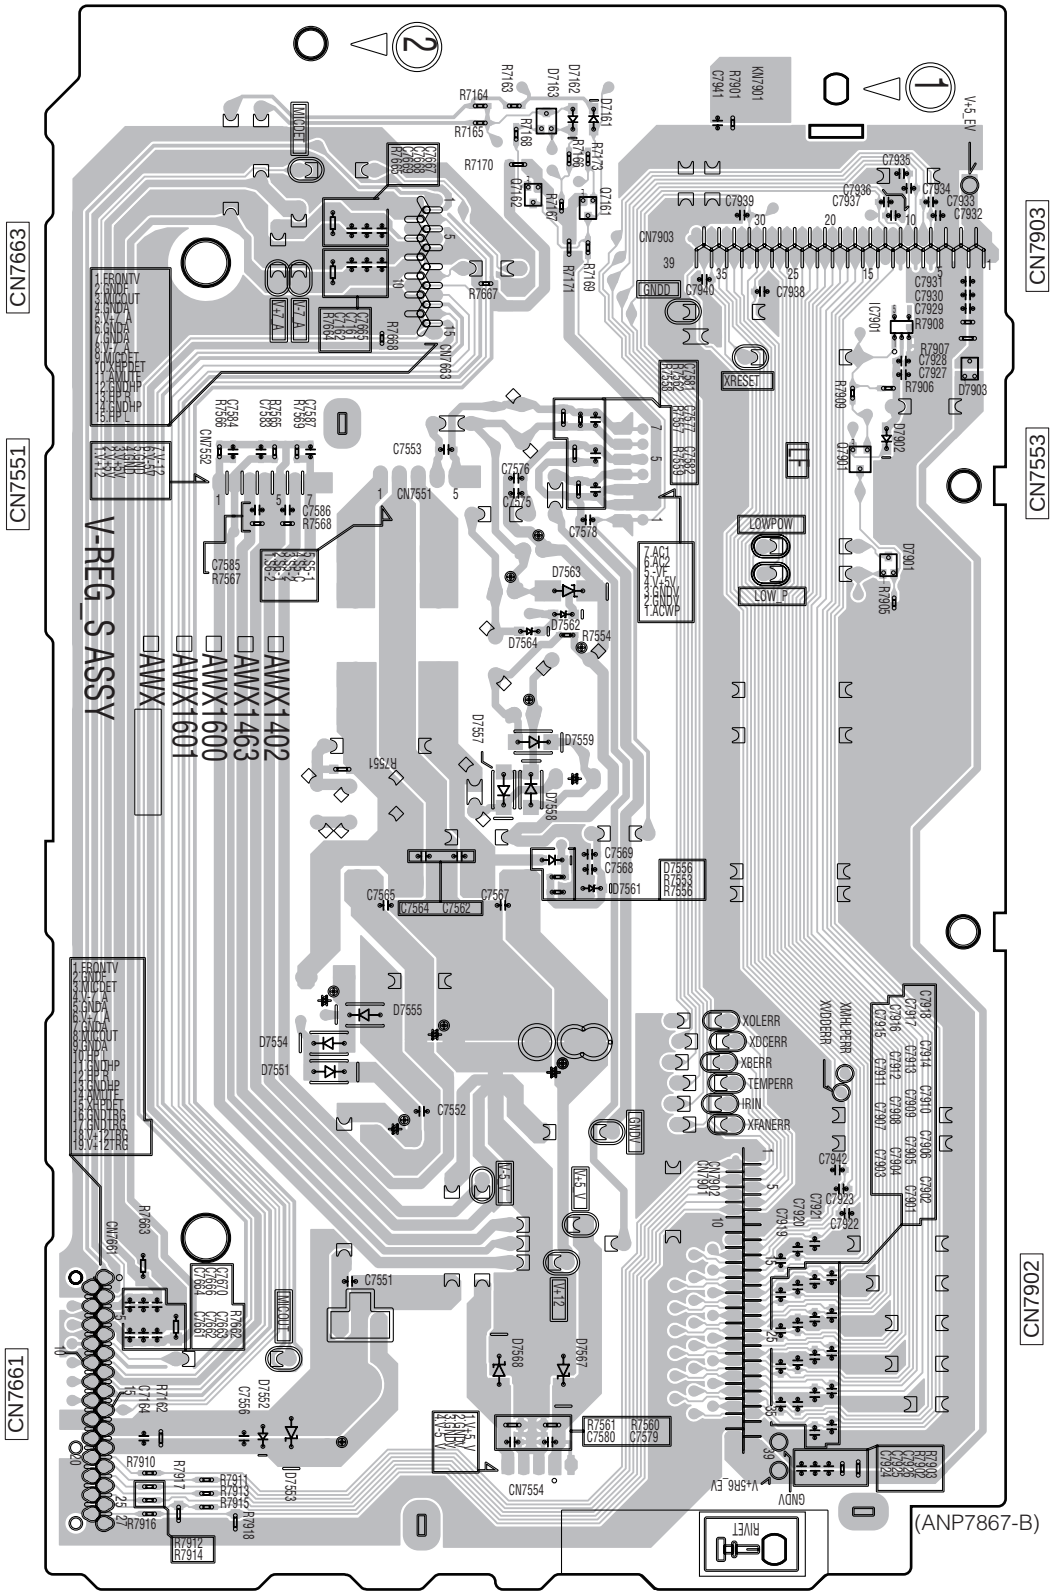

Q Q7162 Q7161 Q7901

IC IC7901

11.15 VREG CHILD_S ASSY, CONNECT_S ASSY and A-DAC BRIDGE ASSY

SIDE A

SIDE A

V VREG CHILD_S ASSY

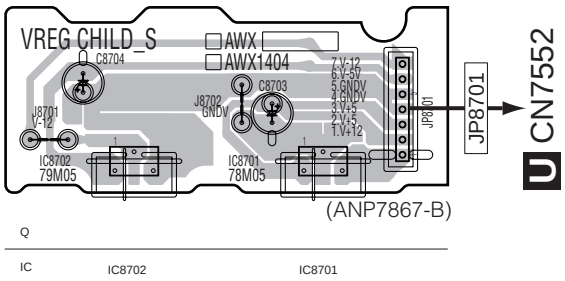

W CONNECT_S ASSY

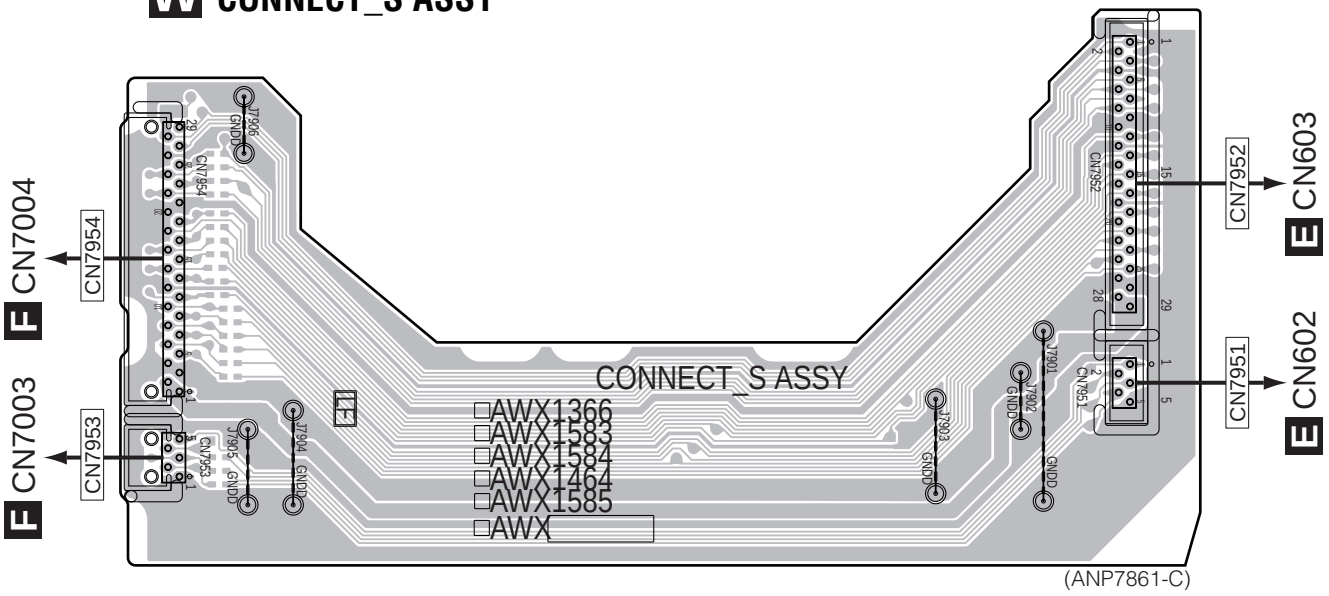

X A-DAC BRIDGE ASSY

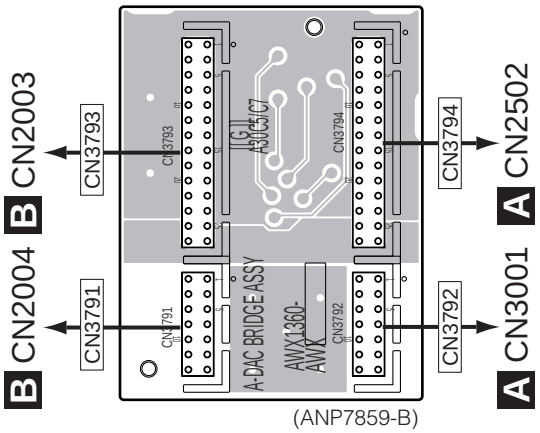

V W X

V W X

SIDE B

V VREG CHILD_S ASSY

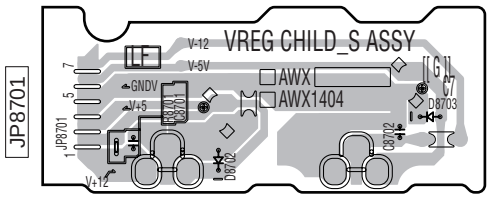

(ANP7867-B)

W CONNECT_S ASSY

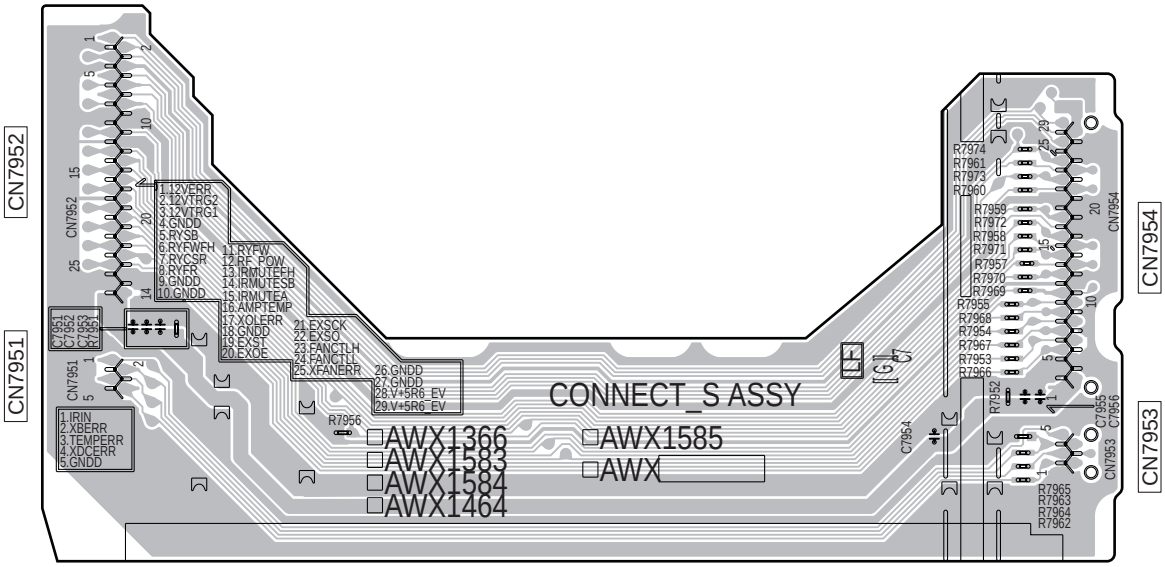

(ANP7861-C)

X A-DAC BRIDGE ASSY

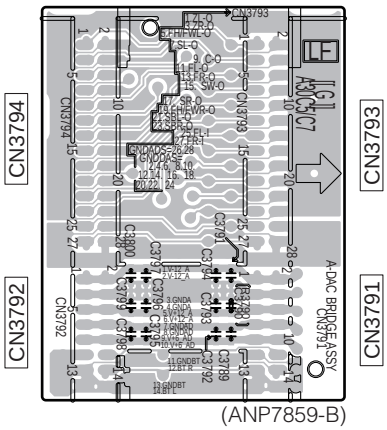

(ANP7859-B)

11.16 D-AUDIO BRIDGE, D-DAC BRIDGE, PRE BRIDGE_S and FAN CONNECT ASSYS

SIDE A

Y D-AUDIO BRIDGE ASSY

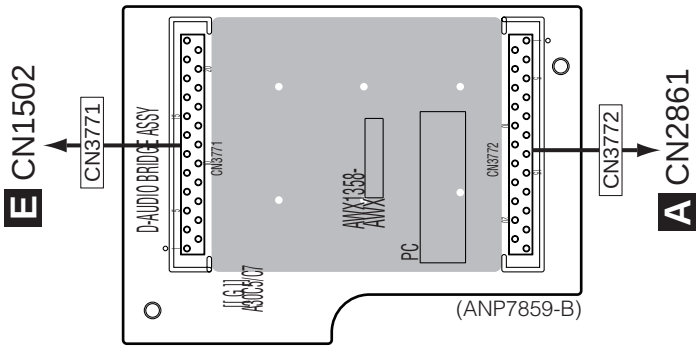

Z D-DAC BRIDGE ASSY

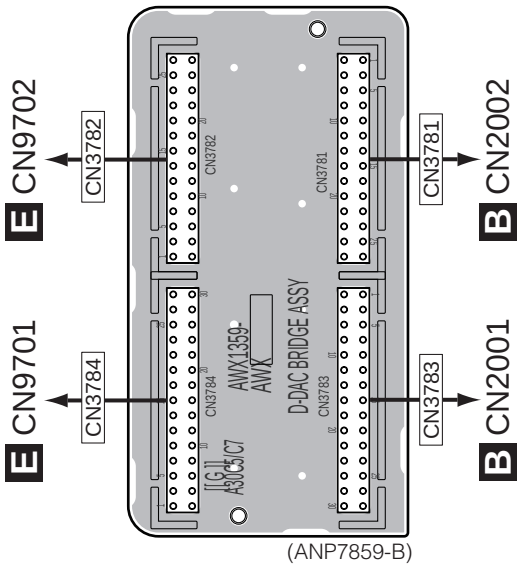

AA PRE BRIDGE_S ASSY

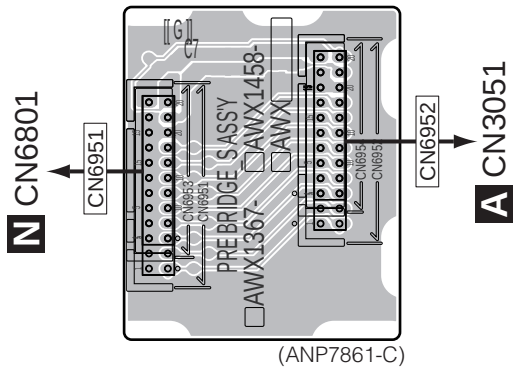

SIDE A

AB FAN CONNECT ASSY

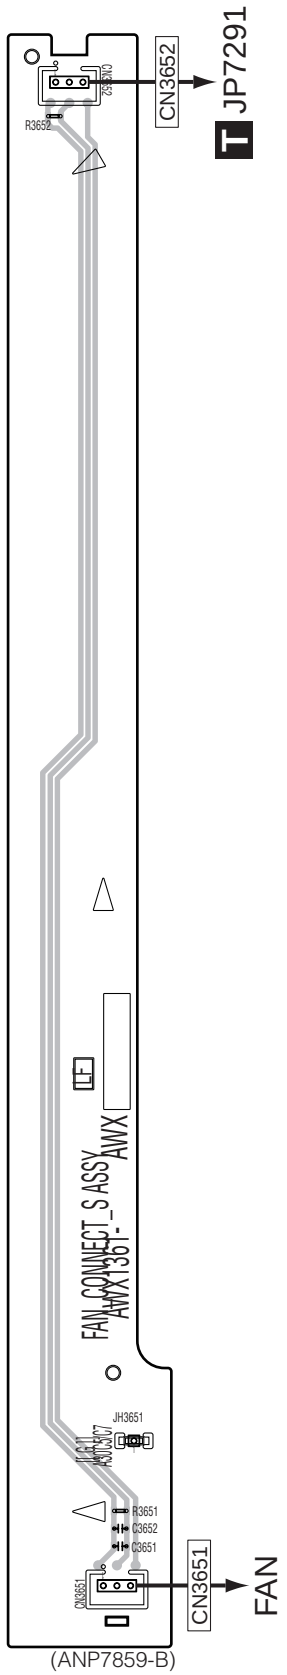

Y Z AA AB

Y Z AA AB

SIDE B

AB FAN CONNECT ASSY

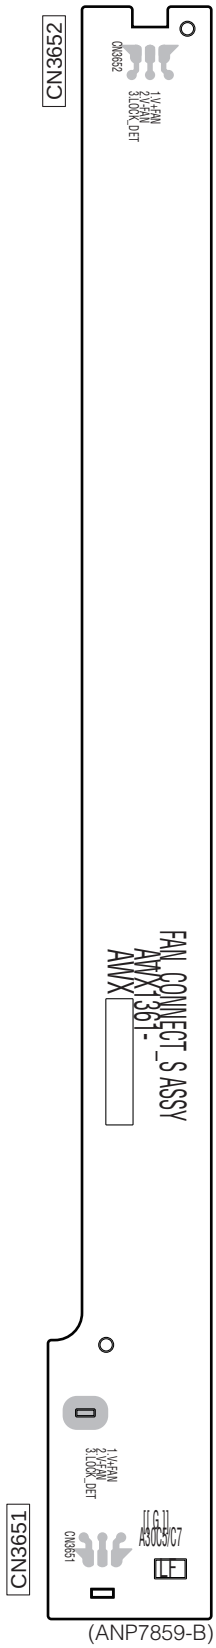

(ANP7859-B)

SIDE B

Y D-AUDIO BRIDGE ASSY

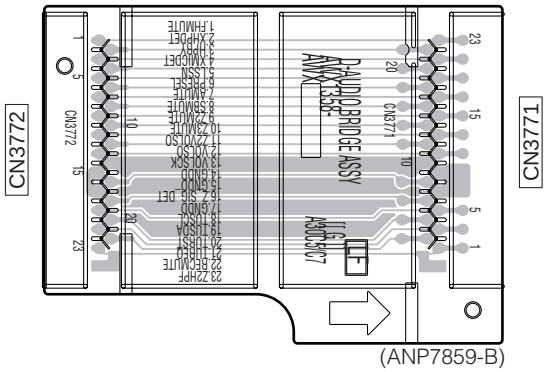

(ANP7859-B)

Z D-DAC BRIDGE ASSY

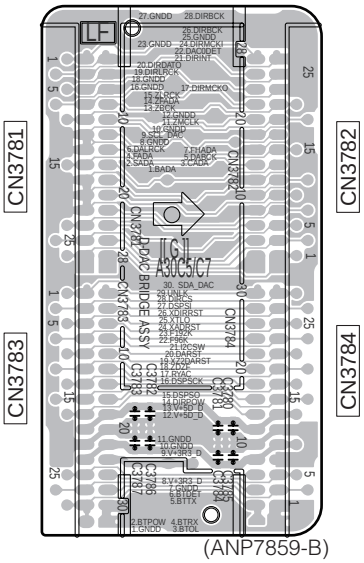

(ANP7859-B)

AA PRE BRIDGE_S ASSY

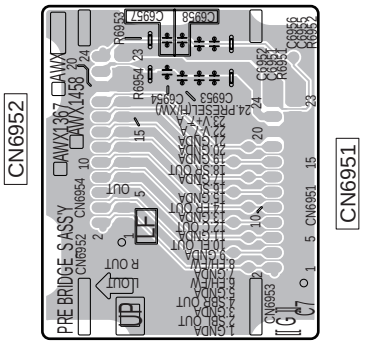

(ANP7861-C)

Y Z AA AB

Y Z AA AB

11.17 MIC HP GUARD, BIND DM CABLE_S and P WIRE GUARD_S ASSYS

SIDE A

SIDE A

AC MIC HP GUARD ASSY

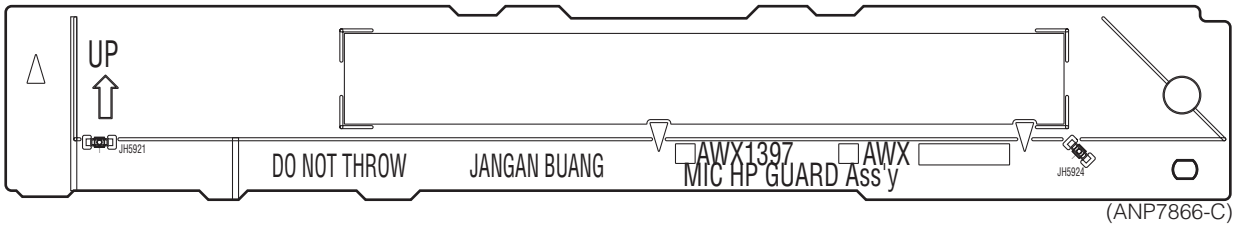

(ANP7866-C)

AD BIND DM CABLE_S ASSY



(ANP7867-B)

AE P WIRE GUARD_S ASSY

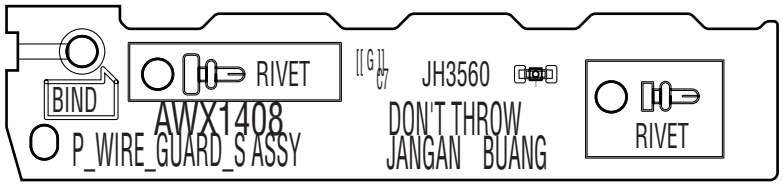

(ANP7867-B)

SIDE B

SIDE B

AD BIND DM CABLE_S ASSY



(ANP7867-B)

AE P WIRE GUARD_S ASSY

(ANP7867-B)

AC MIC HP GUARD ASSY

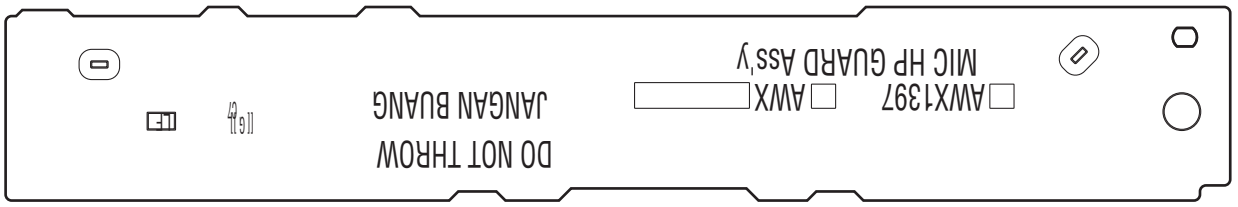

(ANP7866-C)

AC AD AE

AC AD AE

11.18 FFC GUARD_S, BAINDFAN CABLE_S and TRANS VREG STYL_S ASSYS

SIDE A

AF FFC GUARD_S ASSY

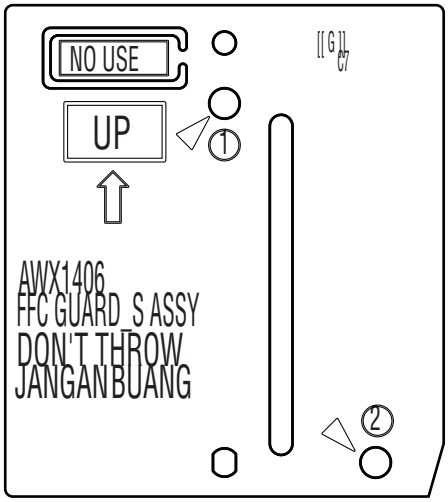

(ANP7867-B)

SIDE A

AG BINDFAN CABLE_S ASSY

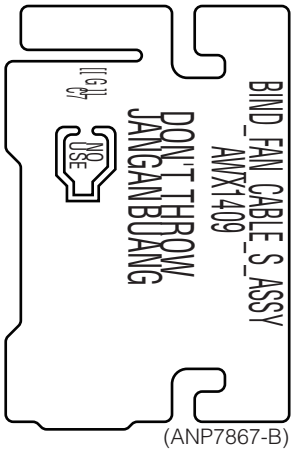

(ANP7867-B)

AH TRANS VREG STYL_S ASSY



(ANP7861-C)

SIDE B

AF FFC GUARD_S ASSY

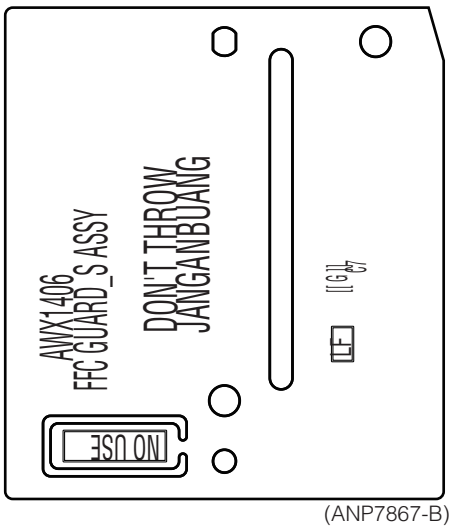

(ANP7867-B)

SIDE B

AH TRANS VREG STYL_S ASSY

(ANP7861-C)

AG BINDFAN CABLE_S ASSY

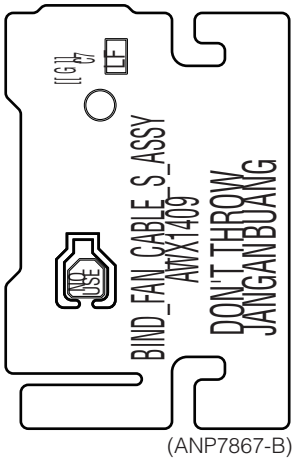

(ANP7867-B)

AF AG AH **AF AG AH**

11.19 VREG GUARD, PANEL GUARD and IR EDGE GUARD_S ASSYS

SIDE A

SIDE A


(ANP7866-C)

AI VREG GUARD ASSY

(ANP7866-C)

AJ PANEL GUARD ASSY

(ANP7890-A)

AK IR EDGE GUARD_S ASSY

SIDE B

SIDE B


(ANP7866-C)

AI VREG GUARD ASSY

(ANP7866-C)

AJ PANEL GUARD ASSY

(ANP7890-A)

AK IR EDGE GUARD_S ASSY

AI AJ AK

AI AJ AK

12. PCB PARTS LIST

NOTES: ● *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
● *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
● *When ordering resistors, first convert resistance values into code form as shown in the following examples.*

Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47 k ohm (tolerance is shown by J = 5%, and K = 10%).

560 Ω → 56 × 10[1] → 561 ····· RD1/4PU 5 6 1 J
47 kΩ → 47 × 10[3] → 473 ····· RD1/4PU 4 7 3 J
0.5 Ω → R50 ····· RN2H R 5 0 K
1 Ω → 1R0 ····· RS1P 1 R 0 K

Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62 kΩ → 562 × 10[1] → 5621 ····· RN1/4PC 5 6 2 1 F

LIST OF ASSEMBLIES

------ SC-75, SC-1528-K, SC-1523-K ------

Mark	No.	Description	Part No.
NSP	1	D-AMP_S ASSY	AWH7071
	2	D-AMP_S ASSY	AWX1429
NSP	1	PRIM DISPLAY ASSY(SC-75)	AWM8322
	2	VOL ASSY	AWX1392
	2	ENCODER ASSY	AWX1396
	2	MIC HP GUARD ASSY	AWX1397
	2	MIC HP ASSY	AWX1457
	2	DISPLAY ASSY	AWX1465
	2	PRIMARY ASSY	AWX1614
	2	POWER SW ASSY	AWX1653
NSP	2	VREG GUARD ASSY	AWX1398
NSP	2	PANEL GUARD ASSY	AWX1399
NSP	1	PRIM DISPLAY ASSY(SC-1528-K,SC-1523-K)	AWM8340
	2	VOL ASSY	AWX1392
	2	ENCODER ASSY	AWX1396
	2	MIC HP GUARD ASSY	AWX1397
	2	MIC HP ASSY	AWX1457
	2	DISPLAY ASSY	AWX1505
	2	PRIMARY ASSY	AWX1614
	2	POWER SW ASSY	AWX1654
NSP	2	VREG GUARD ASSY	AWX1398
NSP	2	PANEL GUARD ASSY	AWX1399
NSP	1	IR BUFFER_S ASSY	AWM8348
	2	IR BUFFER_S ASSY	AWX1542
	2	BUFFER GND_S ASSY	AWX1544
NSP	1	AUDIO COMPOSITE ASSY	AWR7192
	2	COMPOSITE ASSY	AWX1357
	2	D-AUDIO BRIDGE ASSY	AWX1358
	2	D-DAC BRIDGE ASSY	AWX1359
	2	A-DAC BRIDGE ASSY	AWX1360
	2	FAN CONNECT ASSY	AWX1361
	2	AUDIO ASSY	AWX1525
NSP	1	INTERFACE REG_S ASSY	AWR7206
	2	PRE BRIDGE_S ASSY	AWX1367
	2	TRANS VREG STYL_S ASSY	AWX1368
	2	INTERFACE_S ASSY	AWX1572
	2	IR REG_S ASSY	AWX1576
	2	CONNECT_S ASSY	AWX1583
NSP	1	PRE POWER_S ASSY	AWR7217
	2	VREG CHILD_S ASSY	AWX1404
	2	USB RECT_S ASSY	AWX1405
	2	FFC GUARD_S ASSY	AWX1406
	2	BIND DM CABLE_S ASSY	AWX1407
	2	P WIRE GUARD_S ASSY	AWX1408
	2	BINDFAN CABLE_S ASSY	AWX1409
	2	A-REG_S ASSY	AWX1596
	2	V-REG_S ASSY	AWX1600
	1	DIGITAL MAIN ASSY	AWX1422
	1	COMPONENT ASSY	AWX1623
	1	DAC HIGH ASSY	AWX1515
	1	IR INTERFACE_S ASSY	AWX1637
NSP	2	IR EDGE GUARD_S ASSY	AWX1230
	1	FRONT HDMI USB ASSY	AWX1548

LIST OF ASSEMBLIES

------ SC-LX57 ------

Mark	No.	Description	Part No.
NSP	1..	D-AMP_S ASSY	AWH7073
	2..	D-AMP_S ASSY	AWX1431
NSP	1..	IR BUFFER_S ASSY	AWM8349
	2..	IR BUFFER_S ASSY	AWX1543
	2..	BUFFER GND_S ASSY	AWX1544
NSP	1..	PRIM DISPLAY ASSY	AWM8324
	2..	VOL ASSY	AWX1392
	2..	ENCODER ASSY	AWX1396
	2..	MIC HP GUARD ASSY	AWX1397
	2..	MIC HP ASSY	AWX1510
	2..	DISPLAY ASSY	AWX1682
	2..	PRIMARY ASSY	AWX1466
	2..	POWER SW ASSY	AWX1653
NSP	2..	VREG GUARD ASSY	AWX1398
NSP	2..	PANEL GUARD ASSY	AWX1399
NSP	1..	AUDIO COMPOSITE ASSY	AWR7193
	2..	COMPOSITE ASSY	AWX1357
	2..	D-AUDIO BRIDGE ASSY	AWX1358
	2..	D-DAC BRIDGE ASSY	AWX1359
	2..	A-DAC BRIDGE ASSY	AWX1360
	2..	FAN CONNECT ASSY	AWX1361
	2..	AUDIO ASSY	AWX1526
NSP	1..	INTERFACE REG_S ASSY	AWR7207
	2..	PRE BRIDGE_S ASSY	AWX1367
	2..	TRANS VREG STYL_S ASSY	AWX1368
	2..	INTERFACE_S ASSY	AWX1573
	2..	IR REG_S ASSY	AWX1577
	2..	CONNECT_S ASSY	AWX1584
NSP	1..	PRE POWER_S ASSY	AWR7218
	2..	VREG CHILD_S ASSY	AWX1404
	2..	USB RECT_S ASSY	AWX1405
	2..	FFC GUARD_S ASSY	AWX1406
	2..	BIND DM CABLE_S ASSY	AWX1407
	2..	P WIRE GUARD_S ASSY	AWX1408
	2..	BINDFAN CABLE_S ASSY	AWX1409
	2..	A-REG_S ASSY	AWX1597
	2..	V-REG_S ASSY	AWX1601
	1..	DIGITAL MAIN ASSY	AWX1660
	1..	COMPONENT ASSY	AWX1673
	1..	DAC HIGH ASSY	AWX1517
	1..	IR INTERFACE_S ASSY	AWX1637
NSP	2..	IR EDGE GUARD_S ASSY	AWX1230
	1..	FRONT HDMI USB ASSY	AWX1675

C FRONT HDMI USB ASSY

AWX1548 and AWX1675 are constructed the same except for the following:

Mark	Symbol and Description	AWX1548	AWX1675
	R8025	RS1/16SS473J	RS1/16SS104J
	C8001	CCSSCH101J50	CCSSCH470J50
	C8002	CKSRYB104K50	CKSRYB103K50
	C8023	CKSQYB225K16	VCG1072
	C8041	CCSRCH100D50	CCSRCH221J50
	C8048	Not used	CEAK470M25

F INTERFACE_S ASSY

AWX1572 and AWX1573 are constructed the same except for the following:

Mark	Symbol and Description	AWX1572	AWX1573
	KN7002 Earth Terminal	Not used	AKF7002
	KN7004 Earth Terminal	Not used	AKF7002
	R7043	Not used	RS1/10SR0R0J
	R7098	Not used	RS1/10SR0R0J
	R7110	Not used	RS1/4SA105J
	R7111	Not used	RS1/4SA105J
	R7113	RS1/10SR0R0J	RS1/10SR100J
	R7136	Not used	RS1/10SR0R0J
	R7137	Not used	RS1/10SR0R0J
	R7155	Not used	RS1/10SR0R0J
	R7301	Not used	RS1/10SR0R0J
	R7302	Not used	RS1/10SR0R0J
	R7303	Not used	RS1/10SR0R0J
	C7006	CCSRCH102J50	Not used
	C7011	CKSRYB104K50	Not used
	C7012	CCSRCH102J50	Not used
	C7015	CKSRYB104K50	CKSRYB103K50
	C7080	CCSRCH102J50	Not used
	C7081	CKSRYB104K50	Not used
	C7082	CCSRCH102J50	Not used

Mark	Symbol and Description	AWX1572	AWX1573
	C7083	CKSRYB104K50	Not used
	C7114	CKSRYB104K50	Not used

G COMPONENT ASSY

AWX1623 and AWX1673 are constructed the same except for the following:

Mark	Symbol and Description	AWX1623	AWX1673
	R8382	Not used	RS1/10SR105J
	R8504	RS1/10SR101J	RS1/10SR471J
	R8505	RS1/10SR101J	RS1/10SR471J
	R8506	RS1/10SR331J	RS1/10SR471J
	C8501	CCSRCH102J50	CCSRCH471J50
	C8509	CCSRCH101J50	Not used
	C8511	CCSRCH470J50	Not used
	C8512	CCSRCH470J50	Not used

J DISPLAY ASSY

AWX1465 and AWX1505 are constructed the same except for the following:

Mark	Symbol and Description	AWX1465	AWX1505
	Q6006	DTC124EUA	Not used
	Q6007	DTC124EUA	Not used
	Q6008	DTC124EUA	Not used
	Q6009	DTC124EUA	Not used
	Q6010	DTC124EUA	Not used
	D6006	SLR343BC4T(JKLM)	SLR-343VC(NPQ)
	D6008	SLR343BC4T(JKLM)	SLR-343VC(NPQ)
	D6010	SLR343BC4T(JKLM)	SLR-343VC(NPQ)
	D6012	SLR343BC4T(JKLM)	SLR-343VC(NPQ)
	D6014	SLR343BC4T(JKLM)	Not used
	R6056	RS1/10SR102J	Not used
	R6064	Not used	RS1/10SR0R0J
	R6070	RS1/10SR101J	Not used
	R6081	Not used	RS1/10SR0R0J
	R6113	Not used	RS1/10SR0R0J
	R6114	Not used	RS1/10SR0R0J
	R6115	Not used	RS1/10SR0R0J
	R6116	Not used	RS1/10SR0R0J
	R6134	RS1/10SR151J	RS1/10SR681J
	R6135	RS1/10SR151J	RS1/10SR681J
	R6136	RS1/10SR151J	RS1/10SR681J
	R6137	RS1/10SR151J	RS1/10SR681J
	R6138	RS1/10SR151J	Not used
	R6194	RS1/10SR101J	Not used
	C6032	CCSRCH100D50	Not used
	C6058	CCSRCH470J50	Not used
	C6092	CCSRCH100D50	Not used

J DISPLAY ASSY

AWX1465 and AWX1682 are constructed the same except for the following:

Mark	Symbol and Description	AWX1465	AWX1682
	D6005	DAN217U	Not used
	R6067	Not used	RS1/10SR0R0J
	R6107	RS1/10SR101J	RS1/10SR121J
	R6108	RS1/10SR101J	RS1/10SR121J
	R6109	RS1/10SR101J	RS1/10SR121J
	R6111	RS1/10SR101J	RS1/10SR121J
	R6227	Not used	RS1/10SR0R0J
	R6228	Not used	RS1/10SR0R0J
	R6229	Not used	RS1/10SR0R0J
	R6230	Not used	RS1/10SR105J

Mark	Symbol and Description	AWX1465	AWX1682
	R6231	Not used	RS1/10SR105J
	C6006	CKSRYB104K50	CKSRYB103K50
	C6008	CKSRYB103K50	CKSRYB104K50
	C6010	CKSRYB104K50	CKSRYB103K50
	C6019	CKSRYB104K50	Not used
	C6022	CKSRYB104K50	CCSRCH470J50
	C6029	CCSRCH101J50	Not used
	C6037	CKSRYB104K50	CKSRYB103K50
	C6043	CKSRYB104K50	CKSRYB103K50
	C6046	Not used	CKSRYB473K50
	C6049	CKSRYB105K16	CKSRYB103K50
	C6050	Not used	CCSRCH221J50
	C6063	CCSRCH471J50	CCSRCH470J50
	C6065	CKSRYB104K50	CKSRYB103K50
	C6069	CEAK470M50	Not used
	C6070	Not used	CCSRCH471J50
	C6074	CCSRCH471J50	CCSRCH221J50
	C6083	CCSRCH471J50	CCSRCH331J50
	C6087	CEAK101M35	Not used
	C6088	CEAK470M50	Not used
	C6091	CKSRYB103K50	CCSRCH331J50
	C6097	CCSRCH331J50	Not used

L POWER SW ASSY

AWX1653 and AWX1654 are constructed the same except for the following:

Mark	Symbol and Description	AWX1653	AWX1654
	Q3401	DTC143EUA	Not used
	D3402	SLR343BC4T(JKLM)	Not used
	R3401	RS1/10SR151J	Not used
	C3401	CCSRCH221J50	Not used

N IR BUFFER_S ASSY

AWX1542 and AWX1543 are constructed the same except for the following:

Mark	Symbol and Description	AWX1542	AWX1543
	R6815	RS1/8SQ204J	RS1/8SQ224J
	R6817	RS1/10SR120J	RS1/10SR100J
	R6837	RS1/10SR120J	RS1/10SR100J
	R6857	RS1/10SR120J	RS1/10SR100J
	R6877	RS1/10SR120J	RS1/10SR100J
	R6897	RS1/10SR120J	RS1/10SR100J
	R6917	RS1/10SR120J	RS1/10SR100J
	R6937	RS1/10SR120J	RS1/10SR100J
	R7467	RS1/10SR120J	RS1/10SR100J
	R7487	RS1/10SR120J	RS1/10SR100J
	R7493	RS1/10SR100J	RS1/10SR101J
	R8866	RS1/10SR100J	RS1/10SR220J
	R8867	RS1/10SR100J	RS1/10SR220J
	R8868	RS1/10SR100J	RS1/10SR220J
	C6807	CEAK220M50	CEAK100M50
	C6814	CEAK470M25	CEAK100M50
	C6827	CEAK220M50	CEAK100M50
	C6834	CEAK470M25	CEAK100M50
	C6847	CEAK220M50	CEAK100M50
	C6854	CEAK470M25	CEAK100M50
	C6867	CEAK220M50	CEAK100M50
	C6874	CEAK470M25	CEAK100M50
	C6887	CEAK220M50	CEAK100M50
	C6894	CEAK470M25	CEAK100M50
	C6907	CEAK220M50	CEAK100M50

Mark	Symbol and Description	AWX1542	AWX1543
	C6914	CEAK470M25	CEAK100M50
	C6927	CEAK220M50	CEAK100M50
	C6934	CEAK470M25	CEAK100M50
	C7457	CEAK220M50	CEAK100M50
	C7464	CEAK470M25	CEAK100M50
	C7477	CEAK220M50	CEAK100M50
	C7484	CEAK470M25	CEAK100M50
	C7495	CCSRCH100D50	Not used

R PRIMARY ASSY

AWX1614 and AWX1466 are constructed the same except for the following:

Mark	Symbol and Description	AWX1614	AWX1466
	R6	RS1/8SQ471J	RS1/8SQ751J
	R51	RS1/10SR221J	RS1/10SR181J
	R59	RS1/8SQ365J	Not used
	R70	RS1/10SR0R0J	RS1/10SR390J
	R80	Not used	RS1/10SR105J
	C55	CCSRCH331J50	Not used
	C61	CCSRCH100D50	Not used
	C62	Not used	DCH1330
	C66	Not used	CCSQCH330J50

S A-REG_S ASSY

AWX1596 and AWX1597 are constructed the same except for the following:

Mark	Symbol and Description	AWX1596	AWX1597
	D7506	1SS355	Not used
	D7507	1SS355	Not used
	R7504	RS1/8SQ223J	Not used
	R7505	RS1/8SQ273J	Not used
	R7506	RS1/8SQ273J	Not used
	R7513	Not used	RS1/8SQ105J

T IR REG_S ASSY

AWX1576 and AWX1577 are constructed the same except for the following:

Mark	Symbol and Description	AWX1576	AWX1577
	R7255	RS1/8SQ4R7J	RS1/8SQ1R5J
	R7256	RS1/8SQ3R3J	RS1/8SQ1R0J
	R7275	RS1/8SQ223J	Not used
	R7276	RS1/8SQ223J	Not used
	R7277	RS1/8SQ223J	Not used
	R7278	RS1/8SQ223J	Not used
	C7275	CEAK221M16	Not used
	C7276	CEAK221M16	Not used
	C7283	Not used	CEAK471M16
	C7284	Not used	CEAK471M16
	C7292	CEAK471M16	Not used
	C7293	CEAK471M16	Not used

U V-REG_S ASSY

AWX1600 and AWX1601 are constructed the same except for the following:

Mark	Symbol and Description	AWX1600	AWX1601
	KN7901 Earth Terminal	Not used	AKF7002
	R7557	Not used	RS1/8SQ105J
	R7901	Not used	RS1/10SR0R0J
	R7919	Not used	RS1/10SR0R0J
	C7571	CEAK470M50	CEAK101M35
	C7575	Not used	CCSRCH101J50

PCB PARTS LIST FOR SC-75/CUXJ UNLESS OTHERWISE NOTED

A AUDIO ASSY (SC-75)

SEMICONDUCTORS

Mark	No.	Description	Part No.
	IC	2501,3273	BD3473KS2
	IC	2701	TC4066BFN
	IC	2702,2751,2801,6701	NJM4565MD
	IC	3221,6703	TC4052BFN
	IC	3271,3272	NJM4565V
	IC	6702	NJM4565MD
	Q	2721,3221	DTC115EUA
	Q	2722	DTA124EUA
	Q	2971,3101,3102,3151	IMX25
⚠	Q	3001	2SD2400A
⚠	Q	3002	2SB1569A
	Q	3152,3201,3202,3251	IMX25
	Q	3222,6703,6704	DTC124EUA
	Q	3252,3271,3272	IMX25
	Q	3274-3276,6701	IMX25
⚠	Q	3901	2SC5712
	Q	6702	2SD2704K
	D	2691,2692	DAN217U
	D	3001,3002	DZ2J075M0
	D	3902	DZ2J056M0

MISCELLANEOUS

	JA	2501,2504,3101	RCA JACK
	JA	2502,2505,3202,3206	RCA JACK
	JA	3102	RCA JACK
	JA	3201	RCA JACK
	JA	6701	RCA JACK
	CN	2502	B TO B CONNECTOR
	CN	2503	CONNECTOR
	CN	2861	B TO B 23PIN JACK
	CN	3001	14P SOCKET
	CN	3051	24P SOCKET
	CN	3902	CONNECTOR
	JP	3001	CONNECTOR ASSY

	AKB7246		
	AKB7247		
	AKB7248		
	AKB7245		
	AKB7249		
	AKP7269		
	9607S-15F		
	AKN7073		
	AKP7248		
	AKP7251		
	9604S-09C		
	PF05PG-S20		

RESISTORS

	R	2567,2568,2726,2727	RS1/8SQ0R0J
	R	2687	RS1/8SQ105J
	R	2688	RS1/8SQ132J
	R	2819,2820	RS1/4SA180J
	R	3031	RS1/8SQ475J
	R	3032	RS1/8SQ182J
	R	3055,3056,6729,6730	RS1/8SQ0R0J
	Other Resistors		RS1/10SR###J

CAPACITORS

	C	2503,2504,2523,2524	CCSQCH101J50
	C	2505,2506,2525,2526	CEAK220M50
	C	2507,2508,2817,2818	CEAK101M16
	C	2543,2544,2561,2562	CCSQCH101J50
	C	2545,2546,2587,2588	CEAK220M50
	C	2563,2564	CCSQCH220J50
	C	2565,2566,2826,2827	CEAK100M50
	C	2589,2590,2607,2608	CCSQCH101J50
	C	2609,2610,2707,2708	CEAK220M50
	C	2683,2701,2702,3223	CKSRYB103K50
	C	2693,2694,2828,2836	ACH1479
	C	2695,2696,2699,2834	CFHXSQ103J16
	C	2697,2698,2703,2704	CCSRCH101J50
	C	2700	CCSQCH101J50
	C	2709,2710,2763,2764	CKSQYB103K50
	C	2731,2732,2760,3105	CEAK220M50
	C	2759,2829,2830,2832	CCSRCH101J50
	C	2805,2806	CEAK1R0M50
	C	2807,2808	CCSQCH221J50
	C	2819,2820	CEAK471M16
	C	2835	CFHXSQ103J16
	C	2903,2904,3025,3026	CEAK100M50
	C	2971,2972,6703,6704	CCSRCH471J50
	C	3001,3002	CEAK2R2M50
	C	3106,3155,3205,3206	CEAK220M50
	C	3113,3114,3163,3164	CCSRCH101J50
	C	3117,3118,3169,3170	CCSQCH331J50
	C	3167,3913,3915,3917	CCSRCH100D50
	C	3213,3214,3263,3264	CCSRCH101J50
	C	3224,3285,3286,3907	CKSRYB103K50
	C	3229,3230,3950	CCSQCH331J50
	C	3255,3256,3275,3276	CEAK220M50
	C	3261,3262,3281,3282	CCSRCH331J50
	C	3283,3284,3914,3922	CCSRCH101J50
	C	3293-3296,6711,6712	CKSRYB104K50
	C	3297,3298	CCSRCH222J50
	C	3903,3906	CEAK101M16
	C	3909,3924,3925	CCSRCH331J50
	C	3923,3945,3951	CCSRCH101J50
	C	3926,3927,3952	CEAK220M50
	C	3931,3933	CKSRYB103K50
	C	3946	CCSRCH100D50
	C	6701,6702,6707,6727	CEAK100M50
	C	6708	CCSRCH471J50
	C	6710	CKSRYB333K50
	C	6713,6716	CKSRYB473K50
	C	6714,6715,6717	CKSRYB104K50
	C	6718-6723	CKSQYB103K50
	C	6728	CEAK100M50

A AUDIO ASSY (SC-LX57)

SEMICONDUCTORS

Mark	No.	Description	Part No.
	IC	2501,3273	BD3473KS2
	IC	2701	TC4066BFN
	IC	2702	UPC4570G2-A
	IC	2751,2801,6701,6702	NJM4565MD
	IC	3221,6703	TC4052BFN
	IC	3271,3272	NJM4565V
	Q	2721,3221	DTC115EUA
	Q	2722	DTA124EUA
	Q	2971,3101,3102,3151	IMX25
⚠	Q	3001	2SD2400A
⚠	Q	3002	2SB1569A
	Q	3152,3201,3202,3251	IMX25
	Q	3222,6703,6704	DTC124EUA
	Q	3252,3271,3272	IMX25
	Q	3274-3276,6701	IMX25

Mark	No.	Description	Part No.
	Q	6702	2SD2704K
	D	2691,2692	DAN217U
	D	3001,3002	DZ2J075M0
		MISCELLANEOUS	
	JA	2501,2504,3101 RCA JACK	AKB7246
	JA	2502,2505,3202,3206 RCA JACK	AKB7247
	JA	3102 RCA JACK	AKB7248
	JA	3201 RCA JACK	AKB7245
	JA	6701 RCA JACK	AKB7249
	CN	2502 B TO B CONNECTOR	AKP7269
	CN	2503 CONNECTOR	9607S-15F
	CN	2861 B TO B 23PIN JACK	AKN7073
	CN	3001 14P SOCKET	AKP7248
	CN	3051 24P SOCKET	AKP7251
	JP	3001 CONNECTOR ASSY	PF05PG-S20
		RESISTORS	
	R	2567,2568,2726,2727	RS1/8SQ0R0J
	R	2687,3032	RS1/8SQ105J
	R	2688	RS1/8SQ132J
	R	2819,2820	RS1/4SA180J
	R	3031	RS1/8SQ472J
	R	3055,3056,6729,6730	RS1/8SQ100J
		Other Resistors	RS1/10SR###J
		CAPACITORS	
	C	2505,2506,2525,2526	CEAK220M50
	C	2507,2508,2817,2818	CEAK101M16
	C	2545,2546,2587,2588	CEAK220M50
	C	2565,2566,2826,2827	CEAK100M50
	C	2609,2610,2707,2708	CEAK220M50
	C	2683	CKSRYB103K50
	C	2693,2694,2828,2836	ACH1479
	C	2695,2696,2699,2709	CFHXSQ103J16
	C	2697,2698,2759,2829	CCSRCH101J50
	C	2700	CCSQCH101J50
	C	2710,2834,2835	CFHXSQ103J16
	C	2731,2732,2760,3105	CEAK220M50
	C	2763,2764,6720-6723	CKSQYB103K50
	C	2805,2806	CEAK1R0M50
	C	2807,2808	CCSQCH221J50
	C	2819,2820	CEAK471M16
	C	2830,2832,3951	CCSRCH101J50
	C	2903,2904,3025,3026	CEAK100M50
	C	3001,3002	CEAK2R2M50
	C	3053,3054	CEAK101M16
	C	3106,3155,3205,3206	CEAK220M50
	C	3167,3946	CCSRCH100D50
	C	3255,3256,3275,3276	CEAK220M50
	C	3293-3296,6711,6712	CKSRYB104K50
	C	3297,3298	CCSRCH222J50
	C	3926,3927,3952	CEAK220M50
	C	6701,6702,6707,6727	CEAK100M50
	C	6710	CKSRYB333K50
	C	6713,6716	CKSRYB473K50
	C	6714,6715,6717	CKSRYB104K50
	C	6728	CEAK100M50

B DAC HIGH ASSY (SC-75)

Mark	No.	Description	Part No.
		SEMICONDUCTORS	
⚠	IC	2001	BD2224G
⚠	IC	2002	NJM2881F33
	IC	2003	AK4118AEQ
	IC	2004,2005	TC7SH126FU
	IC	2006	TC74VHC08FK
	IC	2007	TC74VHC32FK
	IC	2008,2011-2025,2033	UPC4570G2-A
	IC	2009	ES9011S
	IC	2010	ES9016S
	IC	2026	AK4388ET
	IC	2027	PCM1804DB
⚠	IC	2028,2037	S-1172B12-E6
⚠	IC	2029,2031	NJM2872BF33
⚠	IC	2030	S-1172B33-E6
	IC	2032	NJM4565MD
⚠	IC	2034	NJM2845DL1-05
	IC	2035	UPC4570G2-A
	Q	2001,2002	HN1K02FU
	Q	2003,2004	2SA1576A
	Q	2005	2SC4081
	D	2004,2007	DAN202U
	D	2005,2006	DAP202U
		MISCELLANEOUS	
	L	2001 CHIP SOLID INDUCTOR	QTL1013
	L	2004,2010 CHIP BEADS	VTL1129
	L	2005-2009 CHIP SOLID INDUCTOR	QTL1013
	L	2011,2012 CHIP SOLID INDUCTOR	QTL1013
	L	2015 CHIP SOLID INDUCTOR	QTL1013
	JA	2002,2004 OPT IN MODULE	AKS7008
	JA	2006 OPT OUT MODULE	AKS7009
	JA	2009 PIN JACK(2P)	AKB7173
	JA	2010 CONNECTOR	CKS5712
	KN	2001,2002 SCREW PLATE	VNE1948
	X	2001 CRYSTAL OSCILLATOR	ASS7124
	CN	2001 SOCKET(30PL)	BKP1047
	CN	2002,2003 B TO B CONNECTOR	AKP7269
	CN	2004 14P SOCKET	AKP7248
		RESISTORS	
	R	2003,2084,2085	RS1/16SS220J
	R	2004,2005,2010-2014	RS1/16SS101J
	R	2006,2018,2019,2039	RS1/16SS0R0J
	R	2022,2028,2048,2117	RS1/16SS101J
	R	2023,2030,2037,2038	RS1/16SS100J
	R	2035	RS1/16SS1002F
	R	2040,2057,2064,2083	RS1/16SS0R0J
	R	2041,2042,2044-2046	RS1/16SS121J
	R	2043	RS1/16SS471J
	R	2047,2417-2419	RS1/16SS221J
	R	2049,2065-2067,2073	RS1/16SS100J
	R	2050,2053	RS1/16SS680J
	R	2051,2052,2054-2056	RS1/16SS470J
	R	2058,2059	RS1/8SQ225J
	R	2068,2141,2146,2421	RS1/16SS470J

Mark	No.	Description	Part No.
	R	2070,2071	RS1/16SS121J
	R	2074,2078-2082	RS1/16SS100J
	R	2105-2111,2118-2121	RS1/16SS100J
	R	2112,2122,2446,2474	RS1/16SS0R0J
	R	2123,2138-2140,2149	RS1/16SS100J
	R	2134,2135,2147,2148	RS1/16SS101J
	R	2150,2151,2416,2420	RS1/16SS101J
	R	2167,2168,2172-2175	RS1/8SQ0R0J
	R	2170,2171	RS1/8SQ102J
	R	2177,2178	RS1/8SQ101J
	R	2190,2191,2196,2197	RS1/8SQ103J
	R	2199,2200	RS1/8SQ103J
	R	2204,2205,5407-5412	RS1/8SQ0R0J
	R	2245,2248,2249,2252	RS1/4SA272J
	R	2253,2256,2257,2260	RS1/4SA272J
	R	2261,2264,2265,2268	RS1/4SA272J
	R	2269,2272,2273,2276	RS1/4SA272J
	R	2277,2280,2281,2284	RS1/4SA272J
	R	2285-2304	RS1/4SA123J
	R	2305,2308,2309,2312	RS1/4SA272J
	R	2313,2316,2325,2328	RS1/4SA332J
	R	2317,2320	RS1/4SA562J
	R	2321,2324,2329,2332	RS1/4SA272J
	R	2333,2336,2337,2340	RS1/4SA272J
	R	2341,2344	RS1/4SA272J
	R	2422-2425,2440-2443	RS1/16SS101J
	R	2428	RS1/16SS102J
	R	2465,5417,5418	RS1/16SS100J
	R	2485,2493	RS1/8SQ105J
	R	2490	RS1/8SQ242J
	R	5419,5429,5430	RS1/16SS0R0J
	R	5447,5448	RS1/4SA1R0J
	Other Resistors		RS1/10SR###J

CAPACITORS

	C	2005-2008,2030,2033	CKSRYB104K50
	C	2009,2021,2055,2081	CEAK221M16
	C	2016,2017	CCSSCH221J50
	C	2018,2042,2049	CCSSCH100D50
	C	2022,2023,2125,2126	CEAK100M50
	C	2025,2078,2278,2308	CKSQYB225K16
	C	2026,2084,2085,2087	CEAK470M25
	C	2028,2031,2046,2295	CKSRYB474K16
	C	2029,2032,2035,2122	CKSRYB103K50
	C	2037,2039,2052,2060	CKSSYB104K16
	C	2038,2050,2057,2061	CCSSCH331J50
	C	2040	CEAK102M16
	C	2041,2047	CCSSCH101J50
	C	2043,2051,2290	CEAK101M16
	C	2044	CCG1222
	C	2048,2071	CKSSYB103K25
	C	2053,2058,2059,2065	CCSRCH100D50
	C	2062,2068	CKSSYB104K16
	C	2063,2069,2070	CCSSCH331J50
	C	2082,2111,2268,2269	CKSRYB104K50
	C	2083,2088,2092	CEAK221M16
	C	2086	CCSRCH331J50
	C	2089,2091,2093,2109	CEAK470M25
	C	2094,2095,2101,2104	CKSQYB103K50
	C	2098,2116,2134,2137	CCSQCH331J50
	C	2099,2100,2117,2118	CKSQYB104K50
	C	2102,2106,2133,2136	CCSQCH102J50
	C	2105,2108,2128-2132	CKSQYB103K50
	C	2110,2274,2277,2287	CEAK470M25
	C	2124,2267,2291	CKSRYB103K50
	C	2135,2140-2149	CKSQYB103K50
	C	2138,2139,2261,2266	CKSQYB104K50
	C	2150-2169	CFHXSQ101J50
	C	2170-2189,2240-2249	CKSQYB103K50
	C	2190-2195,2198-2209	CCSQCH472J50
	C	2196,2197	CCSQCH222J50
	C	2210-2215,2218-2229	CCSQCH471J50
	C	2216,2217	CCSQCH271J50
	C	2230,2231,2233,2234	CEAK220M50
	C	2236-2239,2305,2306	CEAK220M50
	C	2260	CCSQCH330J50
	C	2270	CCSQCH221J50
	C	2271,2279,2288,2351	CKSQYB104K50
	C	2273,2334,2345,2348	CEAK101M35
	C	2281,2329-2331,2335	CFHXSQ103J16
	C	2282,2285,2292,2293	CKSRYB104K50
	C	2283	CCSQCH471J50
	C	2284,2296,2318	CKSQYB103K50
	C	2294,2298,2307,2352	CEAK470M25
	C	2297	CCSRCH221J50
	C	2311	CKSRYB104K50
	C	2314,2315	DCH1263
	C	2316,2317,2319,2320	CEAK100M50
	C	2322,2323	CCSRCH391J50
	C	2324,2325	CCSRCH471J50
	C	2332	CKSQYB225K16
	C	2336,2342-2344,2349	CFHXSQ103J16
	C	2338,2339	CEAK100M50
	C	2340,2341	CCSRCH101J50
	C	2350	CCSQCH331J50
	C	2354	CFHXSQ103J16

B DAC HIGH ASSY (SC-LX57)

SEMICONDUCTORS

⚠	IC	2001	BD2224G
⚠	IC	2002	NJM2881F33
	IC	2003	AK4118AEQ
	IC	2004,2005	TC7SH126FU
	IC	2006	TC74VHC08FK
	IC	2007	TC74VHC32FK
	IC	2008,2011-2025,2033	UPC4570G2-A
	IC	2009	ES9011S
	IC	2010	ES9016S
	IC	2026	AK4388ET
	IC	2027	PCM1804DB
⚠	IC	2028,2037	S-1172B12-E6
⚠	IC	2029,2031	NJM2872BF33
⚠	IC	2030	S-1172B33-E6
	IC	2032	NJM4565MD

Mark	No.	Description	Part No.
⚠	IC	2034	NJM2845DL1-05
	IC	2035	UPC4570G2-A
	Q	2001,2002	HN1K02FU
	Q	2003,2004	2SA1576A
	Q	2005	2SC4081
	D	2004,2007	DAN202U
	D	2005,2006	DAP202U

MISCELLANEOUS

	L	2001	CHIP SOLID INDUCTOR QTL1013
	L	2004,2010	CHIP BEADS VTL1129
	L	2005-2009	CHIP SOLID INDUCTOR QTL1013
	L	2011,2012	CHIP SOLID INDUCTOR QTL1013
	L	2015	CHIP SOLID INDUCTOR QTL1013
	JA	2002,2004	OPT IN MODULE AKS7008
	JA	2006	OPT OUT MODULE AKS7009
	JA	2009	PIN JACK(2P) AKB7173
	JA	2010	CONNECTOR CKS5712
	KN	2001,2002	SCREW PLATE VNE1948
	X	2001	CRYSTAL OSCILLATOR ASS7124
	CN	2001	SOCKET(30PL) BKP1047
	CN	2002,2003	B TO B CONNECTOR AKP7269
	CN	2004	14P SOCKET AKP7248

RESISTORS

	R	2003,2084,2085	RS1/16SS220J
	R	2004,2005,2010-2014	RS1/16SS101J
	R	2006,2018,2019,2039	RS1/16SS0R0J
	R	2022,2028,2048,2117	RS1/16SS101J
	R	2023,2030,2037,2038	RS1/16SS100J
	R	2035	RS1/16SS1002F
	R	2040,2057,2064,2122	RS1/16SS0R0J
	R	2041,2042,2044-2046	RS1/16SS121J
	R	2043	RS1/16SS471J
	R	2047,2417-2419	RS1/16SS221J
	R	2049,2065-2067,2073	RS1/16SS100J
	R	2050,2053	RS1/16SS680J
	R	2051,2052,2054-2056	RS1/16SS470J
	R	2058,2059	RS1/8SQ225J
	R	2068,2146	RS1/16SS470J
	R	2070,2071	RS1/16SS121J
	R	2074,2078-2083	RS1/16SS100J
	R	2105-2112,2118-2121	RS1/16SS100J
	R	2123,2138-2140,2149	RS1/16SS100J
	R	2134,2135,2141,2147	RS1/16SS101J
	R	2148,2150,2151,2416	RS1/16SS101J
	R	2167,2168,2172-2175	RS1/8SQ0R0J
	R	2170,2171	RS1/8SQ102J
	R	2177,2178	RS1/8SQ101J
	R	2190,2191,2196,2197	RS1/8SQ103J
	R	2199,2200	RS1/8SQ103J
	R	2204,2205,5407-5410	RS1/8SQ0R0J
	R	2245,2248,2249,2252	RS1/4SA272J
	R	2253,2256,2257,2260	RS1/4SA272J
	R	2261,2264,2265,2268	RS1/4SA272J
	R	2269,2272,2273,2276	RS1/4SA272J
	R	2277,2280,2281,2284	RS1/4SA272J
	R	2285-2304	RS1/4SA123J
	R	2305,2308,2309,2312	RS1/4SA272J
	R	2313,2316,2325,2328	RS1/4SA332J
	R	2317,2320	RS1/4SA562J
	R	2321,2324,2329,2332	RS1/4SA272J
	R	2333,2336,2337,2340	RS1/4SA272J
	R	2341,2344	RS1/4SA272J
	R	2420,2422-2425	RS1/16SS101J
	R	2421	RS1/16SS560J
	R	2428	RS1/16SS102J
	R	2440-2443	RS1/16SS101J
	R	2446,2474,5419,5429	RS1/16SS0R0J
	R	2465,5417,5418	RS1/16SS100J
	R	2485,2493	RS1/8SQ105J
	R	2490	RS1/8SQ242J
	R	5411,5412	RS1/8SQ100J
	R	5430	RS1/16SS0R0J
	R	5447,5448	RS1/4SA1R0J
	Other Resistors		RS1/10SR###J

CAPACITORS

	C	2005-2007,2030,2033	CKSRYB104K50
	C	2009,2021,2055,2081	CEAK221M16
	C	2016,2017	CCSSCH221J50
	C	2018,2042,2049	CCSSCH100D50
	C	2022,2023,2125,2126	CEAK100M50
	C	2025,2332	CKSQYB225K16
	C	2026,2084,2085,2087	CEAK470M25
	C	2029,2032,2035,2082	CKSRYB103K50
	C	2037,2039,2052,2060	CKSSYB104K16
	C	2038,2050,2057,2061	CCSSCH331J50
	C	2040	CEAK102M16
	C	2041	CCSSCH101J50
	C	2043,2051,2109,2110	CEAK101M16
	C	2044	CCG1222
	C	2046	CKSRYB474K16
	C	2047	CCSSCH470J50
	C	2048,2071	CKSSYB103K25
	C	2053,2058,2059,2065	CCSRCH100D50
	C	2062,2068	CKSSYB104K16
	C	2063,2069,2070	CCSSCH331J50
	C	2078,2308	VCG1072
	C	2083,2088,2092	CEAK221M16
	C	2086	CCSRCH331J50
	C	2089,2091,2093,2274	CEAK470M25
	C	2098,2102,2106,2350	CCSQCH331J50
	C	2099,2100,2105,2108	CKSQYB103K50
	C	2111,2268,2269,2282	CKSRYB104K50
	C	2117,2118,2128-2131	CKSQYB103K50
	C	2133,2136,2240-2249	CKSQYB103K50
	C	2138,2139,2261,2279	CKSQYB104K50
	C	2150-2169,2356,2358	CFHXSQ101J50
	C	2190-2195,2198-2209	CCSQCH472J50
	C	2196,2197	CCSQCH222J50
	C	2210-2215,2218-2229	CCSQCH471J50
	C	2216,2217	CCSQCH271J50
	C	2230,2231,2233,2234	CEAK220M50
	C	2236-2239,2305,2306	CEAK220M50
	C	2260	CCSQCH330J50
	C	2266,2284,2288,2296	CKSQYB103K50
	C	2267,2291	CKSRYB103K50

Mark	No.	Description	Part No.
	C	2273,2334,2345,2348	CEAK101M35
	C	2277,2287,2294,2298	CEAK470M25
	C	2281,2329-2331,2335	CFHXSQ103J16
	C	2283	CCSQCH471J50
	C	2290	CEAK101M16
	C	2292,2293,2311	CKSRYB104K50
	C	2307,2352	CEAK470M25
	C	2314,2315	DCH1263
	C	2316,2317,2319,2320	CEAK100M50
	C	2318	CKSQYB103K50
	C	2322,2323	CCSRCH391J50
	C	2324,2325	CCSRCH471J50
	C	2336,2342-2344,2349	CFHXSQ103J16
	C	2338,2339	CEAK100M50
	C	2340,2341	CCSRCH101J50
	C	2351,2362	CKSQYB104K50
	C	2354	CFHXSQ103J16
	C	2357,2359	CFHXSQ471J50
	C	2363	CCSQCH221J50
	C	2364	CCSQCH331J50

C FRONT HDMI USB ASSY

SEMICONDUCTORS

Mark	No.	Description	Part No.
⚠	IC	8001	TPS2557DRB
⚠	IC	8002	BD82065FVJ
	IC	8003	PCA9517DGK
⚠	IC	8004	BD9329EFJ
	Q	8004	2SC4081
	D	8004	DZ2J056M0

MISCELLANEOUS

	L	8001,8002 CHIP BEADS	ATL7010
	L	8003 CHOKE COIL	CTH1446
	JA	8001 USB CONNECTOR	DKB1106
	JA	8002 HDMI JACK	AKP7268
	JA	8003 HDMI JACK	AKP7280
	KN	8001,8002 EARTH TERMINAL	AKF7002
	CN	8001 CONNECTOR	AKM1278
	CN	8002 5P CONNECTOR	VKN1374
	JH	8002 PCB BINDER	AEF7008
	JP	8001 HOUSING	ADX7760

RESISTORS

	R	8005,8011,8052-8054	RS1/8SQ0R0J
	R	8009	RS1/10SR473J
	R	8014,8015	RS1/16SS2202F
	R	8022	RS1/10SR0R0J
	R	8033	RS1/8SQ105J
	R	8044	RS1/16SS1801F
	R	8045	RS1/16SS2200F
	R	8046	RS1/16SS8201F
	R	8055	RS1/4SA105J
	R	8058,8059	RS1/8SQ0R0J
	R	8087	RS1/16SS3003D
	Other Resistors		RS1/16SS###J

Mark	No.	Description	Part No.
	C	8001,8015,8021	CCSSCH101J50
	C	8002,8029,8037,8038	CKSRYB104K50
	C	8003,8016,8020,8022	CCSSCH331J50
	C	8010,8054	CEAK221M16
	C	8012,8017,8030	CKSRYB103K50
	C	8014,8031,8051	CCSRCH331J50
	C	8018	CKSSYB104K16
	C	8023	CKSQYB225K16
	C	8032,8033,8044,8045	CCG1236
	C	8039	CCSRCH222J50
	C	8041,8053	CCSRCH100D50
	C	8042,8043	CCSSCH331J50
	C	8078	CKSSYB473K16

D USB RECT_S ASSY

SEMICONDUCTORS

Mark	No.	Description	Part No.
⚠	D	3651	D5SBA60(B)

MISCELLANEOUS

	H	3651,3652 FUSE CLIP	AKR1004
	KN	3651 EARTH TERMINAL	AKF7002
	CN	3652,3653 2P TOP POST	B2B-EH
		7400 HEAT SINK	ANH7250
		7401 SCREW	IBZ30P080FCC
	JH	3651,3652 PCB BINDER	AEF7008

RESISTORS

	R	3652	RS1/4SA105J
	R	3654,3655,3699	RS1/10SR0R0J
	Other Resistors		RS1/8SQ###J

CAPACITORS

	C	3651	CFTLA104J50
	C	3661	CKSRYB104K50
	C	3662	CCSRCH331J50
	C	3665,3666	CEAK472M25

E DIGITAL MAIN ASSY (SC-75)

SEMICONDUCTORS

Mark	No.	Description	Part No.
	IC	101	UPD61110GM-100UEVA
	IC	102	M12L2561616A-5TG2A
	IC	103	AYW7385
	IC	104,604,1808	TC7WHU04FK
	IC	105,613,1601,1616	TC74VHC08FK
⚠	IC	451	TPS65251RHA
	IC	601,612,1502	TC74VHCT08AFKS1
	IC	603	PE7008A
	IC	608	TC74VHCT541AFK
	IC	610,1509	TC74VHC126FK
	IC	611	TC74VHCT126AFK
	IC	614,616,701,1521	TC7SH08FUS1
	IC	615	TC7SZ126FU
	IC	901,910	TC74LCX541FK
	IC	902,911	TC7SZ125FU

Mark	No.	Description	Part No.
	IC	903	SII9587CNUC-3
	IC	909	ADV7181CBSTZ
	IC	1204	88DE2750
	IC	1212	H5PS5162GFR-S5C
⚠	IC	1216	BD3539NUX
	IC	1501,1515,1814,1815	TC74LCX157FK
	IC	1511	ICS511MLF
	IC	1516	TC7WH157FK
	IC	1602	SII9616CTUC
⚠	IC	1605,1610,1615	AAT4610BIGV-1
	IC	1609	SII9573CTUC
	IC	1802	TC74LCX08FK
	IC	1806,1807	TC7WH126FK
	IC	1812,9208	TC7SH08FUS1
	IC	1817	TC74VHC157FK
	IC	9001,9702	M12L64164A-5TG2Y
	IC	9002,9703	D808K013DPTP400
	IC	9004	AYW7387
	IC	9005	TC7WGU04FK
	IC	9006	TC7SZU04FU
	IC	9101	TC74VHC541FK
	IC	9102	BU4094BCFV
	IC	9201,9209	A3V56S30FTP-G6
⚠	IC	9202	BD2226G
	IC	9203	LAN8720A-CP
	IC	9204	DM860A
	IC	9205	AYW7390
	IC	9206	H337S3959
⚠	IC	9401,9504,9511	MM3529A50P
⚠	IC	9402	MM3542BF
⚠	IC	9502,9514,9518,9523	S-1172B12-E6
⚠	IC	9503,9524	S-1172B13-E6
⚠	IC	9505	MM3529A18P
⚠	IC	9508	MM3529A25P
⚠	IC	9512	NJM2872BF33
⚠	IC	9513	NJM2846DL3-33
⚠	IC	9515	S-1172B15-E6
	IC	9601	TC74VHC08FK
	IC	9602	SII9575CTUC
	IC	9603	TC7SH04FUS1
	IC	9704	AYW7389
	Q	601,602,701,902	DTC124EUA
	Q	603,1502-1505,1509	DTA124EUA
	Q	901,1601,1602,9602	SSM3K15FU
	Q	906-908,1506	2SA1576A
	Q	909-911,9504	2SC4081
	Q	1501,1603,9603	DTC124EUA
	Q	9001	DTC114YUA
⚠	Q	9503	RAQ045P01
	D	601	RB501V-40
	D	602,603,9504,9602	1SS355
	D	1601,1602,9601	DZ2J051M0
	D	9401	1SR154-400

MISCELLANEOUS

	L	101-107,603,604 CHIP BEADS	VTL1129
	L	451 INDUCTOR	ATH7096
	L	452,9403 INDUCTOR	ATH7086
	L	453 SMD SPL INDUCTOR	ATH7092
	L	454,455,457-459 CHIP BEADS	ATL7010
	L	606,903,907,908 CHIP BEADS	VTL1129
	L	901,902,918,1210 CHIP BEADS	ATL7010
	L	917,919,928,929 CHIP BEADS	VTL1129
	L	921 INDUCTOR	CTF1547
	L	922-924 INDUCTOR	ATL7033
	L	925-927 INDUCTOR	ATL7035
	L	1208,1209,1503,1505 CHIP BEADS	VTL1129
	L	1507,1515,1521,1522 CHIP BEADS	VTL1129
	L	1510,9004,9010,9011 CHIP BEADS	VTL1128
	L	1601-1604,1607,1608 CHIP BEADS	VTL1129
	L	1605,1606,1621-1624 CHIP BEADS	ATL7010
	L	1609-1612,1630-1633 COIL	ATH7064
	L	1613,1614,1625-1628 CHIP BEADS	VTL1129
	L	1617 CHIP BEADS	VTL1126
	L	1618,1634,1642 FERRITE BEAD	CTF1528
	L	1638-1641 COIL	ATH7064
	L	1643,1801-1803 CHIP BEADS	VTL1129
	L	1806-1808,1810,1815 CHIP BEADS	VTL1129
	L	1817,1818,9005-9007 CHIP BEADS	VTL1129
	L	9002,9003,9203,9205 CHIP BEADS	ATL7010
	L	9101,9201,9202 CHIP BEADS	VTL1129
	L	9206,9401,9402,9405 CHIP BEADS	ATL7010
	L	9207-9212,9214,9219 CHIP BEADS	VTL1129
	L	9215,9216 CHOKE COIL	ATH7098
	L	9217 FILTER	CTF1703
	L	9406,9409,9501 CHIP BEADS	ATL7010
	L	9510-9513,9610-9613 CHIP BEADS	ATL7010
	L	9605,9614-9618,9704 CHIP BEADS	VTL1129
	L	9701,9702 CHIP BEADS	ATL7010
	L	9703,9705 CHIP BEADS	VTL1128
	JA	1601-1603,9601-9608 HDMI JACK	AKP7268
	JA	9201 USB CONNECTOR	DKB1106
	JA	9202 RJ45 CONNECTOR	AKN7115
	JA	9620 HDMI JACK	AKP7268
	KN	602 SCREW PLATE	VNE1948
	X	101,1601 CRYSTAL OSCILLATOR	ASS7123
	X	602 CRYSTAL	ASS7094
	X	902 CRYSTAL	ASS7111
	X	1201 CRYSTAL	ASS7114
	X	1602,9601 CRYSTAL OSCILLATOR	ASS7123
	X	1801 CRYSTAL OSCILLATOR	ASS7102
	X	1802 CRYSTAL OSCILLATOR	ASS7101
	X	9001 RESONATOR	CSS1795
	X	9201 CRYSTAL(24MHZ)	DSS1203
	CN	601 39P CONNECTOR	VKN2098
	CN	602 B TO B CONNECTOR	AKN7155
	CN	603 B TO B CONNECTOR	AKN7152
	CN	901 DUMMY CODE	AKN7151
	CN	1502 B TO B 23PIN JACK	AKN7073
	CN	9202 CONNECTOR	AKM1276
	CN	9501 CONNECTOR	B7B-EH
	CN	9601 CONNECTOR	AKM1273
	CN	9701 SOCKET(30PL)	BKP1047
	CN	9702 B TO B CONNECTOR	AKP7269
	JH	9501,9502 PCB BINDER	AEF7008

Mark	No.	Description	Part No.
RESISTORS			
	R	101,119,120	RAB4CQ470J
	R	102-104,611-614	RAB4CQ101J
	R	108-110,1277,1284	RAB4CQ151J
	R	117,118,132-135	RAB4CQ220J
	R	124-128,185,186	RAB4CQ470J
	R	189,200,202	RAB4CQ103J
	R	196-199	RAB4CQ223J
	R	208,209	RS1/16SS1001F
	R	211	RS1/16SS4700F
	R	215,1100-1102	RS1/16SS2200F
	R	455,457,459	RS1/16SS4022F
	R	456	RS1/16SS3002F
	R	458,460	RS1/16SS1272F
	R	469	RS1/16SS8202F
	R	470	RS1/16SS7501F
	R	471,9407	RS1/16SS2401F
	R	475-478,789,9257	RS1/8SQ0R0J
	R	480-483,9418,9530	RS1/8SQ105J
	R	608,609,9903,9904	RAB4CQ100J
	R	907,909,1201,1202	RAB4CQ473J
	R	910,911,913,914	RAB4CQ330J
	R	919,920,923,924	RAB4CQ330J
	R	1041,1049,1677,1679	RAB4CQ330J
	R	1047,1048,1608,1611	RAB4CQ680J
	R	1103-1105	RS1/16SS5601F
	R	1115,9401,9402	RS1/10SR0R0J
	R	1205,1207,1215,1339	RAB4CQ101J
	R	1208,1243,1244,1343	RAB4CQ473J
	R	1235,1797-1799,9227	RAB4CQ472J
	R	1242,1245,1248,1249	RAB4CQ470J
	R	1288,1289,1291,9265	RAB4CQ151J
	R	1342,9043,9785	RAB4CQ101J
	R	1345-1348,9268,9686	RAB4CQ473J
	R	1365,9050,9226,9232	RAB4CQ470J
	R	1615,1622,1623,9011	RAB4CQ680J
	R	1680,1687,1690	RAB4CQ330J
	R	9007-9010,9752-9755	RAB4CQ330J
	R	9012,9018,9019,9756	RAB4CQ680J
	R	9016,9017,9024,9031	RAB4CQ220J
	R	9209,9211	RAB4CQ390J
	R	9233,9240	RAB4CQ470J
	R	9234-9237	RAB4CQ121J
	R	9266	RAB4CQ151J
	R	9279	RS1/16SS2801F
	R	9285	RS1/16SS1202F
	R	9286	RS1/16SS1000F
	R	9290-9292,9294	RS1/16SS49R9F
	R	9312	RS1/16SS3001F
	R	9426	RS1/16SS3000F
	R	9427	RS1/16SS3900F
	R	9428	RS1/16SS8201F
	R	9513,9516	RS1/8SQ0R0J
	R	9515	RS1/8SQ475J
	R	9588,9591,9641,9952	RS1/8SQ105J
	R	9687,9901,9902,9944	RAB4CQ473J
	R	9757,9763,9764,9781	RAB4CQ680J
	R	9761,9762,9766,9770	RAB4CQ220J
	R	9908,9909	RAB4CQ100J
	Other Resistors		RS1/16SS###J

Mark	No.	Description	Part No.
CAPACITORS			
	C	101,1357,1610,1650	CEVW101M4
	C	102,111,114,117	CCSSCH331J50
	C	103,106,109,112	DCH1246
	C	104,107,110,116	CEVW101M16
	C	105,108,146,162	CCSSCH101J50
	C	115,118,136,500	DCH1246
	C	119,126,135,138	CCSSCH331J50
	C	120,121,124,130	CKSSYB103K25
	C	122,129,133,148	CCSSCH471J50
	C	123,125,127,132	CKSSYB104K16
	C	140,142,147,150	CKSSYB104K16
	C	144,959,1049,1252	CCSSCH102J50
	C	149,151,154,163	CCSSCH331J50
	C	152,153,159,161	CKSSYB104K16
	C	155,158,199-201	CKSSYB103K25
	C	156,160,170,178	CCSSCH471J50
	C	157,193,215,403	CCSSCH100D50
	C	165,173,176,184	CCSSCH331J50
	C	166,167,171,175	CKSSYB104K16
	C	179,181,185	CKSSYB104K16
	C	180,182,207,212	CCSSCH101J50
	C	186,187,1095-1097	CCSSCH7R0D50
	C	202-205,426,613	CKSSYB104K16
	C	206,627,904,907	CCSSCH471J50
	C	222	CKSSYB472K50
	C	223,463,610,612	CKSSYB103K25
	C	405,407,417,502	CCG1222
	C	406,9008,9525,9751	CCSSCH330J50
	C	421,424,474,476	CKSQYB105K25
	C	427,451,454,457	CCSSCH331J50
	C	428,499,601,602	CEVW101M16
	C	452,455,458	CCG1236
	C	456,459,505,917	CEVW221M4
	C	460-462	CKSRYB473K50
	C	465,489-491,501	CCSSCH100D50
	C	467,1098-1100,1716	CCSSCH5R0C50
	C	477,479	CCSRCH222J50
	C	481-483,9302	CKSSYB223K16
	C	484-486,495-497	CCG1236
	C	487	CCSRCH102J50
	C	503,619,623,636	CCSSCH101J50
	C	504,1656,1661,1737	CCG1222
	C	506-508,9408,9414	CCG1236
	C	604,608,611,621	CCSSCH100D50
	C	606,607,618,620	CCSSCH331J50
	C	614,616,628,632	CKSSYB103K25
	C	615,617,622,625	CKSSYB104K16
	C	624,631,633,635	CCSSCH331J50
	C	626,637,638,642	CKSSYB104K16
	C	634,640,648,665	CCSSCH100D50
	C	639,641,647,649	CCSSCH331J50
	C	643,653,654,664	CKSSYB103K25
	C	644,645,657,662	CKSSYB104K16
	C	646,650,651,656	CCSSCH101J50
	C	659,660,671,682	CCSSCH101J50

Mark	No.	Description	Part No.
C	666,678,679,737		CCSSCH100D50
C	670,675,681,686		CKSSYB104K16
C	674,696,698-701		CCSSCH331J50
C	680,685,925,929		CKSSYB103K25
C	690,691,697		CCSSCH101J50
C	704,713,720,721		CCSSCH331J50
C	705-708,717,718		CCSSCH101J50
C	722,761,764,903		CKSSYB104K16
C	723,728,731,733		CCSSCH331J50
C	734,750,1040,1299		CCSSCH221J50
C	735,749,751,752		CCSSCH101J50
C	740-742,745,746		CCSSCH100D50
C	748,753,754,756		CCSSCH331J50
C	755,905,1062,1088		CCSSCH100D50
C	757,762,765,928		CCSSCH331J50
C	902,923,941,952		CCSSCH101J50
C	906,927,942,945		CKSSYB104K16
C	911,915,920,933		DCH1246
C	913,1025,1031,1042		CEVW101M16
C	919,1566,1601,1615		CEVW470M4
C	926,930,932,956		CCSSCH471J50
C	931,947,948,950		CKSSYB103K25
C	934,937,939,963		DCH1246
C	946,1089-1091,1674		DCH1201
C	953,957,965,1029		CKSSYB103K25
C	954,958,969,1024		CCSSCH331J50
C	955,962,964,1026		CKSSYB104K16
C	960,961,1069,1116		CCSSCH471J50
C	1027,1033,1041,1084		CCSSCH101J50
C	1028,1036		CCSSCH270J50
C	1030,1035,1037,1046		CCSSCH331J50
C	1032,1050-1052,1055		CKSSYB104K16
C	1034,1038,1039,1043		CKSSYB103K25
C	1044		CKSSYB823K10
C	1045,1047,1054,1056		CKSSYB103K25
C	1048,1060,1063,1065		DCH1263
C	1057,1059,1061,1067		CKSSYB104K16
C	1064,1075,9005,9029		CEVW101M16
C	1068,1071,1072		CKSSYB104K16
C	1070,1079,1080,1225		CCSSCH331J50
C	1074,1205,1352,1713		DCH1263
C	1092-1094,1110-1112		CKSSYB104K16
C	1101-1103,1107-1109		CCSSCH180J50
C	1104-1106		CCSSCH4R0C50
C	1115,1118,1213,1223		CKSSYB104K16
C	1119,1456,1458,1464		CCSSCH471J50
C	1203,1222,1230,1839		CKSRYB105K16
C	1206		CCSSCH220J50
C	1207,1355,1358,1630		CEVW221M4
C	1208,1427,1638,1733		VCH1234
C	1214,1349-1351,1605		DCH1246
C	1215,1220,1231,1246		CCSSCH101J50
C	1224,1238,1243,1270		CKSSYB103K25
C	1226,1244,1248,1251		CCSSCH331J50
C	1229,1236,1240,1254		CKSSYB104K16
C	1256,1268,1278,1286		CCSSCH101J50
C	1267,1276,1289,1297		CKSSYB104K16
C	1272,1285,1305,1318		CKSSYB103K25
C	1274,1294,1311,1323		CCSSCH331J50
C	1313,1326		CCSSCH150J50

Mark	No.	Description	Part No.
C	1319,1325,1328,1334		CKSSYB103K25
C	1322,1333,1339,1390		CCSSCH101J50
C	1324,1346,1347,1359		CCSSCH331J50
C	1342,1380,1391,1401		CKSSYB103K25
C	1343,1384,1392,1394		CKSSYB104K16
C	1361,1410,1502,1518		CCSSCH100D50
C	1381,1388,1398,1411		CCSSCH331J50
C	1393,1395,1425,1452		CCSSCH101J50
C	1408,1426,1455,1457		CKSSYB103K25
C	1409,1451,1453,1459		CKSSYB104K16
C	1424,1454,1466,1468		CCSSCH331J50
C	1433,1933,9248,9540		CKSQYB225K16
C	1460,1462,1501,1681		CCSSCH101J50
C	1461,1467,1475,1481		CKSSYB104K16
C	1463,1465,1469,1472		CKSSYB103K25
C	1470,1471,1523,1536		CCSSCH331J50
C	1476,1482,1670,1694		CCSSCH471J50
C	1477,1508,1535,1567		CKSSYB103K25
C	1478		CCSSCH8R0D50
C	1479		CCSSCH7R0D50
C	1503,1522,1551,1564		CKSSYB104K16
C	1509,9545,9546		CEAK102M16-P35
C	1537,1584-1587,1744		CCSSCH100D50
C	1541,1546,1552,1571		CCSSCH331J50
C	1574,1595,1666,1673		CKSSYB104K16
C	1575,1581-1583		CCSSCH331J50
C	1590-1592,1594,1623		CCSSCH331J50
C	1593,1618,1658,1663		CKSSYB103K25
C	1596,1756,1835,9061		CCSSCH221J50
C	1606,1624,1704		CKSQYB103K50
C	1612,1617,1619,1635		DCH1246
C	1621,1631,1693,9543		CKSRYB103K50
C	1625,1642,1643,1645		CEVW470M4
C	1633,1667,1675,1679		CCSSCH331J50
C	1640,1647,1652,1665		DCH1246
C	1655,1660,1669,9298		CEVW470M4
C	1668,1680,1682,1684		CKSSYB103K25
C	1678,1687,1698,1700		CKSSYB104K16
C	1683,1689,1702,1730		CCSSCH101J50
C	1685,1691,1699,1701		CCSSCH331J50
C	1688,1690,1692,1705		CKSSYB103K25
C	1695,1696,1711,1722		DCH1246
C	1706,1725,1735,1745		CCSSCH331J50
C	1717,9609,9610		CCSSCH5R0C50
C	1720,1729,9217,9312		CEVW221M4
C	1724,1752,1753,1761		CKSSYB103K25
C	1726,1739,1749,1755		CKSSYB104K16
C	1734,1750,1760,1762		CCSSCH101J50
C	1736,1746,1793,1795		DCH1246
C	1740,1808,1811,9201		CCG1222
C	1742,1935,9530,9648		CEVW101M4
C	1751,1754,1758,1766		CCSSCH331J50
C	1757,1759,1763,1769		CKSSYB104K16
C	1764,1772,1780,1792		CCSSCH101J50
C	1765,1767,1771,1773		CKSSYB103K25
C	1768,1770,1774,1776		CCSSCH331J50
C	1775,1779,1781,1783		CKSSYB103K25
C	1777,1787,1789,1809		CKSSYB104K16
C	1778,1782,1784,1786		CCSSCH331J50
C	1785,1791,1801,9010		CKSSYB103K25

Mark	No.	Description	Part No.
	C	1788,1790,1803,1810	CCSSCH331J50
	C	1797,1799,9030,9628	DCH1246
	C	1812,1828,1834,1846	CKSSYB104K16
A	C	1813,1829,1845,1866	CCSSCH331J50
	C	1824,1855,9011,9019	CCSSCH101J50
	C	1825,9039,9054,9069	CCSSCH471J50
	C	1854,1864,1926,1931	CKSSYB104K16
	C	1927,9013,9015,9021	CCSSCH331J50
	C	1932,9006,9007,9012	CKSSYB104K16
	C	1934	CFHXSQ103J16
	C	9001,9075,9332,9410	CKSRYB104K50
	C	9004,9639	VCH1234
	C	9009,9022,9034,9065	CCSSCH100D50
	C	9014,9018,9023,9025	CKSSYB104K16
B	C	9016,9020,9028,9035	CKSSYB103K25
	C	9024,9027,9046,9053	CCSSCH101J50
	C	9026,9032,9038,9048	CCSSCH331J50
	C	9031,9036,9042,9044	CKSSYB104K16
	C	9037,9245,9246	CCSSCH120J50
	C	9040,9041,9043,9045	CKSSYB103K25
	C	9047,9059,9063,9066	CKSSYB104K16
	C	9049,9050,9052,9058	CKSSYB103K25
	C	9051,9055,9062,9064	CCSSCH331J50
	C	9056,9057,9072,9085	CCSSCH101J50
C	C	9060,9071,9086,9087	CKSSYB103K25
	C	9068,9073,9080,9088	CKSSYB104K16
	C	9070,9662,9770,9789	CCSSCH221J50
	C	9074,9076,9077,9081	CCSSCH331J50
	C	9089,9094,9095,9097	CKSSYB103K25
	C	9090-9093,9096,9102	CKSSYB104K16
	C	9098,9203,9207,9212	CKSSYB103K25
	C	9101,9204,9211,9215	CCSSCH101J50
	C	9126,9208,9229,9241	CCSSCH100D50
	C	9131,9144,9202,9205	CKSSYB104K16
	C	9132,9143,9206,9209	CCSSCH331J50
D	C	9210,9213,9227,9234	CKSSYB104K16
	C	9214,9232,9235,9243	CCSSCH331J50
	C	9216,9219,9221,9223	CKSSYB103K25
	C	9220,9224,9225,9238	CCSSCH101J50
	C	9222,9289,9690,9761	CCSSCH471J50
	C	9230,9233	DCH1263
	C	9231,9237,9244,9252	CKSSYB103K25
	C	9236,9284,9285,9433	CCG1222
	C	9240,9242,9256,9266	CKSSYB104K16
	C	9249,9279,9326	CCSSCH102J50
E	C	9250,9489,9559,9600	CEVW101M16
	C	9251,9255,9263,9265	CCSSCH331J50
	C	9253,9257,9259,9261	CCSSCH101J50
	C	9254,9258,9260,9262	CKSSYB103K25
	C	9264,9268,9270,9276	CKSSYB103K25
	C	9267,9271,9281,9291	CCSSCH331J50
	C	9269,9273,9296,9358	CCSSCH100D50
	C	9272,9274,9278,9280	CKSSYB104K16
	C	9275,9277,9287,9293	CCSSCH101J50
	C	9282,9283,9286,9290	CKSSYB103K25
	C	9288,9311,9337,9355	CKSSYB104K16
F	C	9292,9325,9333,9353	CKSSYB103K25
	C	9297,9319,9334,9344	CCSSCH331J50
	C	9300,9614,9615,9645	CEVW470M4
	C	9301,9310,9338,9354	CCSSCH101J50

Mark	No.	Description	Part No.
	C	9314,9367,9436,9475	CEVW221M4
	C	9318	CKSRYB105K16
	C	9324,9411	CKSSYB222K50
	C	9356,9359,9364,9413	CCSSCH331J50
	C	9357,9362,9366,9409	CKSSYB103K25
	C	9360,9363,9491,9506	CKSSYB104K16
	C	9361,9365,9434,9504	CCSSCH101J50
	C	9401,9402,9415,9431	CCSSCH100D50
	C	9403,9405,9406,9438	CKSQYB105K25
	C	9412	CKSSYB153K16
	C	9420,9487,9507,9518	CCSSCH331J50
	C	9424,9426-9428,9490	CKSSYB103K25
	C	9432,9477,9478,9480	CCSSCH100D50
	C	9435,9479,9481,9486	CCG1222
	C	9440,9517,9519,9524	CKSQYB105K25
	C	9485,9492,9495,9501	CCSSCH100D50
	C	9488,9493,9496,9503	CCG1222
	C	9502,9509,9522,9534	CCSSCH100D50
	C	9505,9643,9646	CCG1222
	C	9508,9626,9635	CEVW221M4
	C	9516,9533,9535,9548	CCSSCH101J50
	C	9526,9536,9582,9590	CKSQYB105K25
	C	9528,9531,9632,9659	CKSSYB104K16
	C	9529,9585,9599,9602	CCSSCH331J50
	C	9544,9799	CKSRYB104K50
	C	9575	CCG1236
	C	9581,9597,9616,9617	CCSSCH101J50
	C	9598,9621,9624,9633	CCSSCH100D50
	C	9604,9606,9608,9612	CCSSCH331J50
	C	9613	DCH1201
	C	9623,9657,9664,9672	CCSSCH331J50
	C	9637,9701-9706	CCSSCH100D50
	C	9640,9650,9660,9666	CCSSCH101J50
	C	9642,9652,9697,9700	DCH1246
	C	9651	CEVW470M4
	C	9661,9663,9665,9669	CKSSYB103K25
	C	9667,9673,9675,9687	CKSSYB104K16
	C	9668,9670,9678,9684	CCSSCH101J50
	C	9671,9677,9679,9681	CKSSYB103K25
	C	9674,9676,9680,9682	CCSSCH331J50
	C	9683,9685,9689,9693	CKSSYB103K25
	C	9686,9688,9692,9694	CCSSCH331J50
	C	9691,9708,9710-9712	CKSSYB104K16
	C	9695,9709,9713-9715	CKSSYB103K25
	C	9696,9754,9758,9777	CCSSCH101J50
	C	9698,9745,9756,9759	CCSSCH331J50
	C	9716-9718,9720,9722	CKSSYB104K16
	C	9719,9723,9729,9753	CKSSYB103K25
	C	9721,9725,9727,9728	CKSSYB332K50
	C	9724,9749,9750,9755	CKSSYB104K16
	C	9730-9740,9742,9746	CCSSCH100D50
	C	9747,9748,9772	CEVW101M16
	C	9752,9765,9769,9782	CCSSCH100D50
	C	9757,9762-9764,9768	CKSSYB104K16
	C	9760,9766,9771,9774	CKSSYB103K25
	C	9767,9775,9778,9783	CCSSCH331J50
	C	9773,9910,9912,9914	DCH1246
	C	9776,9779,9788,9805	CKSSYB104K16
	C	9780,9786,9790,9792	CKSSYB103K25
	C	9781,9784,9787,9795	CCSSCH101J50

Mark	No.	Description	Part No.
	C	9785,9793,9797,9800	CCSSCH331J50
	C	9791	CCSSCH471J50
	C	9794,9798,9804,9814	CKSSYB103K25
	C	9796,9810,9822,9924	CCSSCH101J50
	C	9801-9803	CCSSCH100D50
	C	9811,9812,9816,9817	CKSSYB104K16
	C	9813,9815,9819,9902	CCSSCH331J50
	C	9818,9908,9918,9919	CKSSYB103K25
	C	9820	CCSSCH221J50
	C	9821,9925,9928	CKSSYB104K16
	C	9916	DCH1246
	C	9920,9926,9929	CCSSCH331J50

E DIGITAL MAIN ASSY (SC-LX57)

SEMICONDUCTORS

Mark	No.	Description	Part No.
	IC	101	UPD61110GM-100UEVA
	IC	102	M12L2561616A-5TG2A
	IC	103	AYW7385
	IC	104,604,1808	TC7WHU04FK
	IC	105,613,1601,1616	TC74VHC08FK
⚠	IC	451	TPS65251RHA
	IC	601,612,1502	TC74VHCT08AFKS1
	IC	603	PE7008A
	IC	608	TC74VHCT541AFK
	IC	610,1509	TC74VHC126FK
	IC	611	TC74VHCT126AFK
	IC	614,616,701,1521	TC7SH08FUS1
	IC	615	TC7SZ126FU
	IC	901,910	TC74LCX541FK
	IC	902,911	TC7SZ125FU
	IC	903	SII9587CNUC-3
	IC	909	ADV7181CBSTZ
	IC	1204	88DE2750
	IC	1212	H5PS5162GFR-S5C
⚠	IC	1216	BD3539NUX
	IC	1501,1515,1814,1815	TC74LCX157FK
	IC	1511	ICS511MLF
	IC	1516	TC7WH157FK
	IC	1602	SII9616CTUC
⚠	IC	1605,1610,1615	AAT4610BIGV-1
	IC	1609	SII9573CTUC
	IC	1802	TC74LCX08FK
	IC	1806,1807	TC7WH126FK
	IC	1812,9208	TC7SH08FUS1
	IC	1817	TC74VHC157FK
	IC	9001,9702	M12L64164A-5TG2Y
	IC	9002,9703	D808K013DPTP400
	IC	9004	AYW7387
	IC	9005	TC7WGU04FK
	IC	9006	TC7SZU04FU
	IC	9101	TC74VHC541FK
	IC	9102	BU4094BCFV
	IC	9201,9209	A3V56S30FTP-G6
⚠	IC	9202	BD2226G
	IC	9203	LAN8720A-CP
	IC	9204	DM860A
	IC	9205	AYW7390
	IC	9206	H337S3959
⚠	IC	9401,9504,9511	MM3529A50P
⚠	IC	9402	MM3542BF
⚠	IC	9502,9514,9518,9523	S-1172B12-E6
⚠	IC	9503,9524	S-1172B13-E6
⚠	IC	9505	MM3529A18P
⚠	IC	9508	MM3529A25P
⚠	IC	9512	NJM2872BF33
⚠	IC	9513	NJM2846DL3-33
⚠	IC	9515	S-1172B15-E6
	IC	9601	TC74VHC08FK
	IC	9602	SII9575CTUC
	IC	9603	TC7SH04FUS1
	IC	9704	AYW7389
	Q	601,602,701,902	DTC124EUA
	Q	603,1502-1505,1509	DTA124EUA
	Q	901,1601,1602,9602	SSM3K15FU
	Q	906-908,1506	2SA1576A
	Q	909-911,9504	2SC4081
	Q	1501,1603,9603	DTC124EUA
	Q	9001	DTC114YUA
⚠	Q	9503	RAQ045P01
	D	601	RB501V-40
	D	602,603,9504,9602	1SS355
	D	1601,1602,9601	DZ2J051M0
	D	9401	1SR154-400

MISCELLANEOUS

Mark	No.	Description	Part No.
	L	101-107,603,604 CHIP BEADS	VTL1129
	L	451 INDUCTOR	ATH7096
	L	452,9403 INDUCTOR	ATH7086
	L	453 SMD SPL INDUCTOR	ATH7092
	L	454,455,457-459 CHIP BEADS	ATL7010
	L	606,903,907,908 CHIP BEADS	VTL1129
	L	901,902,918,1210 CHIP BEADS	ATL7010
	L	917,919,928,929 CHIP BEADS	VTL1129
	L	921 INDUCTOR	CTF1547
	L	922-924 INDUCTOR	ATL7033
	L	925-927 INDUCTOR	ATL7035
	L	1208,1209,1503,1505 CHIP BEADS	VTL1129
	L	1507,1515,1521,1522 CHIP BEADS	VTL1129
	L	1510,9004,9010,9011 CHIP BEADS	VTL1128
	L	1601-1604,1607,1608 CHIP BEADS	VTL1129
	L	1605,1606,1621-1624 CHIP BEADS	ATL7010
	L	1609-1612,1630-1633 COIL	ATH7064
	L	1613,1614,1625-1628 CHIP BEADS	VTL1129
	L	1617 CHIP BEADS	VTL1126
	L	1618,1634,1642 FERRITE BEAD	CTF1528
	L	1638-1641 COIL	ATH7064
	L	1643,1801-1803 CHIP BEADS	VTL1129
	L	1806-1808,1810,1815 CHIP BEADS	VTL1129
	L	1817,1818,9005-9007 CHIP BEADS	VTL1129
	L	9002,9003,9203,9205 CHIP BEADS	ATL7010
	L	9101,9201,9202 CHIP BEADS	VTL1129
	L	9206,9401,9402,9405 CHIP BEADS	ATL7010
	L	9207-9212,9214,9219 CHIP BEADS	VTL1129
	L	9215,9216 CHOKE COIL	ATH7098
	L	9217 FILTER	CTF1703

Mark	No.	Description	Part No.
	L	9406,9409,9501 CHIP BEADS	ATL7010
	L	9510-9513,9610-9613 CHIP BEADS	ATL7010
	L	9605,9614-9618,9704 CHIP BEADS	VTL1129
	L	9701,9702 CHIP BEADS	ATL7010
	L	9703,9705 CHIP BEADS	VTL1128
	JA	1601-1603,9601-9608 HDMI JACK	AKP7268
	JA	9201 USB CONNECTOR	DKB1106
	JA	9202 RJ45 CONNECTOR	AKN7115
	JA	9620 HDMI JACK	AKP7268
	KN	602 SCREW PLATE	VNE1948
	X	101,1601 CRYSTAL OSCILLATOR	ASS7123
	X	602 CRYSTAL	ASS7094
	X	902 CRYSTAL	ASS7111
	X	1201 CRYSTAL	ASS7114
	X	1602,9601 CRYSTAL OSCILLATOR	ASS7123
	X	1801 CRYSTAL OSCILLATOR	ASS7102
	X	1802 CRYSTAL OSCILLATOR	ASS7101
	X	9001 RESONATOR	CSS1795
	X	9201 CRYSTAL(24MHZ)	DSS1203
	CN	601 39P CONNECTOR	VKN2098
	CN	602 B TO B CONNECTOR	AKN7155
	CN	603 B TO B CONNECTOR	AKN7152
	CN	901 DUMMY CODE	AKN7151
	CN	1502 B TO B 23PIN JACK	AKN7073
	CN	9202 CONNECTOR	AKM1276
	CN	9501 CONNECTOR	B7B-EH
	CN	9601 CONNECTOR	AKM1273
	CN	9701 SOCKET(30PL)	BKP1047
	CN	9702 B TO B CONNECTOR	AKP7269
	JH	9501,9502 PCB BINDER	AEF7008

RESISTORS

	R	101,119,120	RAB4CQ470J
	R	102-104,611-614	RAB4CQ101J
	R	108-110,1277,1284	RAB4CQ151J
	R	117,118,132-135	RAB4CQ220J
	R	124-128,185,186	RAB4CQ470J
	R	189,200,202	RAB4CQ103J
	R	196-199	RAB4CQ223J
	R	208,209	RS1/16SS1001F
	R	211	RS1/16SS4700F
	R	215,1100-1102	RS1/16SS2200F
	R	455,457,459	RS1/16SS4022F
	R	456	RS1/16SS3002F
	R	458,460	RS1/16SS1272F
	R	469	RS1/16SS8202F
	R	470	RS1/16SS7501F
	R	471,9407	RS1/16SS2401F
	R	475,476	ATL7010
	R	477,478,789,9257	RS1/8SQ0R0J
	R	480-483,9418,9530	RS1/8SQ105J
	R	608,609,9903,9904	RAB4CQ100J
	R	907,909,1201,1202	RAB4CQ473J
	R	910,911,913,914	RAB4CQ330J
	R	919,920,923,924	RAB4CQ330J
	R	1041,1049,1677,1679	RAB4CQ330J
	R	1047,1048,1608,1611	RAB4CQ680J

Mark	No.	Description	Part No.
	R	1103-1105	RS1/16SS5601F
	R	1115,9401,9402	RS1/10SR0R0J
	R	1205,1207,1215,1339	RAB4CQ101J
	R	1208,1243,1244,1343	RAB4CQ473J
	R	1235,1797-1799,9227	RAB4CQ472J
	R	1242,1245,1248,1249	RAB4CQ470J
	R	1288,1289,1291,9265	RAB4CQ151J
	R	1342,9043,9785	RAB4CQ101J
	R	1345-1348,9268,9686	RAB4CQ473J
	R	1365,9050,9226,9232	RAB4CQ470J
	R	1615,1622,1623,9011	RAB4CQ680J
	R	1680,1687,1690	RAB4CQ330J
	R	9007-9010,9752-9755	RAB4CQ330J
	R	9012,9018,9019,9756	RAB4CQ680J
	R	9016,9017,9024,9031	RAB4CQ220J
	R	9209,9211	RAB4CQ390J
	R	9233,9240	RAB4CQ470J
	R	9234-9237	RAB4CQ121J
	R	9266	RAB4CQ151J
	R	9279	RS1/16SS2801F
	R	9285	RS1/16SS1202F
	R	9286	RS1/16SS1000F
	R	9290-9292,9294	RS1/16SS49R9F
	R	9312	RS1/16SS3001F
	R	9426	RS1/16SS3000F
	R	9427	RS1/16SS3900F
	R	9428	RS1/16SS8201F
	R	9513,9516	RS1/8SQ0R0J
	R	9515	RS1/8SQ475J
	R	9525	RS1/4SA105J
	R	9588,9591,9641,9952	RS1/8SQ105J
	R	9687,9901,9902,9944	RAB4CQ473J
	R	9757,9763,9764,9781	RAB4CQ680J
	R	9761,9762,9766,9770	RAB4CQ220J
	R	9908,9909	RAB4CQ100J
	Other Resistors		RS1/16SS###J

CAPACITORS

	C	101,1357,1610,1650	CEVW101M4
	C	102,111,114,117	CCSSCH331J50
	C	103,106,109,112	DCH1246
	C	104,107,110,116	CEVW101M16
	C	105,108,146,162	CCSSCH101J50
	C	115,118,136,500	DCH1246
	C	119,126,135,138	CCSSCH331J50
	C	120,121,124,130	CKSSYB103K25
	C	122,129,133,148	CCSSCH471J50
	C	123,125,127,132	CKSSYB104K16
	C	140,147,150,152	CKSSYB104K16
	C	144,959,1049,1252	CCSSCH102J50
	C	149,151,154,163	CCSSCH331J50
	C	153,159,161,166	CKSSYB104K16
	C	155,158,199-201	CKSSYB103K25
	C	156,160,170,178	CCSSCH471J50
	C	157,193,403,465	CCSSCH100D50
	C	165,173,184,427	CCSSCH331J50
	C	167,171,175,179	CKSSYB104K16
	C	176,215,492,536	CCSSCH470J50

Mark	No.	Description	Part No.
C	180,182,207,212		CCSSCH101J50
C	181,185,202-205		CKSSYB104K16
C	186,187,1095-1097		CCSSCH7R0D50
C	206,627,904,907		CCSSCH471J50
C	216,426,615,617		CKSSYB104K16
C	222		CKSSYB472K50
C	223,463,610,612		CKSSYB103K25
C	405,407,417,502		CCG1222
C	406,498,572,613		CCSSCH330J50
C	421,9201,9284,9285		VCG1072
C	424,474,476,9403		CKSQYB105K25
C	428,499,601,602		CEVW101M16
C	451,454,457,512		CCSSCH331J50
C	452,455,458		CCG1236
C	456,459,505,917		CEVW221M4
C	460-462		CKSRYB473K50
C	467,1098-1100,1716		CCSSCH5R0C50
C	477,479		CCSRCH222J50
C	481-483		CKSSYB223K16
C	484-486,495-497		CCG1236
C	487		CCSRCH102J50
C	488,9407		CCSQCH330J50
C	489-491,501,604		CCSSCH100D50
C	503,619,623,636		CCSSCH101J50
C	504,1656,1661,1737		CCG1222
C	506-508,9408,9414		CCG1236
C	554,1206,1220,1278		CCSSCH220J50
C	606,607,618,620		CCSSCH331J50
C	608,611,621,634		CCSSCH100D50
C	614,616,628,632		CKSSYB103K25
C	622,625,626,637		CKSSYB104K16
C	624,631,633,635		CCSSCH331J50
C	638,642,644,645		CKSSYB104K16
C	639,641,647,649		CCSSCH331J50
C	640,665,666,679		CCSSCH100D50
C	643,653,654,664		CKSSYB103K25
C	646,650,651,656		CCSSCH101J50
C	648,739,741,743		CCSSCH470J50
C	657,662,670,675		CKSSYB104K16
C	659,660,671,682		CCSSCH101J50
C	674,696,698-701		CCSSCH331J50
C	678,958,969,1670		CCSSCH330J50
C	680,685,925,929		CKSSYB103K25
C	681,686,722,761		CKSSYB104K16
C	690,691,697		CCSSCH101J50
C	704,713,720,721		CCSSCH331J50
C	705-708,717,718		CCSSCH101J50
C	723,728,731,733		CCSSCH331J50
C	734,750,1040,1299		CCSSCH221J50
C	735,749,751,752		CCSSCH101J50
C	737,740,742,745		CCSSCH100D50
C	744,952,1294,1483		CCSSCH470J50
C	746,755,905,1062		CCSSCH100D50
C	748,753,754,756		CCSSCH331J50
C	757,762,765,928		CCSSCH331J50
C	764,903,906,927		CKSSYB104K16
C	902,923,941,1027		CCSSCH101J50
C	911,915,920,933		DCH1246
C	913,1025,1031,1042		CEVW101M16
C	919,1566,1601,1615		CEVW470M4

Mark	No.	Description	Part No.
C	926,930,932,956		CCSSCH471J50
C	931,947,948,950		CKSSYB103K25
C	934,937,939,963		DCH1246
C	942,945,955,962		CKSSYB104K16
C	946,1089-1091,1674		DCH1201
C	953,957,965,1029		CKSSYB103K25
C	954,1024,1030,1035		CCSSCH331J50
C	960,961,1069,1116		CCSSCH471J50
C	964,1026,1032		CKSSYB104K16
C	1028,1036,1274,1390		CCSSCH270J50
C	1033,1041,1084,1215		CCSSCH101J50
C	1034,1038,1039,1043		CKSSYB103K25
C	1037,1046,1070,1079		CCSSCH331J50
C	1044		CKSSYB823K10
C	1045,1047,1054,1056		CKSSYB103K25
C	1048,1060,1063,1065		DCH1263
C	1050-1052,1055,1057		CKSSYB104K16
C	1059,1061,1067,1068		CKSSYB104K16
C	1064,1075,9005,9029		CEVW101M16
C	1071,1072,1092-1094		CKSSYB104K16
C	1074,1205,1352,1713		DCH1263
C	1080,1225,1226,1244		CCSSCH331J50
C	1088,1361,1410,1502		CCSSCH100D50
C	1101-1103,1107-1109		CCSSCH180J50
C	1104-1106		CCSSCH4R0C50
C	1110-1112,1115,1118		CKSSYB104K16
C	1119,1456,1458,1464		CCSSCH471J50
C	1203,1222,1230,1839		CKSRYB105K16
C	1207,1355,1358,1630		CEVW221M4
C	1208,1427,1638,1733		VCH1234
C	1213,1223,1229,1240		CKSSYB104K16
C	1214,1349-1351,1605		DCH1246
C	1224,1236,1238,1243		CKSSYB103K25
C	1231,1246,1256,1268		CCSSCH101J50
C	1248,1251,1311,1323		CCSSCH331J50
C	1254,1276,1289,1297		CKSSYB104K16
C	1267,1270,1272,1285		CKSSYB103K25
C	1286,1322,1333,1339		CCSSCH101J50
C	1305,1318,1319,1325		CKSSYB103K25
C	1313,1326,9730-9732		CCSSCH150J50
C	1324,1346,1347,1359		CCSSCH331J50
C	1328,1334,1342,1380		CKSSYB103K25
C	1343,1384,1392,1394		CKSSYB104K16
C	1381,1388,1398,1411		CCSSCH331J50
C	1391,1401,1408,1426		CKSSYB103K25
C	1393,1689,1691,9072		CCSSCH220J50
C	1395,1425,1452,1460		CCSSCH101J50
C	1409,1451,1453,1459		CKSSYB104K16
C	1424,1454,1466,1468		CCSSCH331J50
C	1433,1933,9248,9540		CKSQYB225K16
C	1455,1457,1463,1465		CKSSYB103K25
C	1461,1467,1475,1481		CKSSYB104K16
C	1462,1501,1681,1702		CCSSCH101J50
C	1469,1472,1477,1503		CKSSYB103K25
C	1470,1471,1523,1536		CCSSCH331J50
C	1476,1482,1694,1825		CCSSCH471J50
C	1478		CCSSCH8R0D50
C	1479		CCSSCH7R0D50
C	1508,1522,1535,1567		CKSSYB103K25
C	1509,9545,9546		CEAK102M16-P35

Mark	No.	Description	Part No.
	C	1518,1537,1584-1587	CCSSCH100D50
	C	1541,1546,1552,1571	CCSSCH331J50
	C	1551,1595,1666,1673	CKSSYB104K16
A	C	1574,1593,1618,1658	CKSSYB103K25
	C	1575,1581-1583	CCSSCH331J50
	C	1590-1592,1594,1623	CCSSCH331J50
	C	1596,1756,1835,9061	CCSSCH221J50
	C	1606,1624,1704	CKSQYB103K50
	C	1612,1617,1619,1635	DCH1246
	C	1621,1631,1693,9543	CKSRYB103K50
	C	1625,1642,1643,1645	CEVW470M4
	C	1633,1667,1675,1679	CCSSCH331J50
	C	1640,1647,1652,1665	DCH1246
	C	1655,1660,1669,9298	CEVW470M4
B	C	1657,9301,9344	CCSSCH270J50
	C	1663,1668,1680,1682	CKSSYB103K25
	C	1678,1687,1698,1700	CKSSYB104K16
	C	1683,1750,1751,1824	CCSSCH330J50
	C	1684,1688,1690,1692	CKSSYB103K25
	C	1685,1766,1768,1784	CCSSCH470J50
	C	1695,1696,1711,1722	DCH1246
	C	1699,1701,1706,1725	CCSSCH331J50
	C	1705,1724,1752,1753	CKSSYB103K25
	C	1717,9609,9610	CCSSCH5R0C50
C	C	1720,1729,9217,9314	CEVW221M4
	C	1726,1749,1755,1757	CKSSYB104K16
	C	1730,1734,1760,1762	CCSSCH101J50
	C	1735,1745,1754,1758	CCSSCH331J50
	C	1736,1746,1793,1795	DCH1246
	C	1740,1808,1811,9236	CCG1222
	C	1742,1935,9530,9648	CEVW101M4
	C	1744,9009,9022,9034	CCSSCH100D50
	C	1759,1763,1769,1777	CKSSYB104K16
	C	1761,1765,1767,1771	CKSSYB103K25
	C	1764,1772,1780,1855	CCSSCH101J50
D	C	1770,1774,1776,1778	CCSSCH331J50
	C	1773,1775,1779,1781	CKSSYB103K25
	C	1782,1786,1788,1803	CCSSCH331J50
	C	1783,1785,1789,1791	CKSSYB103K25
	C	1787,1809,1812,1828	CKSSYB104K16
	C	1790,1792,9015,9056	CCSSCH470J50
	C	1797,1799,9030,9628	DCH1246
	C	1801,1846,9010,9016	CKSSYB103K25
	C	1810,1813,1829,1845	CCSSCH331J50
	C	1834,1854,1864,1926	CKSSYB104K16
E	C	1847	CEVW470M6R3
	C	1866,1927,9013,9021	CCSSCH331J50
	C	1931,1932,9006,9007	CKSSYB104K16
	C	1934	CFHXSQ103J16
	C	9001,9075,9332,9410	CKSRYB104K50
	C	9004,9312,9639	VCH1234
	C	9008,9100,9215,9267	CCSSCH330J50
	C	9011,9019,9024,9027	CCSSCH101J50
	C	9012,9014,9018,9023	CKSSYB104K16
	C	9020,9028,9035,9040	CKSSYB103K25
	C	9025,9031,9036,9042	CKSSYB104K16
F	C	9026,9032,9038,9048	CCSSCH331J50
	C	9037,9245,9246	CCSSCH120J50
	C	9039,9054,9069,9222	CCSSCH471J50
	C	9041,9043,9045,9049	CKSSYB103K25

Mark	No.	Description	Part No.
	C	9044,9047,9059,9063	CKSSYB104K16
	C	9046,9053,9057,9101	CCSSCH101J50
	C	9050,9052,9058,9060	CKSSYB103K25
	C	9051,9055,9062,9064	CCSSCH331J50
	C	9065,9126,9208,9229	CCSSCH100D50
	C	9066,9068,9073,9080	CKSSYB104K16
	C	9070,9662,9770,9789	CCSSCH221J50
	C	9071,9086,9087,9089	CKSSYB103K25
	C	9074,9076,9077,9081	CCSSCH331J50
	C	9085,9269,9342,9343	CCSSCH470J50
	C	9088,9090-9093,9096	CKSSYB104K16
	C	9094,9095,9097,9098	CKSSYB103K25
	C	9102,9131,9144,9202	CKSSYB104K16
	C	9132,9143,9206,9209	CCSSCH331J50
	C	9203,9207,9212,9216	CKSSYB103K25
	C	9204,9211,9220,9224	CCSSCH101J50
	C	9205,9210,9213,9234	CKSSYB104K16
	C	9214,9235,9243,9251	CCSSCH331J50
	C	9219,9221,9223,9231	CKSSYB103K25
	C	9225,9238,9253,9257	CCSSCH101J50
	C	9230,9233	DCH1263
	C	9232	CCSSCH181J50
	C	9237,9244,9252,9254	CKSSYB103K25
	C	9240,9242,9256,9266	CKSSYB104K16
	C	9241,9273,9296,9358	CCSSCH100D50
	C	9249,9279,9326	CCSSCH102J50
	C	9250,9489,9559,9600	CEVW101M16
	C	9255,9263,9265,9271	CCSSCH331J50
	C	9258,9260,9262,9264	CKSSYB103K25
	C	9259,9261,9637,9791	CCSSCH220J50
	C	9268,9270,9276,9286	CKSSYB103K25
	C	9272,9274,9278,9280	CKSSYB104K16
	C	9275,9277,9297,9310	CCSSCH101J50
	C	9281,9289,9291,9319	CCSSCH331J50
	C	9282,9283	CKSSYB152K50
	C	9287,9293,9313,9365	CCSSCH330J50
	C	9288,9311,9337,9355	CKSSYB104K16
	C	9290,9302,9325,9333	CKSSYB103K25
	C	9292,9690,9761	CCSSCH471J50
	C	9300,9614,9615,9645	CEVW470M4
	C	9318	CKSRYB105K16
	C	9324,9411	CKSSYB222K50
	C	9334,9356,9359,9364	CCSSCH331J50
	C	9338,9354,9361,9434	CCSSCH101J50
	C	9345	RS1/16SS105J
	C	9353,9357,9362,9366	CKSSYB103K25
	C	9360,9363,9491,9506	CKSSYB104K16
	C	9367,9436,9475,9508	CEVW221M4
	C	9401,9402,9415,9431	CCSSCH100D50
	C	9405,9406,9438,9440	CKSQYB105K25
	C	9409,9424,9426-9428	CKSSYB103K25
	C	9412	CKSSYB153K16
	C	9413,9420,9487,9507	CCSSCH331J50
	C	9432,9477,9478,9480	CCSSCH100D50
	C	9433,9435,9479,9481	CCG1222
	C	9485,9525,9684,9694	CCSSCH330J50
	C	9486,9488,9493,9496	CCG1222
	C	9492,9495,9501,9509	CCSSCH100D50
	C	9502,9666,9668,9672	CCSSCH470J50
	C	9503,9505,9643,9646	CCG1222

Mark	No.	Description	Part No.
	C	9504,9516,9533,9535	CCSSCH101J50
	C	9517,9519,9524,9526	CKSQYB105K25
	C	9518,9529,9585,9599	CCSSCH331J50
	C	9522,9534,9598,9621	CCSSCH100D50
	C	9528,9531,9632,9659	CKSSYB104K16
	C	9536,9582,9590	CKSQYB105K25
	C	9548,9581,9597,9616	CCSSCH101J50
	C	9575	CCG1236
	C	9601	CCSSCH561J50
	C	9602	CCSSCH151J50
	C	9604,9606,9608,9612	CCSSCH331J50
	C	9613	DCH1201
	C	9617,9640,9650,9660	CCSSCH101J50
	C	9623,9657,9664,9674	CCSSCH331J50
	C	9624,9633,9701-9706	CCSSCH100D50
	C	9626,9635	CEVW221M4
	C	9642,9652,9697,9700	DCH1246
	C	9651	CEVW470M4
	C	9661,9663,9665,9669	CKSSYB103K25
	C	9667,9673,9687,9691	CKSSYB104K16
	C	9670,9678,9696,9754	CCSSCH101J50
	C	9671,9675,9677,9679	CKSSYB103K25
	C	9676,9680,9682,9686	CCSSCH331J50
	C	9681,9683,9685,9689	CKSSYB103K25
	C	9688,9692,9698,9745	CCSSCH331J50
	C	9693,9695,9709	CKSSYB103K25
	C	9708,9710-9712	CKSSYB104K16
	C	9713-9715,9719,9723	CKSSYB103K25
	C	9716-9718,9720,9722	CKSSYB104K16
	C	9721,9725,9727,9728	CKSSYB332K50
	C	9724,9749,9750,9755	CKSSYB104K16
	C	9729,9736,9753,9760	CKSSYB103K25
	C	9733-9735,9737,9742	CCSSCH100D50
	C	9738-9740	CCSSCH150J50
	C	9746,9752,9769,9782	CCSSCH100D50
	C	9747,9748,9772	CEVW101M16
	C	9751,9777	CCSSCH330J50
	C	9756,9759,9767,9775	CCSSCH331J50
	C	9757,9762-9764,9768	CKSSYB104K16
	C	9758,9765,9784,9787	CCSSCH470J50
	C	9766,9771,9774,9780	CKSSYB103K25
	C	9773,9910,9912,9914	DCH1246
	C	9776,9779,9788,9805	CKSSYB104K16
	C	9778,9783,9785,9793	CCSSCH331J50
	C	9781,9795,9796,9810	CCSSCH101J50
	C	9786,9790,9792,9794	CKSSYB103K25
	C	9797,9800,9813,9815	CCSSCH331J50
	C	9798	CCSSCH220J50
	C	9799	CKSRYB104K50
	C	9801-9803	CCSSCH100D50
	C	9804,9814,9818,9908	CKSSYB103K25
	C	9811,9812,9816,9817	CKSSYB104K16
	C	9819,9920	CCSSCH470J50
	C	9820	CCSSCH221J50
	C	9821,9925,9928	CKSSYB104K16
	C	9822,9924	CCSSCH101J50
	C	9902,9926,9929	CCSSCH331J50
	C	9916	DCH1246
	C	9918,9919	CKSSYB103K25

Mark	No.	Description	Part No.

F INTERFACE_S ASSY

SEMICONDUCTORS

	Q	7001-7003,7013,7015	DTC124EUA
	Q	7005	2SA1576A
	Q	7008,7010	2SA1036K
	Q	7014,7016	DTA124EUA
	Q	7025-7028	2SD2704K
	D	7005	DAN202U
	D	7007,7009	RB501VM-40
	D	7024	1SS355

MISCELLANEOUS

	L	7001 CHIP SOLID INDUCTOR	ATL7002
	L	7005-7007 CHIP SOLID INDUCTOR	QTL1013
	JA	7001,7004,7005 JACK	VKB1243
	JA	7003 JACK	AKN-209
	KN	7001 SCREW PLATE	VNE1948
	KN	7005,7006 EARTH TERMINAL	AKF7002
	CN	7003 B TO B CONNECTOR	AKM7225
	CN	7004 B TO B CONNECTOR	AKM7222
	CN	7006 CONNECTOR	9604S-19C
	CN	7009 CONNECTOR	CKS3368
	CN	7010 CONNECTOR	9604S-15C
	CN	7011 B TO B 19PIN PLUG	AKM7105
	JH	7001,7003,7004 PCB BINDER	AEF7008
	JP	7001 HOUSING	ADX7747

RESISTORS

	R	7108	RS1/8SQ105J
	R	7139,7140	RS1/4SA150J
	R	7145-7148	RS1/4SA0R0J
	Other Resistors		RS1/10SR###J

CAPACITORS

	C	7002-7005,7134	CCSRCH100D50
	C	7006,7012,7080,7082	CCSRCH102J50
	C	7007,7011,7015,7081	CKSRYB104K50
	C	7013,7016,7022	CKSRYB103K50
	C	7023,7026	CKSRYB153K50
	C	7083,7114	CKSRYB104K50
	C	7101,7143	CCSRCH101J50
	C	7108	CEAK470M25
	C	7112	CEAK221M16
	C	7113	CCSRCH331J50
	C	7135	CCSRCH102J50

G COMPONENT ASSY

SEMICONDUCTORS

	IC	8301	NJW1327FU1
	IC	8401	NJM2505AF
	IC	8501	PDC162A
	IC	8601	HIN202EIBNZ
	Q	8301,8604	2SA1576A
	Q	8302,8501,8603	2SC4081
	Q	8303,8605	DTC114EUA
⚠	Q	8401	2SC5712
⚠	Q	8402	2SA2070
	D	8301,8302,8601,8605	1SS355

Mark	No.	Description	Part No.
	D	8401	DAN217U
	D	8404,8408	DZ2J039M0
MISCELLANEOUS			
	L	8501 CHIP COIL	LCYA330J2520
	JA	8301 6P PIN JACK NI	AKB7224
	JA	8304 3P PIN JACK NI	AKB7227
	JA	8601 9P D-SUB SOCKET	AKP7256
	X	8501 CRYSTAL RESONATOR	ASS7080
	CN	8301 B TO B CONNECTOR	AKM7221
	CN	8303 20P PLUG	AKM7171
	CN	8401 PLUG(2P)	KM200NA2L
	JP	8402 CONNECTOR ASS'Y	PF04PG-S10
RESISTORS			
	R	8301-8306	RS1/10SR75R0F
	R	8310,8312,8314	RS1/10SR68R0F
	R	8417	RS1/8SQ105J
	R	8418	RS1/8SQ471J
	Other Resistors		RS1/10SR###J
CAPACITORS			
	C	8301,8302,8383,8417	CEAK101M16
	C	8303,8311,8312,8319	CKSRYB103K50
	C	8304,8308,8310,8314	CKSRYB104K50
	C	8305-8307,8313,8315	DCH1263
	C	8309,8317,8322,8340	VCG1072
	C	8316,8318,8321,8323	CKSRYB104K50
	C	8320,8330,8331,8338	CKSRYB103K50
	C	8324,8326,8341-8343	DCH1263
	C	8325,8327,8328,8336	CKSRYB104K50
	C	8333,8334,8389,8501	CCSRCH102J50
	C	8335,8376,8377,8379	CCSRCH100D50
	C	8337,8344,8347-8349	CKSRYB104K50
	C	8339,8360,8402,8513	CKSRYB103K50
	C	8345,8346,8404,8405	DCH1263
	C	8354,8355,8381,8387	CKSRYB105K16
	C	8358,8359	CCSRCH220J50
	C	8378	CCSRCH471J50
	C	8384,8385,8388	CKSRYB473K50
	C	8386	CKSRYB562K50
	C	8390	CKSRYB105K16
	C	8395,8401,8522,8523	CKSRYB104K50
	C	8406,8407,8503,8509	CCSRCH101J50
	C	8409,8414	DCH1263
	C	8418,8520,8521,8613	CEAK101M16
	C	8419,8420	CEAK221M16
	C	8421,8422,8610,8618	CCSRCH331J50
	C	8504,8505	CCSRCH5R0C50
	C	8506,8508	CCSRCH240J50
	C	8507,8510	CCSRCH122J50
	C	8511,8512	CCSRCH470J50
	C	8515,8601	CKSRYB103K50
	C	8602,8604-8606	CKSRYB104K50
	C	8611,8612,8617	CCSRCH100D50
	C	8614	CCSRCH101J50

H COMPOSITE ASSY

Mark	No.	Description	Part No.
SEMICONDUCTORS			
	Q	3601,3604,3608	2SA1576A
	Q	3602,3603,3607	HN1C01FU
MISCELLANEOUS			
	JA	3601-3603 2P PIN JACK	AKB7229
	JA	3605 1P PIN JACK	AKB7231
	CN	3601 20P SOCKET	AKP7249
RESISTORS			
	R	3606,3609,3627	RS1/10SR68R0F
	R	3629-3632	RS1/10SR75R0F
	Other Resistors		RS1/10SR###J
CAPACITORS			
	C	3602,3603,3605,3606	CKSRYB104K50
	C	3607,3619,3620	CCSRCH181J50
	C	3612,3613	CKSRYB104K50
	C	3614,3617	CCSRCH331J50
	C	3615,3616	CKSRYB103K50
	C	3621-3624	CEAK101M16

I MIC HP ASSY

Mark	No.	Description	Part No.
SEMICONDUCTORS			
	IC	3471	NJM4565MD
	Q	3451	DTC124EUA
	Q	3452-3455	2SD2704K
	D	3473-3475	DZ2J051M0
MISCELLANEOUS			
	JA	3471 JACK	VKB1243
	JA	3472 JACK	AKB7219
	JA	3476 HEADPHONE JACK	XKB3066
	KN	3471,3472 EARTH TERMINAL	AKF7002
	CN	3472 CONNECTOR	9604S-15C
RESISTORS			
	R	3456,3459	RS1/4SA0R0J
	R	3495	RS1/10SR75R0F
	R	3498,3499	RS1/8SQ100J
	Other Resistors		RS1/10SR###J
CAPACITORS			
	C	3451,3452	CKSRYB822K50
	C	3457,3475,3479,3494	CCSRCH101J50
	C	3460	CCG1236
	C	3473	CCSRCH471J50
	C	3476,3477	CCSRCH330J50
	C	3478	CEAK100M50
	C	3480	DCH1263
	C	3483,3484	CEAK101M16
	C	3485	CKSRYB105K16
	C	3486,3496	CKSRYB103K50
	C	3488	CKSRYB223K50
	C	3490	CCSRCH331J50

Mark	No.	Description	Part No.

J DISPLAY ASSY

SEMICONDUCTORS

⚠	IC	6002	NJM2878F3-33
	IC	6003	PE5615A
NSP	IC	6111	AYW7395
	Q	6001	2SK2034
	Q	6002-6010,6012	DTC124EUA
	Q	6011	DTA124EUA
	Q	6013	2SA1576A
	D	6001	RB751V-40
	D	6002,6005	DAN217U
	D	6006,6008,6010,6012	SLR343BC4T(JKLM)
	D	6014	SLR343BC4T(JKLM)
	D	6016	1SS355

MISCELLANEOUS

	L	6001 CHIP SOLID INDUCTOR	ATL7002
	KN	6001 FL HOLDER(FE)	VNF1096
	V	6001 FL TUBE DISPLAY	AAV7115
	S	6001-6019 SWITCH	ASG7029
	X	6002 CERAMIC RESONATOR	VSS1142
	CN	6001 39P CONNECTOR	VKN2098
	CN	6003 5P CONNECTOR	VKN1820
	JH	6002 4P CABLE HOLDER	51048-0400
	JH	6003,6004 3P CABLE HOLDER	51048-0300
	JP	6001 HOUSING	ADX7776
	JP	6002 JUMPER WIRE	D20PYY0410E
	JP	6003,6004 JUMPER WIRE	D20PYY0310E
	U	6001 REMOTE RECEIVER UNIT	GP1UE274XKC1

RESISTORS

	All Resistors	RS1/10SR###J

CAPACITORS

	C	6001,6008,6014,6024	CKSRYB103K50
	C	6004	CKSRYB474K16
	C	6005,6045,6063	CCSRCH471J50
	C	6006,6010,6011,6019	CKSRYB104K50
	C	6007,6029	CCSRCH101J50
	C	6009	CKSRYB472K50
	C	6012,6013	CKSRYB473K50
	C	6016,6017,6049	CKSRYB105K16
	C	6018,6034,6038,6042	CCSRCH331J50
	C	6020,6022,6026,6037	CKSRYB104K50
	C	6027,6048	CEAK221M16
	C	6030,6068,6089-6091	CKSRYB103K50
	C	6032,6035,6047,6092	CCSRCH100D50
	C	6039,6043,6044,6065	CKSRYB104K50
	C	6040	CCSRCH330J50
	C	6051,6053	CEAK101M16
	C	6054,6056,6057	CCSRCH221J50
	C	6055,6058	CCSRCH470J50
	C	6059-6061,6064,6067	CCSRCH331J50
	C	6066,6069,6088	CEAK470M50
	C	6071-6086	CCSRCH471J50
	C	6087	CEAK101M35
	C	6093	CCSRCK2R0C50
	C	6094,6096	CCSRCH100D50
	C	6095	CKSRYB103K50
	C	6097,6098	CCSRCH331J50

K VOL ASSY

MISCELLANEOUS

	S	3371 ROTARY ENCODER	ASX7053
	CN	3371 3P JUMPER CONNECTOR	52147-0310

CAPACITORS

	C	3371,3372	CKSRYB103K50

L POWER SW ASSY

SEMICONDUCTORS

	Q	3401	DTC143EUA
	D	3402	SLR343BC4T(JKLM)

MISCELLANEOUS

	S	3401 SWITCH	VSG1024
	CN	3401 4P JUMPER CONNECTOR	52147-0410

RESISTORS

	All Resistors	RS1/10SR###J

CAPACITORS

	C	3401	CCSRCH221J50
	C	3402	CKSRYB104K50

M ENCODER ASSY

MISCELLANEOUS

	S	3501 ROTARY ENCODER	ASX7054
	CN	3501 3P JUMPER CONNECTOR	52147-0310

RESISTORS

	All Resistors	RS1/10SR###J

CAPACITORS

	C	3501,3502	CKSRYB103K50

N IR BUFFER_S ASSY

SEMICONDUCTORS

	IC	6801,6821,6841,6861	UPC4570G2-A
	IC	6881,6901,6921,7451	UPC4570G2-A
	IC	7471	UPC4570G2-A
	IC	7491	TC4053BFN
	Q	6801,6821,6841,6861	2SD2704K
	Q	6881,6901,6921,7451	2SD2704K
	Q	7471	2SD2704K

MISCELLANEOUS

	KN	6801 WRAPPING TERMINAL	CKF1089
	CN	6801 24P SOCKET	AKP7251
	CN	6802,6803 24P PLUG	AKM7173

Mark	No.	Description	Part No.
		RESISTORS	
	R	6801,6802,6807,6808	RS1/10SR8201F
	R	6815	RS1/8SQ204J
	R	6816,6835,6836,6855	RS1/8SQ225J
	R	6821,6822,6827,6828	RS1/10SR8201F
	R	6841,6842,6847,6848	RS1/10SR8201F
	R	6856,6875,6876,6895	RS1/8SQ225J
	R	6861,6862,6867,6868	RS1/10SR8201F
	R	6881,6882,6887,6888	RS1/10SR8201F
	R	6896,6915,6916,6935	RS1/8SQ225J
	R	6901,6902,6907,6908	RS1/10SR8201F
	R	6921,6922,6927,6928	RS1/10SR8201F
	R	6936,7465,7466,7485	RS1/8SQ225J
	R	7451,7452,7457,7458	RS1/10SR8201F
	R	7471,7472,7477,7478	RS1/10SR8201F
	R	7486	RS1/8SQ225J
	R	7491,7492	RS1/8SQ105J
	R	8851-8855,8864,8865	RS1/8SQ0R0J
		Other Resistors	RS1/10SR###J
		CAPACITORS	
	C	6801,6802,6821,6822	CFHXSQ103J16
	C	6807,6827,6847,6867	CEAK220M50
	C	6814,6834,6854,6874	CEAK470M25
	C	6841,6842,6861,6862	CFHXSQ103J16
	C	6881,6882,6901,6902	CFHXSQ103J16
	C	6887,6907,6927,7457	CEAK220M50
	C	6894,6914,6934,7464	CEAK470M25
	C	6921,6922,7451,7452	CFHXSQ103J16
	C	7471,7472,7494,7497	CFHXSQ103J16
	C	7477	CEAK220M50
	C	7484	CEAK470M25
	C	7495	CCSRCH100D50

O BUFFER GND ASSY

MISCELLANEOUS

KN 6961	SCREW PLATE	VNE1948
KN 6962	SCREW PLATE(MTL)	ANG7591

P IR INTERFACE_S ASSY

MISCELLANEOUS

CN 3801,3802	24P SOCKET	AKP7251
CN 3810,3820,3830,3840	5P SOCKET	KP200IB5L
CN 3850,3860,3870,3880	5P SOCKET	KP200IB5L
CN 3890	5P SOCKET	KP200IB5L

Q D-AMP_S ASSY (SC-75)

SEMICONDUCTORS

	IC	4001	BU7262SFVM
	IC	4004	TC74VHC08FK
	IC	4005	TA76L431FB
	IC	4007	BU4094BCFV
⚠	IC	4008	NJM78M05DL1A
⚠	IC	4009	NJM79M05DL1A
⚠	IC	4101,4201,4301,4401	IRS2092SPBF
⚠	IC	4102,4203,4302,4403	NJM2830U1-12
	IC	4204,4404,4604,4704	NJM12904V
⚠	IC	4501,4601,4701,4801	IRS2092SPBF
⚠	IC	4502,4603,4703,4803	NJM2830U1-12
	IC	4804	NJM12904V
⚠	IC	4901	IRS2092SPBF
⚠	IC	4902	NJM2830U1-12
	IC	4905	TC7SET08FUS1
	Q	4000	DTC124EUA
	Q	4001,4020,4026,4030	2SA1576A
	Q	4002,4003,4017,4036	DTC115EUA
	Q	4004,4006,4008,4010	DTA124EUA
	Q	4005,4007,4009,4011	DTC114TUA
	Q	4012,4013,4035	HN1A01FU
	Q	4014,4016,4027-4029	HN1C01FU
	Q	4015,4021-4023,4025	2SC4081
	Q	4018,4031	DTA124EUA
	Q	4019,4032	DTC114TUA
	Q	4024	2SC3906K
	Q	4033,4112,4115,4116	2SC2412K
	Q	4034,4037,4038,4042	2SC4081
⚠	Q	4101,4102,4201,4202	IRF6775MPBF
	Q	4103-4105,4108	2SC4081
	Q	4106,4107,4111,4113	2SA1576A
	Q	4109,4209,4309,4409	2SD2704K
	Q	4110,4210,4310,4410	2SA1514K
	Q	4114,4314,4514	HN1K02FU
	Q	4203-4205,4208	2SC4081
	Q	4206,4207,4211,4213	2SA1576A
⚠	Q	4301,4302,4401,4402	IRF6775MPBF
	Q	4303-4305,4308	2SC4081
	Q	4306,4307,4311,4313	2SA1576A
	Q	4312,4512,4712,4714	2SC2412K
	Q	4403-4405,4408,4414	2SC4081
	Q	4406,4407,4411,4413	2SA1576A
	Q	4415,4503-4505,4508	2SC4081
⚠	Q	4501,4502,4601,4602	IRF6775MPBF
	Q	4506,4507,4511,4513	2SA1576A
	Q	4509,4609,4709,4809	2SD2704K
	Q	4510,4610,4710,4810	2SA1514K
	Q	4603-4605,4608,4612	2SC4081
	Q	4606,4607,4611,4613	2SA1576A
	Q	4614,4703-4705,4708	2SC4081
⚠	Q	4701,4702,4801,4802	IRF6775MPBF
	Q	4706,4707,4711,4713	2SA1576A
	Q	4715,4912,5012,5013	2SC2412K
	Q	4803-4805,4808,4812	2SC4081
	Q	4806,4807,4811,4813	2SA1576A
	Q	4814,4903-4905,4908	2SC4081
⚠	Q	4901,4902	IRF6775MPBF
	Q	4906,4907,4911,4913	2SA1576A
	Q	4909	2SD2704K
	Q	4910	2SA1514K
	Q	5014,5017-5022	2SC4081
	Q	5015,5016	2SC2412K
	D	4005,4016,4022,4023	1SS355
	D	4011,4012	DAN202U
	D	4013,4014,4018,4019	DZ2J240M0

Mark	No.	Description	Part No.
	D	4015,4020	DZ2J270M0
	D	4017,4021	DZ2J180M0
	D	4108,4109,4208,4209	RF101L2S
	D	4117,4217,4317,4417	RF071M2S
	D	4118,4218,4318,4418	CMH07
	D	4119,4219,4319,4419	1SS355
	D	4308,4309,4408,4409	RF101L2S
	D	4508,4509,4608,4609	RF101L2S
	D	4517,4617,4717,4817	RF071M2S
	D	4518,4618,4718,4818	CMH07
	D	4519,4619,4719,4819	1SS355
	D	4708,4709,4808,4809	RF101L2S
	D	4908,4909	RF101L2S
	D	4917,5000	RF071M2S
	D	4918	CMH07
	D	4919	1SS355

MISCELLANEOUS

	L	4100,4200,4300,4400 OTHER COIL	ATH7090
	L	4500,4600,4700,4800 OTHER COIL	ATH7090
	L	4900 OTHER COIL	ATH7090
	JA	4101 SPEAKER TERMINAL 6-P	AKE7107
	JA	4301,4501 SPEAKER TERMINAL 4-P	AKE7109
	JA	4901,5101 SPEAKER TERMINAL 4-P	AKE7109
	KN	4000 WRAPPING TERMINAL	CKF1089
	KN	4100,4200,4300,4400 SCREW PLATE	VNE1948
	KN	4500,4900 SCREW PLATE	VNE1948
	KN	4502,4901 EARTH TERMINAL	AKF7002
	RY	4100,4300,4500,4700 RELAY	XSR3015
	RY	4900,5000 RELAY	XSR3015
	CN	4000 CONNECTOR	9604S-19C
	CN	4002 PLUG(2P)	KM200NA2
	CN	4003 PLUG(4P)	KM200NA4
	CN	4004 PLUG(7P)	KM200NA7
	CN	4100,4200,4300,4400 5P PLUG	KM200IB5
	CN	4500,4600,4700,4800 5P PLUG	KM200IB5
	CN	4900 5P PLUG	KM200IB5

RESISTORS

	R	4042	RS1/8SQ0R0J
	R	4057	RS1/8SQ471J
	R	4060	RS1/10SR5602F
	R	4061	RS1/10SR3302F
	R	4101,4163,4201,4263	RS1/10SR2701F
	R	4103,4162,4203,4262	RS1/4SA103J
	R	4107,4187,4188,4207	ACN7180
	R	4111-4114,4211-4214	RS1/4SA2R2J
	R	4115,4215,4315,4415	ACN7192
	R	4116,4178,4216,4278	ACN7198
	R	4119,4120,4167,4219	RS1/10SR1001F
	R	4122,4123,4222,4223	ACN7196
	R	4127,4227,4327,4427	RS1/4SA104J
	R	4129,4229,4329,4429	RS1/8SQ182J
	R	4130,4134,4230,4234	RS1/8SQ103J
	R	4131,4135,4231,4235	RS1/8SQ752J
	R	4132,4149,4232,4249	RS1/8SQ822J
	R	4133,4177,4233,4277	ACN7197
	R	4136,4236,4336,4436	RS1/8SQ242J
	R	4137,4140,4141,4237	ACN7165

Mark	No.	Description	Part No.
	R	4138,4238,4338,4438	RS1/8SQ4R7J
	R	4139,4239,4339,4439	RS1/8SQ100J
	R	4142,4143,4242,4243	ACN7189
	R	4145,4245,4345,4445	RS1/10SR4701F
	R	4148,4248,4348,4448	RS1/10SR3901F
	R	4150,4250,4350,4450	RS1/10SR2200F
	R	4152,4157,4252,4257	RS1/10SR6802F
	R	4154,4254,4354,4454	ACN7186
	R	4155,4168,4255,4268	RS1/10SR4702F
	R	4156,4256,4356,4456	RS1/10SR8201F
	R	4165,4179,4265,4279	RS1/8SQ124J
	R	4166,4266,4366,4466	RS1/10SR1002F
	R	4169,4269,4369,4469	RS1/10SR3902F
	R	4173,4373,4573,4773	RS1/4SA390J
	R	4174,4374,4574,4774	RS1/4SA470J
	R	4175,4375,4575,4791	RS1/4SA100J
	R	4176,4276,4376,4476	RS1/8SQ102J
⚠	R	4181,4281,4381,4481	NTCG104KF104FB
	R	4186,4195-4198,4286	RS1/8SQR47J
	R	4193,4293,4393,4493	RS1/8SQ1R0J
	R	4220,4267,4319,4320	RS1/10SR1001F
	R	4240,4241,4337,4340	ACN7165
	R	4287,4288,4307,4387	ACN7180
	R	4295-4298,4386	RS1/8SQR47J
	R	4301,4363,4401,4463	RS1/10SR2701F
	R	4303,4362,4403,4462	RS1/4SA103J
	R	4311-4314,4411-4414	RS1/4SA2R2J
	R	4316,4378,4416,4478	ACN7198
	R	4322,4323,4422,4423	ACN7196
	R	4330,4334,4430,4434	RS1/8SQ103J
	R	4331,4335,4431,4435	RS1/8SQ752J
	R	4332,4349,4432,4449	RS1/8SQ822J
	R	4333,4377,4433,4477	ACN7197
	R	4341,4437,4440,4441	ACN7165
	R	4342,4343,4442,4443	ACN7189
	R	4352,4357,4452,4457	RS1/10SR6802F
	R	4355,4368,4455,4468	RS1/10SR4702F
	R	4365,4379,4465,4479	RS1/8SQ124J
	R	4367,4419,4420,4467	RS1/10SR1001F
	R	4388,4407,4487,4488	ACN7180
	R	4395-4398,4486	RS1/8SQR47J
	R	4495-4498,4586	RS1/8SQR47J
	R	4501,4563,4601,4663	RS1/10SR2701F
	R	4503,4562,4603,4662	RS1/4SA103J
	R	4507,4587,4588,4607	ACN7180
	R	4511-4514,4611-4614	RS1/4SA2R2J
	R	4515,4615,4715,4815	ACN7192
	R	4516,4578,4616,4678	ACN7198
	R	4519,4520,4567,4619	RS1/10SR1001F
	R	4522,4523,4622,4623	ACN7196
	R	4527,4627,4727,4827	RS1/4SA104J
	R	4529,4629,4729,4829	RS1/8SQ182J
	R	4530,4534,4630,4634	RS1/8SQ103J
	R	4531,4535,4631,4635	RS1/8SQ752J
	R	4532,4549,4632,4649	RS1/8SQ822J
	R	4533,4577,4633,4677	ACN7197
	R	4536,4636,4736,4836	RS1/8SQ242J
	R	4537,4540,4541,4637	ACN7165
	R	4538,4638,4738,4838	RS1/8SQ4R7J
	R	4539,4639,4739,4839	RS1/8SQ100J

Mark	No.	Description	Part No.
	R	4542,4543,4642,4643	ACN7189
	R	4545,4645,4745,4845	RS1/10SR4701F
	R	4548,4648,4748,4848	RS1/10SR3901F
	R	4550,4650,4750,4850	RS1/10SR2200F
	R	4552,4557,4652,4657	RS1/10SR6802F
	R	4554,4654,4754,4854	ACN7186
	R	4555,4568,4655,4668	RS1/10SR4702F
	R	4556,4656,4756,4856	RS1/10SR8201F
	R	4565,4579,4665,4679	RS1/8SQ124J
	R	4566,4666,4766,4866	RS1/10SR1002F
	R	4569,4669,4769,4869	RS1/10SR3902F
	R	4576,4676,4776,4876	RS1/8SQ102J
⚠	R	4581,4681,4781,4881	NTCG104KF104FB
	R	4593,4693,4793,4893	RS1/8SQ1R0J
	R	4595-4598,4686	RS1/8SQR47J
	R	4620,4667,4719,4720	RS1/10SR1001F
	R	4640,4641,4737,4740	ACN7165
	R	4687,4688,4707,4787	ACN7180
	R	4695-4698,4786	RS1/8SQR47J
	R	4701,4763,4801,4863	RS1/10SR2701F
	R	4703,4762,4803,4862	RS1/4SA103J
	R	4711-4714,4811-4814	RS1/4SA2R2J
	R	4716,4778,4816,4878	ACN7198
	R	4722,4723,4822,4823	ACN7196
	R	4730,4734,4830,4834	RS1/8SQ103J
	R	4731,4735,4831,4835	RS1/8SQ752J
	R	4732,4749,4832,4849	RS1/8SQ822J
	R	4733,4777,4833,4877	ACN7197
	R	4741,4837,4840,4841	ACN7165
	R	4742,4743,4842,4843	ACN7189
	R	4752,4757,4852,4857	RS1/10SR6802F
	R	4755,4768,4855,4868	RS1/10SR4702F
	R	4765,4779,4865,4879	RS1/8SQ124J
	R	4767,4819,4820,4867	RS1/10SR1001F
	R	4788,4807,4887,4888	ACN7180
	R	4795-4798,4886	RS1/8SQR47J
	R	4895-4898,4986	RS1/8SQR47J
	R	4901,4963	RS1/10SR2701F
	R	4903,4962	RS1/4SA103J
	R	4907,4987,4988,5003	ACN7180
	R	4911-4914	RS1/4SA2R2J
	R	4915	ACN7192
	R	4916,4978	ACN7198
	R	4919,4920,4967,5000	RS1/10SR1001F
	R	4922,4923	ACN7196
	R	4927	RS1/4SA104J
	R	4929	RS1/8SQ182J
	R	4930,4934,5029,5030	RS1/8SQ103J
	R	4931,4935	RS1/8SQ752J
	R	4932,4949	RS1/8SQ822J
	R	4933,4977	ACN7197
	R	4936	RS1/8SQ242J
	R	4937,4940,4941	ACN7165
	R	4938	RS1/8SQ4R7J
	R	4939,5105	RS1/8SQ100J
	R	4942,4943	ACN7189
	R	4945	RS1/10SR4701F
	R	4948	RS1/10SR3901F
	R	4950	RS1/10SR2200F
	R	4952,4957	RS1/10SR6802F

Mark	No.	Description	Part No.
	R	4954	ACN7186
	R	4955,4968	RS1/10SR4702F
	R	4956	RS1/10SR8201F
	R	4965,4979	RS1/8SQ124J
	R	4966,5001	RS1/10SR1002F
	R	4969	RS1/10SR3902F
	R	4973,5173	RS1/4SA390J
	R	4974,5174	RS1/4SA470J
	R	4975,5095,5175	RS1/4SA100J
	R	4976	RS1/8SQ102J
⚠	R	4981	NTCG104KF104FB
	R	4993	RS1/8SQ1R0J
	R	4995-4998	RS1/8SQR47J
	R	5004,5026,5059,5159	ACN7180
	R	5006-5009	RS1/4SA105J
	R	5011,5018	RS1/8SQ563J
	R	5012,5016,5020,5021	RS1/8SQ104J
	R	5013,5019,5111,5112	RS1/8SQ224J
	R	5014,5022	RS1/8SQ683J
	R	5015,5023,5113,5114	RS1/8SQ223J
	R	5017,5025	RS1/8SQ473J
	R	5024,5110,5115,5122	RS1/8SQ104J
	R	5039,5040,5099,5100	RS1/8SQ222J
	R	5062,5063	RS1/4SA222J
	R	5066,5068	RS1/8SQ331J
	R	5101,5102	RS1/4SA331J
	R	5107	RS1/4SA224J
	R	5116,5117,5123,5124	RS1/8SQ224J
	R	5118,5119,5126,5127	RS1/8SQ223J
	R	5128,5133,5142,5151	RS1/8SQ104J
	R	5130,5131,5135,5136	RS1/8SQ224J
	R	5132,5137,5138	RS1/8SQ223J
	R	5143,5144,5152,5153	RS1/8SQ224J
	R	5157,5187	RS1/8SQ104J
	R	5158,5160,5188,5189	RS1/8SQ224J
		Other Resistors	RS1/10SR###J

CAPACITORS

	C	4006,4086,4258,4458	CKSRYB103K50
	C	4007,4011,4013	CCSRCH331J50
	C	4008,4010,4036,4052	ACH7321
	C	4009,4014,4016,4017	CCSRCH101J50
	C	4022,4026,4035,4040	CKSRYB104K50
	C	4023	CEHVW100M16
	C	4024,4065,4066,4069	CEAK101M16
	C	4044	CCSRCH221J50
	C	4046-4048,4050,4051	CCSRCH331J50
	C	4053	ACH7321
	C	4057,4058	ACH7305
	C	4063	ACH7311
	C	4067,4068,4073,4074	CFHXSQ103J16
	C	4070,4166,4167,4266	CEAK101M16
	C	4071,4072	CEAK471M16
	C	4077	CCSRCH100D50
	C	4078,4079,4180,4182	ACE7090
	C	4080,4098,4099,4105	CFHXSQ102J50
	C	4087,4097	CCSRCH101J50
	C	4100,4200,4300,4400	CFTLA104J2A

Mark	No.	Description	Part No.
	C	4101,4201,4301,4401	CFTLA474J2A
	C	4108,4109,4208,4209	CEAK471M16-P35
	C	4110,4310,4510,4710	CEAK100M50
	C	4111,4121,4122,4211	CFHXSQ103J16
	C	4112,4212,4312,4412	CCG1255
	C	4113,4213,4313,4413	CKSRYB104K50
	C	4119,4219,4319,4419	ACG7110
	C	4120,4123,4205,4220	CFHXSQ102J50
	C	4125,4225,4325,4425	RS1/8SQ105J
	C	4126,4226,4326,4426	RS1/8SQ242J
	C	4134,4136,4234,4236	ACH7376
	C	4149,4150,4249,4250	ACH7359
	C	4156,4256,4356,4456	CKSRYB473K50
	C	4159,4160,4259,4260	ACG7107
	C	4161,4175,4261,4275	ACG7105
	C	4221,4222,4311,4321	CFHXSQ103J16
	C	4223,4305,4320,4323	CFHXSQ102J50
	C	4267,4366,4367,4466	CEAK101M16
	C	4280,4282,4380,4382	ACE7090
	C	4308,4309,4408,4409	CEAK471M16-P35
	C	4322,4411,4421,4422	CFHXSQ103J16
	C	4334,4336,4434,4436	ACH7376
	C	4349,4350,4449,4450	ACH7359
	C	4359,4360,4459,4460	ACG7107
	C	4361,4375,4461,4475	ACG7105
	C	4405,4420,4423,4505	CFHXSQ102J50
	C	4467,4566,4567,4666	CEAK101M16
	C	4480,4482,4580,4582	ACE7090
	C	4500,4600,4700,4800	CFTLA104J2A
	C	4501,4601,4701,4801	CFTLA474J2A
	C	4508,4509,4608,4609	CEAK471M16-P35
	C	4511,4521,4522,4611	CFHXSQ103J16
	C	4512,4612,4712,4812	CCG1255
	C	4513,4613,4713,4813	CKSRYB104K50
	C	4519,4619,4719,4819	ACG7110
	C	4520,4523,4605,4620	CFHXSQ102J50
	C	4525,4625,4725,4825	RS1/8SQ105J
	C	4526,4626,4726,4826	RS1/8SQ242J
	C	4534,4536,4634,4636	ACH7376
	C	4549,4550,4649,4650	ACH7359
	C	4556,4656,4756,4856	CKSRYB473K50
	C	4559,4560,4659,4660	ACG7107
	C	4561,4575,4661,4675	ACG7105
	C	4621,4622,4711,4721	CFHXSQ103J16
	C	4623,4705,4720,4723	CFHXSQ102J50
	C	4658,4758,4858	CKSRYB103K50
	C	4667,4766,4767,4866	CEAK101M16
	C	4680,4682,4780,4782	ACE7090
	C	4708,4709,4808,4809	CEAK471M16-P35
	C	4722,4811,4821,4822	CFHXSQ103J16
	C	4734,4736,4834,4836	ACH7376
	C	4749,4750,4849,4850	ACH7359
	C	4759,4760,4859,4860	ACG7107
	C	4761,4775,4861,4875	ACG7105
	C	4805,4820,4823,4905	CFHXSQ102J50
	C	4867,4966,4967	CEAK101M16
	C	4880,4882,4980,4982	ACE7090
	C	4900	CFTLA104J2A
	C	4901	CFTLA474J2A
	C	4908,4909	CEAK471M16-P35

Mark	No.	Description	Part No.
	C	4910,5110	CEAK100M50
	C	4911,4921,4922	CFHXSQ103J16
	C	4912	CCG1255
	C	4913	CKSRYB104K50
	C	4919	ACG7110
	C	4920,4923,5000	CFHXSQ102J50
	C	4925	RS1/8SQ105J
	C	4926	RS1/8SQ242J
	C	4934,4936	ACH7376
	C	4949,4950	ACH7359
	C	4956	CKSRYB473K50
	C	4959,4960	ACG7107
	C	4961,4975	ACG7105
	C	5080,5082,5180,5182	ACE7090

Q D-AMP_S ASSY (SC-LX57)

SEMICONDUCTORS

Mark	No.	Description	Part No.
	IC	4001	BU7262SFVM
	IC	4004	TC74VHC08FK
	IC	4005	TA76L431FB
	IC	4007	BU4094BCFV
⚠	IC	4008	NJM78M05DL1A
⚠	IC	4009	NJM79M05DL1A
⚠	IC	4101,4201,4301,4401	IRS2092SPBF
⚠	IC	4102,4203,4302,4403	NJM2830U1-12
	IC	4204,4404,4604,4704	NJM2732V
⚠	IC	4501,4601,4701,4801	IRS2092SPBF
⚠	IC	4502,4603,4703,4803	NJM2830U1-12
	IC	4804	NJM2732V
⚠	IC	4901	IRS2092SPBF
⚠	IC	4902	NJM2830U1-12
	IC	4905	TC7SET08FUS1
	Q	4002,4003,4017,4036	DTC115EUA
	Q	4004,4006,4008,4010	DTA124EUA
	Q	4005,4007,4009,4011	DTC114TUA
	Q	4012,4013,4035	HN1A01FU
	Q	4014,4016,4027-4029	HN1C01FU
	Q	4015,4021-4023,4025	2SC4081
	Q	4018,4031	DTA124EUA
	Q	4019,4032	DTC114TUA
	Q	4020,4026,4030,4106	2SA1576A
	Q	4024	2SC3906K
	Q	4033,4112,4115,4116	2SC2412K
	Q	4034,4037,4038,4042	2SC4081
⚠	Q	4101,4102,4201,4202	IRF6775MPBF
	Q	4104,4105,4108,4204	2SC4081
	Q	4107,4111,4113,4206	2SA1576A
	Q	4109,4209,4309,4409	2SD2704K
	Q	4110,4210,4310,4410	2SA1514K
	Q	4114,4314,4514	HN1K02FU
	Q	4205,4208,4304,4305	2SC4081
	Q	4207,4211,4213,4306	2SA1576A
⚠	Q	4301,4302,4401,4402	IRF6775MPBF
	Q	4307,4311,4313,4406	2SA1576A
	Q	4308,4404,4405,4408	2SC4081
	Q	4312,4414,4415,4512	2SC2412K
	Q	4407,4411,4413,4506	2SA1576A

Mark	No.	Description	Part No.
⚠	Q	4501,4502,4601,4602	IRF6775MPBF
	Q	4504,4505,4508,4604	2SC4081
	Q	4507,4511,4513,4606	2SA1576A
	Q	4509,4609,4709,4809	2SD2704K
	Q	4510,4610,4710,4810	2SA1514K
	Q	4605,4608,4704,4705	2SC4081
	Q	4607,4611,4613,4706	2SA1576A
	Q	4612,4614,4712,4714	2SC2412K
⚠	Q	4701,4702,4801,4802	IRF6775MPBF
	Q	4707,4711,4713,4806	2SA1576A
	Q	4708,4804,4805,4808	2SC4081
	Q	4715,4812,4814,4912	2SC2412K
	Q	4807,4811,4813,4906	2SA1576A
⚠	Q	4901,4902	IRF6775MPBF
	Q	4904,4905,4908,5014	2SC4081
	Q	4907,4911,4913	2SA1576A
	Q	4909	2SD2704K
	Q	4910	2SA1514K
	Q	5012,5013,5015-5022	2SC2412K
	D	4005,4016,4022,4023	1SS355
	D	4011,4012	DAN202U
	D	4013,4014,4018,4019	DZ2J240M0
	D	4015,4020	DZ2J270M0
	D	4017,4021	DZ2J180M0
	D	4101,4119,4201,4219	1SS355
	D	4108,4109,4208,4209	RF101L2S
	D	4117,4217,4317,4417	RF071M2S
	D	4118,4218,4318,4418	CMH07
	D	4301,4319,4401,4419	1SS355
	D	4308,4309,4408,4409	RF101L2S
	D	4501,4519,4601,4619	1SS355
	D	4508,4509,4608,4609	RF101L2S
	D	4517,4617,4717,4817	RF071M2S
	D	4518,4618,4718,4818	CMH07
	D	4701,4719,4801,4819	1SS355
	D	4708,4709,4808,4809	RF101L2S
	D	4901,4919	1SS355
	D	4908,4909	RF101L2S
	D	4917,5000	RF071M2S
	D	4918	CMH07

MISCELLANEOUS

	L	4100,4200,4300,4400 OTHER COIL	ATH7090
	L	4500,4600,4700,4800 OTHER COIL	ATH7090
	L	4900 OTHER COIL	ATH7090
	JA	4101 SPEAKER TERMINAL 6-P	AKE7107
	JA	4301,4501 SPEAKER TERMINAL 4-P	AKE7109
	JA	4901,5101 SPEAKER TERMINAL 4-P	AKE7109
	KN	4000 WRAPPING TERMINAL	CKF1089
	KN	4100,4200,4300,4400 SCREW PLATE	VNE1948
	KN	4500,4900 SCREW PLATE	VNE1948
	KN	4502,4901 EARTH TERMINAL	AKF7002
	RY	4100,4300,4500,4700 RELAY	XSR3015
	RY	4900,5000 RELAY	XSR3015
	CN	4000 CONNECTOR	9604S-19C
	CN	4002 PLUG(2P)	KM200NA2
	CN	4003 PLUG(4P)	KM200NA4
	CN	4004 PLUG(7P)	KM200NA7
	CN	4100,4200,4300,4400 5P PLUG	KM200IB5
	CN	4500,4600,4700,4800 5P PLUG	KM200IB5
	CN	4900 5P PLUG	KM200IB5

Mark	No.	Description	Part No.

RESISTORS

	R	4042	RS1/8SQ0R0J
	R	4057	RS1/8SQ471J
	R	4060	RS1/10SR5602F
	R	4061	RS1/10SR3302F
	R	4101,4163,4201,4263	RS1/10SR2701F
	R	4103,4203,4303,4403	RS1/4SA103J
	R	4107,4187,4188,4207	ACN7180
	R	4111-4114,4211-4214	RS1/4SA2R2J
	R	4115,4215,4315,4415	ACN7192
	R	4116,4178,4216,4278	ACN7198
	R	4120,4167,4220,4267	RS1/10SR1001F
	R	4122,4123,4222,4223	ACN7196
	R	4125,4126,4225,4226	ACN7094
	R	4127,4227,4327,4427	RS1/4SA104J
	R	4129,4229,4329,4429	RS1/8SQ182J
	R	4130,4134,4230,4234	RS1/8SQ103J
	R	4131,4135,4231,4235	RS1/8SQ752J
	R	4132,4232,4332,4432	RS1/8SQ822J
	R	4133,4177,4233,4277	ACN7197
	R	4136,4236,4336,4436	RS1/8SQ242J
	R	4137,4141,4237,4241	ACN7165
	R	4138,4238,4338,4438	RS1/8SQ4R7J
	R	4139,4239,4339,4439	RS1/8SQ100J
	R	4140,4174,4240,4340	RS1/4SA470J
	R	4142,4143,4242,4243	ACN7189
	R	4145,4245,4345,4445	RS1/10SR4701F
	R	4148,4248,4348,4448	RS1/10SR3901F
	R	4149,4249,4349,4449	RS1/8SQ153J
	R	4150,4250,4350,4450	RS1/10SR2200F
	R	4152,4157,4252,4257	RS1/10SR6802F
	R	4154,4254,4354,4454	ACN7186
	R	4155,4168,4255,4268	RS1/10SR4702F
	R	4156,4256,4356,4456	RS1/10SR8201F
	R	4162,4262,4362,4462	RS1/4SA123J
	R	4165,4179,4265,4279	RS1/8SQ124J
	R	4166,4266,4366,4466	RS1/10SR1002F
	R	4169,4269,4369,4469	RS1/10SR3902F
	R	4173,4373,4573,4773	RS1/4SA390J
	R	4175,4375,4575,4791	RS1/4SA100J
	R	4176,4276,4376,4476	RS1/8SQ102J
⚠	R	4181,4281,4381,4481	NTCG104KF104FB
	R	4186,4195-4198,4286	RS1/8SQR47J
	R	4193,4293,4393,4493	RS1/8SQ1R0J
	R	4287,4288,4307,4387	ACN7180
	R	4295-4298,4386	RS1/8SQR47J
	R	4301,4363,4401,4463	RS1/10SR2701F
	R	4311-4314,4411-4414	RS1/4SA2R2J
	R	4316,4378,4416,4478	ACN7198
	R	4320,4367,4420,4467	RS1/10SR1001F
	R	4322,4323,4422,4423	ACN7196
	R	4325,4326,4425,4426	ACN7094
	R	4330,4334,4430,4434	RS1/8SQ103J
	R	4331,4335,4431,4435	RS1/8SQ752J
	R	4333,4377,4433,4477	ACN7197
	R	4337,4341,4437,4441	ACN7165

Mark	No.	Description	Part No.
	R	4342,4343,4442,4443	ACN7189
	R	4352,4357,4452,4457	RS1/10SR6802F
	R	4355,4368,4455,4468	RS1/10SR4702F
	R	4365,4379,4465,4479	RS1/8SQ124J
	R	4374,4440,4540,4574	RS1/4SA470J
	R	4388,4407,4487,4488	ACN7180
	R	4395-4398,4486	RS1/8SQR47J
	R	4495-4498,4586	RS1/8SQR47J
	R	4501,4563,4601,4663	RS1/10SR2701F
	R	4503,4603,4703,4803	RS1/4SA103J
	R	4507,4587,4588,4607	ACN7180
	R	4511-4514,4611-4614	RS1/4SA2R2J
	R	4515,4615,4715,4815	ACN7192
	R	4516,4578,4616,4678	ACN7198
	R	4520,4567,4620,4667	RS1/10SR1001F
	R	4522,4523,4622,4623	ACN7196
	R	4525,4526,4625,4626	ACN7094
	R	4527,4627,4727,4827	RS1/4SA104J
	R	4529,4629,4729,4829	RS1/8SQ182J
	R	4530,4534,4630,4634	RS1/8SQ103J
	R	4531,4535,4631,4635	RS1/8SQ752J
	R	4532,4632,4732,4832	RS1/8SQ822J
	R	4533,4577,4633,4677	ACN7197
	R	4536,4636,4736,4836	RS1/8SQ242J
	R	4537,4541,4637,4641	ACN7165
	R	4538,4638,4738,4838	RS1/8SQ4R7J
	R	4539,4639,4739,4839	RS1/8SQ100J
	R	4542,4543,4642,4643	ACN7189
	R	4545,4645,4745,4845	RS1/10SR4701F
	R	4548,4648,4748,4848	RS1/10SR3901F
	R	4549,4649,4749,4849	RS1/8SQ153J
	R	4550,4650,4750,4850	RS1/10SR2200F
	R	4552,4557,4652,4657	RS1/10SR6802F
	R	4554,4654,4754,4854	ACN7186
	R	4555,4568,4655,4668	RS1/10SR4702F
	R	4556,4656,4756,4856	RS1/10SR8201F
	R	4562,4662,4762,4862	RS1/4SA123J
	R	4565,4579,4665,4679	RS1/8SQ124J
	R	4566,4666,4766,4866	RS1/10SR1002F
	R	4569,4669,4769,4869	RS1/10SR3902F
	R	4576,4676,4776,4876	RS1/8SQ102J
⚠	R	4581,4681,4781,4881	NTCG104KF104FB
	R	4593,4693,4793,4893	RS1/8SQ1R0J
	R	4595-4598,4686	RS1/8SQR47J
	R	4640,4740,4774,4840	RS1/4SA470J
	R	4687,4688,4707,4787	ACN7180
	R	4695-4698,4786	RS1/8SQR47J
	R	4701,4763,4801,4863	RS1/10SR2701F
	R	4711-4714,4811-4814	RS1/4SA2R2J
	R	4716,4778,4816,4878	ACN7198
	R	4720,4767,4820,4867	RS1/10SR1001F
	R	4722,4723,4822,4823	ACN7196
	R	4725,4726,4825,4826	ACN7094
	R	4730,4734,4830,4834	RS1/8SQ103J
	R	4731,4735,4831,4835	RS1/8SQ752J
	R	4733,4777,4833,4877	ACN7197
	R	4737,4741,4837,4841	ACN7165
	R	4742,4743,4842,4843	ACN7189
	R	4752,4757,4852,4857	RS1/10SR6802F
	R	4755,4768,4855,4868	RS1/10SR4702F

Mark	No.	Description	Part No.
	R	4765,4779,4865,4879	RS1/8SQ124J
	R	4788,4807,4887,4888	ACN7180
	R	4795-4798,4886	RS1/8SQR47J
	R	4895-4898,4986	RS1/8SQR47J
	R	4901,4963	RS1/10SR2701F
	R	4903	RS1/4SA103J
	R	4907,4987,4988	ACN7180
	R	4911-4914	RS1/4SA2R2J
	R	4915	ACN7192
	R	4916,4978	ACN7198
	R	4920,4967,5000	RS1/10SR1001F
	R	4922,4923	ACN7196
	R	4925,4926	ACN7094
	R	4927	RS1/4SA104J
	R	4929	RS1/8SQ182J
	R	4930,4934,5029,5030	RS1/8SQ103J
	R	4931,4935	RS1/8SQ752J
	R	4932	RS1/8SQ822J
	R	4933,4977	ACN7197
	R	4936	RS1/8SQ242J
	R	4937,4941	ACN7165
	R	4938	RS1/8SQ4R7J
	R	4939,5105	RS1/8SQ100J
	R	4940,4974,5174	RS1/4SA470J
	R	4942,4943	ACN7189
	R	4945	RS1/10SR4701F
	R	4948	RS1/10SR3901F
	R	4949	RS1/8SQ153J
	R	4950	RS1/10SR2200F
	R	4952,4957	RS1/10SR6802F
	R	4954	ACN7186
	R	4955,4968	RS1/10SR4702F
	R	4956	RS1/10SR8201F
	R	4962	RS1/4SA123J
	R	4965,4979	RS1/8SQ124J
	R	4966,5001	RS1/10SR1002F
	R	4969	RS1/10SR3902F
	R	4973,5173	RS1/4SA390J
	R	4975,5095,5175	RS1/4SA100J
	R	4976	RS1/8SQ102J
⚠	R	4981	NTCG104KF104FB
	R	4993	RS1/8SQ1R0J
	R	4995-4998	RS1/8SQR47J
	R	5003-5005,5026,5059	ACN7180
	R	5006-5010,5096	RS1/4SA105J
	R	5011,5018	RS1/8SQ563J
	R	5012,5016,5020,5021	RS1/8SQ104J
	R	5013,5019,5111,5112	RS1/8SQ224J
	R	5014,5022	RS1/8SQ683J
	R	5015,5023	RS1/8SQ223J
	R	5017,5025,5113,5114	RS1/8SQ473J
	R	5024,5110,5115,5122	RS1/8SQ104J
	R	5039,5040,5099,5100	RS1/8SQ222J
	R	5062,5063	RS1/4SA222J
	R	5066,5068	RS1/8SQ331J
	R	5101,5102	RS1/4SA331J
	R	5107	RS1/4SA224J
	R	5116,5117,5123,5124	RS1/8SQ224J
	R	5118,5119,5126,5127	RS1/8SQ473J
	R	5128,5133,5142,5151	RS1/8SQ104J

Mark	No.	Description	Part No.
	R	5130,5131,5135,5136	RS1/8SQ224J
	R	5132,5137,5138	RS1/8SQ473J
	R	5143,5144,5152,5153	RS1/8SQ224J
	R	5157,5187	RS1/8SQ104J
	R	5158,5160,5188,5189	RS1/8SQ224J
	R	5159	ACN7180
	Other Resistors		RS1/10SR###J

CAPACITORS

	C	4006,4258,4458,4658	CKSRYB103K50
	C	4007,4011,4013,4046	CCSRCH331J50
	C	4008,4010,4036,4052	ACH7321
	C	4009,4014,4016,4017	CCSRCH101J50
	C	4022	CFHXSR102J16
	C	4023,5184,5185	CEHVW100M16
	C	4024,4065,4066,4069	CEAK101M16
	C	4026,4067,4068,4073	CFHXSQ103J16
	C	4040	CCH1814
	C	4044,4048	CCSRCH221J50
	C	4047,4050,4051	CCSRCH331J50
	C	4053	ACH7321
	C	4057,4058	ACH7305
	C	4070,4166,4167,4266	CEAK101M16
	C	4071,4072	CEAK471M16
	C	4074,4111,4121,4122	CFHXSQ103J16
	C	4077	CCSRCH470J50
	C	4078,4079,4180,4182	ACE7090
	C	4084	ACE7082
	C	4097	CCSRCH101J50
	C	4098,4099,4105,4120	CFHXSQ102J50
	C	4100,4200,4300,4400	CFTLA104J2A
	C	4101,4201,4301,4401	CFTLA474J2A
	C	4108,4109,4208,4209	CEAK471M16-P35
	C	4110,4310,4510,4710	CEAK100M50
	C	4112,4212,4312,4412	CCG1255
	C	4113,4213,4313,4413	CKSRYB104K50
	C	4119,4219,4319,4419	ACG7110
	C	4123,4205,4220,4223	CFHXSQ102J50
	C	4125,4225,4325,4425	RS1/8SQ105J
	C	4126,4226,4326,4426	RS1/8SQ242J
	C	4134,4136,4234,4236	ACH7376
	C	4149,4150,4249,4250	ACH7359
	C	4156,4256,4356,4456	CKSRYB473K50
	C	4159,4160,4259,4260	ACG7107
	C	4161,4175,4261,4275	ACG7105
	C	4211,4221,4222,4311	CFHXSQ103J16
	C	4267,4366,4367,4466	CEAK101M16
	C	4280,4282,4380,4382	ACE7090
	C	4305,4320,4323,4405	CFHXSQ102J50
	C	4308,4309,4408,4409	CEAK471M16-P35
	C	4321,4322,4411,4421	CFHXSQ103J16
	C	4334,4336,4434,4436	ACH7376
	C	4349,4350,4449,4450	ACH7359
	C	4359,4360,4459,4460	ACG7107
	C	4361,4375,4461,4475	ACG7105
	C	4420,4423,4505,4520	CFHXSQ102J50
	C	4422,4511,4521,4522	CFHXSQ103J16
	C	4467,4566,4567,4666	CEAK101M16
	C	4480,4482,4580,4582	ACE7090
	C	4500,4600,4700,4800	CFTLA104J2A
	C	4501,4601,4701,4801	CFTLA474J2A
	C	4508,4509,4608,4609	CEAK471M16-P35
	C	4512,4612,4712,4812	CCG1255
	C	4513,4613,4713,4813	CKSRYB104K50
	C	4519,4619,4719,4819	ACG7110
	C	4523,4605,4620,4623	CFHXSQ102J50
	C	4525,4625,4725,4825	RS1/8SQ105J
	C	4526,4626,4726,4826	RS1/8SQ242J
	C	4534,4536,4634,4636	ACH7376
	C	4549,4550,4649,4650	ACH7359
	C	4556,4656,4756,4856	CKSRYB473K50
	C	4559,4560,4659,4660	ACG7107
	C	4561,4575,4661,4675	ACG7105
	C	4611,4621,4622,4711	CFHXSQ103J16
	C	4667,4766,4767,4866	CEAK101M16
	C	4680,4682,4780,4782	ACE7090
	C	4705,4720,4723,4805	CFHXSQ102J50
	C	4708,4709,4808,4809	CEAK471M16-P35
	C	4721,4722,4811,4821	CFHXSQ103J16
	C	4734,4736,4834,4836	ACH7376
	C	4749,4750,4849,4850	ACH7359
	C	4758,4858	CKSRYB103K50
	C	4759,4760,4859,4860	ACG7107
	C	4761,4775,4861,4875	ACG7105
	C	4820,4823,4905,4920	CFHXSQ102J50
	C	4822,4911,4921,4922	CFHXSQ103J16
	C	4867,4966,4967	CEAK101M16
	C	4880,4882,4980,4982	ACE7090
	C	4900	CFTLA104J2A
	C	4901	CFTLA474J2A
	C	4908,4909	CEAK471M16-P35
	C	4910,5110	CEAK100M50
	C	4912	CCG1255
	C	4913	CKSRYB104K50
	C	4919	ACG7110
	C	4923,5000	CFHXSQ102J50
	C	4925	RS1/8SQ105J
	C	4926	RS1/8SQ242J
	C	4934,4936	ACH7376
	C	4949,4950	ACH7359
	C	4956	CKSRYB473K50
	C	4959,4960	ACG7107
	C	4961,4975	ACG7105
	C	5080,5082,5180,5182	ACE7090
	C	5186	CFHXSQ103J16

R PRIMARY ASSY

SEMICONDUCTORS

⚠	IC	1	STR2A153
⚠	IC	52	NJM1431AF
	Q	71	2SD2704K
⚠	D	1	D2SB60A
⚠	D	2,5	SARS01LF-F7

Mark	No.	Description	Part No.
⚠	D 3		SJPL-D2
	D 4		KDZ36B
⚠	D 50		FMEN-220A
	D 71,72		1SS355

MISCELLANEOUS

⚠	L 1	LINE FILTER	ATF7046
	L 51	COIL	ATH7080
⚠	L 71	LINE FILTER	XTF3004
	H 1,2,71,72	FUSE CLIP	AKR1004
⚠	JA 71	AC INLET ASSY	ADX7513
	KN 1,2	SCREW PLATE	VNE1948
	KN 50,52	EARTH TERMINAL	AKF7002
⚠	RY 71	POWER RELAY	ASR7034
⚠	T 1	POWER TRANSFORMER	ATK7006
⚠	CN 81	CONNECTOR	B2P3-VH
	1	HEAT SINK(AL)	ANH7224
	2	SCREW	BBZ30P080FCC
	JP 51	HOUSING	ADX7812
⚠	PC 1	PHOTO COUPLER	TLP781(GR)

RESISTORS

	R 1	RS1LMF680J
	R 2	ACN7200
	R 3	RS1LMFR68J
	R 5	RS1/8SQ120J
	R 6	RS1/8SQ471J
⚠	R 9-11	ACN7173
	R 53	RS1/10SR3001F
	R 54	RS1/10SR7501F
	R 56	RS1/10SR8201F
	R 57	ACN7180
	R 59	RS1/8SQ365J
	R 74	RS1/8SQ105J
	Other Resistors	RS1/10SR###J

CAPACITORS

⚠	C 1	ACE7071
	C 3	ACH7342
	C 4	ACE7095
	C 5	ACH7385
	C 6	ACG7112
⚠	C 12,21	VCG1046
	C 52	BCH1044
	C 53,56	CKSRYB104K50
	C 55	CCSRCH331J50
	C 58	ACH7369
	C 61	CCSRCH100D50
⚠	C 73	XCG3010
	C 74,75	CCSRCH220J50

S A-REG_S ASSY

SEMICONDUCTORS

⚠	IC 7501	NJM78M12FA
⚠	IC 7502	NJM79M12FA
⚠	IC 7521	NJM78M06FA
⚠	D 7501-7504	1SR154-400
	D 7506,7507	1SS355

Mark	No.	Description	Part No.

MISCELLANEOUS

H	7501-7504	FUSE CLIP
CN	7501	5P TOP POST
CN	7502	L-PLUG(5P)
JH	7501,7502	PCB BINDER

RESISTORS

R	7515	RS3LMF180J
R	7516	RS3LMF220J
	Other Resistors	RS1/8SQ###J

CAPACITORS

C	7503	CEAK332M25
C	7504	CFTLA394J50
C	7511	CEAK222M25
C	7515,7516	CEAK221M35
C	7523	CEAK101M35

T IR REG_S ASSY

SEMICONDUCTORS

⚠	IC 7241	NJM78M15FA
⚠	IC 7251	NJM78M12FA
⚠	IC 7252	NJM79M12FA
⚠	IC 7271	NJM78M08FA
⚠	IC 7272	NJM79M08FA
	Q 7203,7204,7207,7221	DTC124EUA
	Q 7205,7206,7224	DTA124EUA
⚠	Q 7211	2SD2400A
⚠	Q 7212	2SB1569A
	Q 7222	DTA143EUA
	Q 7223,7225,7226	DTC124EUA
	D 7200,7219	1SS355
	D 7213,7214	DZ2J075M0
	D 7215,7216	1SR154-400
⚠	D 7241-7244,7251-7254	1SR154-400
⚠	D 7271-7274	1SR154-400
⚠	D 7400,7401	LN6SB60-4003

MISCELLANEOUS

H	7201-7204,7241,7242	FUSE CLIP AKR1004
H	7251-7254	FUSE CLIP AKR1004
CN	7201	8P TOP POST B8B-EH
CN	7241	PLUG(2P) KM200NA2
CN	7251	PLUG(7P) KM200NA7
CN	7271	PLUG(4P) KM200NA4
CN	7281	CONNECTOR CKS3368
CN	7400	PLUG CKS-556
	7400,7401	HEAT SINK ANH7250
	7402,7403	SCREW IBZ30P080FCC
JH	7251-7254	PCB BINDER AEF7008
JP	7291	HOUSING ADX7778

RESISTORS

R	7211,7213	RD1/4MUF102J
R	7245,7259,7273,7274	RS1/4SA105J
R	7255	RS1/8SQ4R7J
R	7256	RS1/8SQ3R3J
R	7258	RS1/4SA824J

Mark	No.	Description	Part No.
	R	7260	RS1/8SQ105J
	R	7272,7403,7404	ACN7180
	R	7275-7278	RS1/8SQ223J
	R	7400	RS1/4SA913J
	R	7401	RS1/4SA683J
	R	7402	RD1/4MUF100J
	R	7405,7406	RS1/4SA105J
		Other Resistors	RS1/10SR###J

CAPACITORS

	C	7203,7204	CCSRCH331J50
	C	7213,7214	CEAK221M10
	C	7215,7219	CEAK100M50
	C	7221,7246	CEAK470M25
	C	7240,7250	CFTLA394J50
	C	7241	CEAK222M35
	C	7251,7252	CEAK222M25
	C	7255,7256	CEAK221M35
	C	7270	CFTLA474J2A
	C	7271,7272	CEAK222M16
	C	7275,7276	CEAK221M16
	C	7292,7293	CEAK471M16
	C	7400,7401	ACH7258
	C	7402,7403	CFTLA104J2A

U V-REG_S ASSY

SEMICONDUCTORS

⚠	IC	7551	NJM78M12FA
	IC	7901	S-80848CNMC-B89
	Q	7161	2SC4081
	Q	7901	2SA1037K
	D	7161,7162,7556,7902	1SS355
⚠	D	7551,7554,7555	1SR154-400
⚠	D	7557-7559	1SR154-400
	D	7560	D3SBA60(B)
	D	7561,7562,7564	DZ2J051M0
	D	7563	PTZ22(B)
	D	7901,7903	DAN202U

MISCELLANEOUS

	H	7551-7554 FUSE CLIP	AKR1004
	CN	7551 5P TOP POST	B5B-EH
	CN	7552,7553 PLUG(7P)	KM200NA7
	CN	7554 PLUG(4P)	KM200NA4
	CN	7662 B TO B 19PIN JACK	AKN7071
	CN	7663 CONNECTOR	9604S-15C
	CN	7902,7903 39P CONNECTOR	VKN2097
		7551 SCREW	BBZ30P080FCC
		7552 HEAT SINK	ANH7251
	JH	7901,7903,7904 PCB BINDER	AEF7008

RESISTORS

	R	7171	RS1/8SQ0R0J
⚠	R	7552	RD1/4MUF4R7J
⚠	R	7555	RD1/4MUF391J
	R	7558	RS1/8SQ225J
	R	7903,7907	RS1/8SQ105J
		Other Resistors	RS1/10SR###J

Mark	No.	Description	Part No.

CAPACITORS

	C	7554	CEAK471M35
	C	7555	CEAK100M50
	C	7557	CEAK102M35
	C	7559,7560	CFTLA104J50
	C	7561	CEANP101M35
	C	7563	CEAK221M35
	C	7566	CEAK101M35
	C	7568,7582,7928	CCSRCH101J50
	C	7569	CKSRYB103K50
	C	7571	CEAK470M50
	C	7572	CEAK101M16
	C	7573	CEAK472M16
	C	7574	CEAK222M16
	C	7918,7920,7921,7924	CCSRCH100D50
	C	7927	CKSRYB105K16
	C	7933,7939	CCSRCH100D50

V VREG CHILD_S ASSY

SEMICONDUCTORS

⚠	IC	8701	NJM78M05FA
⚠	IC	8702	NJM79M05FA
	D	8702,8703	1SS355

MISCELLANEOUS

	JP	8701 HOUSING	ADX7783

CAPACITORS

	C	8701,8702	CKSRYB103K50
	C	8703,8704	CEAK101M16

W CONNECT_S ASSY

MISCELLANEOUS

	CN	7951 B TO B CONNECTOR	AKM7225
	CN	7952 B TO B CONNECTOR	AKM7222
	CN	7953 B TO B CONNECTOR	AKN7155
	CN	7954 B TO B CONNECTOR	AKN7152

RESISTORS

	R	7956,7965	RS1/8SQ105J
		Other Resistors	RS1/10SR###J

CAPACITORS

	C	7951,7956	CCSRCH100D50

X A-DAC BRIDGE ASSY

MISCELLANEOUS

	CN	3791,3792 14P PLUG	AKM7170
	CN	3793,3794 B TO B CONNECTOR	AKM7176

RESISTORS

		All Resistors	RS1/10SR###J

Mark	No.	Description	Part No.

Y D-AUDIO BRIDGE ASSY

MISCELLANEOUS

	CN3771,3772 B TO B 23PIN PLUG	AKM7107

Z D-DAC BRIDGE ASSY

MISCELLANEOUS

	CN3781,3782 B TO B CONNECTOR	AKM7176
	CN3783,3784 PLUG (30P)	BKM1035

CAPACITORS

	C 3780	CCSRCH100D50
	C 3785	CKSRYB103K50
	C 3786	CCSRCH101J50

AA PRE BRIDGE_S ASSY

MISCELLANEOUS

	CN6951,6952 24P PLUG	AKM7173

AB FAN CONNECT ASSY

MISCELLANEOUS

	CN3651,3652 PLUG(3P)	KM200NA3
	JH 3651 PCB BINDER	AEF7008

AC MIC HP GUARD ASSY

MISCELLANEOUS

	JH 5921,5924 PCB BINDER	AEF7008

AD BIND DM CABLE_S ASSY

MISCELLANEOUS

	JH 3551 PCB BINDER	AEF7008

AE P WIRE GUARD_S ASSY

MISCELLANEOUS

	JH 3560 PCB BINDER	AEF7008

AF FFC GUARD_S ASSY

FFC GUARD_S ASSY has no service parts.

Mark	No.	Description	Part No.

AG BINDFAN CABLE_S ASSY

BINDFAN CABLE_S ASSY has no service parts.

AH TRANS VREG STYL_S ASSY

TRANS VREG STYL_S ASSY has no service parts.

AI VREG GUARD ASSY

VREG GUARD ASSY has no service parts.

AJ PANEL GUARD ASSY

PANEL GUARD ASSY has no service parts.

AK IR EDGE GUARD_S ASSY

IR EDGE GUARD_S ASSY has no service parts.

A B C D E F